

**7000 lb. Hydraulic Trailer Tongue Jack****ITEM 300257****\$59.95**

• Brand new, STILWELL hydraulically powered trailer tongue jack. Works with bumper hitch trailers. Use with trash trailers, equipment trailers. Works with any source of hydraulic pressure providing two way hydraulic flow. Centrally located ports on body with steel lines to each end of cylinder. Simple installation using existing jack mounting holes on trailer tongue.

SPECIFICATIONS

- Load Capacity 7000 lbs.
- Stroke Length 24"
- Removable Foot 8" x 6"
- Ports SAE 6 (9/16-18 ORB)
- Maximum Pressure 3200 PSI
- Cylinder 2" Bore, 1.25" Rod
- Retracted Overall Length 32"
- Extended Overall Length 56"
- Mount to Foot 12" retracted
- Shpg. 35 lbs.

**12 VDC, 24" Travel, 3500 lb. Electric Tongue Jack****ITEM 300170****\$204.80**

• Brand new, BUYERS PRODUCTS Model 0093500 electric tongue jack. Ideal for use on travel trailers and boat trailers. Powder-coated steel tubing, hardened steel gears, weather-sealed switches. Travel length includes 18" of electric-powered travel plus 6" of manual drop leg extension length. Drop leg adjustable in 1 1/2" increments. Built-in leveling gauge and two LED night-lights. Crank-handle included for manual over-ride.

SPECIFICATIONS

- Load Ratings: 3500 lbs. continuous, 5000 lbs. break-away
- Travel 24" (see above)
- Voltage 12 DC
- Speed 30 sec. full stroke
- Wiring 48" cord w/ 7-pin RV plug
- Foot Pad 5 1/4" O.D.
- Retracted Height 26 1/2"
- Shpg. 23 lbs.

**7000 lb. Hydraulic Trailer Tongue Jack****ITEM 300329****\$59.95**

• Brand new, STILWELL hydraulically powered trailer tongue jack. Works with bumper hitch trailers. Use with trash trailers, equipment trailers. Works with any source of hydraulic pressure providing two way hydraulic flow. Centrally located ports on body with steel lines to each end of cylinder. Simple installation using existing jack mounting holes on trailer tongue.

SPECIFICATIONS

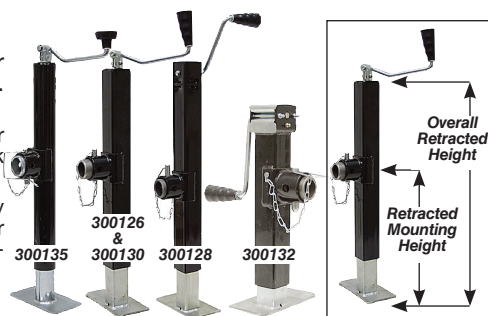
- Load Capacity 7000 lbs.
- Stroke Length 16"
- Removable Foot 8" x 6"
- Ports SAE 6 (9/16-18 ORB)
- Maximum Pressure 3000 PSI
- Cylinder 2" Bore, 1.25" Rod
- Retracted Overall Length 24"
- Extended Overall Length 40"
- Mount to Foot 8" retracted
- Shpg. 29 lbs.

**Trailer Jacks**

• Brand new trailer jacks. Zinc plated inner tube for long life. Mounting style 2" dia. tube, foot size 4" x 7".

2 1/4" Round Tube Body • Black painted outer tube. Swivel mount with retaining pin allows jack to be swiveled 90° for clearance.

2 1/4" Square Heavy Duty • 12 gauge tube body with powder coated outer tube. Weld-on tubular mount allows jack to be swiveled 90° for clearance. 3 year mfg. warranty.

**2 1/4" Round Tube Body**

ITEM	Load Capacity lbs.	Type of Wind	Lgth. of Travel	Retracted Mounting Height	Overall Retracted Height	Shpg.	Price
300134	2000	Top	10"	11 3/4"	15"	13 lbs.	\$40.15
300135	2000	Top	15"	15 1/4"	24 1/2"	13 lbs.	\$49.85

2 1/4" Square Tube Body

ITEM	Load Capacity lbs.	Type of Wind	Lgth. of Travel	Retracted Mounting Height	Overall Retracted Height	Shpg.	Price
300125	2000	Top	10"	11"	15"	15 lbs.	\$61.85
300126	2000	Top	15"	14 1/2"	24 3/4"	19 lbs.	\$70.70
300127	2000	Side	10"	10 3/4"	17 1/4"	16 lbs.	\$56.80
300128	2000	Side	15"	14 5/8"	26 7/8"	20 lbs.	\$58.60
300129	5000	Top	10"	11 1/4"	15 1/4"	16 lbs.	\$55.30
300130	5000	Top	15"	14 5/8"	24 1/4"	21 lbs.	\$58.65
300131	5000	Side	10"	10 1/2"	19 1/2"	18 lbs.	\$73.70
300132	5000	Side	15"	15 1/2"	21 3/4"	21 lbs.	\$83.00

8000 lb. Trailer Jack**ITEM 300133****\$103.80**

• Brand new heavy duty trailer jack. For large high capacity trailers. 12 gauge square tubing for extra strength. Powder coated outer tube and zinc plated inner tube for long life. Direct weld mount. Drop leg allows 13 1/2" extra length. 3 year mfg. warranty.

SPECIFICATIONS

- Load Capacity 8000 lbs.
- Top-wind
- 15" travel
- 2 1/2" square tube body
- 6" x 8 ft.
- Length center of tube mount to base: Retracted 21 1/2", Extended 50"
- 9/16" pin for mount w/retainer chain
- Shpg. 25 lbs.

**3000 lb. Trailer Jack****ITEM 300369****\$29.95**

• New, heavy duty trailer jack with sidewind plastic handle.

SPECIFICATIONS

- Model 796875
- Lift Capacity 3000 lbs.
- Support Capacity 5000 lbs.
- Handle Sidewind
- Travel 16"
- Retracted length 22 1/2"
- Round Tube Body 2 1/4" dia.
- Jack Mount Three slotted 0.42" x 0.75" holes on triangle mount
- Base Mount 0.42" thru hole w/ 2" dia. with groove for mounting foot baseplate or wheel
- Size 22 1/2" x 8 1/2" x 4 1/2"
- Shpg. 12 lbs.

**2" Receiver Anchor Shackle****ITEM 300304****\$37.15**

• Brand new, BUYERS PRODUCTS model 1804020 2" receiver anchor shackle. Mounts in vehicles receiver for towing and recovery purposes. Removable anchor shackle features a threaded pin for easy installation and use. Durable steel construction. Corrosion resistant black powder-coated finish. Intended for straight line pulling. Do Not Exceed Vehicles Towing Capacity!

SPECIFICATIONS

- Fits 2" Receiver
- Anchor Shackle Fits 2" Wide Straps
- Hitch Pin Hole Size 5/8" dia.
- Working Load Limit 10,000 lbs. W.L.L.
- Size 7" x 4 1/4" x 2"
- Shpg 11 lbs.

ITEM 300307**3" Receiver****SPECIFICATIONS**

- Fits 3" Receiver
- Size 8" x 5" x 3"

\$88.00
Model 1804040

- Working Load Limit 18,000 lbs. W.L.L.
- Shpg 22 lbs.

**Tri-Ball and Hook Hitch For 2" Receiver****ITEM 300306****\$66.25**

• Brand new, BUYERS PRODUCTS model 1802208 tri-ball and hook hitch for 2" receiver. Mounts in vehicles receiver. Durable steel construction. Corrosion resistant black powder-coated finish. The hook can be used with chains or straps to recover objects but is NOT intended for towing use.

SPECIFICATIONS

- Fits 2" Receiver
- 1 1/8" Ball Towing Capacity 6,000 lbs.
- 2" Ball Towing Capacity 7,500 lbs.
- 2 5/16" Ball Towing Capacity 10,000 lbs.
- Hitch Pin Hole Size 5/8" dia.
- Size 12" x 7 1/2" x 8 1/2"
- Shpg 17 lbs.

