

Cast Iron Foot Mounts


- Brand new, cast iron foot mounts for hydraulic pumps or motors.




ITEM	Pump Mount	Pilot Dia.	Bolt Holes	Centerline Height	Size	Shpg.	Price
903067	SAE A (4 $\frac{3}{16}$ " c/c)	3 $\frac{1}{4}$ "	$\frac{3}{8}$ -16	4 $\frac{1}{2}$ "	5 $\frac{1}{8}$ " x 2 $\frac{1}{4}$ " x 6 $\frac{1}{2}$ "	5 lbs.	\$101.75
903092	SAE A (4 $\frac{3}{16}$ " c/c)	3 $\frac{1}{4}$ "	$\frac{3}{8}$ -16	2 $\frac{3}{4}$ "	6 $\frac{1}{4}$ " x 4" x 5 $\frac{1}{2}$ "	6 lbs.	\$74.70
903068	SAE B (5 $\frac{3}{4}$ " c/c)	4"	$\frac{1}{2}$ -13	3 $\frac{5}{8}$ "	7" x 3 $\frac{3}{4}$ " x 7 $\frac{1}{4}$ "	9 lbs.	\$97.50
903093	SAE C (7 $\frac{1}{8}$ " c/c)	5"	$\frac{5}{8}$ -11	4 $\frac{5}{16}$ "	10 $\frac{1}{2}$ " x 5 $\frac{1}{4}$ " x 8 $\frac{1}{2}$ "	16 lbs.	\$181.00

Hydraulic Pump Mounts

- Brand new, Hydra-Mount aluminum alloy pump mounts. Available as foot mounts, and adapters from gas engines or electric motors to a variety of common pump flanges.

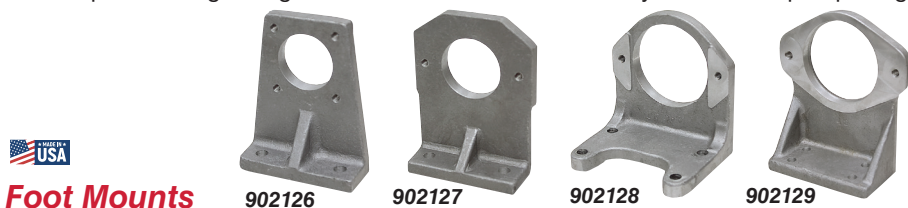


ITEM	Pump Flange	Pilot Dia.	Centerline Height	Size	Shpg.	Price
902126	4F17 (2" sq.)	1.78"	3.59"	3 $\frac{7}{8}$ " x 1 $\frac{1}{2}$ " x 4 $\frac{3}{4}$ "	2 lbs.	\$38.40
902127	SAE AA (2 bolt, 3 $\frac{1}{4}$ " c/c)	2"	3.59"	3 $\frac{7}{8}$ " x 1 $\frac{1}{2}$ " x 4 $\frac{3}{4}$ "	2 lbs.	\$65.40
902128	SAE A (2 bolt, 4 $\frac{3}{16}$ " c/c)	3.25"	3 $\frac{1}{4}$ "	5 $\frac{1}{8}$ " x 4 $\frac{1}{8}$ " x 5 $\frac{3}{4}$ "	3 lbs.	\$34.35
902129	SAE B (2 bolt, 5 $\frac{3}{4}$ " c/c)	4"	5 $\frac{1}{4}$ "	5 $\frac{1}{2}$ " x 3" x 8"	4 lbs.	\$51.25

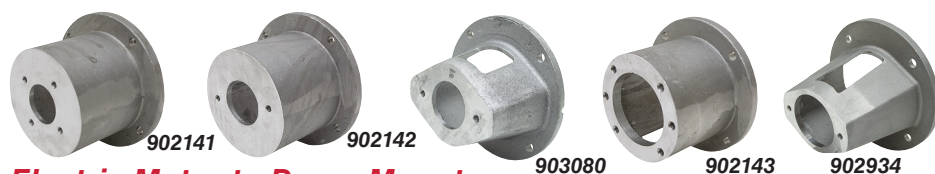

Electric Motor to Pump Mounts

ITEM	Pump Flange	Pilot Dia.	Motor Frame	Total Length	Shpg.	Price
907099	4F17 (2" sq.)	1.78"	56C, 143TC, 145TC	4 $\frac{1}{4}$ "	5 lbs.	\$66.10
907100	SAE AA (2 bolt, 3 $\frac{1}{4}$ " c/c)	2"	56C, 143TC, 145TC	4 $\frac{1}{4}$ "	5 lbs.	\$66.10
907096	SAE AA (2 bolt, 3 $\frac{1}{4}$ " c/c)	2"	56C, 143TC, 145TC	3 $\frac{1}{2}$ "	3 lbs.	\$60.00
907101	SAE A (2 bolt, 4 $\frac{3}{16}$ " c/c)	3.25"	56C, 143TC, 145TC	4 $\frac{1}{4}$ "	5 lbs.	\$66.10
907095	SAE A (2 bolt, 4 $\frac{3}{16}$ " c/c)	3.25"	182TC, 184TC, 213TC 215TC, 254TC, 256TC	5.81"	5 lbs.	\$85.45

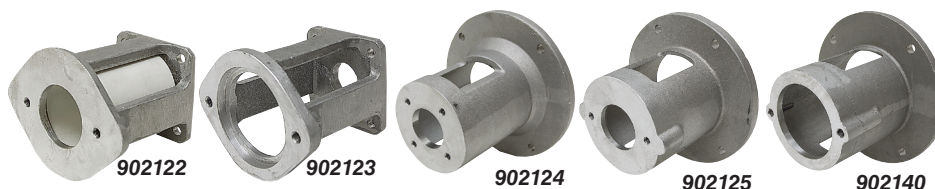


Gas Engine to Pump Mounts

ITEM	Pump Flange	Pilot Dia.	Engine Mount	Total Length	Shpg.	Price
907089	4F17 (2" sq.)	1.78"	3 $\frac{5}{8}$ " bolt circle, 1 $\frac{5}{8}$ " pilot	4.44"	2 lbs.	\$45.15
907097	4F17 (2" sq.)	1.78"	6 $\frac{1}{2}$ " bolt circle, 5 $\frac{3}{4}$ " pilot	5 $\frac{5}{8}$ "	4 lbs.	\$57.30
907090	SAE AA (2 bolt, 3 $\frac{1}{4}$ " c/c)	2"	3 $\frac{5}{8}$ " bolt circle, 1 $\frac{5}{8}$ " pilot	4.44"	2 lbs.	\$64.00
907098	SAE AA (2 bolt, 3 $\frac{1}{4}$ " c/c)	2"	6 $\frac{1}{2}$ " bolt circle, 5 $\frac{3}{4}$ " pilot	5 $\frac{1}{8}$ "	4 lbs.	\$62.05
907091	SAE A (2 bolt, 4 $\frac{3}{16}$ " c/c)	3.25"	3 $\frac{5}{8}$ " bolt circle, 1 $\frac{5}{8}$ " pilot	4.69"	2 lbs.	\$64.00
907094	SAE A (2 bolt, 4 $\frac{3}{16}$ " c/c)	3.25"	6 $\frac{1}{2}$ " bolt circle, 5 $\frac{3}{4}$ " pilot	5 $\frac{5}{8}$ "	5 lbs.	\$71.75
907092	SAE A (2 bolt, 4 $\frac{3}{16}$ " c/c)	3.25"	6 $\frac{1}{2}$ " bolt circle, 5 $\frac{3}{4}$ " pilot	5 $\frac{1}{8}$ "	4 lbs.	\$59.35
907103	SAE A (2 bolt, 4 $\frac{3}{16}$ " c/c)	3.25"	6 $\frac{1}{2}$ " bolt circle, 5 $\frac{3}{4}$ " pilot	6"	5 lbs.	\$71.75
907104	SAE A (2 bolt, 4 $\frac{3}{16}$ " c/c)	3.25"	6 $\frac{1}{2}$ " bolt circle, 5 $\frac{3}{4}$ " pilot	6 $\frac{5}{8}$ "	6 lbs.	\$83.25

Overhung Load Adapters

- Brand new, ZEROMAX overhung load adapters. Cast iron construction. Prevents wear on motor/pump components due to external overhung loads (axial and radial), provides solid mounting. Isolates from contamination in harsh environments. Allows removal of motor/pump while leaving load attached to shaft. Grease zerk for bearings.




Four Hole Input Mount on 3 $\frac{1}{4}$ " B.C.

SPECIFICATIONS

- Output shaft 1" dia. x 2 $\frac{3}{4}$ " w/ $\frac{1}{4}$ " keyway
- Base mount four $\frac{3}{16}$ -16 tapped holes, 2 $\frac{5}{16}$ " x 1 $\frac{3}{4}$ "
- Max. speed 4400 RPM
- Ball bearings
- Size 3 $\frac{1}{2}$ " x 2 $\frac{3}{4}$ " x 3 $\frac{7}{8}$ "
- Shpg. 9 lbs.

ITEM	Input Shaft	Price
603001	1" dia. keyed	\$329.95

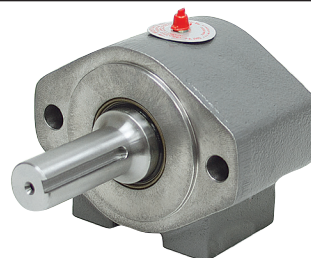


SAE A 2 Bolt Input Mount

SPECIFICATIONS

- Output shaft 1" dia. x 2 $\frac{3}{4}$ " w/ $\frac{1}{4}$ " keyway
- Base mount four $\frac{3}{16}$ -16 tapped holes, 2 $\frac{5}{16}$ " x 1 $\frac{3}{4}$ "
- Max. speed 4400 RPM
- Ball bearings
- Size 5 $\frac{1}{2}$ " x 2 $\frac{3}{4}$ " x 4 $\frac{1}{8}$ "
- Shpg. 12 lbs.

ITEM	Input Shaft	Price
603002	1" dia. keyed	\$329.95
603003	$\frac{5}{8}$ " dia. keyed	\$350.60
603004	$\frac{3}{4}$ " dia. keyed	\$373.25

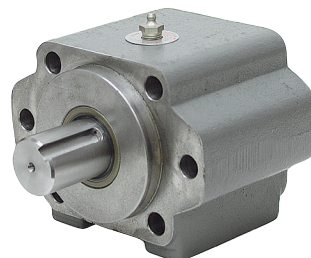

SAE B 2/4 Bolt Input Mount

SPECIFICATIONS

- Output shaft 1 $\frac{1}{2}$ " dia. x 2 $\frac{1}{2}$ " w/ $\frac{3}{8}$ " keyway
- Base mount four $\frac{7}{16}$ -14 tapped holes, 3 $\frac{1}{16}$ " x 3"
- Max. speed 3300 RPM
- Tapered roller bearings
- Size 7" x 4 $\frac{1}{2}$ " x 5 $\frac{1}{8}$ "
- Shpg. 30 lbs.

ITEM	Input Shaft	Price
603005	$\frac{7}{8}$ -13 spline	\$800.85
603006	$\frac{7}{8}$ " dia. keyed	\$787.50