




Cross High Speed Hydraulic Gear Motors



- Brand new CROSS hydraulic gear motors. Pressure balanced loading plates for high efficiency. Aluminum body for good heat dissipation. Pressure lubricated Teflon impregnated sleeve bearings. Internal check valves eliminate need for case drain at shaft seal pressures under 250 PSI.



40 Series


SPECIFICATIONS

- PSI 3000 max.
- RPM 3000 max. cont
- Reversible rotation
- Shaft 5/8" x 1 1/4" keyed
- Mount SAE A 2 Bolt
- Ports SAE 12
- drain port 1/4" NPT bolt
- Shpg 9 lbs.

50 Series

SPECIFICATIONS

- PSI 3000 max.
- RPM 3000 max. cont
- Reversible rotation
- Shaft 7/8" x 1 5/8" keyed
- Mount SAE B 2 Bolt
- Ports SAE 16
- drain port SAE 5
- Shpg 19 lbs.



40 Series

HP and torque specifications listed at 2500 PSI

ITEM	Displ.	GPM for 1800 RPM	Torque	HP at 1800 RPM	Price
901471	0.50	4.4	180 in-lbs.	4.8	\$332.95
901472	0.75	6.5	280 in-lbs.	7.5	\$348.35
901473	1.00	8.8	375 in-lbs.	10	\$363.70
901474	1.25	10.9	475 in-lbs.	13.5	\$379.65
901475	1.50	13	575 in-lbs.	16	\$395.00
901476	1.80	15.5	700 in-lbs.	20	\$410.35

50 Series

HP and torque specifications listed at 2500 PSI

ITEM	Displ.	GPM for 1800 RPM	Torque	HP at 1800 RPM	Price
901477	1.95	17	775 in-lbs.	18	\$584.05
901478	2.32	20	900 in-lbs.	23	\$599.20
901479	2.74	23.75	1050 in-lbs.	28	\$613.60
901480	3.30	28.5	1275 in-lbs.	33	\$669.50
901481	3.80	33	1450 in-lbs.	38	\$669.50
901482	5.20	45	2000 in-lbs.	65	\$896.20

Compact, Hi-Torque Hydraulic Motors

- Brand New, DYNAMIC BMM series hydraulic motor. Compact frame with Rotortorc gear set to provide highly efficient low speed high torque output for limited space applications. Can be used in parallel or series hydraulic systems



SPECIFICATIONS


- Reversible rotation
- Ports SAE 6, Case Drain SAE 3
- Shaft 5/8" dia. x 1 1/16" w/ 0.18" keyway

- Two Mounting Choices:
3 hole face mount, tapped 1/4"-28 on 1.77" Bolt Circle, side ports
or
2 hole flange 3.15" bolt centers, 2.48" pilot, rear ports

3 Bolt Mount	2 Bolt Mount		PSI	Torque in lbs.	RPM	GPM		
ITEM #	ITEM #	Displ.	Cont. Int.	Cont. Int.	Cont. Int.	Cont. Int.	Shpg	Price
904255	904262	0.5	1450 2030	97 132	1950 2450	3.96 5.28	6 lbs.	\$193.40
904256	904263	0.76	1450 2030	141 203	1550 1940	5.28 6.6	6 lbs.	\$195.90
904257	904264	1.21	1450 2030	221 310	1000 1250	5.28 6.6	7 lbs.	\$199.70
904258	904265	1.93	1450 2030	354 504	630 800	5.28 6.6	7 lbs.	\$202.60
904259	904266	2.43	1233 1740	398 620	500 630	5.28 6.6	7 lbs.	\$205.15
904261	904267	3.07	1015 1450	407 779	400 500	5.28 6.6	7 lbs.	\$208.50

Parker MGG Hydraulic Motors

- Brand new, PARKER MGG Series. Gerotor design hydraulic motor. Heavy duty roller bearings, aluminum case, Buna-N seals. Can also be used as a pump up to 3500 RPM max. Wide range of displacement, mounting and port location options to fit specific applications.

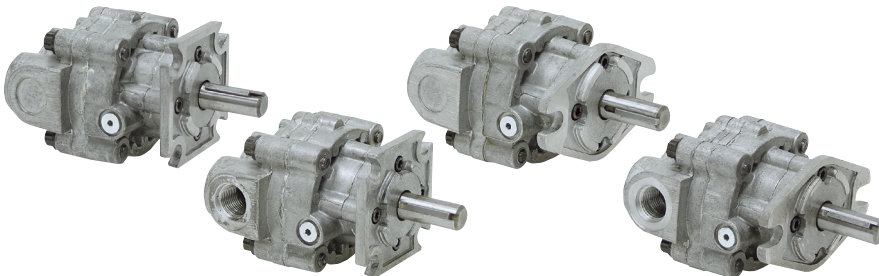

SPECIFICATIONS FOR ALL

- Speed: 5000 RPM max as motor, 3500 RPM max as pump
- Rotation reversible
- Shaft 9/16" x 1 1/2" w/ 1/8" keyway
- Size 5 1/2" x 3 1/2" x 3 3/8"
- Shpg. 5 lbs.
- 2 Mounting Choices:
4 Bolt on 2" square pattern with 1.78" dia. pilot
or
2 Bolt 3.25" Bolt Centers 2" dia. pilot

Displ. cu. in.	Motor Model	4 Bolt Mount				2 Bolt Mount				GPM for Max. PSI					
		Rear Ports		Side Ports		Rear Ports		Side Ports		Price	RPM	PSI Cont.	PSI Int.	Torque in. lbs.	Port
0.218	MGG20010	903475	BB1A3	900798	BB1B3	900214	BA1A3	901132	BA1B3	\$386.10	4.75	2000	2500	70	SAE 8
0.372	MGG20016	903476	BB1A3	900799	BB1B3	900215	BA1A3	901170	BA1B3	\$404.75	8.05	2000	2500	118	SAE 8
0.45	MGG20020	903477	BB1A3	900800	BB1B3	900216	BA1A3	901171	BA1B3	\$412.85	9.75	2000	2500	144	SAE 8
0.58	MGG20025	903478	BB1A3	900801	BB1B3	900217	BA1A3	901172	BA1B3	\$431.30	12.55	2000	2500	184	SAE 10
0.7	MGG20030	903479	BB1A3	900802	BB1B3	900218	BA1A3	900968	BA1B3	\$438.65	15.15	1500	2000	222	SAE 10