




Cross High Speed Hydraulic Gear Motors



- Brand new CROSS hydraulic gear motors. Pressure balanced loading plates for high efficiency. Aluminum body for good heat dissipation. Pressure lubricated Teflon impregnated sleeve bearings. Internal check valves eliminate need for case drain at shaft seal pressures under 250 PSI.



40 Series


SPECIFICATIONS

- PSI 3000 max.
- RPM 3000 max. cont
- Reversible rotation
- Shaft 5/8" x 1 1/4" keyed
- Mount SAE A 2 Bolt
- Ports SAE 12
- drain port 1/4" NPT bolt
- Shpg 9 lbs.

50 Series

SPECIFICATIONS

- PSI 3000 max.
- RPM 3000 max. cont
- Reversible rotation
- Shaft 7/8" x 1 5/8" keyed
- Mount SAE B 2 Bolt
- Ports SAE 16
- drain port SAE 5
- Shpg 19 lbs.



40 Series

HP and torque specifications listed at 2500 PSI

ITEM	Displ.	GPM for 1800 RPM	Torque	HP at 1800 RPM	Price
9-7073-50	0.50	4.4	180 in-lbs.	4.8	\$288.15
9-7073-75	0.75	6.5	280 in-lbs.	7.5	\$301.45
9-7073-100	1.00	8.8	375 in-lbs.	10	\$314.75
9-7073-125	1.25	10.9	475 in-lbs.	13.5	\$328.55
9-7073-150	1.50	13	575 in-lbs.	16	\$341.80
9-7073-180	1.80	15.5	700 in-lbs.	20	\$355.15

50 Series

HP and torque specifications listed at 2500 PSI

ITEM	Displ.	GPM for 1800 RPM	Torque	HP at 1800 RPM	Price
9-7074-195	1.95	17	775 in-lbs.	18	\$505.40
9-7074-232	2.32	20	900 in-lbs.	23	\$518.50
9-7074-274	2.74	23.75	1050 in-lbs.	28	\$531.00
9-7074-330	3.30	28.5	1275 in-lbs.	33	\$579.40
9-7074-380	3.80	33	1450 in-lbs.	38	\$579.40
9-7074-520	5.20	45	2000 in-lbs.	65	\$775.50

Compact, Hi-Torque Hydraulic Motors

- Brand New, DYNAMIC BMM series hydraulic motor. Compact frame with Rotortorc gear set to provide highly efficient low speed high torque output for limited space applications. Can be used in parallel or series hydraulic systems



SPECIFICATIONS


- Reversible rotation
- Ports SAE 6, Case Drain SAE 3
- Shaft 5/8" diam. x 1 5/16" w/ 0.18 keyway

- Two Mounting Choices:
3 hole face mount, tapped 1/4-28 on 1.77" Bolt Circle, side ports
or
2 hole flange 3.15" bolt centers, 2.48" pilot, rear ports

3 Bolt Mount ITEM #	2 Bolt Mount ITEM #	Displ.	PSI Cont. Int.	Torque in lbs. Cont. Int.	RPM Cont. Int.	GPM Cont. Int.	Shpg	Price
9-12221-8	9-12222-8	0.5	1450 2030	97 132	1950 2450	3.96 5.28	6 lbs.	\$193.40
9-12221-12	9-12222-12	0.76	1450 2030	141 203	1550 1940	5.28 6.6	6 lbs.	\$195.90
9-12221-20	9-12222-20	1.21	1450 2030	221 310	1000 1250	5.28 6.6	7 lbs.	\$199.70
9-12221-32	9-12222-32	1.93	1450 2030	354 504	630 800	5.28 6.6	7 lbs.	\$202.60
9-12221-40	9-12222-40	2.43	1233 1740	398 620	500 630	5.28 6.6	7 lbs.	\$205.15
9-12221-50	9-12222-50	3.07	1015 1450	407 779	400 500	5.28 6.6	7 lbs.	\$208.50

Parker MGG Hydraulic Motors

- Brand new, PARKER MGG Series. Gerotor design hydraulic motor. Heavy duty roller bearings, aluminum case, Buna-N seals. Can also be used as a pump up to 3500 RPM max. Wide range of displacement, mounting and port location options to fit specific applications.

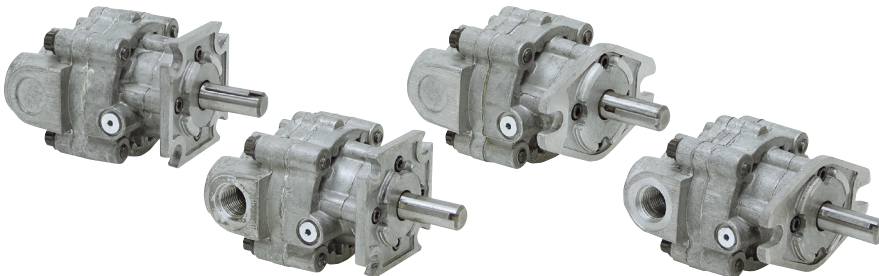

SPECIFICATIONS FOR ALL

- Speed: 5000 RPM max as motor, 3500 RPM max as pump
- Rotation reversible
- Shaft 9/16" x 1 1/2" w/ 1/8" keyway
- Size 5 1/2" x 3 1/2" x 3 3/8"
- Shpg. 5 lbs.
- 2 Mounting Choices:
4 Bolt on 2" square pattern with 1.78" dia. pilot
or
2 Bolt 3.25 Bolt Centers 2" dia. pilot

Displ. cu. in.	Motor Model	4 Bolt Mount				2 Bolt Mount				GPM for Max. PSI					
		Rear Ports		Side Ports		Rear Ports		Side Ports		Price	RPM	Cont.	PSI Int.	Torque in. lbs.	Port
0.218	MGG20010	9-8499	BB1A3	9-4765	BB1B3	9-1180	BA1A3	9-6590	BA1B3	\$386.10	4.75	2000	2500	70	SAE 8
0.372	MGG20016	9-8500	BB1A3	9-4766	BB1B3	9-1181	BA1A3	9-6591	BA1B3	\$404.75	8.05	2000	2500	118	SAE 8
0.45	MGG20020	9-8501	BB1A3	9-4767	BB1B3	9-1182	BA1A3	9-6592	BA1B3	\$412.85	9.75	2000	2500	144	SAE 8
0.58	MGG20025	9-8502	BB1A3	9-4768	BB1B3	9-1183	BA1A3	9-6593	BA1B3	\$431.30	12.55	2000	2500	184	SAE 10
0.7	MGG20030	9-8503	BB1A3	9-4769	BB1B3	9-1184	BA1A3	9-6594	BA1B3	\$438.65	15.15	1500	2000	222	SAE 10