

AXIAL FANS | ELETTROVENTILATORI ASSIALI

FAN DIAMETER | DIAMETRO VENTOLE

MOTOR (dimension) | MOTORE (dimensione)

MOTOR TYPE | TIPO MOTORE

Ø 225 mm

Ø 8 in

52 mm

8608

12V

D.C. - C.C.

90050209

suction - aspirante

90050220

blowing - soffiante

24V

D.C. - C.C.

90050221

suction - aspirante

90050300

blowing - soffiante

Static Pressure Pressione Statica	Airflow Portata	Current Corrente	Airflow Portata	Current Corrente
mmH ₂ O	m ³ /h	A	m ³ /h	A
0,0	999	7,2	946	7,2
2,5	910	7,2	886	7,3
5,0	839	7,3	830	7,3
7,5	764	7,2	769	7,3
10,0	689	7,2	703	7,4
12,5	605	7,3	631	7,5
15,0	518	7,5	515	7,5
17,5	443	7,8	381	7,9
20,0	354	8,1	251	8,0
22,5	256	8,2	128	8,0
25,0	173	8,3		



Static Pressure Pressione Statica	Airflow Portata	Current Corrente	Airflow Portata	Current Corrente
inH ₂ O	m ³ /h	A	m ³ /h	A
0	994	3,5	977	3,6
0,1	918	3,6	923	3,7
0,2	835	3,6	857	3,7
0,3	763	3,6	802	3,7
0,4	683	3,6	736	3,7
0,5	608	3,6	666	3,7
0,6	527	3,7	594	3,8
0,7	449	3,9	471	4,0
0,8	361	4,0	337	4,1
0,9			219	4,1
1				

Test voltage 13V D.C. - Tensione di prova 13V C.C.

Test voltage 26V D.C. - Tensione di prova 26V C.C.

Airflow - Portata d'aria : 1 m³/h = 0,59 cfm

Static pressure - Pressione : 1 mmH₂O = 0,04 inH₂O - 1 mmH₂O = 9,81 Pa

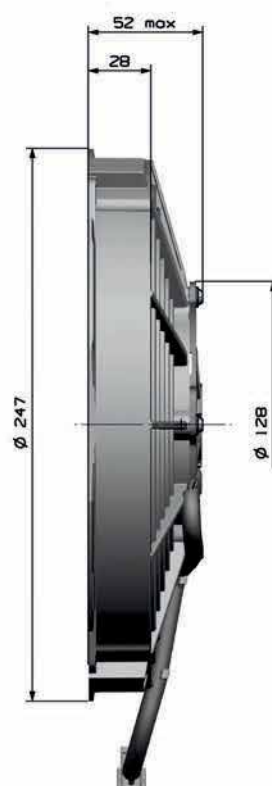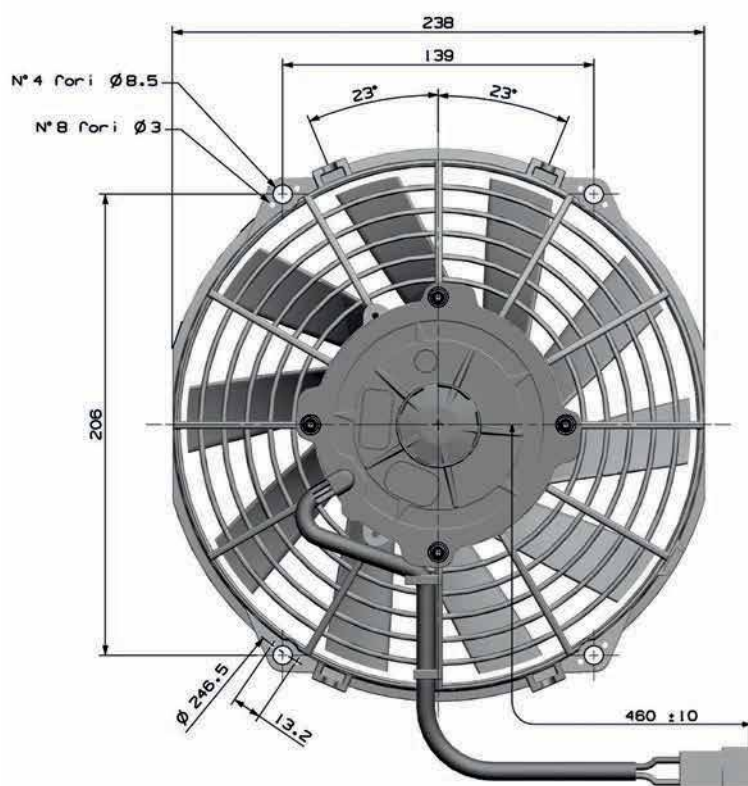

Waterproof Motor IP68

Motore stagno IP68

AMP Connector: 180908

Connettore AMP: 180908

Available with other connectors

Disponibile con altri connettori

