



AXIAL FANS | ELETTROVENTILATORI ASSIALI

FAN DIAMETER | DIAMETRO VENTOLE

MOTOR (dimension) | MOTORE (dimensione)

MOTOR TYPE | TIPO MOTORE

Ø 385 mm

Ø 15 in

63 mm

8612

12V

D.C. - C.C.

90050196

suction - aspirante

90050197

blowing - soffiante

24V

D.C. - C.C.

90050198

suction - aspirante

90050199

blowing - soffiante

Static Pressure Pressione Statica	Airflow Portata	Current Corrente	Airflow Portata	Current Corrente
mmH ₂ O	m ³ /h	A	m ³ /h	A
0,0	2950	12,4	2967	12,3
2,5	2663	12,8	2736	12,7
5,0	2383	13,0	2489	12,9
7,5	2083	13,0	2201	13,0
10,0	1697	12,6	1804	12,7
12,5	1095	11,6	1105	12,1
15,0	510	11,4	452	11,9
17,5				



Static Pressure Pressione Statica	Airflow Portata	Current Corrente	Airflow Portata	Current Corrente
inH ₂ O	m ³ /h	A	m ³ /h	A
0	3101	6,5	3040	6,2
0,1	2806	6,7	2824	6,3
0,2	2538	6,9	2591	6,4
0,3	2233	6,9	2335	6,5
0,4	1896	6,8	1953	6,4
0,5	1427	6,4	1197	6,2
0,6	751	6,0	589	6,0
0,7	284	6,1		

Test voltage 13V D.C. - Tensione di prova 13V C.C.

Test voltage 26V D.C. - Tensione di prova 26V C.C.

Airflow - Portata d'aria : 1 m³/h = 0,59 cfm

Static pressure - Pressione : 1 mmH₂O = 0,04 inH₂O - 1 mmH₂O = 9,81 Pa

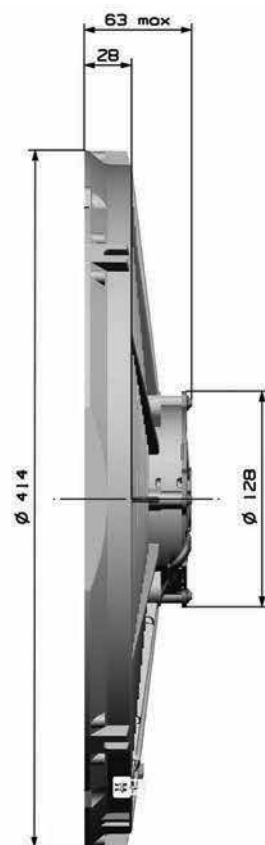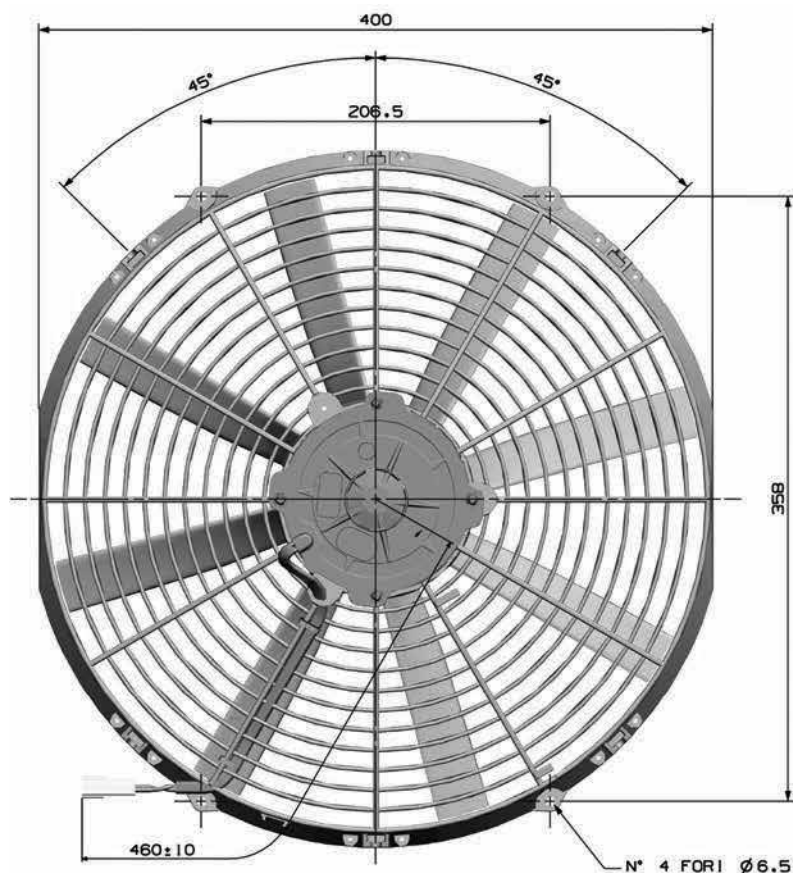

Waterproof Motor IP68

Motore stagno IP68

AMP Connector: 180908

Connettore AMP: 180908

Available with other connectors

Disponibile con altri connettori

