



AXIAL FANS | ELETTROVENTILATORI ASSIALI

FAN DIAMETER | DIAMETRO VENTOLE

MOTOR (dimension) | MOTORE (dimensione)

MOTOR TYPE | TIPO MOTORE

Ø 280 mm

Ø 11 in

80 mm

8622

12V

D.C. - C.C.

90050563

suction - aspirante

90050564

blowing - soffiante

24V

D.C. - C.C.

90050553

suction - aspirante

90050554

blowing - soffiante

Static Pressure Pressione Statica	Airflow Portata	Current Corrente	Airflow Portata	Current Corrente
mmH ₂ O	m ³ /h	A	m ³ /h	A
0,0	2022	11,9	1878	9,5
2,5	1924	12,3	1785	10,0
5,0	1825	12,8	1692	10,5
7,5	1717	13,2	1597	10,9
10,0	1609	13,6	1502	11,2
12,5	1471	13,8	1440	11,5
15,0	1334	13,9	1380	11,9
17,5	1145	14,0	1321	12,2
20,0	956	14,0	1261	12,6
22,5	874	14,6	996	13,1
25,0	793	15,2	703	13,6



Static Pressure Pressione Statica	Airflow Portata	Current Corrente	Airflow Portata	Current Corrente
inH ₂ O	m ³ /h	A	m ³ /h	A
0	2139	6,8	2010	5,5
0,1	2043	7,1	1928	5,7
0,2	1947	7,3	1847	5,9
0,3	1846	7,5	1745	6,1
0,4	1744	7,7	1642	6,3
0,5	1616	7,8	1543	6,5
0,6	1486	7,9	1445	6,6
0,7	1326	7,9	1304	6,8
0,8	1166	7,9	1161	6,9
0,9	1048	8,1	1019	7,1
1	931	8,3	877	7,3

Test voltage 13V D.C. - Tensione di prova 13V C.C.

Test voltage 26V D.C. - Tensione di prova 26V C.C.

Airflow - Portata d'aria : 1 m³/h = 0,59 cfm

Static pressure - Pressione : 1 mmH₂O = 0,04 inH₂O - 1 mmH₂O = 9,81 Pa

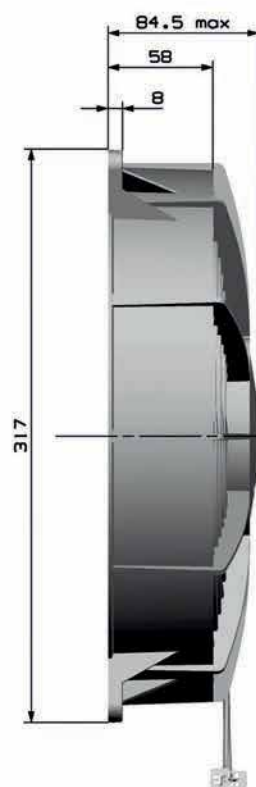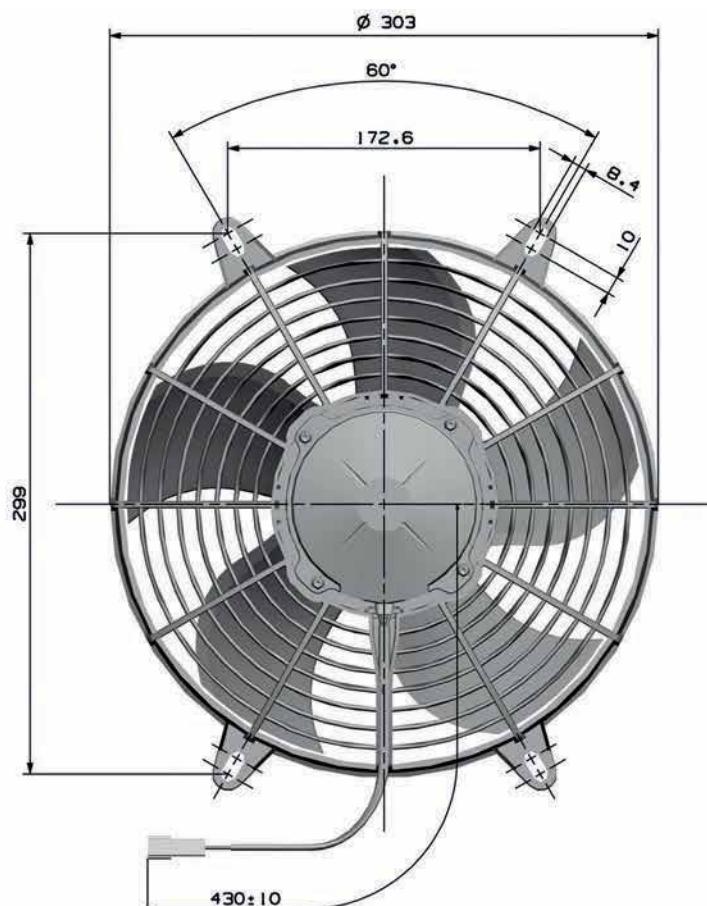

Waterproof Motor IP68

Motore stagno IP68

AMP Connector: 180908

Connettore AMP: 180908

Available with other connectors

Disponibile con altri connettori

