

DATA SHEET

Premium Efficiency Motor: **NAT12-18-56CRD**

60 Hz

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Document Generated: 14-Aug-2025
Document ID:

Customer:

MOTOR INFORMATION	
HP	1/2
RPM	1800
Phase	3
Frequency	60 Hz
Voltage	230/460
Frame Size	56C
Enclosure	TEFC
Degree of Protection	IP43
Service Factor	1.15
Poles	4
Full Load Speed	1725
Insulation Class	F
Temp Rise	80°C
NEMA Code Letter	M
Duty Cycle	S1 / Continuous
Slip	0.04%
NEMA Design	B
Moment of Inertia	0.0381 lb.ft.^2
Sound Pressure Level	68 dB(A)
Max Ambient Temperature	40°C
Max Elevation	1000 m.a.s.l (3300 f.a.s.l)
Mounting	F1
Base	C-Face Footless
Rotation	Bi-Directional
Standard	NEMA MG-1
Approvals	CSA, CE

EFFICIENCY/POWER FACTOR		
LOAD	EFF	P. F.
100%	70.7 %	71.9
75%	69.4 %	62.3
50%	64.6 %	49.2

TORQUE		
FULL LOAD	LRT	BDT
1.51 lb.ft.	250 %	325 %

AMPERAGE INFORMATION		
	230V	460V
Full Load Amps	1.9	0.95
Locked Rotor Amps	10.16	5.08
No Load Current	1.36	0.68
Usable at 208V	--	

BEARING INFORMATION	
DE Bearing	6203 2RS
ODE Bearing	6203 2RS

ADDITIONAL DATA	
F2 Suitable	No
Shaft Material	1045 Carbon Steel
Connection Diagram	230 / 460 V - 9 Lead Y
Approximate Weight	19 lbs.


MOTOR DRAWING

Premium Efficiency Motor: **NAT12-18-56CRD**

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net

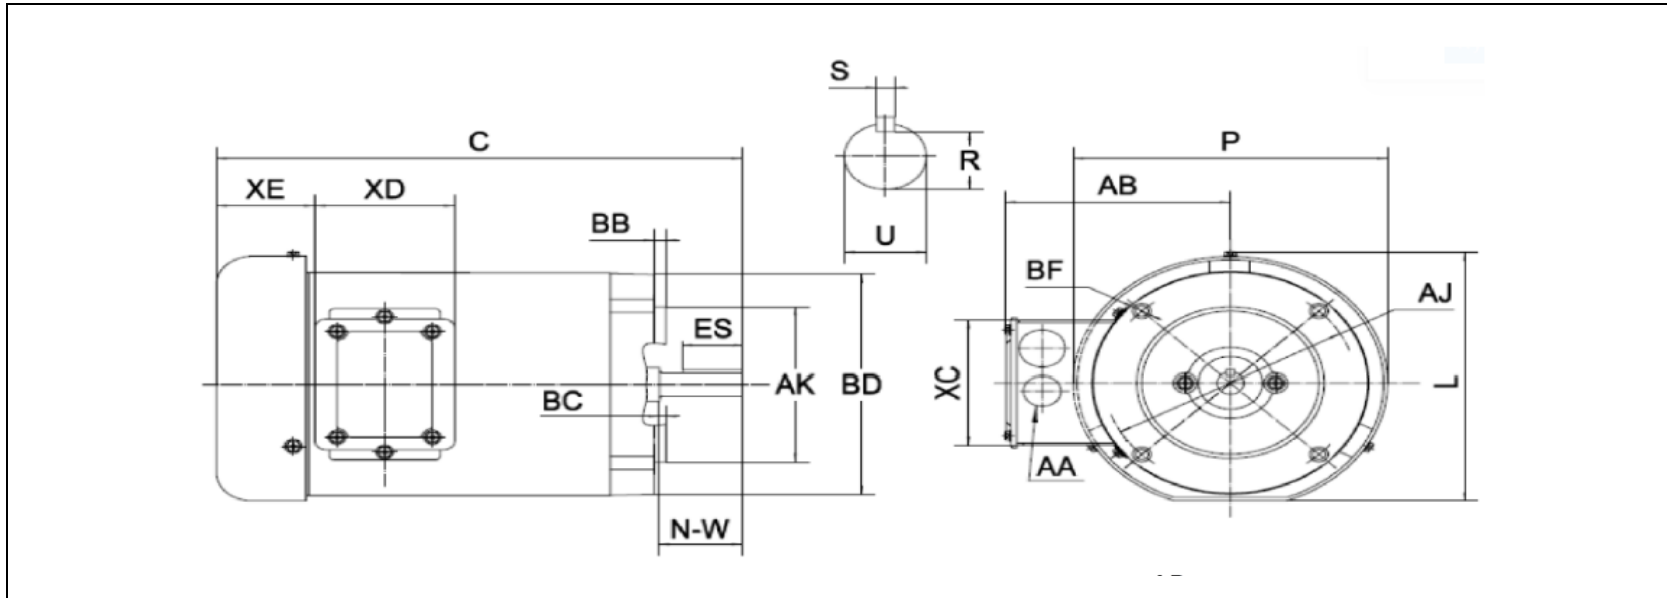

DIMENSION - INCHES

FLANGE MOUNTING						C	P	L	AB
AK	Max BD	AJ	BF	BB	BC				
4.5	6.5	5.875	3/8-16	0.16	-0.19	11.9	7.3	7.4	5.2

SHAFT & KEY				
S	ES	R	N-W	U
0.188	1.41	0.517	1.88	0.625

TERMINAL BOX				
AA	XB	XC	XD	XE
3-0.88/2-1.109	11	3.7	3.2	2.15

PERFORMANCE CURVES

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net




Premium Efficiency Motor:

NAT12-18-56CRD

Document Generated: 14-Aug-2025	Customer:
Document ID:	

Motor Type					
Output Rating (HP)	1/2		FL Speed	1725	
Full Load Torque	1.51 lb.ft		LRT (%FLT)	250	460 volt FLA 0.95
Rotor Wk^2	0.0381 lb-ft^2		BDT (%FLT)	325	230 volt FLA 1.9

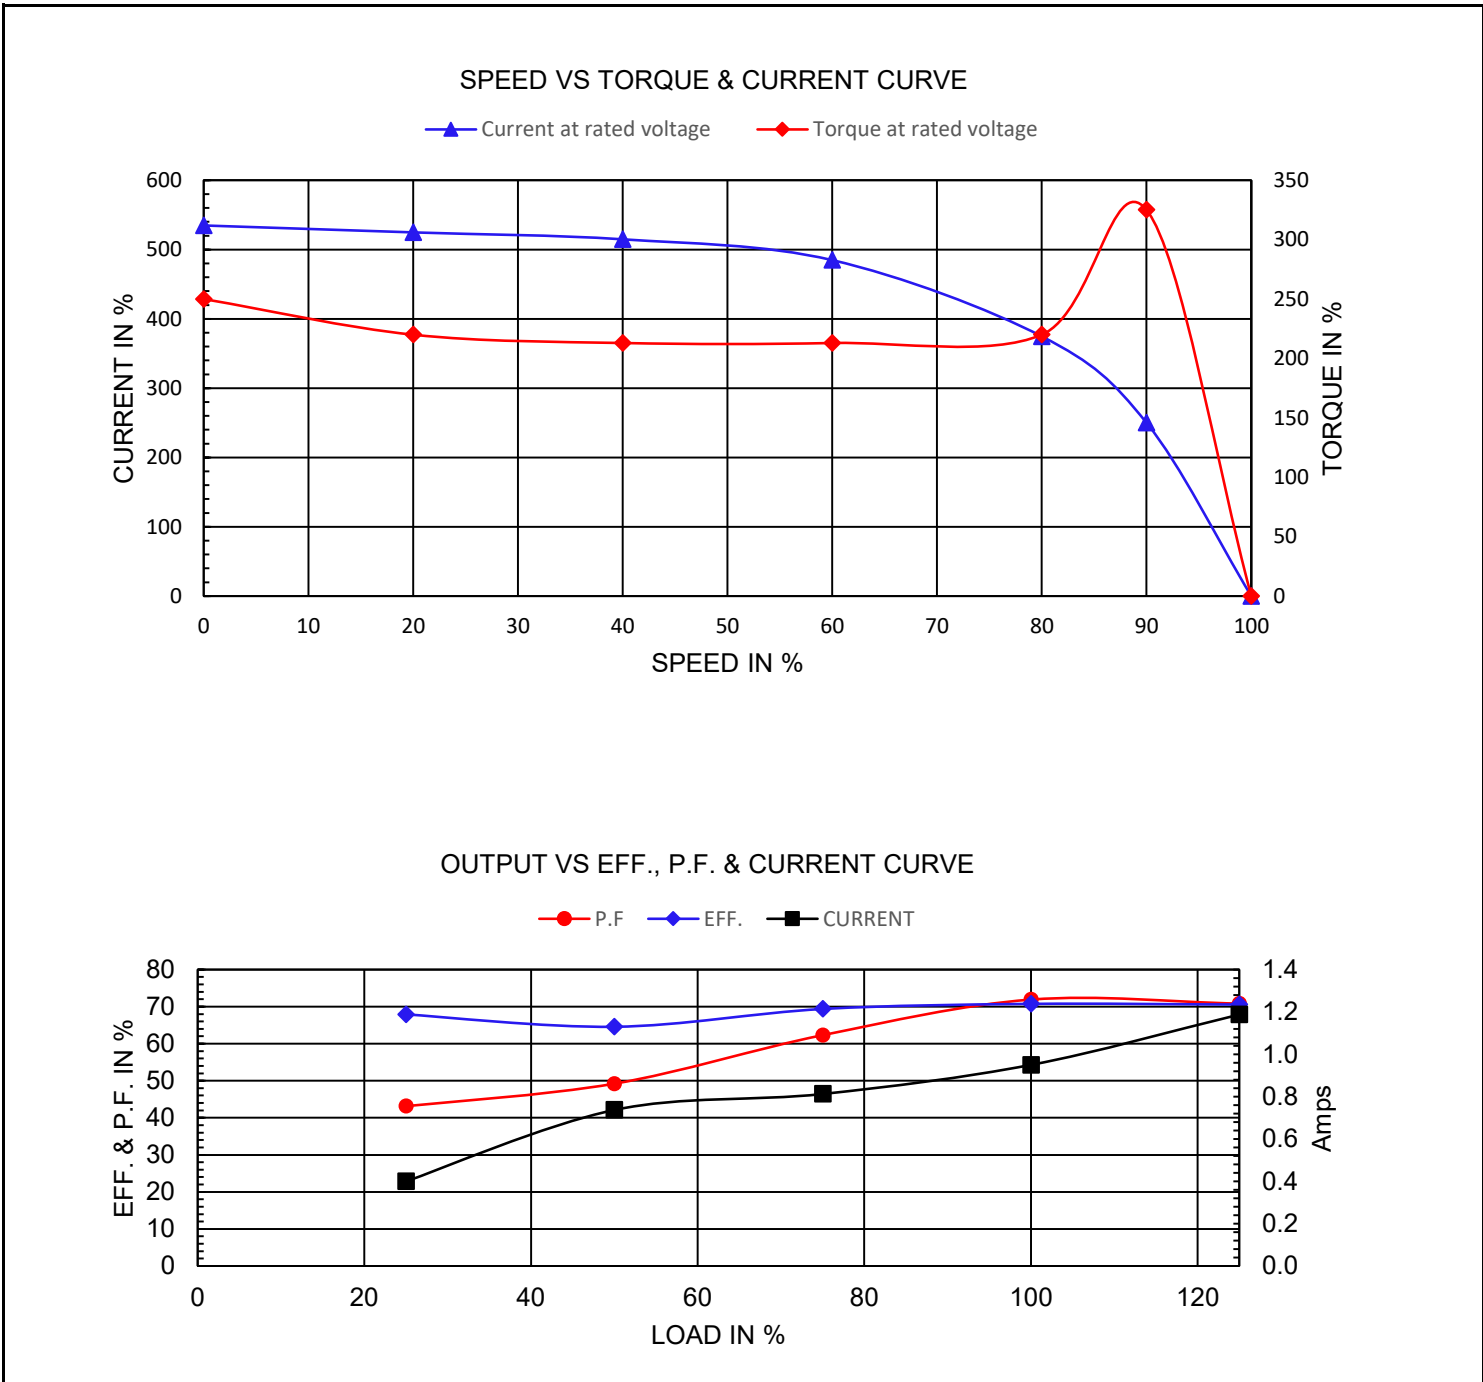

NAMEPLATE / WIRING

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Premium Efficiency Motor: **NAT12-18-56CRD**

Document Generated: 14-Aug-2025
Document ID:

Customer:

SAMPLE NAMEPLATE DATA

		THREE PHASE INDUCTION MOTOR		 C US Energy Verified 256950			
MODEL	FRAME	LOW VOLTAGE		HIGH VOLTAGE		MADE IN CHINA	
Hz	ENCL. TEFC	BLUE (T1) —	LINE1	BLUE (T1) —	LINE1		
HP	PH 3	BROWN (T7) —	LINE2	WHITE (T2) —	LINE2		
RPM	DUTY CONT	WHITE (T2) —		ORANGE (T3) —	LINE3		
VOLTS	CODE	RED (T8) —	LINE3	YELLOW (T4) —	INS		
AMPS	INS. F	ORANGE (T3) —		BLACK (T5) —	INS		
	DES.	YEL/BLA (T9) —	INS	RED (T8) —	INS		
S. F.	LB/WT	YELLOW (T4) —		GRAY (T6) —	INS		
		BLACK (T5) —		YEL/BLA (T9) —	INS		
		GRAY (T6) —					
NOM. EFF (60Hz)	DE/ODE BRG.	ACCEPTABLE FOR FIELD WIRING					
MAX. AMB. 40°C	Date Code XX/XXXXX	THERMALLY PROTECTED : NONE					
SERIAL NO. XXXXXXXXXX		WorldWide Electric Corporation					

Model	NAT12-18-56CRD	Frame	56C
Hz	60 Hz	Encl	TEFC
HP	1/2	PH	3
RPM	1725	DUTY	CONT
Voltage	230/460	Code	M
Amps	1.9/0.95	Ins Cl	F
IP	IP43	Design	B
S.F.	1.15	LB/WT	19 lbs.
Nom.Eff.	70.7%	DE Brng	6203 2RS
		ODE Brng	6203 2RS