



SV12-34

Performance

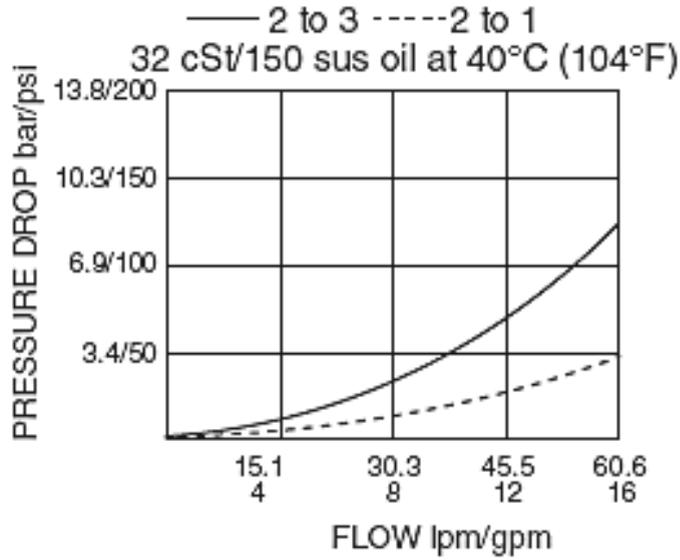

OPERATING LIMITS
 Pull-In Current 85% of Nominal
 Drop-Out Current 5% of Nominal
 Inlet at 2: hatched; Inlet at 3: shaded
 32 cSt/150 sus oil at 40°C (104°F)

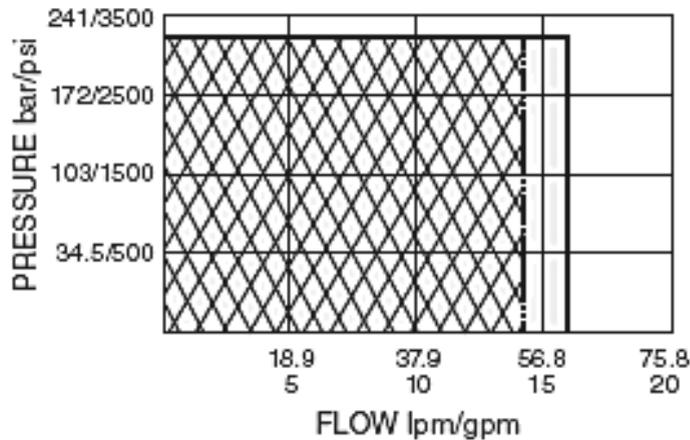

CONTINUOUS DUTY OPERATING RANGE
 Minimum Voltage at the Coil Required for Pull-In
 32 cSt/150 sus oil at 40°C (104°F)

