


DIMENSIONS (mm)

OPERATING CHARACTERISTICS

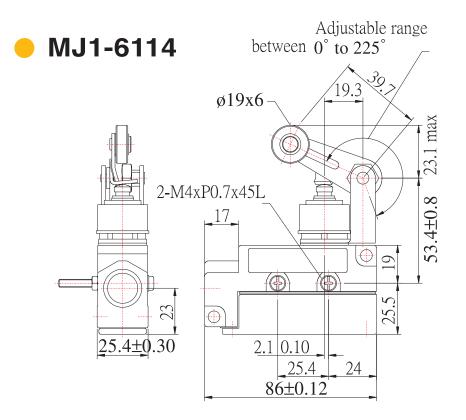

OF MAX	640g
RF MIN	230g
PT MAX	5mm
OT MIN	6mm
DT MAX	0.4mm

Characteristics:

OF = Operating Force

RF = Release Force

PT = Pretravel

OT = Over Travel

DT = Differential Travel