

Two Stage Compressors



400127



400239



400128






400136

- Cast Iron Cylinders
- Reed Valves
- Brass Connection Rod Inserts
- Aluminum Heads & Crankcase for Faster Heat Dissipation
- Deep Finned Extended Intercoolers
- Oil Sight Gauge
- Ball Main Bearings
- Machine Balanced Flywheel

Item #	Model	HP	RPM	Piston Displ.	ACFM @ 175 PSI
400127	K24	3	1000	14.58	10.37
		5	1250	18.25	13.14
400239	K28	3	800	16.66	13.02
		5	1250	20.35	15.87
400128	K30	5	800	20.52	16.01
		7-1/2	1200	30.78	23.63
400136	K60	10	800	41.04	33.65
		15	1100	54.58	44.75

Two Stage Compressors

	400127	400239	400128	400136
Cylinders	2	2	2	4
Bore L.P. (in.)	3.54	3.74	4.13	4.13 x 2
Bore H.P. (in.)	1.97	1.97	2.05	2.05 x 2
Stroke	2.56	2.56	3.31	3.31
Flywheel Dia. (in.)	15.16	15.16	15.16	21.65
V-Belts	2-A	2-A	2-A	2-B
Intake (NPT)	1/2"	3/4"	3/4"	1" x 2
Discharge (NPT)	1/2"	3/4"	3/4"	1"
Oil Capacity (Qt.)	2	2	2	3

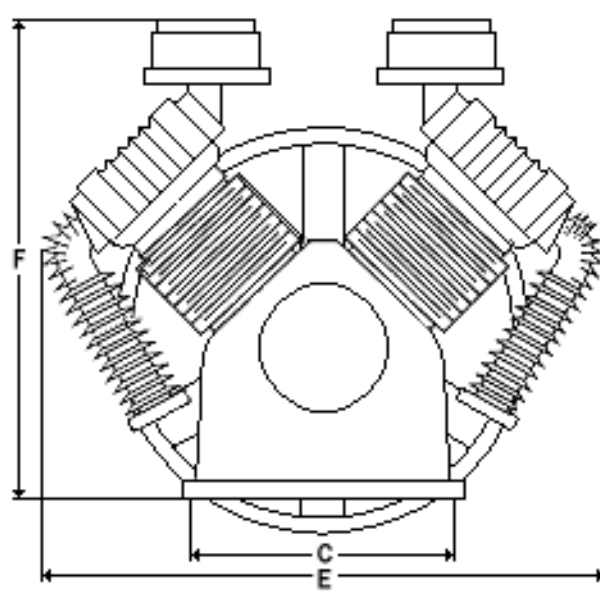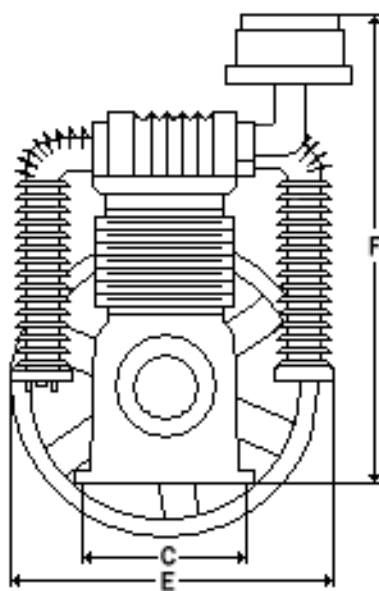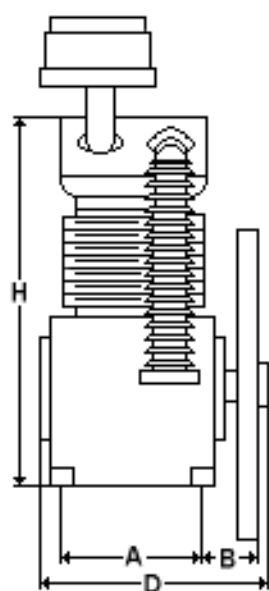

Item #	A	B	C	D	E	F	H
400127	6.41"	3.94"	8.09"	12.20"	15.16"	16.33"	16.33"
400239	6.41"	3.94"	8.09"	12.20"	16.33"	16.61"	16.61"
400128	7.48"	5.31"	8.97"	14.17"	16.33"	22.24"	18.70"
400136	9.60"	6.30"	11.73"	17.52"	28.93"	23.62"	19.29"