
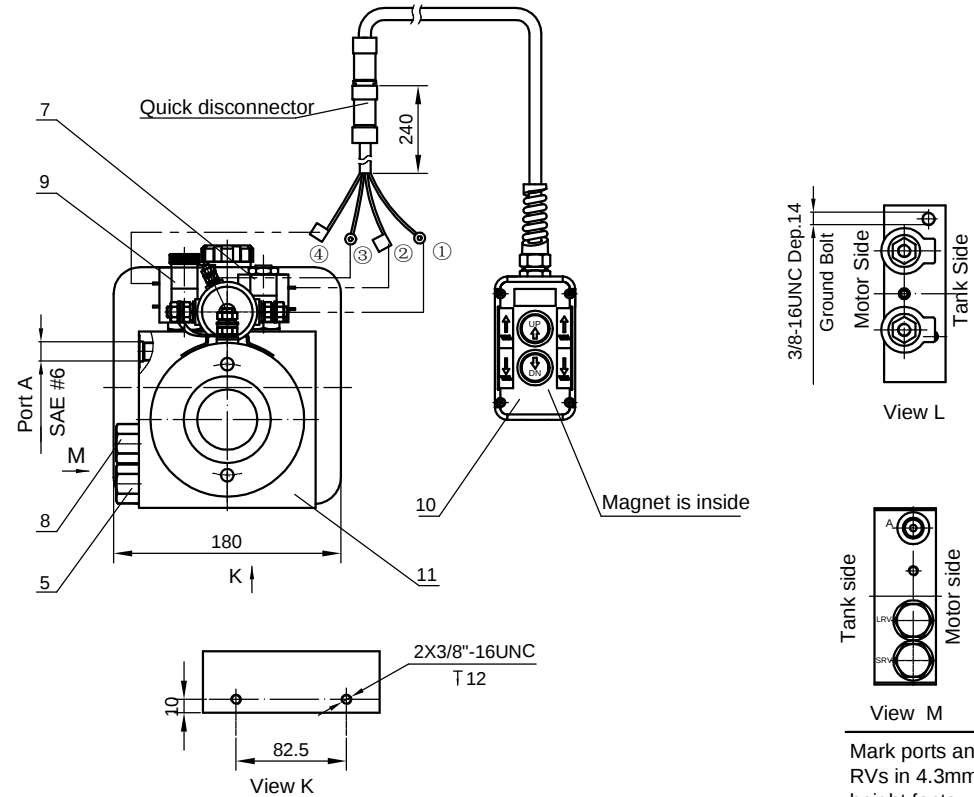
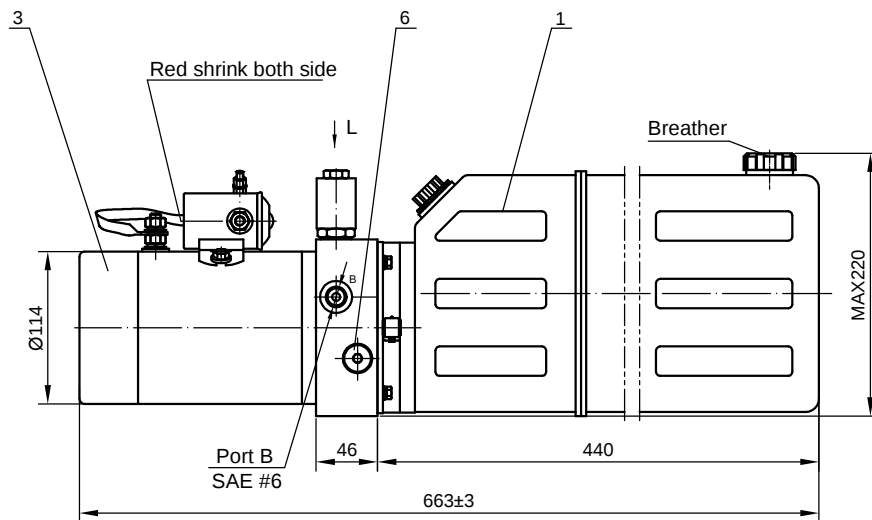


HYDRAULIC SCHEMATIC

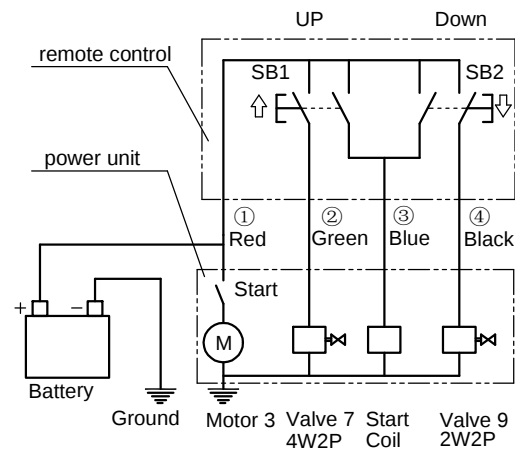

ELECTRICAL SCHEMATIC

11	Central Manifold	LBZ-T61KK-1	Aluminium
10	Remote Control	RCA-2B4L6M-H	6 Meters long
9	Solenoid Valve	LSV-08-2NCP-5B	2-Way,2-Position,10VDC
8	Low Relief valve	RV-3/4-B	1500PSI
7	Solenoid Valve	LSV2-08-4CO-5B	4-Way,2-Position,10VDC
6	Check valve	ILCV2000-G14	Max 4350PSI
5	System Relief valve	RV-3/4-A	Preset at 3000 PSI
4	Gear pump	CBKA-F2.1F	2.1cc/r
3	Motor	DM11-1AWU-3BC2R-O	12VDC,2KW,S3 duty
2	Suction Filter	YBZ-GLQ-G3/8-Ø62.5	150um
1	Tank	YBZ-SLYX-8L-N	8L,Plastic
No.	Description	P/N	Technical data

Designed by	Checked by	Reviewed by	Approved by	Name: Hydraulic Power Unit	 Wuxi Deli Hydraulics Co., Ltd. www.wx-dl.com tech@wx-dl.com
				P/N: YBZ5-F2.1C1A61/WUUTT1	
				Item#: 9-12368-21	