

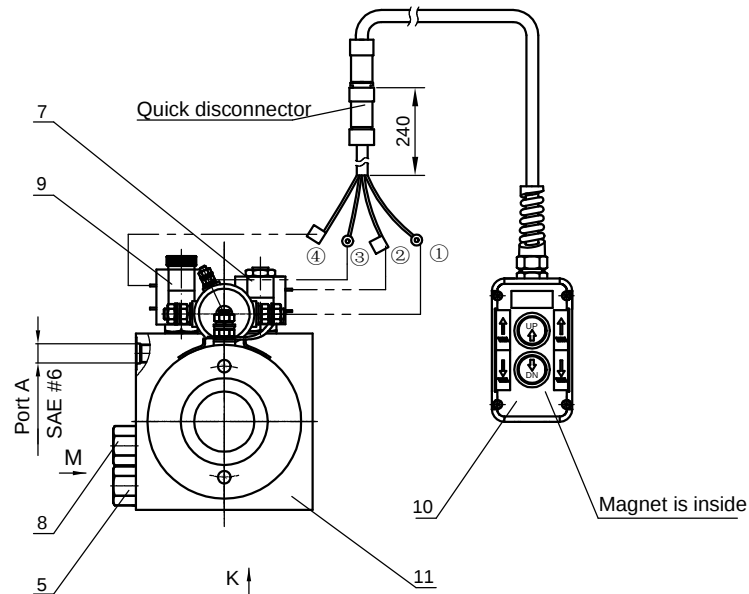
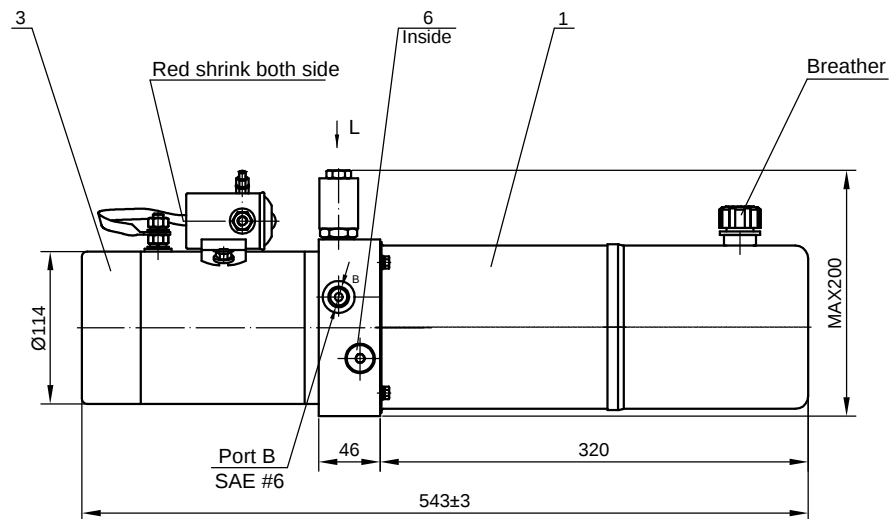


Mark ports and RVs in 4.3mm height fonts

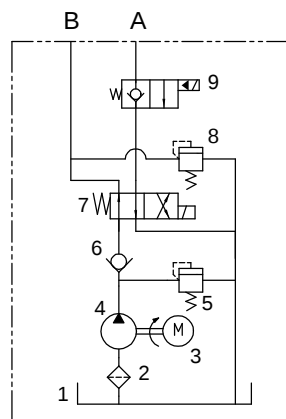

HYDRAULIC SCHEMATIC

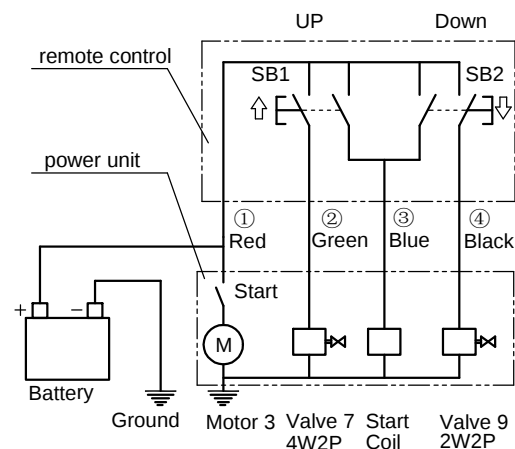

ELECTRICAL SCHEMATIC

11	Central Manifold	LBZ-T61KK-1	Aluminium
10	Remote Control	RCA-2B4L6M-H	6 Meters long
9	Solenoid Valve	LSV-08-2NCP-5B	2-Way,2-Position,10VDC
8	Low Relief valve	RV-3/4-B	1500PSI
7	Solenoid Valve	LSV2-08-4CO-5B	4-Way,2-Position,10VDC
6	Check valve	ICV2000-G14	
5	System Relief valve	RV-3/4-A	Preset at 3200 PSI
4	Gear pump	CBKA-F2.1F	2.1cc/r
3	Motor	DM11-1AWU-3BC5R-B	12VDC,2KW,S3 duty
2	Suction Filter	YBZ-GLQ-G3/8	
1	Tank	KR13W	Steel,Black,3L Usable,Horizontal
No.	Description	P/N	Technical data

Designed by	Checked by	Reviewed by	Approved by	Name: Hydraulic Power Unit	 Wuxi Deli Hydraulics Co., Ltd. www.wx-dl.com tech@wx-dl.com
				P/N: YBZ5-F2.1A1A61/WUATT2	
				Item# 9-12369	
				Rev.: O	