


901980


Posted 09/02/2021

** HYDRAULIC CIRCUIT **

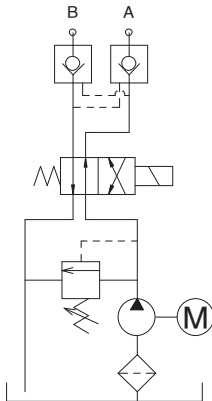


** ELECTRIC CIRCUIT **

START SWITCH AND MOTOR




DIRECTIONAL VALVE SOLENOID



** UNIT SPECIFICATION **

MOTOR	12VDC, 1 TERMINAL, STANDARD DUTY
PUMP	A.F.C. 2.0 CC/REV. (1.122 CU IN/REV.)
RELIEF	ADJUSTABLE RELIEF VALVE SET AT 2500 P.S.I.
ENDHEAD	9/16 S.A.E. PORTS "A" & "B" (2) 3/8-16 TAP x .38 DEEP MTG. HOLES
TANK	2.5 GAL. CAPACITY HORIZONTAL MOUNT WITH 3/4" NPT BREATHER-FILL PORT
VALVING	2P4W CARTRIDGE VALVE WITH 12V D.C. COIL DOUBLE P.O. CHECKS & 9/16 S.A.E. PORTS
WIRING	12 VOLTS D.C. TO START SWITCH 12 VOLTS D.C. TO 2P4W VALVE COIL

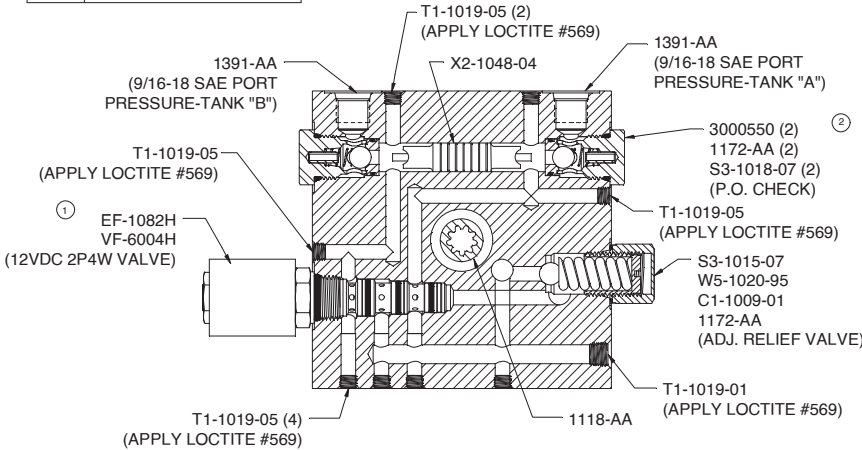

ENDHEAD SECTION

