

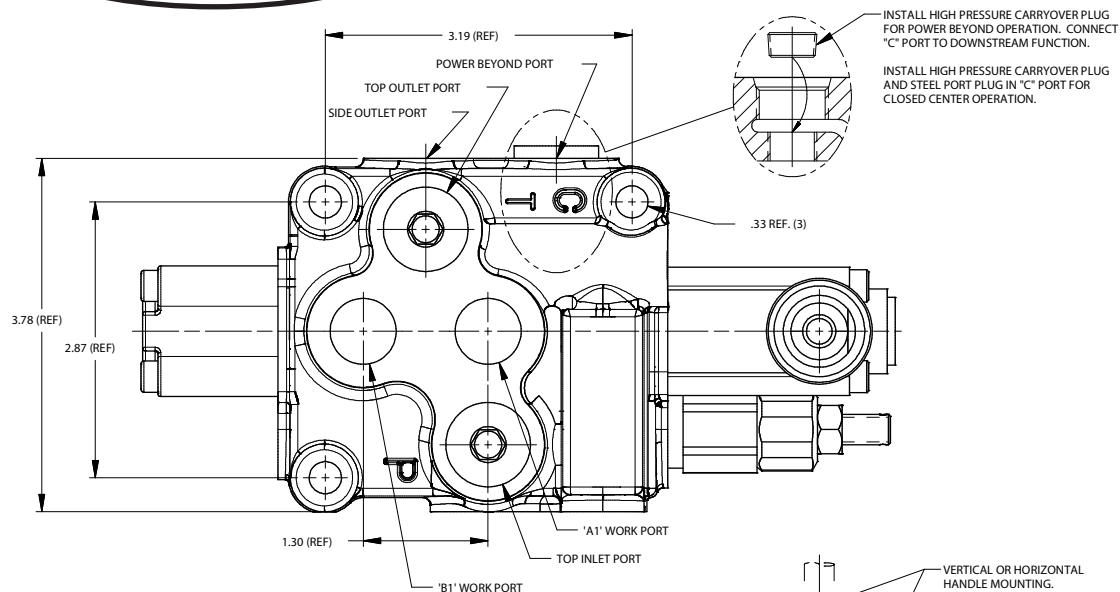



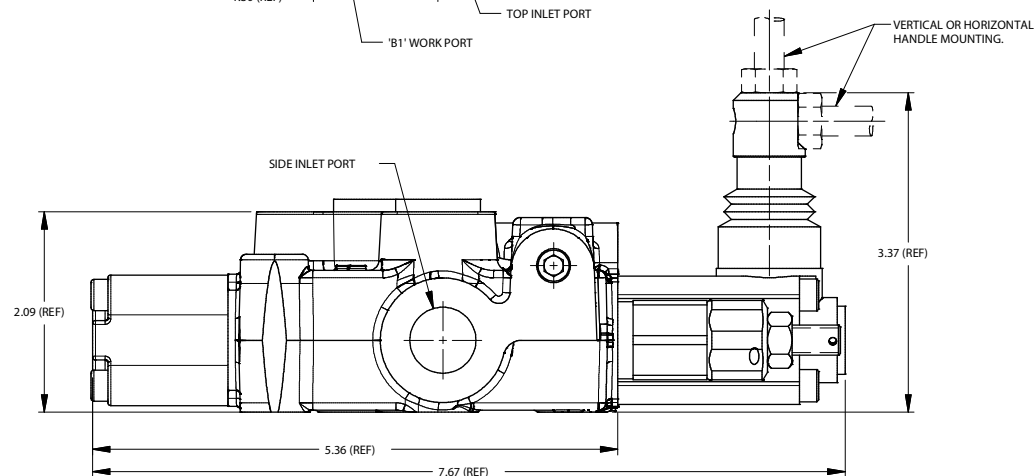


INSTALL HIGH PRESSURE CARRYOVER PLUG FOR POWER BEYOND OPERATION. CONNECT "C" PORT TO DOWNSTREAM FUNCTION.
 INSTALL HIGH PRESSURE CARRYOVER PLUG AND STEEL PORT PLUG IN "C" PORT FOR CLOSED CENTER OPERATION.

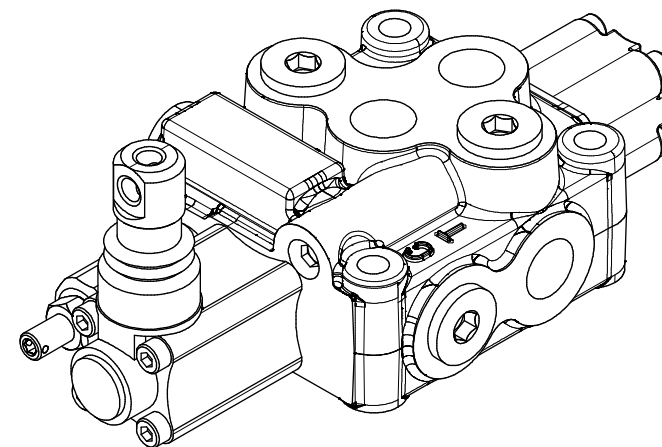

PRODUCT NOTES:

1. SINGLE SPOOL VALVE ASSY, 4-WAY 3-POSITION MOTOR SPOOL, 3 POSITION DETENT ACTION. (3 POSITION DETENT ACTION TO HAVE METAL END CAP AND HANDLE HOUSING.) (POWER BEYOND AND CLOSED CENTER CONVERTIBLE)
2. MAX OPERATING PRESSURE: 3500 PSI
 RELIEF PRESSURE SETTING: 2500 PSI @ 6 GPM FLOW (ADJUSTMENT RANGE: 2000-3500 PSI)
 MAX TANK PRESSURE: 500 PSI
 NOMINAL FLOW RATING: 8 GPM
 MAX OPERATING TEMPERATURE: 180°F.
3. PORT SIZE (INLET/OUTLET, WORK PORTS, POWER BEYOND): #8 SAE/ORB (3/4-16UNF-2B)
4. TOP INLET PORT, TOP OUTLET PORT AND POWER BEYOND PORT ARE TO BE SEALED WITH STEEL PLUGS.
5. NO PAINT
6. VALVE SHIPPED IN OPEN CENTER CONFIGURATION (HIGH PRESSURE CARRY-OVER PLUG IS TO BE SHIPPED UNINSTALLED).
7. HANDLE KIT IS TO BE SHIPPED UNATTACHED.
8. FILTRATION RECOMMENDATIONS: ISO 4406 19/17/14
9. NOTE: TORQUE ON CAPSCREWS HOLDING ON GFN HANDLE HOUSINGS AND GFN END CAPS TO BE 10-12 IN-LBS.

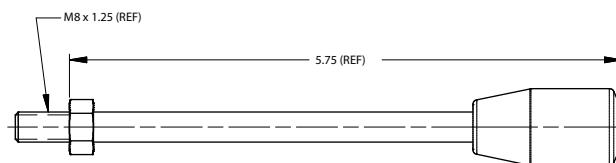

HANDLE KIT (ONE PER SPOOL)



HIGH PRESSURE CARRY-OVER PLUG