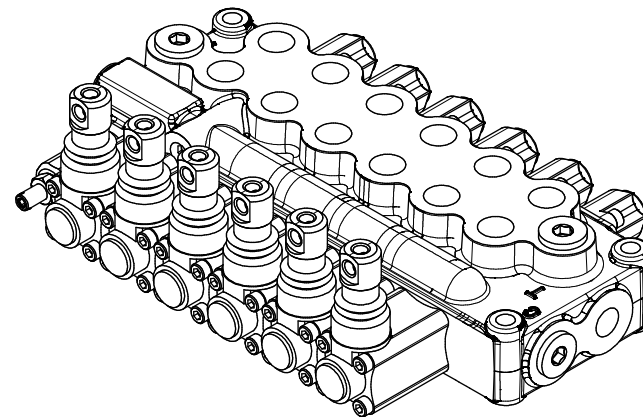
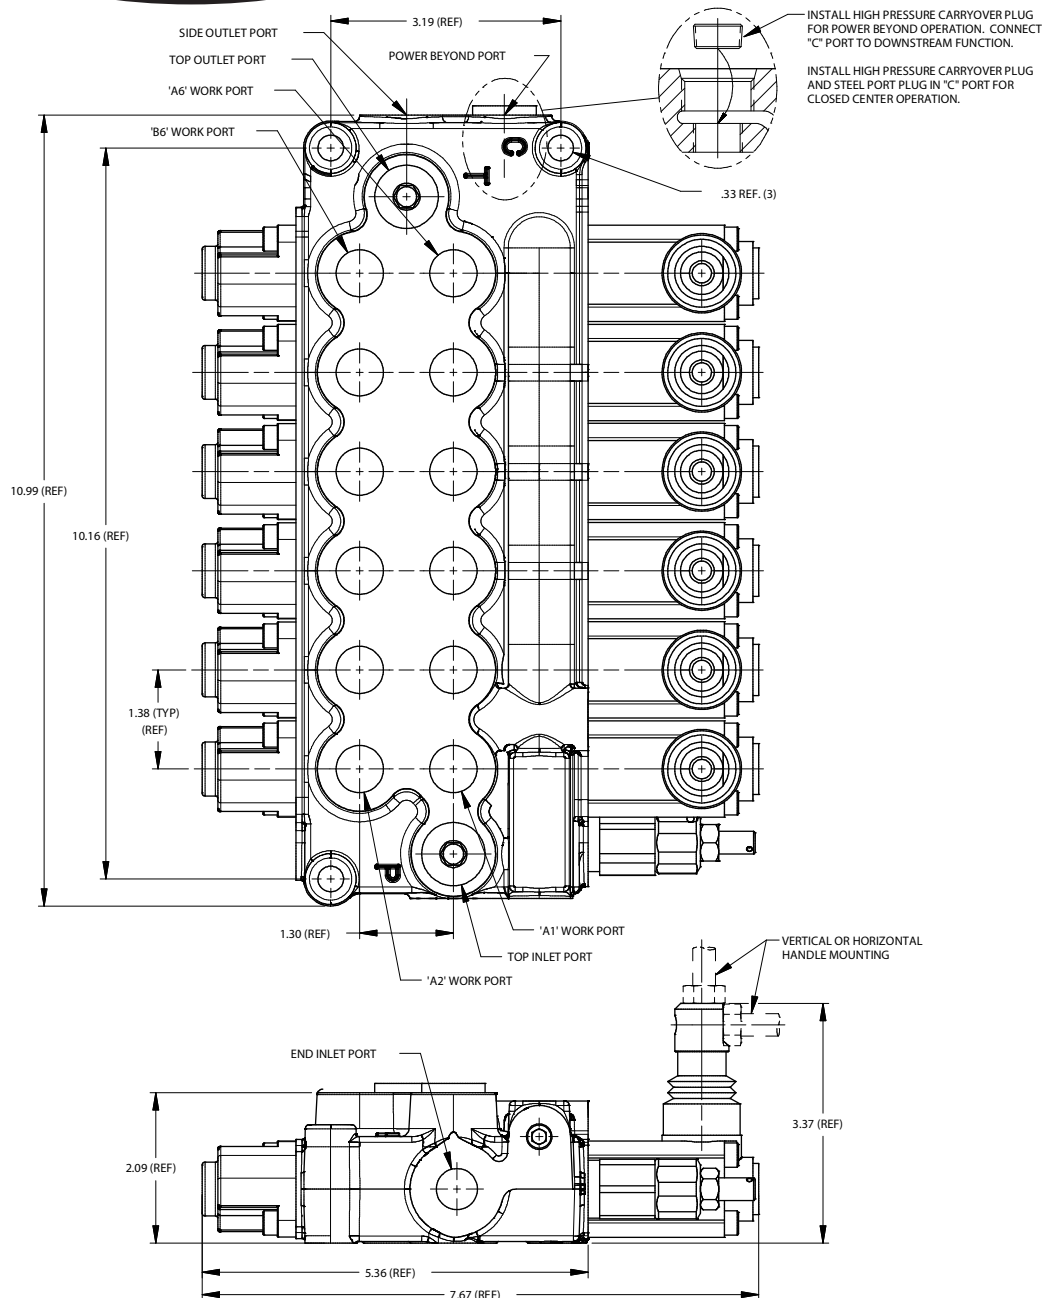


- PRODUCT NOTES:**
- SIX SPOOL VALVE ASSY, 4-WAY 3-POSITION CYLINDER SPOOLS, SPRING CENTER ACTION. (POWER BEYOND AND CLOSED CENTER CONVERTIBLE)
 - MAX OPERATING PRESSURE: 3500 PSI
RELIEF PRESSURE SETTING: 2500 PSI @ 6 GPM FLOW (ADJUSTMENT RANGE: 2000-3500 PSI)
MAX TANK PRESSURE: 500 PSI
NOMINAL FLOW RATING: 8 GPM
MAX OPERATING TEMPERATURE: 180°F
 - PORT SIZE (INLET/OUTLET, WORK PORTS, POWER BEYOND):
#8 SAE/ORB (3/4-16UNF-2B)
 - TOP INLET PORT, TOP OUTLET PORT AND POWER BEYOND PORT ARE TO BE SEALED WITH STEEL PLUGS.
 - NO PAINT
 - VALVE SHIPPED IN OPEN CENTER CONFIGURATION (HIGH PRESSURE CARRY-OVER PLUG IS TO BE SHIPPED UNINSTALLED).
 - HANDLE KITS ARE TO BE SHIPPED UNATTACHED.
 - FILTRATION RECOMMENDATIONS: ISO 4406 19/17/14
 - NOTE: TORQUE ON CAPSCREWS HOLDING ON GFN HANDLE HOUSINGS AND GFN END CAPS TO BE 10-12 IN-LBS.