


These devices are suitable for use on a circuit capable of delivering not more than 5000 RMS symmetrical amperes 600 volts maximum, when protected by fuses.

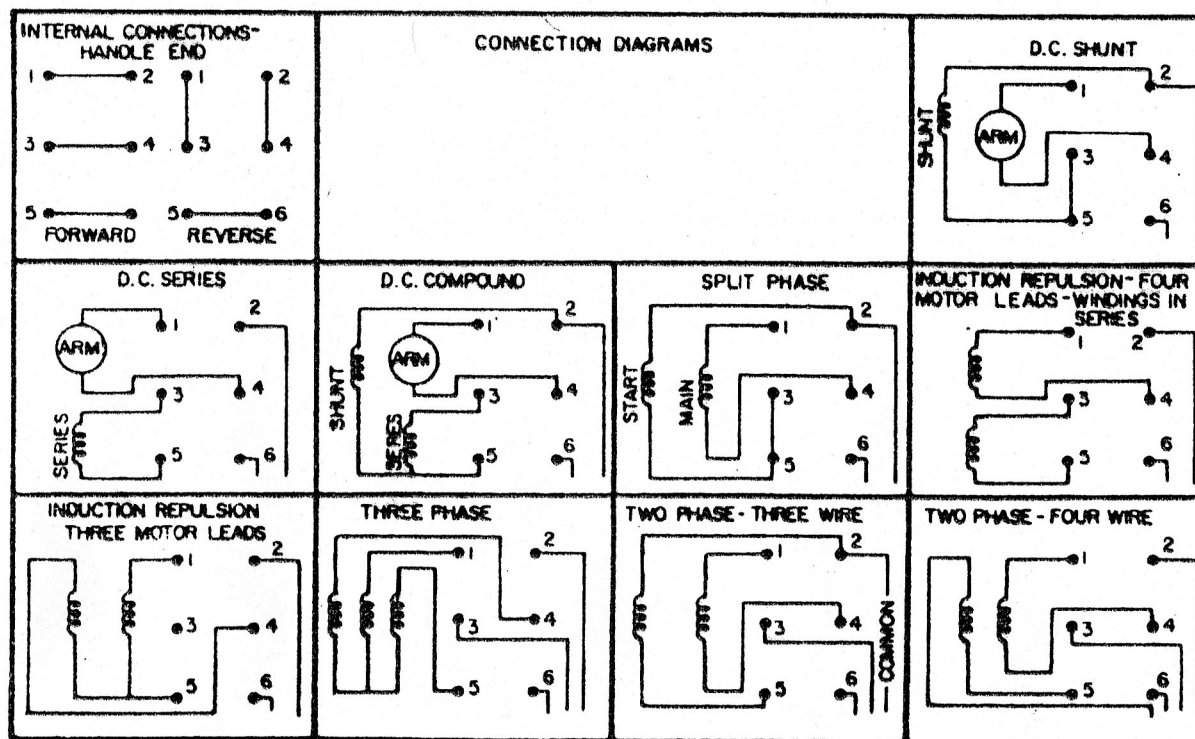

TYPE 1  
INDOOR USE  
ONLY

41A - RS-1  
(E7) - (1M)  
(E8) - (1M-SH)  
F1 - 1 SH