


SV10-47A

Shown with Coils

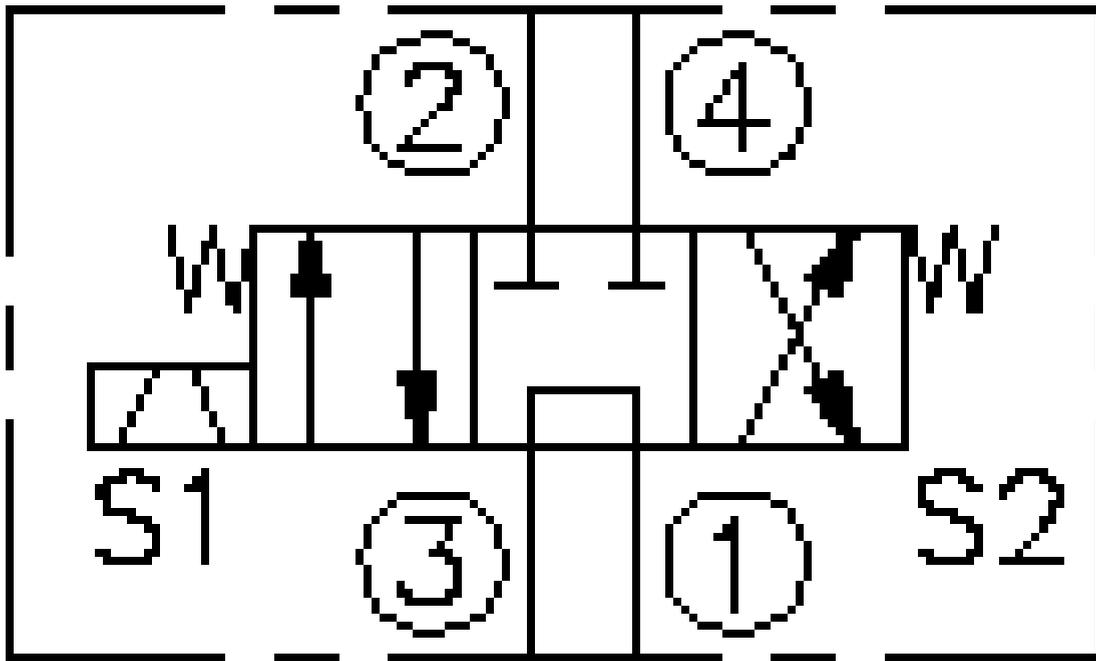

Description

A solenoid-operated, 4-port, 3-position, direct acting spool type screw-in hydraulic cartridge valve. When de-energized, the SV10-47AX blocks cylinder ports, while allowing flow from 3 to 1. When coil 1 is energized, flow is allowed from 3 to 2, and from 4 to 1. When coil 2 is energized, flow is allowed from 3 to 4, and from 2 to 1. In circuits where work port flows are unequal due to cylinder ratios, the higher return flow should be directed to port 2.

Surplus Center Item Number: 902398