
SURPLUS CENTER®

Catalog 299 - 2026 Spring Edition *1015 West "O" Street, Lincoln, NE 68528*

Order Online or by Phone!

www.surpluscenter.com 1-800-488-3407

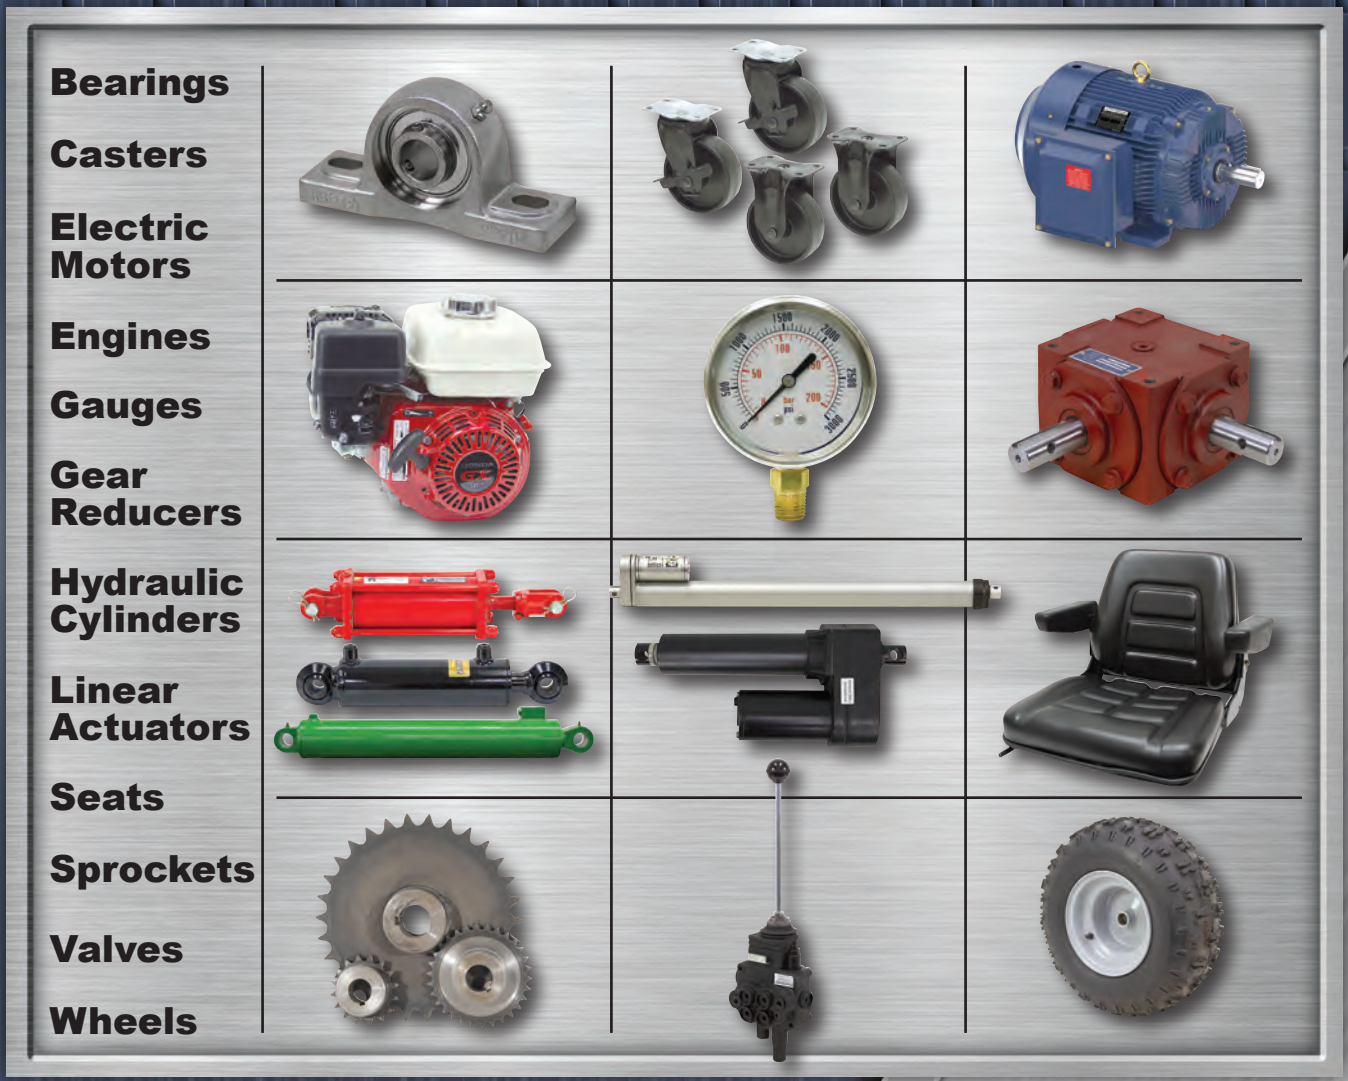

Scissor Hoists for Dump Trailers

• Brand new, Maxim scissor hoists rated for dump trailers with 8-20 ton capacities and 8-14´ bodies (Not recommended for truck bodies). Designed for durability and safety. Used to move heavy loads of material off a dump trailer's bed with ease. Scissor hoists are much more robust and provide more lifting power than standard cylinder dumps. Also cost less than telescopic hoists, while providing similar lifting performance and reliability. A double-acting hydraulic power unit with free flow in extend and controlled flow in return is recommended for hoist only.



Hoist Kits *Includes 12 Volt Hydraulic Power Unit

Item	Model	Capacity Tons	Size	Trailer Body	Shpg	Price
300386	516	8-20	44˝ x 30.5˝ x 10.18˝	8-12´	425 lbs.	$799.95
300388	520	10-20	49.13˝ x 33.03˝ x 11.57˝	10-14´	425 lbs.	$899.95

Hoist Only *Does not include 12 Volt Hydraulic Power Unit

Item	Model	Capacity Tons	Size	Trailer Body	Shpg	Price
300387	516	8-20	44˝ x 30.5˝ x 10.18˝	8-12´	380 lbs.	$599.95
300389	520	10-20	49.13˝ x 33.03˝ x 11.57˝	10-14´	380 lbs.	$699.95

Left & Right Hand Hydrostatic Transaxle Pair



ITEM 604198
$699.95

• New, Tuff Torq left/right hand hydrostatic transaxle pair. Features 5˝ dia. belt-drive input pulley with 7˝ dia. fan, polymer fluid tank, heavy steel axles for added strength and control, aluminum case for professional-grade durability and dependable performance and an internal braking system. Designed to be used on residential zero-turn mowers

SPECIFICATIONS

- Brand Tuff Torq
- Part Number 787Q2124020 & 787Q2124030
- Model Number TZ-450B-X
- Input Rotation CW
- Vehilce Speed Max. 10.5 mph
- Tire Size 23˝ max.
- Vehicle Weight max. w/ Attachments & Operator 1275 lbs. (578 kg)
- Reduction Ratio 18:1
- Pump/Motor Displacement 10/10 cc/rev
- Brake Capacity min. 180 lb-ft (180 Nm)
- Brake Arm Torque 11.7 lb-ft (15.8 Nm)
- Axle Torque 321 lb-ft (435 Nm)
- Fan Size dia. 7˝ (177.8 mm)
- Pulley Size dia. 5˝ (127 mm)
- Axel Length 4⅛˝ (Housing to Face of Hub)
- Output Four bolt (½˝-20 TPI) wheel hub on 4˝ B.C.
- Mount Six 0.38˝ dia. thru holes
- Size 15½˝ x 15¼˝ x 9˝
- **Shpg 82 lbs. (Ships in two boxes)**

ITEM 604194 *Left Hand* **$399.95**

ITEM 604195 *Right Hand* **$399.95**

9.5 HP Kohler Engine ⚠



ITEM 300365
$299.95

• New. KOHLER Command Pro Series horizontal engine. Features a heavy-duty air cleaner, forged-steel crankshaft, electronic ignition and cast-iron cylinder liner.

SPECIFICATIONS

- Model CH395-3149
- Engine Family Command Pro Series
- Power 9.5 HP
- Torque 13.9 ft-lbs.
- Bore/Stroke 78mm/58mm
- Disp. 277 cc
- Speed 3000 RPM
- Start Recoil
- Fuel Tank 7.39 qt
- Shaft 1˝ dia. x 3.49˝ long
- Base Mount Four hole on 3¾˝ x 7¾˝ centers
- Accessory Mount: Inner 4 bolt on 5˝ B.C. Outer 4 bolt on 6.5˝ B.C.
- Size 15.9˝ x 16.8˝ x 16.7˝
- **Shpg. 80 lbs.**

3 GPM Plunger Pumps



ITEM 200821
$119.95

• New, plunger pump. Designed for a wide variety of moderate pressure washing applications. They are constructed with die-cast bodies and feature a brass head. Internal components include special thick solid ceramic plungers for long life and durability. Precision cast cooling fins are anodized for maximum heat dissipation. For use with gas engines with ⅝˝ hollow shaft and flange mount.

SPECIFICATIONS

- Manufacturer Annovi Reverberi
- Model Number XTA 3G22 E
- Flow 3 gpm
- Pressure 2175 psi
- Rpm 1750
- Required HP 4.5 HP
- Rotation Reversible
- Shaft ⅝˝ hollow w/keyway
- Size 7⅞˝ x 7⅜˝ x 4.5˝
- Flange Mount Four 0.405˝ slotted holes on 2¼˝ x 2¼˝ centers
- Body Mount Two M8-1.25 tapped holes on 1⅞˝ centers and Four M8-1.25 tapped holes on 3⅛˝ x 1⅞˝ centers
- Inlet Ports ½˝ NPT
- Outlet Ports ⅜˝ NPT
- **Shpg 17 lbs.**

ITEM 200820 **$119.95**

SPECIFICATIONS SAME AS ABOVE EXCEPT

• Model Number XTA 3G16 E • Pressure 1595 psi

6.5 HP Horizontal Shaft Engine



ITEM 300376
$179.95

• New, BRIGGS & STRATTON XR Series horizontal shaft recoil start engine. Features a premium Dual Clean air filtration system and maintenance-free Magnetron electronic ignition. For utility and general applications like log splitters, pressure washers, compressors, and tillers. 49 state compliant, not for sale in California.

SPECIFICATIONS

- Brand Briggs & Stratton
- Model Number 130G320063F1
- Engine Family XR
- Power 6.5 HP
- Bore/Stroke 2.756˝(70mm)/2.13˝/(54mm)
- Displacement 12.69 cu in (208cc)
- Speed 3600 RPM
- Start Recoil
- Fuel Tank Yes
- Shaft ¾˝ dia. x 2¼˝ long w/ 3⁄16˝ keyway
- Base Mount Four hole on 3⅛˝ x 6⅜˝ centers
- Accessory Mount 4 bolt on 3⅝˝ B.C.
- Size 14½˝ x 12½˝ x 15˝
- **Shpg 45 lbs.**

Flow Control Valves



$86.65 Each

• Brand new, Dynamic full-range pressure compensating variable flow control. Features a cast iron body, heat treated compensator spool and a stainless steel rotary spool. Designed so that the orifice area varies as the lever is rotated. The outlet flow is smooth and constant regardless of the pressure on the control flow or excess flow ports.

SPECIFICATIONS

- Pressure 3000 PSI max.
- * Relief Valve Adjustable 75 to 3000 PSI, preset to 2100 PSI
- Mount Two 17⁄64˝ holes thru body on 3.87˝ centers
- Size 5.78˝ x 4.56˝ x 2.87˝
- **Shpg 11 lbs.**

ITEM	Model	Ports	GPM
907009*	DFC-R-51-12-S	SAE 12	0-32
907016	DFC-N-51-12-S	SAE 12	0-32
907015	DFC-N-51-10-S	SAE 10	0-16
907008*	DFC-R-51-10-S	SAE 10	0-16
907014	DFC-N-51-08-S	SAE 8	0-16
907007*	DFC-R-51-08-S	SAE 8	0-16
907013	DFC-N-51-06-S	SAE 6	0-8
907006*	DFC-R-51-06-S	SAE 6	0-8
907012	DFC-N-51-¾-N	¾˝ NPT	0-30
907005*	DFC-R-51-¾-N	¾˝ NPT	0-30
907004*	DFC-R-51-½-N	½˝ NPT	0-16
907011	DFC-N-51-½-N	½˝ NPT	0-16
907010	DFC-N-51-⅜-N	¾˝ NPT	0-8
907003*	DFC-R-51-⅜-N	¾˝ NPT	0-8

13 HP Horizontal Shaft Engine



ITEM 300374
$199.95

• New, POWERPRO horizontal shaft engine features overhead valves, cast iron sleeve liner, low-oil sensor, and electronic ignition. EPA certified. CARB compliant for 2020-2021.

SPECIFICATIONS

- Model 2541-0048
- Power 13 HP
- Torque 19.6 ft-lbs
- Bore/Stroke 3.46˝ x 2.51˝
- Disp. 23.73 cu. inch
- Speed 3600 RPM
- Start Recoil
- Shaft Horizontal
- Shaft 1˝ dia. x 3⅝˝ keyed, tapped ⅜˝-24
- Mount 3¾˝ x 7 1⁄16˝
- Accessory Mount 5˝ bolt circle and 6.5˝ bolt circle
- Fuel Tank 1.7 gallons
- Size 14½˝ x 18˝ x 17˝
- **Shpg. 81 lbs.**

TABLE OF CONTENTS

PRODUCT	PAGE
Acme Rod (Lead Screws)	122
Air	
Cylinders	159
Compressors	157, 159
Pressure Switches	160
Valves	158, 159
Automotive	8 - 10, 22
Backup Alarms & Cameras	8, 16
Battery Chargers	10
Bearings	103 - 106, 163
Blowers	147 - 148
Cab Heaters	8
Cable Ties	161
Capacitors	137
Casters	167 - 179
Counters	161
Couplings	123 - 124
Engines	4, 6 - 7
Fans	147 - 149
Gauges	98 - 99
Gearboxes	113 - 114
Gearmotors	
AC	138
DC	141 - 143
Gear Reducers	107 - 112
Hose Clamps	22
Hourmeters	8
Hydraulic	
Cylinders	46 - 72
Filters,Strainers	83, 86 - 87
Fittings	90 - 97
Gauges	98 - 99
Hoses	88 - 89
Hose Sleeve	81
Oil Coolers	84 - 85
Motors	73 - 79
Power Packs	38 - 39
Power Team 10,000 PSI	40
Pumps	38 - 44
Reservoirs	82 - 83
Quick Couplers	80 - 81
Valves, Control	23 - 32
Valves, Flow	33 - 37
Valves, Relief	34, 36
Valves, Selector	35
Valves, Solenoid	34 - 35
Keystock	121
Lights	16 - 21
Limit Switches	151
Linear Actuators	142 - 146
Motors	
AC	130 - 137
Slide Bases	135
Controllers	130, 140
DC	139 - 140
Single Phase	133 - 137
3 Phase	130 - 132
ORDERING INFORMATION	3 - 4
Phase Converters	130
Pressure Gauges	98 - 99
Pulleys	125 - 126
Pumps	
Centrifugal	101 - 102
Diaphragm	100 - 102
Roller	101
Submersible	102
Pump Mounts	45
QD Sprockets & Bushings	119
Ratchet Straps	15
Rake Teeth	10
Relays	150
Rod Ends	115
Roller Chain	120, 121
Rotary Cutter Gearbox	114
Seats	11 - 15
Shaft Collars	121
Shafting	122
Shaft Mount Reducers	112
Sprockets	116 - 119
Switches	151 - 155
Tension Bushings	106
Toggle Pliers	146
Trailer Related	156, 162
Transaxles	113
U-Joints	122
V-Belts	127 - 129
Variable Frequency Drives	130
Water Pumps	100 - 102
Wheels	163 - 167
Wireless Controllers	141, 152

▼ ORDERING INFORMATION ▼

3 Easy Ways To Order

Online: www.surpluscenter.com

Call: 800-488-3407

Fax: 877-474-5198

8-5 Central Time Monday thru Friday

We ship via UPS, USPS and Truck Freight

Buying and Selling Industrial Surplus Since 1933

What is the Surplus Center?

• We buy top quality products from overstocks, design changes and bankruptcies in order to pass great savings on to our customers. We buy clean, new items because we know how important product reliability is to our customers. In addition to our surplus items, we also stock products from major manufacturers to keep the products that you need on hand.

All of our products fit into these product classifications:

• *Brand new* – New products that we buy directly from the manufacturer and keep in stock. These items include the manufacturer's warranty.
• *New* – Excess inventory that is new and unused. Quantities of surplus items are limited; once we sell out we cannot order more. We support these items with a 90 day warranty.
• *New Takeoffs* – Removed from UNUSED machinery. We support these items with a 90 day warranty.
• *Used* – Equipment that was in use before we bought it. Applies to only a few of our products. We support these items with a 90 day warranty.
• All of our products have a warranty (full warranty details on page 4.)

Surplus Center Sales Counter

• Simply specify sales counter pickup when you order by phone, email, fax or online. Please note that orders picked up in Lincoln are subject to Nebraska sales tax. We will contact you when the order is ready for pickup.
• The sales counter is open for in person shopping of all our products. Our knowledgeable staff are eager to assist you.

Orders for pickup can be phoned in, emailed, ordered on our website with sales counter pickup as the ship method or faxed to us.

- ***Phone 402-474-5167***
- ***Fax 402-474-4359***
- ***Email salescounter@surpluscenter.com***
- ***Website www.surpluscenter.com***
- ***1015 West O Street Lincoln, NE 68528***
- ***Sales Counter hours: 8-5 Monday thru Friday***

• It's easy to get here from any direction. Our warehouse is approx. 1 mile from Interstate 80. See the map for details.



Prices subject to change.
Quantities limited to surplus items on hand.

California Residents WARNING:Cancer and Reproductive Harm
For more information refer to:www.P65Warnings.ca.gov

What Is The Surplus Center?

- **All of our products fit into these classifications:**
  - ***Brand new.*** New products we buy directly from the manufacturer and keep in stock. Some items ship directly from manufacturer.
  - **New.** Surplus inventory that is new and unused. Quantities of surplus items are limited; once we sell out we cannot order more.
  - ***New take-offs.*** Removed from UNUSED machinery.
  - ***Used.*** Used products in good working condition.

Pricing

- **Burden Sales Company, D.B.A. Surplus Center,** reserves the right to correct any website or catalog printing errors. All prices are subject to change without notice.

Order Online

- **Please visit our website www.surpluscenter.com.** Many more items than in this catalog! Also a great source of additional information, current stock counts, and pictures. Updated daily with new items.

Order By Phone

- **Call our toll free number 1-800-488-3407** for fast service Monday – Friday from 8:00 to 5:00 CST from all 50 state plus Canada, Puerto Rico and the Virgin Islands.

Order By Mail

- **Call our toll free number 800-488-3407 from 8:00 to 5:00 CST** and we will take your order. Our sales staff can provide you with current product availability, shipping charges, state sales tax and your total order amount. Send payment to: Surplus Center, 1015 West O St, Lincoln NE 68528.

Sales Counter Pickup Lincoln NE

- **Visit our website www.surpluscenter.com** to place your order and select Pickup at Surplus Center or call the Sales Counter at 402-474-5167 from 8:00 to 5:00 CST to arrange a pick up in Lincoln NE. Sales Counter address: Surplus Center, 1015 West O St, Lincoln NE 68528.

Shipping & Delivery

- **Please allow 5 - 7 working days for delivery.** If an item is out of stock we will inform you of the expected delay.
- **All items, unless otherwise noted, are priced F.O.B. Lincoln.** You are responsible for shipping costs.
- **We normally ship by:**
  - ***UPS.*** Most items 150 lbs. and under can be sent using ground, 3rd Day, 2nd Day or Next Day service. 3rd Day, 2nd Day and Next Day are guaranteed services.
  - ***Priority Mail.*** Items 70 lbs. and under will be delivered in 2-3 days to most U.S. addresses.
  - ***Truck Freight.*** We use Fedex Freight Co. to ship items that weigh more than 150 lbs. or are too large to ship using UPS. A residential delivery fee will apply to shipments made to residential or rural areas.
  - ***International Orders.*** Ship via USPS Priority Mail International, DB Schenker or UPS International services.

Returning Merchandise

- **If you receive a product from us and are not satisfied** or the item is not suitable for your application, you can return it within **30 Days**, as long as the item has not been installed or modified and it is in the original manufacturers condition. A refund will be issued for the cost of the item only. All returns must be shipped back **PREPAID** with all original parts, manuals and accessories. **We do not accept COD shipments**.
- **Products drop-shipped from the manufacturer are not returnable.**
- **If a product is defective within the warranty period** please contact us immediately so we may assist you.
- **All returns should have a Return Authorization** number written on the box. To obtain an authorization and shipping instructions ***call 1-800-488-3407*** or ***email customerservice@surpluscenter.com***
- Pack the products securely and ship to this address:

Surplus Center Returns Dept.
1015 West "O" Street
Lincoln, NE 68528

Limited Warranty

- Products we regularly stock that are purchased directly from the manufacturer are covered by that manufacturers warranty.
- We warrant all other products, only to the original purchaser, to be free from defects in materials and workmanship for a period of 90 days from date of shipment.
- Because we have no assurance of the purposes for which any of the items herein will or may be used, no warranty is given as to the fitness of the item for any particular purpose. You have the responsibility for determining the suitability of items herein for your particular use. We shall not be liable for incidental or consequential damages. NOTE! Warranties do not cover bent hydraulic cylinder shafts.
- We shall, at our option, repair or replace any items deemed by us to be defective under this warranty. Items returned by the purchaser for warranty adjustment must be handled as stated in our return policy. Proof of, and date of purchase will be required. Remedies under this warranty shall be limited to the original purchase price of the claimed defective item. (Some states do not allow limitations on implied warranties, incidental or consequential damages, thus, some of the limitations or exclusions referred to above may not apply to you.)
- In no event shall we be liable for any damages, or warrant any of our products which are made defective as a result of damage in shipment, user's abuse, neglect or improper operation.
- A copy of the warranty, if any, for an item in this catalog may be obtained, at no charge, upon written request addressed to: ***SURPLUS CENTER Warranty Department***
1015 West "O" Street Lincoln, NE 68528

23 HP Kawasaki Vertical Shaft Engine



ITEM 300395 ***$1199.95***

• New, Kawasaki FR691V V-twin(OHV) 4-cycle vertical shaft engine. Designed for reliable residential use across a range of power and project needs. Features internally vented carburetor, rotating metal grass chopper screen, and cast-iron cylinder liners for durability.

SPECIFICATIONS

- Brand Kawasaki
- Series FR
- Model FR691V-ES37-R
- Power 23 HP @ 3600 RPM
- Torque 39.3 ft-lbs. @ 2200 RPM
- Bore/Stoke 3.1″(78mm)/3.0″(76mm)
- Disp. 44.3 cu in (726 cc)
- Oil Capacity 2.2 quart (2.1 liter)
- Speed 3600 RPM max.
- Start Electric Start
- Fuel Tank None
- Shaft Orientation Vertical

Truck freight only.

- Shaft 1.125″ dia. x 4.281″ w/ 0.25″ Keyway tapped 7⁄16″-20 TPI
- Mount Four 3⁄8″-16 TPI tapped holes
- Size 22.24″(564.9mm) x 18.85″(478.8mm) x 18.18″(461.8mm)
- **Shpg 145 lbs.**

21.5 HP Kawasaki Vertical Shaft Engine



ITEM 300396 ***$1095.95***

• New, Kawasaki FR651V V-twin(OHV) 4-cycle vertical shaft engine. Designed for reliable residential use across a range of power and project needs. Features internally vented carburetor, rotating metal grass chopper screen, and cast-iron cylinder liners for durability.

SPECIFICATIONS

- Brand Kawasaki
- Series FR
- Model FR651V-BS42-R
- Power 21.5 HP @ 3600 RPM
- Torque 39.3 ft-lbs. @ 2200 RPM
- Bore/Stoke 3.1″(78mm)/3.0″(76mm)
- Disp. 44.3 cu in (726 cc)
- Oil Capacity 2.2 quart (2.1 liter)
- Speed 3600 RPM max.
- Start Electric Start
- Fuel Tank None
- Shaft Orientation Vertical

Truck freight only.

- Shaft 1.125″ dia. x 4.281″ w/ 0.25″ Keyway tapped 7⁄16″-20 TPI
- Mount Four 3⁄8″-16 TPI tapped holes
- Size 19.60″(497.8mm) x 18.14″(460.7mm) x 15.43″(391.9mm)
- **Shpg 137 lbs.**

26 HP Vanguard Vertical Engine



ITEM 300398 ***$995.95***

• New, Briggs & Stratton 49R9 Vanguard mid-block V-twin(OHV) vertical shaft engine. Designed for zero turn mowers. Features heavy-duty cylinder and sump, forged connecting rods, fire ring head gaskets, cast aluminum valve covers, forged crankshaft and a 5″ cyclonic air cleaner.

SPECIFICATIONS

- Brand Briggs & Stratton
- Series Vanguard
- Model 49R9770013G1
- Power 26 HP @ 3600 RPM
- Torque Unknown
- Bore/Stoke 3.3″(84mm)/2.89″(73mm)
- Disp. 49.4 cu in (810 cc)
- Oil Capacity 67 oz
- Speed 3600 RPM max.
- Start Electric Start
- Fuel Tank None
- Shaft Orientation Vertical

Truck freight only.

- Shaft 1.125″ dia. x 4.3125″ w/ 0.25″ Keyway tapped 7⁄16″-20 TPI
- Mount Four 0.34″ dia.
- Size 22.89″(581.4mm) x 19.94″(506.5mm) x 18.53″(470.7mm)
- **Shpg 140 lbs.**

27 HP Briggs & Stratton Vertical Engine



ITEM 300397 ***$995.95***

• New, Briggs & Stratton 49T8 CXi 2700 series V-twin(OHV) vertical shaft engine. Designed for zero turn mowers and other high-debris applications. Features strengthened cylinder, sump and rod for durability, Oil Xtend system and 5-step Cyclonic Debris Management to keep dirt out and extend engine life.

SPECIFICATIONS

- Brand Briggs & Stratton
- Series CXi 2700
- Model 49T8770036G1
- Power 27 HP @ 3600 RPM
- Torque Unknown

Truck freight only.

- Bore/Stoke 3.3″(84mm)/2.89″(73mm)
- Disp. 49.4 cu in (810 cc)
- Oil Capacity 75 oz
- Speed 3600 RPM max.
- Start Electric Start
- Fuel Tank None
- Shaft Orientation Vertical
- Shaft 1.125″ dia. x 4.3125″ w/ 0.25″ Keyway tapped 7⁄16″-20 TPI
- Mount Four 0.34″ dia. holes
- Size 19.3″ x 17.6″ x 15.7″
- **Shpg 145 lbs.**

Hydrolico Vane Pumps



- Brand new, Hydrolico hydraulic vane pumps. Cast iron construction. Ports inline with one another.
- Input rotation CW • Mount SAE A 2 bolt

SPECIFICATIONS For V10 Series

- Inlet port 1″ NPT • Outlet port ½″ NPT • Shaft ¾″ dia. x 1.65″ w/ 3⁄16″ keyway

ITEM	Model	Displ.	Max. RPM	PSI	GPM max.	Size	Shpg.	Price
906588	V10-1P1P-1C20	0.20	4800	2500	3.6	6.3″ x 5.07″ x 4.22″	14 lbs.	$246.65
906589	V10-1P2P-1C20	0.40	4500	2500	7.3	6.3″ x 5.12″ x 4.25″	14 lbs.	$246.65
906590	V10-1P3P-1C20	0.60	4000	2500	9.4	6.3″ x 5.12″ x 4.25″	14 lbs.	$246.65
906591	V10-1P4P-1C20	0.80	3400	2500	10.9	6.55″ x 5.12″ x 4.25″	14 lbs.	$246.65
906592	V10-1P5P-1C20	1.0	3200	2500	12.8	6.79″ x 5.12″ x 4.25″	15 lbs.	$246.65
906593	V10-1P6P-1C20	1.19	3000	2200	14.6	6.75″ x 5.12″ x 4.25″	15 lbs.	$246.65
906594	V10-1P7P-1C20	1.39	2800	2000	16	6.75″ x 5.12″ x 4.25″	15 lbs.	$246.65

SPECIFICATIONS For V20 Series

- Inlet port 1¼″ NPT • Outlet port ¾″ NPT • Shaft ¾″ dia. x 2.655″ w/ 3⁄16″ keyway

ITEM	Model	Displ.	Max. RPM	PSI	GPM max.	Size	Shpg.	Price
906595	V20-1P5P-1C11	1.0	3400	2500	13.5	7.59″ x 5.12″ x 4.79″	19 lbs.	$286.55
906596	V20-1P6P-1C11	1.19	3400	2500	16.1	7.59″ x 5.12″ x 4.79″	19 lbs.	$286.55
906597	V20-1P7P-1C11	1.39	3000	2500	16.7	7.84″ x 5.12″ x 4.79″	20 lbs.	$286.55
906598	V20-1P8P-1C11	1.62	2800	2500	17.7	7.84″ x 5.12″ x 4.79″	20 lbs.	$286.65
906599	V20-1P9P-1C11	1.81	2800	2500	19.8	7.84″ x 5.12″ x 4.79″	20 lbs.	$286.55
906600	V20-1P10P-1C11	2.0	2500	2500	20.6	8.04″ x 5.12″ x 4.79″	21 lbs.	$286.55
906601	V20-1P11P-1C11	2.22	2500	2500	22.9	8.04″ x 5.12″ x 4.79″	21 lbs.	$286.55
906602	V20-1P12P-1C11	2.38	2400	2200	23.4	8.18″ x 5.12″ x 4.79″	21 lbs.	$286.55
906587	V20-1P13P-1C11	2.59	2400	2200	25.9	8.18″ x 5.12″ x 4.79″	21 lbs.	$286.55

Cross Control Valves



- Brand new CROSS directional control valve for operating double acting cylinders. Features include built-in adjustable pressure relief valve, open center, side inlet/outlet and top work ports. Intergral load holding check valves. Can be converted to power beyond.

SPECIFICATIONS

- Max. 25 GPM
- Max. 3000 PSI
- Adjustable relief valve 1500-3000 PSI factory set at 2000 PSI
- Spring centering

NPT Ports
- IN/OUT ¾″ NPT, Work Ports ½″ NPT

SAE Ports
- IN/OUT SAE 12 Work Ports SAE 10

Available with your choice of NPT or SAE ports

One Spool Valves 30 GPM

NPT Ports ITEM	NPT Ports Price	SAE Ports ITEM	SAE Ports Price	Style	Size	Shpg.
906138	$243.95	906139	$243.95	DA spring centered	13.25″ x 7.3″ x 4.88″	16 lbs.

Two Spool Valves 30 GPM

NPT Ports ITEM	NPT Ports Price	SAE Ports ITEM	SAE Ports Price	Style	Size	Shpg.
906140	$371.10	906141	$374.75	DA spring centered	13.25″ x 7.3″ x 7.13″	24 lbs.
906145	$423.00	906146	$435.40	DA spring centered w/float	13.25″ x 7.3″ x 7.13″	25 lbs.

Three Spool Valves 30 GPM

NPT Ports ITEM	NPT Ports Price	SAE Ports ITEM	SAE Ports Price	Style	Size	Shpg.
906143	$491.35	906144	$496.15	DA spring centered	13.25″ x 7.3″ x 7.13″	37 lbs.
906149	$548.55	906150	$582.95	DA spring centered w/float	13.25″ x 7.3″ x 7.13″	37 lbs.

Pneumatic Dust Collectors



ITEM 100426

$249.95

- New, Chicago Pneumatic CDP 10 dust collector. Heavy steel construction. Unit does not require power, only a reliable source of compressed air. For indoor and outdoor use. Intended for use with one hand-held rock drill or breaker with proper attachments. The ejector tube is located in a well protected position inside the filter and the housing-unit. Unit has three folding legs that need to be deployed on a flat surface before use. The rock cuttings and dust particles that are sucked into the dust collector are collected into a sack. The sack is secured around the cyclone part of the filter unit by the sack holder.

SPECIFICATIONS

- Brand Chicago Pneumatic
- Model Number CDP 10
- Air Consumption at 87 psi (6 bar) 23.3 to 25.4 cfm (11 to 12 l/s)
- Suction Hose 1½″ (38mm)
- Filter Surface Area 21½ sq. ft. (2 m²)
- Collection Sack, Flat Dimensions 22″ x 27.5″ (560mm x 700mm)
- Diameter of Housing Unit 14⅜″ (365mm)
- Height of Housing Unit 30″ (760mm)
- Height above ground 51-½″ (1310mm)
- Shpg in Two Boxes
  First Box:
  29 lbs. Dimensional
  (20 lbs. Actual)
  Second Box:
  117 lbs. Dimensional
  (87 lbs. Actual)
  Total weight: 146 lbs.
  Dimensional
  (107 lbs. Actual)

ITEM 100433 ***$249.95***

- Brand Atlas Copco. With multi-tool attachment

7.9 GPM Gear Pump



ITEM 200883

$29.95

- New, Shurflo heavy duty cast iron pedestal rotary external gear pump. These pumps are specifically designed to be used with oil-based fluids, not to be used with water-based fluids. Pumps include steel spur gears with steel shafts and cast iron shaft support.

SPECIFICATIONS

- Brand Shurflo
- Model Number GPCV3-01-09
- Max. Flow 7.9 GPM
- Max. Pressure 125 PSI
- Max. RPM 1725
- Ports ½″ NPT
- Rotation Reversible
- Shaft 5⁄8″ dia. x 1⅞″ long w/ 3⁄16″ keyway
- Mount Two 0.387″ holes on 2⅞″ centers
- Size 7″ x 3¾″ x 4⅛″
- **Shpg 8 lbs.**

California Residents WARNING:Cancer and Reproductive Harm For more information refer to:www.P65Warnings.ca.gov

14 HP Kohler Engine ⚠



ITEM 300356

$699.95

• New, KOHLER Command Pro series horizontal shaft engine. Engine features overhead valves, cast iron cylinder liner, dual ball bearings, mechanical governor, electronic ignition, fuel valve and easy to use controls. Four stage air cleaner. Automatic low oil shutdown system. EPA and California EXH/EVP SORE compliant.

SPECIFICATIONS

- Model CH440-3275
- Engine Family NKHXS.4292GB
- Power 14 HP
- Torque 22.7 ft-lb.
- Bore/Stroke 89mm/69mm
- Disp. 420 cc
- Speed 3600 RPM
- Start 12 Volt Electric Start and Recoil
- Charging System 10 Amps w/Regulator
- Fuel Tank 7.39 qt.
- Shaft Horizontal
- Shaft 1″ dia. x 3 31/64″, 1/4″ keyway, tapped 3/8″-24 UNF
- Base Mount Four hole on 7 11/16″ x 3 1/4″ centers
- Accessory Mount Inner 4 bolt on 5″ B.C. Outer 4 bolt on 6.5″ B.C.
- Size 18″ x 16 1/4″ x 18 1/2″
- **Shpg. 135 lbs.**

Truck freight only.

13.5 HP Briggs & Stratton Engine



ITEM 300334 ⚠

$649.95

• New, BRIGGS & STRATTON XR Professional series horizontal shaft engine. Engine feature overhead valves, cast iron sleeve liner, ball bearing supported crankshaft, muffler, mechanical governor, electronic ignition, fuel valve and easy to use controls. Not for sale in California.

SPECIFICATIONS

- Model 25T2370085F1
- Engine Family XR Professional
- Power 13.5 HP (Gross)
- Torque 21.0 ft-lbs (Gross)
- Disp. 420 cc
- Speed 3600 RPM
- Start 12 Volt Electric Start and Recoil
- Charging System 10 Amps
- Fuel Tank 1.709 Gallon
- Shaft Horizontal
- Shaft 1″ dia. x 3 31/64″ keyed, tapped 7/16″-20 UNF
- Accessory Mount Inner 4 bolt on 5″ B.C. Outer 4 bolt on 6.5″ B.C.
- Size 12 1/4″ x 20 3/8″ x 18 1/4″
- **Shpg. 131 lbs.**

Truck freight only.

11.5 HP Briggs & Stratton Engine



ITEM 300330 ⚠

$592.50

• New, BRIGGS & STRATTON XR Professional series engine. Engine feature overhead valves, cast iron sleeve liner, dual ball bearing supported crankshaft, muffler, governor, fuel valve and easy to use controls. EPA and California EXH/EVP SORE compliant.

SPECIFICATIONS

- Model 25N1370014F1
- Power 11.5 HP (Gross)
- Torque 16.5 ft-lbs (Gross)
- Disp. 420 cc
- Speed 3600 RPM
- Start 12 Volt Electric Start and Recoil
- Charging System 10 Amps w/Regulator
- Fuel Tank 3.2 Qt.
- Shaft Horizontal
- Shaft 1″ dia. x 3 31/64″ keyed, tapped 7/16″-20 UNF
- Accessory Mount Inner 4 bolt on 5″ B.C. Outer 4 bolt on 6.5″ B.C.
- Size 13 3/8″ x 19 1/4″ x 18″
- **Shpg. 131 lbs.**

Truck freight only.

Find additional engines at www.surpluscenter.com

10 HP Briggs & Stratton Engine ⚠



ITEM 300332

$549.95

• New, BRIGGS & STRATTON Vanguard commercial series engine. Features include cast iron cylinder sleeve, float carburetor, electronic ignition, overhead valves, air cleaner, compression release, engine mounted controls, accessory mount and fuel shut off. EPA compliant and California EXH/EVP SORE compliant.

SPECIFICATIONS

- Model 19L2320110F1
- Power 10 HP (Gross)
- Disp. 305 cc
- Speed 3600 RPM
- Start Recoil
- Shaft Horizontal
- Shaft 1″ diam. x 3 21/32″ w/ keyway tapped 7/16″-20
- Accessory Mount Inner 4 bolt on 3 5/8″ B.C. Middle 4 bolt on 5″ B.C. Outer 4 bolt on 6.5″ B.C.
- Fuel Tank 3.8 qt. (3.6L)
- Size 12 1/2″ x 16 7/16″ x 16″
- **Dimensional Shpg. 70 lbs.**

8.5 HP Honda Engine ⚠



ITEM 300328

$449.95

• New, HONDA GX series horizontal shaft engine. Replacement engine for generator use and other applications using a tapered shaft. Engines feature overhead valves, cast iron sleeve liner, ball bearing supported crankshaft, mechanical governor, low-oil sensor, electronic ignition, ON/OFF switch and solenoid operated Eco Throttle to control engine RPM from idle to rated speed. No muffler or fuel tank.

SPECIFICATIONS

- Model GX270 RT1 VMT2
- Engine Family GX
- Power 8 HP at 3600 RPM
- Torque 14.1 ft-lbs at 2500 RPM
- Disp. 270 cc
- Speed 3600 RPM
- Start Recoil
- Fuel Tank None
- Shaft Horizontal
- Shaft 22mm dia. x 4 11/64″ tapered 2 1/4″/ft tapped 5/16″-24 UNF
- Accessory Mount Inner 4 bolt on 5″ B.C. Outer 4 bolt on 6.5″ B.C.
- Size 12 1/2″ x 17″ x 16 1/2″
- **Shpg 60 lbs.**

Honda Fuel Tank



ITEM 300138

$14.95

• New. Painted steel tank. Base mount with two threaded studs and two tapped holes. Large plated steel cap with chain retainer included.

• Original equipment on HONDA Model GX140, GX160 and GX200 engines.

SPECIFICATIONS

- Capacity 3.3 quarts
- Fuel Port 1/4″ hose barb
- Filler Opening 1 5/8″
- Size 9 1/2″ x 8 1/4″ x 5″
- **Shpg. 5 lbs.**

30″ Throttle Control Cable



ITEM 300113 **$4.95**

• New throttle-control cable with control handle assembly. Handle detent at full throttle position. Stop, slow-fast, and choke positions.

SPECIFICATIONS

- 0.055″ dia. cable in 0.190″ O.D. steel jacket
- 1 5/8″ total pull distance
- 30″ max. cable length
- Overall handle size: 2 1/2″ x 9/16″ x 3″
- Two bolt mount on handle assembly on 1 1/2″ centers
- **Shpg. 1 lb.**

6.5 HP Briggs & Stratton Engine ⚠



ITEM 300331

$399.95

• New, BRIGGS & STRATTON XR950 Professional series engine. Features include cast iron cylinder sleeve, electronic ignition, overhead valves, ball bearing crankshaft, air cleaner, manual or remote throttle, manual choke, muffler, fuel shut off valve. EPA and California EXH/EVP SORE compliant.

SPECIFICATIONS

- Model 130G370130F1
- Power 6.5 HP (Gross) at 3600 RPM
- Torque 9.5 ft-lbs.
- Disp. 208 cc
- Speed 3600 RPM
- Start 12 Volt Electric Start and Recoil
- Charging System 3 Amps
- Shaft Horizontal
- Shaft 3/4″ diam. x 2 27/64″ w/ keyway tapped 5/16″-24
- Accessory Mount 4 Bolt on 3 5/8 B.C.
- Fuel Tank 3.2 qt.
- Size 11 3/8″ x 14 7/8″ x 15″
- **Dimensional Shpg. 58 lbs.**

6.5 HP Briggs & Stratton Engine



ITEM 300361 ⚠

$299.95

• New. BRIGGS & STRATTON Vanguard Series 200 horizontal shaft engine. Features overhead valve, manual throttle and choke, muffler and integrated cyclonic air cleaner.

SPECIFICATIONS

- Model 12V3320012F-1DV1001
- Engine Family Vanguard 200 Series
- Power 6.5 HP
- Bore/Stroke 68mm/56mm
- Disp. 203 cc
- Speed 3600 RPM
- Start Recoil
- Fuel Tank Yes
- Shaft 3/4″ dia. x 2 27/64″ long
- Base Mount Four hole on 3 1/8″ x 6 3/8″ centers
- Accessory Mount 4 bolt on 3 5/8″ B.C.
- Size 14.8″ x 14.2″ x 11.4″
- **Shpg 50 lbs.**

4-Bolt Engine To Pump Mounts



• New, SPEECO aluminum pump mounts for connecting gas engines to hydraulic pumps with 4F17 flange (2″ sq. bolt pattern and 1.78″ dia.)

ITEM 904842 **$14.95**

SPECIFICATIONS

- Model S40081200
- Engine Mount 3 5/8″ bolt circle and 1 5/8″ pilot
- Engine HP Range 3-6.5 HP
- Total Length 4 1/8″
- Size 4 1/8″ x 4″ x 4″
- **Shpg. 1 lb.**

Cast Iron

ITEM 905095 **$14.95**

ITEM 905714 **$14.95**

SPECIFICATIONS

- Model 578475
- Engine Mount 3 5/8″ bolt circle
- Pump Mount 4F17
- Total Length 4 1/2″
- Size 4 1/2″ x 3 1/2″ x 3 1/2″
- **Shpg. 3 lbs.**

ITEM 905684 **$18.95**

SPECIFICATIONS

- Model S40081800
- Engine Mount 5″ bolt circle
- Engine HP Range 8-13 HP
- Pump Mount 4F17
- Total Length 5 1/4″
- Size 5 1/4″ x 4 5/8″ x 4 5/8″
- **Shpg. 6 lbs.**

3.5 HP Honda Engine ⚠



ITEM 300243

$453.00

• New, HONDA GX series horizontal shaft engine. Honda is the worlds largest manufacturer of engines and has earned its reputation for unsurpassed quality, performance and reliability. Engines feature overhead valves, cast iron sleeve liner, ball bearing supported crankshaft, mechanical governor, low-oil sensor, electronic ignition, fuel valve and easy to use controls. Meets EPA and CARB emission regulations for all states.

SPECIFICATIONS

- Model GX120UT2QX2
- Engine Family GX
- Power 3.5 HP
- Torque 5.4 ft-lbs
- Bore/Stroke 60mm/40mm
- Disp. 118 cc
- Speed 3600 RPM
- Start Recoil
- Fuel Tank 2.1 quarts
- Shaft Horizontal
- Shaft ¾″ dia. x 2 7⁄16″ keyed, tapped 5⁄16″-24 UNF
- Base Mount Four hole on 3.1″ x 6.378″ centers
- Accessory Mount 4 bolt on 3⅝″ B.C.
- Size 9½″ x 13⅝″ x 13″
- Actual Weight 29 lbs.
- **Dimensional Shpg. 48 lbs.**

4.8 HP Honda Engine ⚠



ITEM 300244

$442.50

• New, HONDA GX series horizontal shaft engine. Honda is the worlds largest manufacturer of engines and has earned its reputation for unsurpassed quality, performance and reliability. Engines feature overhead valves, cast iron sleeve liner, ball bearing supported crankshaft, mechanical governor, low-oil sensor, electronic ignition, fuel valve and easy to use controls. Meets EPA and CARB emission regulations for all states.

SPECIFICATIONS

- Model GX160UT2QX2
- Engine Family GX
- Power 4.8 HP
- Torque 7.6 ft-lbs
- Bore/Stroke 68mm/45mm
- Disp. 163 cc
- Speed 3600 RPM
- Start Recoil
- Fuel Tank 3.3 quarts
- Shaft Horizontal
- Shaft ¾″ dia. x 2 7⁄16″ keyed, tapped 5⁄16″-24 UNF
- Base Mount Four hole on 3.1″ x 6.378″ centers
- Accessory Mount 4 bolt on 3⅝″ B.C.
- Size 10¼″ x 14″ x 13½″
- Actual Weight 35 lbs.
- **Dimensional Shpg. 48 lbs.**

ITEM 300245 **$742.50**

• Model GX160UT2QXE2. Electric Start.

5.5 HP Kohler Engine ⚠



ITEM 300370

$199.95

• New, KOHLER Command Pro series horizontal engine. Features a heavy-duty air cleaner, forged-steel crankshaft, electronic ignition and cast-iron cylinder liner.

SPECIFICATIONS

- Brand Kohler
- Model CH255-3152
- Engine Family CH255 series
- Power 5.5 HP
- Torque 11.2 ft-lbs.
- Bore/Stroke 2.7″(68mm)/1.9″(49mm)
- Disp. 177 cc
- Speed 3600 RPM max.
- Start Recoil
- Fuel Tank 3.1 qt
- Shaft ¾″ dia. x 2¼″ long
- Base Mount Four hole on 3¼″ x 6⅜″ centers
- Accessory Mount: Inner 4 bolt on 3⅝″ B.C.
- Size 12″ x 13½″ x 14¼″
- **Shpg. 42 lbs.**

6.5 HP Kohler Engine ⚠



ITEM 300371

$229.95

• New, KOHLER 6.5 HP PA-SH265-3011 SH series horizontal engine. Overhead Valve design, variable speed, and cast-iron cylinder liners.

SPECIFICATIONS

- Brand Kohler
- Model PA-SH265-3011
- Engine Family SH series
- Power 6.5 HP
- Torque 10.2 ft-lbs.
- Bore/Stroke 2.7″(68mm)/2.1″(53.3mm)
- Disp. 196 cc
- Speed 3850 RPM max.
- Start Recoil
- Fuel Tank 3.4 qt
- Shaft ¾″ dia. x 2 7⁄16″ long
- Base Mount Four hole on 3⅛″ x 6⅜″ centers
- Accessory Mount 4 bolt on 3⅝″ B.C.
- Size 12½″ x 14¾″ x 14½″
- **Shpg. 38 lbs.**

8.5 HP Honda Engine ⚠



ITEM 300246

$969.95

• New, HONDA GX series horizontal shaft engine. Honda is the worlds largest manufacturer of engines and has earned its reputation for unsurpassed quality, performance and reliability. Engines feature overhead valves, cast iron sleeve liner, ball bearing supported crankshaft, mechanical governor, low-oil sensor, electronic ignition, fuel valve, easy to use controls and electric start with keyswith panel. Meets EPA and CARB emission regulations for all states.

SPECIFICATIONS

- Model GX270UT2XQAE2
- Engine Family GX
- Power 8.5 HP
- Torque 14.1 ft-lbs
- Bore/Stroke 77mm/58mm
- Disp. 270 cc
- Speed 3600 RPM
- Start 12 Volt Electric and Recoil
- Charging System 3 Amps
- Fuel Tank 5.6 quarts
- Shaft Horizontal
- Shaft 1″ dia. x 3 21⁄32″ keyed, tapped 7⁄16″-20 UNF
- Base Mount Four hole on 3½″ x 7 11⁄16″ centers
- Accessory Mount: Inner 4 bolt on 5″ B.C. Outer 4 bolt on 6.5″ B.C.
- Size 12½″ x 18″ x 16½″
- **Shpg. 79 lbs.**

11.7 HP Honda Engine ⚠

w/Electric Start



ITEM 300247

$992.25

• New, HONDA GX series horizontal shaft engine. Honda is the worlds largest manufacturer of engines and has earned its reputation for unsurpassed quality, performance and reliability. Engines feature overhead valves, cast iron sleeve liner, ball bearing supported crankshaft, mechanical governor, low-oil sensor, electronic ignition, fuel valve and easy to use controls. Meets EPA and CARB emission regulations for all states.

SPECIFICATIONS

- Model GX390UT2XQAE2
- Engine Family GX
- Power 11.7 HP
- Torque 19.51 ft-lbs
- Bore/Stroke 88mm/64mm
- Disp. 389 cc
- Speed 3600 RPM
- Start 12 Volt Electric Start and Recoil
- Charging System 3 Amps
- Fuel Tank 6.4 quarts
- Shaft Horizontal
- Shaft 1″ dia. x 3 21⁄32″ keyed, tapped 7⁄16″-20 UNF
- Base Mount Four hole on 3½″ x 7 11⁄16″ centers
- Accessory Mount″ Inner 4 bolt on 5″ B.C. Outer 4 bolt on 6.5″ B.C.
- Size 14″ x 19½″ x 17½″
- **Shpg. 89 lbs.**

13.5 HP Briggs & Stratton Engine ⚠



ITEM 300362

$499.95

• New. Briggs & Stratton XR2100 Series horizontal shaft engine. Features overhead valve, muffler, manual throttle and choke.

SPECIFICATIONS

- Brand Briggs & Stratton
- Model 25T2320135F1AY1012
- Engine Family XR2100 Series
- Power 13.5 HP
- Torque 21 ft-lbs.
- Bore/Stroke 90mm/66mm
- Disp. 420 cc
- Speed 3600 RPM
- Start Recoil
- Fuel Tank Yes
- Shaft 1″ dia. x 3 21⁄32″ long
- Base Mount Four hole on 4″ x 7¾″ centers
- Accessory Mount 4 bolt on 5″ B.C.
- Size 14.5″ x 18.3″ x 18.1″
- **Shpg. 85 lbs.**

14 HP Kohler Engine ⚠



ITEM 300372

$499.95

• New, KOHLER Command Pro series horizontal engine. Features a heavy-duty air cleaner, forged-steel crankshaft, electronic ignition and cast-iron cylinder liner.

SPECIFICATIONS

- Model CH440-3302
- Engine Family GX
- Power 14 HP
- Torque 22.7 ft-lbs
- Bore/Stroke 3.5″/68.58″ (88.9mm/68.58mm)
- Disp. 429 cc
- Speed 3600 RPM max.
- Start Recoil
- Fuel Tank 7.4 qt
- Shaft 1″ dia. x 3⅝″ long
- Base Mount Four hole on 4″ x 7¾″ centers
- Accessory Mount: Inner 4 bolt on 5″ B.C. Outer 4 bolt on 6.5″ B.C.
- Size 16″ x 17½″ x 18″
- **Shpg. 88 lbs.**

18 HP Briggs Vanguard Engine ⚠



ITEM 300360

$1195.95

• New, BRIGGS & STRATTON Vanguard 356447-0677-F1 horizontal shaft engine. Float carburetor for consistent easy starting. Dual-Clean™ air cleaner pleated paper filter with a foam precleaner ensures maximum protection for extended engine life. Overhead valve (OHV) engine design; OHV engines run cooler and cleaner for better fuel economy and longer engine life.

SPECIFICATIONS

- Model 356447-0677-F1
- Engine Family 350000
- Power 18 HP
- Torque 26.3 ft-lbs.
- Bore/Stroke 71.88mm/70.1mm
- Disp. 570 cc
- Speed 3600 RPM
- Start 12 Volt Electric Start and Recoil
- Fuel Tank Yes
- Shaft Horizontal, 1⅛″ dia. x 3″ long w/ ¼″ keyway
- Base Mount Eight 0.375″ dia. holes on ½″, 4″, 4½″ x 8¾″ centers
- Accessory Mount 4 Bolt on 5″ B.C.
- Size 16½″ x 18″ x 21½″
- **Shpg 150 lbs.**

Truck freight only.

California Residents WARNING:Cancer and Reproductive Harm
For more information refer to:www.P65Warnings.ca.gov



13200 BTU 12 VDC Cab Heater

With 2 Speed Fan

MARADYNE HIGH PERFORMANCE FANS

ITEM 300220 **$299.55**

• Brand new, MARADYNE Model H-400012 cab heater. Heater uses engine coolant to heat your cab. Mounts easily to floor of cab. 2 speed fan with speed control switch built into the housing. Four, rotatable, adjustable opening louvers. Glass-filled nylon housing, aluminum tube and fin heating core.

SPECIFICATIONS

- Heating Output 13200 BTU/HR
- Air Flow 200 CFM
- Blower Motor Voltage 12 VDC
- Size 7⅜″ x 7¼″ x 9⅞″
- Blower Motor Amperage 6 amps
- Hose Fittings ⅝″ dia. x 1 15/16″ hose barb
- Mount Three 5/16″-18 x 1″ studs
- **Shpg. 10 lbs.**



12500 BTU 12 VDC Cab Heater


With 3 Speed Fan

ITEM 300219 **$205.90**

• Brand new, MARADYNE cab heater. Heater uses engine coolant to heat your cab. Mounts easily to wall or floor of cab. 3 speed fan. Directional airflow doors. Steel housing, aluminum tube and fin heating core. Comes with 3 speed fan switch.

SPECIFICATIONS

- Heating Output 12500 BTU/HR
- Air Flow 200 CFM
- Blower Motor Voltage 12 VDC
- Size 7 7/16″ x 7⅜″ x 7 1/16″
- Blower Motor Amperage 2.9 amps
- Hose Fittings ⅝″ dia. x 1½″ hose barb
- Mount Three 5/16″-18 x 1″ studs
- **Shpg. 11 lbs.**



Cab Heater Installation Kit

ITEM 300221 **$46.00**

SPECIFICATIONS

- One, shut-off valve ⅜″ NPTM x ⅝″ hosebarb
- One, ⅜″ NPTM x ⅝″ hose barb
- Two, ½″ NPTM x ⅜″ NPTF bushing
- Four, ⅝″ hose clamps
- **Shpg. ½ lb.**

12 Volt Digital Hourmeter



ITEM 501019 **$25.00**

• Brand new. Shows running time of equipment. Digital design, no moving parts. Spade terminals. Includes metal clamp mounting bracket to hold meter in place in a panel. Chrome bezel.

SPECIFICATIONS

- Operates on 12/24 volts DC
- Non-resettable
- Panel mount in 2″ diameter hole
- **Shpg. ¼ lb.**

12-24 VDC Back-Up Alarms

• Brand new, BUYERS back-up alarms. Plastic housing, epoxy sealed from moisture, dust and vibration. Self grounding. Back up alarm should be louder than background noise of all jobsites vehicle is used at. Meets OSHA, Bureau of Mines, GSA and all state regulations. Conforms to J994 criteria.

• Voltage 12-24 VDC. Mount two ¼″ holes on side or base. **Shpg. ¾ lb.**





ITEM	Decibels	Size	Price
500664	97 dB	4¼″ x 2¾″ x 2″	$18.75
500665	102 dB	4 5/16″ x 2⅞″ x 2″	$20.05
500666	107 dB	4 3/16″ x 3⅜″ x 2″	$20.50

Magnetic Engine Block Heaters

• Brand new, KAT'S MAGNUM HANDI-HEAT magnetic heaters. General application usage includes hydraulic reservoirs, thawing frozen locks, pipes, gutters and live stock feeders.

200 Watt



ITEM 500810 **$84.95**

• Ideal for small engine blocks. Thermostatically controlled.

SPECIFICATIONS

- Voltage 120 Volts AC
- Power 200 W
- Cord Length 43″
- Heated surface dimension 3¾″ x 2¼″
- Size 6½″ x 2¼″ x 2″
- **Shpg. 1 lb.**

300 Watt



ITEM 500811 **$141.00**

• Ideal for car and truck engine blocks.

SPECIFICATIONS

- Voltage 120 Volts AC
- Power 300 W
- Cord Length 42″
- Heated surface dimension 4⅛″ x 5″
- Size 7″ x 5″ x 2″
- **Shpg. 1½ lbs.**

Backup Alarm



ITEM 501586 **$19.95**

• New, Ingersoll Rand multi tone warning alarm.

SPECIFICATIONS

- Brand Ingersoll Rand
- Model 19295435
- Decibles Unknown
- Voltage Unknown
- Plug Three pin
- Mount Two 0.21″ slotted holes on 3″ centers
- Size 4″ x 2¾″ x 1″
- **Shpg 0.55 lb.**

Flat Document Holders



• Brand new. Molded plastic construction with two latches for lid and rubber seal to keep manuals, service records or other documents clean and dry. Four holes for mounting.

Holds 8½″ x 11″ documents

ITEM 300216 **$11.95**

SPECIFICATIONS

- ServiceMate SM9000-8
- Document Size 8.5″ x 11″ x 1″
- Label area 6.25″ x 2.75″
- Size 14.5″ x 11″ x 2.135″
- Mounting pattern 5.875″ x 7″
- **Shpg. 3 lbs.**

Holds 6″ x 8″ documents

ITEM 300218 **$9.55**

SPECIFICATIONS

- ServiceMate SM9000-16
- Document Size 6″ x 8″ x 1″
- Label area 5″ x 2.75″
- Size 11.2″ x 8.25″ x 1.95″
- Mounting pattern 4.25″ x 6″ (T pattern)
- **Shpg. 3 lbs.**

Round Document Holder



ITEM 300217 **$7.80**

• Brand new, SERVICEMATE SM9000-14, holds rolled up 8½″ x 11″ documents. Molded plastic construction with twist lock lid and rubber seal to keep manuals, service records or other documents clean and dry.

SPECIFICATIONS

- Document Size 8.5″ x 11″ x 1″
- Label area 5.25″ x 1.75″
- Size 3.7″ dia. x 12.5″
- **Shpg. ¼ lb.**

12 VDC Electronic Fuel Pumps



• Brand new, FACET solid state electronic fuel pumps. For carbureted gas, diesel and blended fuel engines. ***Not intended for any aircraft use.***

SPECIFICATIONS

- Voltage 12 Volts DC
- Amps 1.6
- Ports ⅛″ NPT female
- Size 3″ x 3¼″ x 2⅜″
- **Shpg. 2 lbs.**

ITEM	Model	Pressure	Range Flow (GPH)	Price
300231	40104	1.5-4 PSI	25	$68.00
300238*	40102	1.5-4 PSI	25	$73.10
300239	40106	4-7 PSI	32	$68.00
300240	40185	9-11.5 PSI	32	$85.10

** Same as 300231 but includes brass adapters to 5/16″ ID hose and mounting hardware.*

12 Volt Hourmeters

• Brand new. Shows running time of equipment. 12 volt DC (will operate on 10-80 VDC). Non-resettable. **Shpg ¼ lb.**



ITEM 500103



ITEM 500384



ITEM 500385

ITEM	Front Face	Mount	Panel Opening And Rear Clearance Required	Price
500103	2⅜″ O.D.	Rear Clamp	2″ dia. x 1¾″	$29.90
500384	2⅞″ O.D.	3 holes in flange 2½″ B.C.	2″ dia. x 1¾″	$31.60
500385	2⅛″ x 1¼″	2 holes in flange 1¾″ c/c	1″ x 1½″ x 2⅝″	$29.90

Flush Mount Rectangular Paddle Latches


300261


300260

• Brand new. BUYERS PRODUCTS locking paddle latches. Rust-resistant steel construction.

ITEM 300261 **$16.25**
Standard Model L3980

SPECIFICATIONS
- Installation Opening 4.625″ x 3.375″ x 1.25″
- Mount Weld-on
- Striker Pin Travel 0.5625″
- Striker Edge to Back Face of Pane 1″
- Size 5.875″ x 4.25″ x 1.625″
- **Shpg. 1½ lbs.**

ITEM 300260 **$12.70**
Junior Model L1980

SPECIFICATIONS
- Installation Opening 4.125″ x 2.5″ x 1.625″
- Mount Weld-on
- Striker Pin Travel 0.435″
- Striker Edge to Back Face of Pane 0.875″
- Size 5.125″ x 3.625″ x 1.5″
- **Shpg. 1½ lbs.**

Stainless Steel T-Handle Latches


300263


300264

• Brand new, BUYERS PRODUCTS model L8815 T-handle latch. Stainless steel construction. Flush mount with key lock and gasket. The cam adjusts from 1¼″ to 2″ to accommodate varying door thicknesses. The latch is shaped and sized to accommodate standard-size cut-outs.

ITEM 300263 ⚠ **$17.30**
Model L8815

SPECIFICATIONS
- Latch Length Past Edge of Mount ⅞″
- Flush Mount
- Mount Depth 2⅝″
- 4 Hole Mount 3⅞″ x 3⅝″ centers
- Size 5¾″ x 4¾″ x 2⅝″
- **Shpg. 2 lbs.**

ITEM 300264 ⚠ **$25.05**
Model L8816 w/Blind Studs

SPECIFICATIONS
- Latch Length Past Edge of Mount 1″
- Flush Mount
- Mounting Studs Four #10-32 x ½″ long
- 4 Mounting Studs 3¹⁵⁄₁₆″ x 3⅞″ centers
- Mount Depth 2⅝″
- Size 6⅝″ x 5¾″ x 2⅝″
- **Shpg. 2 lbs.**

Spring Latch



ITEM 300268 **$7.65**

• Brand new, weld-on Spring Latch. Ideal for doors, compartments or panels that need to engage and disengage quickly and securely. Zinc plated steel construction. Spring loaded bolt can lock in the open position.

SPECIFICATIONS
- Brand Buyers Products
- Model Number B2598H
- Travel 0.75″
- Bolt 0.625″ dia. x 0.875″ long
- Size 5″ x 2.55″ x 1.875″
- **Shpg. 1 lb.**

Die Cast Compression Latch ⚠



ITEM 300262 **$33.80**

• Brand new, BUYERS PRODUCTS model LL9000 T-handle compression latch. Spring loaded cam clinches the roller plunger against compartment body holding the door close to the body. Chrome plated T-handle die cast body. Flush mount with key lock and gasket. The cam adjusts from 0.85″ to 1.3″ to accommodate varying door thicknesses. Powder-coated housing for maximum corrosion resistance.

SPECIFICATIONS
- Latch Length Past Edge of Mount 1″
- Latch Size 0.75″ dia. x 1.25″
- Flush Mount
- Mount Depth 2.88″
- Mounting Studs Four #10-32 x 0.5″ long
- 4 Mounting Studs 3.95″ x 3.88″ centers
- Size 6.75″ x 5.63″ x 2.88″
- **Shpg. 3 lbs.**

Heavy Duty Zinc Folding Step/Grab ⚠



ITEM 300299 **$31.15**

• Brand new, BUYERS PRODUCTS heavy duty folding step/grab. Cast steel construction with zinc finish. Stainless steel spring keeps step firmly open while in use or closed while in transit. Conforms to NFPA specs for use on emergency vehicles.

SPECIFICATIONS
- Model Number 5236586
- Heavy Duty Folding Step/Grab
- Size 8.63″ x 6.5″ x 1.5″
- Step Size 6.5″ wide x 5.3″ deep
- Mount Two 0.34″ dia. holes on 3.88″ centers
- **Shpg. 4 lbs.**

Breakaway Truck Step



ITEM 300300 **$194.80**

• Brand new, BUYERS PRODUCTS model 5230710. Mounts to a step bumper to add an extra step on higher truck cabs. Pivots forward or backward to prevent damage. Can also fold up for transport. Cast brass mounting bracket, stainless steel pivot shafts and galvanized steel step with deep perforations for extra slip protection.

SPECIFICATIONS
- Top of Step to Highest Point of Opening Mounting Plate 7¾″
- Top of Step to Bottom Lowest Point of Mounting Bracket 2¾″
- Width of Step 10″
- Depth of Step 4¾″
- Mounting Holes 7⁄16″ dia.
- Mount Two slots on 7½″ to 8″ centers
- **Shpg. 14 lbs.**

Spring Latch



ITEM 300266 **$6.30**

• Brand new, Spring Latch. Ideal for doors, compartments or panels that need to engage and disengage quickly and securely. Zinc plated steel construction. Spring loaded bolt can lock in the open position.

SPECIFICATIONS
- Brand Buyers Products
- Model Number B2595
- Bolt 0.5″ dia. x 1.0625″ long
- Travel 1.0625″
- Spring Latch Mount Four 0.285″ dia. holes on 1.5″ x 1.25″ centers
- Size 5.5″ x 5″ x 1.875″
- **Shpg. 1 lb.**

Retractable Two-Rung Truck Step



ITEM 300301 **$112.35**

• Brand new, BUYERS PRODUCTS model 5232000. Perforated steel non-slip tread. Step folds away when not in use. Easy bolt on, or weld on installation. Step has a locking peg that inserts into mounting frame when not in use. Black powder coat.

SPECIFICATIONS
- Top of Lowest Step to Face of Mounting Plate 20¹¹⁄₁₆″
- Top of Lowest Step to Top of Highest Step 11″
- Width of Steps 13½″
- Depth of Steps 1⅜″
- 28 Mounting Slots 1³⁄₁₆″ long x ⅜″ wide
- Back Clearance for Mounting Bracket from Vehicle Face when Retracted 26″
- Mounting Slots Increment on 1¹³⁄₁₆″ centers
- Mounting Rails Slots width 18⅝″ centers
- Size 26″ x 19⅞″ x 2⅞″
- **Shpg. 29 lbs.**

Cable Truck Step



ITEM 300295 **$114.45**

• Brand new, BUYERS PRODUCTS model 5230912 cable truck step. Black powder coated for corrosion resistance. 1¼″ Diameter galvanized wire sides, that are welded to 1½″ diameter pipe sleeve ends. Step is 1⅜″ deep, perforated anti-slip metal.

SPECIFICATIONS
- Top of Step to Bottom of Mounting Plate 7¾″
- Width of Step 9″
- Depth of Step 1⅜″
- Mounting Holes ⅜″ dia.
- Mount Two holes on 6″ centers
- **Shpg. 10 lbs.**

Grab Handle ⚠



ITEM 300271 **$7.35**

• Brand new, BUYERS PRODUCTS model B239918C chrome-plated solid steel grab handle. Smooth handle bolts onto vehicle where needed for added safety while entering and exiting vehicle.

SPECIFICATIONS
- Mounting Holes Four ⅝″ dia.
- Size ½″ dia. x 13¼″ long
- Mounting Centers 10⅛″ inner 12⅛″ outer
- **Shpg. 0.75 lb.**

Shovel Holder For Trucks



ITEM 300259 **$34.60**

• Brand new. BUYERS PRODUCTS model SH675SS truck mount stainless steel shovel holder. Heavy duty spring holds shovel or other round handle tool in place. Stainlesss steel construction.

SPECIFICATIONS
- Model SH675SS
- Holds One Shovel or other round handled tool
- Mount Holes 0.34″ dia.
- Mount 4 holes on 6.75″ x 3.5″
- Size 7.5625″ x 6″ x 1.5″
- **Shpg. 3 lbs.**

California Residents WARNING:Cancer and Reproductive Harm For more information refer to:www.P65Warnings.ca.gov

Rubber Rake Teeth






- Brand new, rubber rake teeth by BLACK TALON. Heat treated tines with injection molded rubber. Hook style head for maximum rubber adhesion. Sold in factory box quantities. Refer to our website for specific model and mfg part numbers.


** Double tooth*

Factory Box Sales

ITEM	Application	Yoke Opening	Bolt Hole	Tine Lgth.	Tine Diam.	Qty.	Shpg.	Price
100155	John Deere, many others,universal	1⅝″	⅜″	10″	9⁄32″	100	55 lbs.	$345.00
100156	New Holland,Allen rakes, Left Hand	1 55⁄64″	⅜″	10″	9⁄32″	100	59 lbs.	$399.00
100157	New Holland,Allen rakes, Right Hand	1 55⁄64″	⅜″	10″	9⁄32″	100	59 lbs.	$399.00
100158	John Deere, Vermeer	1⅝″	⅜″	10″	9⁄32″	100	53 lbs.	$430.50
100159	John Deere	1⅝″	⅜″	10″	9⁄32″	100	55 lbs.	$445.50
100161	Farmhand, New Idea,others *		⅜″	7″	9⁄32″	50	50 lbs.	$470.25
100212	Vermeer, Massey Ferguson *	1⅜″	5⁄16″	7¼″	¼″	60	41 lbs.	$441.90
100162	Ford, other windrowers	1⅛″	5⁄16″	7½″	¼″	100	29 lbs.	$273.95
100163	Heath windrowers	1¼″	5⁄16″	8″	¼″	100	29 lbs.	$471.95

Brass Ball Valves





- New, HYPRO lead-free brass ball valves

** Plated Brass*

ITEM	Model Number	Ports	PSI Max.	Length x Width x Height with Handle	Shpg.	Price
200749	171N-38	⅜″ NPT	600	4¼″ x 3⅞″ x 1⅞″	0.3 lb.	$5.95
200747	171N-12	½″ NPT	600	5″ x 4⅜″ x 2¼″	0.5 lb.	$6.95
200755*	90FMB14	¼″ NPT	300	1¾″ x 1″ x 1⅝″	0.25 lb.	$5.95
200756*	90FMB38	⅜″ NPT	300	1¾″ x 1½″ x 1⅝″	0.25 lb.	$6.95

12 Volt Automatic Battery Chargers



- New, PEAK 12 volt battery charger. Automatic shutoff. Charge rate indicator and full charge LED. Reverse polarity indicator and thermal overload protection.

ITEM 501275 **$79.95**

SPECIFICATIONS

- Model PKC0C100.
- Charge Rates: Maintain 2 amps, Charge 15 amps, Start 100 amps
- Input 115 VAC
- Input Cord 6 ft.
- Battery Cables 5½ ft.
- Size 10″ x 7″ x 5″
- **Shpg. 19 lbs.**

ITEM 501274 **$29.95**

SPECIFICATIONS

- Model PKC0C6.
- Charge Rates: Low 2 amps, High 6 amps
- Input 115 VAC
- Input Cord 6 ft.
- Battery Cables 5½ ft.
- Size 8¾″ x 5½″ x 4⅛″
- **Shpg. 9 lbs.**

Terminal Block Kit



ITEM 501692 **$7.95**

- New, Bobcat terminal block kit with battery cables. Fits Bobcat 3400 UTV.

SPECIFICATIONS

- Brand Bobcat
- Model Number 7260992
- Parts Included Terminal Block (1), Mounting Screws (2), 20″ Red Battery Cable (1), 20″ Black Battery Cable (1), 118″ Cable (1)
- **Shpg 2 lbs.**

2/6/40/200 Amp Battery Charger/ Starter



ITEM 501463 **$179.95**

- New, SCHUMACHER ELECTRIC model SC1324 12 volt battery charger. Triple mode operation, start,fast charge and slow/ maintain charge. Push button controls with LED indicator lights. Use with standard or AGM batteries. Includes wheel kit for portability. Thermal overload protection. mounting holes with metal insert. Shutoff valve on outlet port.

SPECIFICATIONS

- Battery Voltage 12 VDC
- Charge Rates
- Boost 200 amps
- Fast Charge 40 amps
- Slow Charge 6<>2 amps
- Input 115 VAC
- Input Cord 6 ft.
- Battery Cables 6 ft.
- Size 12″ x 10″ x 23″
- **Shpg. 30 lbs.**

63″ Heavy Duty Battery Cable



ITEM 501116 **$29.95**

- New, Positive battery cable with lug style connectors at each end. Main cable and auxiliary cable connected together at battery terminal. Protective cover over cables.

SPECIFICATIONS

- Length Main Cable 63″ Auxiliary 32″
- Terminals 10mm
- Wire Gauge Main 95mm2 (between 3/0 & 4/0 AWG) Auxiliary 25mm2 (Similar to #3 AWG)
- **Shpg. 5 lbs.**

Gas Springs

- Brand new, BUYERS PRODUCTS gas spring. Shock features dampened extension and undampened compression for smooth operation. The cylinder is black powder-coated for corrosion resistance. Commonly used on rear windows, tool boxes and truck boxes. **Shpg 1 lb.**



ITEM	Force Rating	Comp. Lgth.	Ext. Lgth.	Stroke	Price
100415*	35 ft-lbs.	8.5″	13.93″	5.5″	$13.75
100416	40 ft-lbs.	8″	12″	4″	$14.60
100417	60 ft-lbs.	8″	12″	4″	$14.60
100418	80 ft-lbs.	8″	12″	4″	$12.90
100419	97 ft-lbs.	10.8″	17.1″	6.3″	$14.60
100420	250 ft-lbs.	11.63″	19.63″	8″	$33.80


* Includes 10mm ball stud



ITEM 100421 **.65¢**

- 10mm ball stud for gas springs. 5⁄16″-18 threaded stud mount.

Jumper Cables



ITEM 501358 **$12.95**

- New, heavy duty jumper cable set. Use for starting engines on cars and trucks. Compatible with top or side terminal batteries. The wire is CCA (Copper Clad Aluminum) and the connectors are made of steel, coated in copper.

SPECIFICATIONS

- Length 12 Ft.
- Cable size 8 gauge
- **Shpg. 3 lbs.**

Heavy Duty 1 Gauge Jumper Cables



ITEM 500822 **$87.00**

- New, heavy duty jumper cable set in plastic carrying case. Use for starting engines on trucks, construction equipment. Compatible with top or side terminal batteries.

SPECIFICATIONS

- Length 25 ft.
- Cable size 1 gauge
- Amp rating 900 CCA
- Size 16″ x 14″ x 7″
- **Shpg. 16 lbs.**

20″ 4 Gauge Battery Cables



ITEM 501688 **$5.99**

- New, 20″ 4 gauge top post battery cable.

SPECIFICATIONS

- Standards SAE J1127 SGT TYPE2 60V & SAE J378 50V
- Maximum Voltage 60 Volt DC
- Connection Type Top Post ⅝″
- Color Black
- Stud Size ⅜″
- Wire Size 4 Gauge
- Cable Length 17½″
- Center to Center 20″
- Overall Length 21¾″
- **Shpg 0.55 lbs.**

ITEM 501689 Red **$5.99**



Deluxe High Back Seat ⚠
w/Suspension & Armrest



ITEM 300182
$632.65

• Brand new, BLACK TALON Model 33001BK steel pan with vinyl backed fabric cushion. Swivel base for easy entry and exit of operator position. Adjustable back rest and arm rests. Back rest folds flat. Suspension with weight adjustment and 3 position height adjustment. Seat slides. Ideal replacement for loaders, backhoes, construction equipment, street maintenance, utility tractors, combines, cotton pickers, sprayers, forage harvester, hay cuber and other specialty industrial tractors.

SPECIFICATIONS
- Bolt Pattern (Width x Depth)
  10.25″ x 10.5″
  10.25″ x 11″
  10.25″ x 11.5″
  10.25″ x 12.75″
- Size 25″ x 24″ x 34″
- **Shpg 96 lbs.**
  Truck freight only.

Skid Steer ZTR ⚠ Fold-Down Seat
With Armrests & Lumbar Support



ITEM 300199
$337.50

• Brand new, BLACK TALON Model 44002BK steel frame and black heavy duty vinyl cover, ZTR or skid steer seat. 3 position lumbar support. Adjustable tilt back can be reclined or folded down. Lever controls seat to slide forward and backwards. Adjustable arm rests.

SPECIFICATIONS
- Mounting bolt pattern (width x depth) Adjustable width 7″ to 13.5″ Slotted slides allow for variable depth spacing Maximum depth 13″
- Size 24″ x 20″ x 26″
- Actual weight 42 lbs. • **Shpg. 72 lbs.** (oversize)

Universal Utility Seat ⚠
With Suspension



ITEM 300179
$263.05

• Brand new, BLACK TALON Model 51200BK steel framed vinyl covered cushion utility seat. ideal replacement for utility tractors, industrial tractors and other specialty mobile equipment. Sliding base. Adjustable weight suspension.

SPECIFICATIONS
- Universal bolt pattern
- Size 19¾″ x 19⁵⁄₁₆″ x 23¼″
- **Shpg 43 lbs.**

High Back Seat ⚠
With Integrated Suspension



ITEM 300150
$451.05

• Brand new, BLACK TALON Model 36000BK steel frame and black vinyl cover replacement universal high back seat. Integrated suspension for low profile. Textured seat cushion for air flow. Lever controls seat to slide forward and backwards. Arm rest. Intended for utility trucks, fork lifts, skid steers and other construction equipment.

SPECIFICATIONS
- Mounting bolt pattern (width x depth) width 11¼″ slotted slides allow for depth spacing of 1″ to 11¼″ maximum depth 11¼″
- Size 23″ x 23¼″ x 24″ • **Shpg. 68 lbs.**

High Back Seat ⚠



ITEM 300151
$365.30

• Brand new, BLACK TALON Model 44000BK steel frame and black water resistant Cordura® fabric cover replacement universal high back seat. Three position lumbar support. Adjustable armrests and upper backrest. Backrest folds forward and reclines backwards. Document pouch. Lever controls seat to slide forward and backwards. Intended for utility trucks, fork lifts, skid steers and other construction equipment.

SPECIFICATIONS
- Mounting bolt pattern (width x depth) adjustable width 7″ to 13½″ slotted slides allow for depth spacing of 1″ to 13″ maximum depth 13″
- Size 20″ x 24″ x 26″
- Actual weight 44 lbs. • **Shpg. 53 lbs.** (oversize)

Universal 2 Piece Implement Seat ⚠



ITEM 300148
$147.40

• Brand new, BLACK TALON Model 34000BK steel frame and black vinyl cover replacement universal high back seat. Ribbed seat cushion for air flow. Lever controls seat to slide forward and backwards. Intended for utility trucks, fork lifts, skid steers and other construction equipment.

SPECIFICATIONS
- Mounting bolt pattern (width x depth) 4⁵⁄₁₆″ diam. bolt holes adj. width 5½″ to 15⅛″ depth 11″
- Size 19¾″ x 18⅜″ x 18¾″
- Actual weight 26 lbs.
- **Shpg. 44 lbs.** (oversize)

Universal 2 Piece Tractor Seat ⚠
With Adjustable Suspension



• Brand new, BLACK TALON steel frame and vinyl cover replacement universal high back seat. Adjustable weight suspension with 3½″ stroke. Ribbed seat cushion for air flow. Adjustable base angle. Lever controls seat to slide forward and backwards. Intended for utility, specialty, industrial tractors, equipment.

SPECIFICATIONS
- Mounting bolt pattern (width x depth) depth universal bolt pattern mounting plate
- Size 20¾″ x 23⅝″ x 20½″ • **Shpg. 44 lbs.**

ITEM 300156 **$141.30**
• Model 51000BK03UN. Black vinyl.

ITEM 300158 **$141.30**
• Model 51000BL03UN. Blue vinyl.

ITEM 300157 **$141.30**
• Model 51000YE03UN. Yellow vinyl.

Universal Fold-Down Implement Seat ⚠



ITEM 300149
$166.55

• Brand new, BLACK TALON Model 35500BK steel frame and black vinyl cover replacement universal high back seat. Fold-down back cushion. Textured seat cushion for air flow. Lever controls seat to slide forward and backwards. Arm rest. Intended for utility trucks, fork lifts, skid steers and other construction equipment.

SPECIFICATIONS
- Mounting bolt pattern (width x depth) adjustable width 5½″ to 15⅛″ slotted slides allow for depth spacing of 1″ to 11¼″ maximum depth 11¼″
- Size 21¼″ x 23″ x 18½″
- Actual weight 36 lbs. • **Shpg. 40 lbs.** (oversize)

Universal 2 Piece Implement Seat ⚠



ITEM 300155
$127.25

• Brand new, BLACK TALON Model 50800BK steel frame and black vinyl cover replacement universal high back seat. Ribbed seat cushion for air flow. Lever controls seat to slide forward and backwards. Intended for utility trucks, fork lifts, skid steers and other construction equipment.

SPECIFICATIONS
- Mounting bolt pattern (width x depth) adjustable width 7½″ to 13″ depth 11½″
- Size 19¾″ x 19½″ x 16½″
- Actual weight 28 lbs. • **Shpg. 36 lbs.** (oversize)

Black High Back Vinyl Seat



ITEM 300312
$336.40

• Brand new BLACK TALON Model 390001BK. For forklifts and other industrial equipment applications. Comes with slides, operator presence switch, document holder, and seat belt.

SPECIFICATIONS
- Seat Material Black Vinyl
- Frame Steel
- Backrest Height 17″
- Cushion Depth 17¼″
- Base Slide
- Mounting Holes 11¼″ x 6″ to 13″ centers
- Operator Presence Switch Included
- Size 20¼″ x 22″ x 22¼″
- Actual weight 30 lbs.
- **Shpg. 99 lbs.(Oversize)**

Black High Back Suspension Seat



ITEM 300313
$461.10

• Brand new BLACK TALON Model 390125BK. For forklifts and other industrial equipment applications. Comes with slides, operator presence switch, document holder, and seat belt.

SPECIFICATIONS
- Seat Material Black Vinyl
- Frame Steel
- Backrest Height 17″
- Cushion Depth 17¼″
- Base Slide
- Suspension Stroke 1.57″
- Size 21½″ x 22″ x 23½″
- Weight Adjustment Range 110-265 lbs.
- Mounting Holes 15⅛″ x 11⅛″ centers
- Operator Presence Switch Included
- Actual weight 40 lbs.
- **Shpg. 99 lbs.(Oversize)**

Fold Down Back Seat



ITEM 300314
$277.40

• New BLACK TALON Model 400102BK. Comes with 83-127 degree back angle adjustment, seat belt, and hip restraints.

SPECIFICATIONS
- Seat Material Black Vinyl
- Frame Steel
- Backrest Height 17″
- Cushion Depth 16″
- Base Slide
- Mounting Holes 11″ x 11″
- Operator Presence Switch Cavity Yes
- Operator Presence Switch Not Included
- Size 21″ x 23¾″ x 21½″
- Actual weight 39 lbs.
- **Shpg. 48 lbs.(Oversize)**

Replacement Kubota Seat



ITEM 300175
$152.00

• Brand new, BLACK TALON Model 53000BK03UN replacement KUBOTA seat. Steel frame heavy duty black vinyl covering on high density foam. Two drain holes in the base of the seat.
• *Specific model numbers can be found at www.surpluscenter.com.*

SPECIFICATIONS
- Bolt Patterns: 6″x 2″, 6″x 4″, 7″x 1.625″, 7.5″x 2″, 7.5″x 4″, 7.5″x 6″, 7.5″x 7″
- Size 21½″ x 17″ x 18″
- Actual wt. 14 lbs.
- **Ships (Oversize) 35 lbs.**

Universal 2 Piece Implement Seat



ITEM 300178
$127.25

• Brand new, BLACK TALON Model 50800BK steel frame and yellow vinyl cover. Ribbed seat cushion for air flow. Lever controls seat to slide.

SPECIFICATIONS
- Bolt Pattern: Adjustable Width 7½″ to 13″ Depth 11½″
- Size 19¾″ x 19½″ x 16½″
- Actual wt. 28 lbs.
- **Ships (Oversize) 36 lbs.**

Deluxe High Back Seat



ITEM 300277
$298.15

• Brand new premium high back vinyl seat. Constructed of heavy duty black vinyl with high density foam cushion. Steel frame with hard plastic vinyl lip. Fixed seat back. Adjustable seat slides. Accepts operator presence switch (not included).

SPECIFICATIONS
- Bolt Pattern 13½″ x 11¼″ Slotted
- Size 19″ x 21″ x 22½″
- Base Cushion 18″ x 18″
- Back Height 18½″
- Actual Weight 39 lbs.
- **Ships Oversize 47 lbs.**



ITEM 300278 w/Armrests
$315.40

SPECIFICATIONS SAME AS ABOVE EXCEPT
- Size 16″ x 21″ x 22½″
- Between Armrests 18½″
- Actual Weight 47
- **Ships (Oversize) 54 lbs.**

Forklift Seat

with Integrated Suspension



ITEM 300214
$518.65

• Brand new, BLACK TALON forklift seat with integrated suspension. Steel frame, foam filled black contoured vinyl seat with hip restraint and operator presence switch. Backrest tilts up 30° in either direction. Seat slides. Document holder integrated into backrest.

SPECIFICATIONS
- Mounting: Threaded Mounting Patterns 5⁄16″-18 Width Center 11.25″, 11″, 10″, 9.5″, 8″ Depth Centers 11″ Slots Mounting Patterns Width Center 10.68″, 11″ Depth Centers 12.5″, 11″
- Suspension Stroke 1.6″
- Weight Adjustment Range 110 to 242 lbs.
- Slide Adjustment Range 6″
- Size 23.62″ x 24.41″ x 22.63″
- Actual Weight 65 lbs.
- **Shpg. 78 lbs. (Oversize)**

Forklift Seat



ITEM 300288
$401.50

• Brand new, BLACK TALON 395000BK forklift seat. Universal industrial Features include adjustable seat slide and seat back angle adjustments, retractable seat belts, operator presence switch and document pouch.

SPECIFICATIONS
- Color Black
- Mounting Patterns Width Center 9.06″, 11.02″, 12.60″, 12.99″, 13.39″ Depth Centers 13″
- Slide Adjustment Range 6.3″ 9 positions
- Seat Back Adjustment Range 60 Degrees
- Size 21.5″ x 23″ x 23″
- Actual Weight 50 lbs.
- **Shpg. 78 lbs. (Oversize)**

Mower Seat



ITEM 300394
$119.95

• New, Spartan 471-0032-00 black and orange mower seat. Seat slide rails. Steel base. Operator presence switch. Used on zero turn mowers.

SPECIFICATIONS
- Brand Spartan
- Bash Cushion 18½″ x 15″
- Backrest Height 17½″
- Mount Four 5⁄16″-18 TPI x 1″ long studs
- Travel Range 4½″
- Mounting Pattern 11¼″ x 11″
- Size 21″ x 19½″ x 18½″
- Actual Weight 13.45 lbs.
- **Shpg 77 lbs. (Oversize)**

Pan Seat Cushions



300152



300153



300154

• Brand new, BLACK TALON seat cushions will fit most pan style seats. Two piece cushion. Tie string attachment. Intended for use with our ITEM 300141 (at right).

ITEM	Model	Color	Cushion Fill	Shpg.	Price
300152	50100GR	Gray vinyl	Poly-foam	2 lbs.	$36.80
300153	50200GR	Gray vinyl	Shredded foam	3 lbs.	$37.05
300154	50300RW	Red and white vinyl	Poly-foam	3 lbs.	$39.20

Universal Pan Seat



ITEM 300141
$51.80

• Brand new, BLACK TALON Model 10000BK covered black replacement universal pan seat for lawn mowers and garden tractors. Three drain holes. Steel frame.

SPECIFICATIONS
- Mounting two ½″-13 bolts on 2″ centers
- Size 16¾″ x 19″ x 7″
- **Shpg. 8 lbs.**

Ultra High Back Seat ⚠

w/ Slides

BLACK TALON SEATS



ITEM 300198

$253.20

• Brand new, BLACK TALON Model 46000BK high-back seat. Heavy duty vinyl cover. Ideal replacement for skid steers. Also for commercial turf, utility vehicles, forklifts, loaders, backhoes and other construction equipment. Spring loaded lever to lock seat slide. Steel pan, drain hole. Accepts operator presence switch.

SPECIFICATIONS

- Bolt Pattern
  9″ x 11.5″
  10.25″ x 11.5″
  10.63″ x 11″
  11.25″ x 11.5″
- Size 22.5″ x 18.9″ x 22.5″
- Bolt Pattern With Slides (Width x Depth)
  8″ x 11⅛″
  9½″ x 11⅛″
  11¼″ x 11⅛″
- Actual wt. 26 lbs.
- **Shpg. 61 lbs.** (oversize)

Contoured High Back Seat ⚠

w/ Slides

BLACK TALON SEATS



ITEM 300176

$172.55

• Brand new, BLACK TALON Model 45000BK high-back contoured seat. Heavy duty vinyl cover. Ideal replacement for commercial turf, utility vehicles, forklifts, skid steers, loaders, backhoes and other construction equipment. Spring loaded lever to lock seat slide. Accepts operator presence switch.

SPECIFICATIONS

- Bolt Pattern Without slides (Width/Depth)
  7.5″ x 7″
  7.5″ x 11.5″
  8″ x 11.5″
  8.2″ x 5″
  9.5″ x 11.5″
  11.25″ x 11.5″
- Bolt Pattern With Slides (Width x Depth)
  8″ x 11⅛″
  9½″ x 11⅛″
  11¼″ x 11⅛″
- Size 21″ x 18″ x 19″
- Actual wt. 21 lbs.
- **Shpg. 75 lbs.** (oversize)

Compact Tractor Seat ⚠

w/Flip Forward Bracket

BLACK TALON SEATS



ITEM 300177

$110.10

• Brand new, BLACK TALON Model 52010BK compact tractor seat with flip forward bracket. Integral polyurethane steel frame. Waterproof with drain holes.

• Replacement seat for many models of Bolens, Cub Cadet, Ford/New Holland, Hinomoto, International Harvester, Iseki, John Deere Utility Orchard Tractors, Kubota, Kumiai, Mahindra, Massey Ferguson, Mitsubishi, Rhino, Satoh, White & Yanmar.

• *Specific model numbers can be found at www.surpluscenter.com.*

SPECIFICATIONS

- Bolt pattern without flip bracket (width x depth)
  6½″ x 1.63″ 7½″ x 1.63″ 7½″ x 7″
- Size 17½″ x 15″ x 14½″
- Actual weight 12 lbs.
- **Shpg. 32 lbs.** (oversize)

BLACK TALON SEATS

Implement Seats ⚠

• Brand new implement seats. Intended for a wide variety of applications including garden tractors, lawn mowers, industrial trucks, skid steers and forklifts.



300142



300187



300183

Low Back Seats

ITEM	Color	Material	Mounting Bolt pattern (Width X Depth)			Size	Shpg.	Price
300142	Black	Poly	5¼″ x 4½″	6″ x 5″	7½″ x 7″	16⅜″ x 18½″ x 9⅞″	12 lbs.	$77.80
300187	Yellow	PVC	6″ x 5″	7½″ x 7″	8.2″ x 5″	16½″ x 18¼″ x 11″	10 lbs.	$66.65
300183	Black	PVC	6″ x 5″	7½″ x 7″	8.2″ x 5″	16½″ x 18¼″ x 11″	10 lbs.	$66.65



300143



300144



300145



300147



300180



300181

High Back Seats

* See website for mounting bolt pattern

ITEM	Color	Material	Mounting Bolt pattern (Width X Depth)			Size	Actual Weight	Oversize Shpg.	Price
300143	Black	Poly	5¼″ x 4½″	6″ x 5″	7½″ x 7″	18 15⁄16″ x 15 15⁄16″ x 14½″	12 lbs.	32 lbs.	$86.35
300144	Black	Poly	6″ x 5″	7½″ x 3″	7½″ x 7″	20″ x 19¾″ x 14″	17 lbs.	33 lbs.	$106.95
			8¼″ x 5″	8½″ x 1⅝″	11¼″ x 11″				
300145	Yellow	Poly	6″ x 5″	7½″ x 3″	7½″ x 7″	20″ x 19¾″ x 14″	17 lbs.	33 lbs.	$106.95
			8¼″ x 5″	8½″ x 1⅝″	11¼″ x 11″				
300147*	Black	Vinyl		Universal Slot Pattern		20 15⁄16″ x 18½″ x 18 15⁄16″	18 lbs.	46 lbs.	$131.65
300180	Black	PVC	6″ x 5″	7½″ x 7″	8.2″ x 5″	18″ x 19¼″ x 13¾″	11 lbs.	35 lbs.	$84.85
300181	Black	Poly	8″ x 11½″	10½″ x 7¾″	11¼″ x 11½″	20⅛″ x 17½″ x 19⅛″	14 lbs.	47 lbs.	$122.85

Adjustable Arm Rest Set

ITEM 300350 **$9.95**

• New, adjustable arm rest set for #120 series seat. Set contains left and right armrest with mounting hardware.

SPECIFICATIONS

- Brand CONCENTRIC INTERNATIONAL
- Model# 930000bk
- Arm Rest Width 2¼″
- Arm Rest Length 11¼″
- Color Black
- **Shpg 5 lbs.**



Seat Switch

ITEM 501599 **$3.99**

New, DELTA SYSTEMS, model 6522 operator presence seat switch. Two normally open connections.

SPECIFICATIONS

- Contact Type 1 N.O./1 N.O.
- Contact Rating 3 Amps @ 12 Volt DC
- Actuator Type Plunger
- Plunger Dia. 2½″
- Plunger travel 5⁄16″
- Terminals 0.11″ push on
- Size 4¼″ x 2¾″ x 1⅝″
- Mount 2 holes, 3½″ c/c
- **Shpg. ½ lb.**



California Residents ⚠ WARNING:Cancer and Reproductive Harm For more information refer to:www.P65Warnings.ca.gov

2 Piece Replacement Seat ⚠

For John Deere



ITEM 300160

$177.90

• Brand new, SEAT SOLUTIONS Model 55500YE replacement cushion set for John Deere mobile equipment. Steel frame with heavy yellow vinyl cover on high density foam.

SPECIFICATIONS

Find a complete list online of equipment model numbers that this cushion fits at www.surpluscenter.com.

• Size 23½″ x 14″ x 16″ • **Shpg. 16 lbs.**

Seat Slide Pairs ⚠

• Brand new, BLACK TALON pair adjustable seat slides. Powder coat painted, Sturdy steel construction. Easily adapted to many seats.




ITEM 300200

$47.60

SPECIFICATIONS

• Positions 12
• Travel 7¹¹⁄₁₆″
• Studs ⁵⁄₁₆″-18
• **Shpg. 4 lbs.**

• Bolt Pattern Universal 11⅝″ max. depth. center to center
• Studs Mount 11″ center to center width depends on seat



ITEM 300184


$43.90

SPECIFICATIONS

• Positions 8
• Travel 5⅝″
• Bolt Hole ⁵⁄₁₆″ dia.

• Bolt Pattern Universal 11⅝″ max. depth center to center
• **Shpg. 5 lbs.**

Flip-Type Seat Mounting Hardware



ITEM 300203

⚠ **$39.20**

• Brand new, hardware for flip-type tractor seats. Use with flip-type seats of the following manufacturers: Bolens, Cub Cadet, Deutz/Allis Chalmers, Ford/New Holland, Hinomot, International Harvester, Iseki, John Deere, Kubota, Kamiai, Mahindra, Massey Ferguson, Mitsubishi, Rhino, Satoh, White & Yanmar. **Shpg. 3 lbs.**

Specific model numbers can be found at www.surpluscenter.com

Universal Seat Slot Bar Set ⚠



ITEM 300186

$55.05

• Brand new, BLACK TALON Model 94500BK seat slot bar pair. Sturdy steel construction. Converts many seat bolt patterns to widths of 5″ to 13½″.

SPECIFICATIONS

• Bolt hole ⅜″ dia.
• Size 15″ x 2¹⁵⁄₁₆″
• **Shpg. 7 lbs.**

Heavy Duty Suspension ⚠

With Height & Weight Adjustment



ITEM 300205

$329.50

• Brand new, implement seat suspension system with height and weight adjustments for custom comfort. 4-spring suspension with hydraulic damper. Fully skirted, powder coated steel construction.

SPECIFICATIONS

• Suspension Travel 3¾″
• Weight Adj. 110 to 265 lbs.
• Height Adj. 0″ to 2⅜″
• Bolt Pattern 10⅝″ x 11⅝″ (top & bottom)
• Size 17″ x 14″ x 7″
• **Shpg. 32 lbs.**

Low Profile Seat Suspension

With Weight Adjustment ⚠



ITEM 300206

$306.45

• Brand new, implement seat suspension system with weight adjustments and seat slides for custom comfort. 2-spring suspension with hydraulic damper. Fully skirted, powder coated steel construction.

SPECIFICATIONS

• Suspension Travel 1½″
• Weight Adjustment 110 to 265 lbs.
• Top Bolt Pattern (Width x Length) 10½″ x Slotted Slides
• Bottom Bolt Pattern (Width x Length) 10¼″ x 5¼″, 6½″, 8⅝″, 9⅝″, 10¾″, 12″, 12¾″
• Size 18″ x 14½″ x 4¾″
• **Shpg. 35 lbs.**

Cushions

For John Deere ⚠



• Brand new, SEAT SOLUTIONS replacement back cushion for John Deere mobile equipment. Steel frame with heavy brown fabric cover on high density foam. For use with mechanical or hydraulic suspension. Adjustable lumbar support.

Find a complete list online of equipment model numbers that these cushions fit at www.surpluscenter.com.

Back Cushion

ITEM 300162 **$144.05**

• Model 55700BR. Use with mechanical or hydraulic suspension. Adjustable lumbar support. Size 17″ x 17″ x 7″. **Shpg. 13 lbs.**

Base Cushions

ITEM 300163 **$130.10**

• Model 55800BR. Use with mechanical suspension. Size 23″ x 18″ x 6″. **Shpg. 14 lbs.**

ITEM 300164 **$135.75**

• Model 55850BR. Use with hydraulic suspension. Size 23″ x 18″ x 6″. **Shpg. 14 lbs.**

4 Piece Replacement Cushion Set

For John Deere ⚠



ITEM 300161

$289.60

• Brand new, SEAT SOLUTIONS Model 55600YE replacement cushion set for John Deere mobile equipment. Steel frame with heavy yellow vinyl cover on high density foam.

SPECIFICATIONS

Find a complete list online of equipment model numbers that this cushion fits at www.surpluscenter.com.

• Size 21″ x 24″ x 21″ • **Shpg. 33 lbs.**

3 Piece Replacement Cushion Set ⚠

For International Harvester



ITEM 300165

$200.80

• Brand new, SEAT SOLUTIONS Model 556000BW replacement cushion set for International Harvester mobile equipment. Steel frame with heavy black and white vinyl cover on high density foam.

SPECIFICATIONS

Find a complete list online of equipment model numbers that this cushion fits at www.surpluscenter.com.

• Size 27″ x 21″ x 7″ • **Shpg. 24 lbs.**

3 Piece Replacement Cushion Set ⚠

For John Deere



ITEM 300159

$173.90

• Brand new, SEAT SOLUTIONS Model 55000YE replacement cushion set for John Deere mobile equipment. Steel frame with heavy yellow vinyl cover on high density foam. Does not include hardware.

SPECIFICATIONS

Find a complete list online of equipment model numbers that this cushion fits at www.surpluscenter.com.

• Size 25½″ x 19″ x 15¼″ • **Shpg. 21 lbs.**

Universal 2 Piece Tractor Seat

w/Adjustable Suspension



ITEM 300349

$149.95

• New, CONCENTRIC model 516050BK-BT steel frame and black vinyl cover, universal high back seat. Adjustable suspension with 3½″ stroke. Ribbed cushion for air flow. Adjustable base angle. Lever to slide forward and backwards.

SPECIFICATIONS

• Mounting Universal Bolt Pattern mounting plate
• Size 21½″ x 24½″ x 21½″
• Actual Weight 46.5 lbs
• **Shpg. 87 lbs. (Oversize)**

High Back Implement Seats



• Brand new, BLACK TALON. Plastic frame and vinyl cover, replacement universal high back seat. Intended for lawn mowers, garden tractors and other implement equipment. High density foam cushion. Waterproof with drain hole. Accepts operator presence switch.

SPECIFICATIONS

- Mounting Bolt Pattern (Width x Depth)
  - 6″ x 5″
  - 7.5″ x 3″
  - 7.5″ x 4″
  - 7.5″ x 4″
  - 7.5″ x 7″
  - 8″ x 11.5″
  - 8.2″ x 5″
  - 11.25″ x 8″
  - 11.25″ x 11.5″
- Mounting Holes Thread 5/16″-18
- Size 20″ x 19″ x 18″
- Actual Wt. 11 lbs.
- **Shpg. 58 lbs. (Oversize)**

ITEM 300335 **$128.10**
• Model 143000BK. Black vinyl.

ITEM 300338 **$138.85**
• Model 143000C. Camo vinyl.

ITEM 300336 **$121.70**
• Model 143000GR. Gray vinyl.

ITEM 300337 **$154.85**
• Model 143000YE. Yellow vinyl.

Ultra High Back Implement Seats



• Brand new, BLACK TALON. Plastic frame and vinyl cover, replacement universal ultra high back seat. Intended for lawn mowers, garden tractors, skid steers, utility trucks, ground service equipment, and other implement equipment. High density foam cushion. Waterproof with drain hole. Accepts operator presence switch.

SPECIFICATIONS

- Mounting Bolt Pattern (Width x Depth)
  - 7.5″ x 3″
  - 7.875″ x 7.875″
  - 8″ x 11.5″
  - 8.8″
  - 9.1″
  - 11.25″ x 10.5″
  - 11.25″ x 11.5″
  - 11.25″ x 12.5″
- Mounting Holes Thread 5/16″-18
- Size 23″ x 18.75″ x 21″
- Actual Wt. 13 lbs.
- **Shpg. 58 lbs. (Oversize)**

ITEM 300339 **$163.75**
• Model 149000BK. Black vinyl.

ITEM 300342 **$145.35**
• Model 149000C. Camo vinyl.

ITEM 300340 **$155.55**
• Model 149000GR. Gray vinyl.

ITEM 300341 **$155.55**
• Model 149000YE. Yellow vinyl.

Plastic Seal Pick Tool



ITEM 902773 **$1.95**
• Brand new, plastic pick tool for removing o-rings and seals to prevent damage to delicate machined surfaces. 5½″ overall length. Shpg 1/10 lb. Made in USA.

30 Cal Ammo Box



ITEM 100228
$8.95
• Genuine U.S. military surplus used steel ammo box. Hinged lid with gasket for watertight storage. Functional hinges and handles. May have some light surface rust, water staining, small dents, sun fading and tape indicating the can is empty.

SPECIFICATIONS

- Caliber 30 7.62mm
- Hinge end
- Size 11″ x 4 ″x 7″
- **Shpg 5 lbs.**

ITEM 100349 **$799.20**
• Pallet of 216 • **Shpg 975 lbs.** ***Truck freight only***

6″ Heavy Duty Rubber Hood Catch



ITEM 300270
$9.35
• Brand new, heavy duty rubber hood catch. Ideal for securing battery boxes, truck boxes and hoods. Brackets and pins included.

SPECIFICATIONS

- Brand Buyers Products
- Model Number WJ205
- 6″ Length
- Size 6″ x 3.5″ x 1.5″
- **Shpg. ½ lb.**

Adjustable Seat Slide Pair w/tilt forward Pan



ITEM 300273
$9.95
• New, takeoff, tilt forward seat pan with adjustable slides. Powder coat painted, Sturdy steel construction.

SPECIFICATIONS

- Positions 10
- Travel 6¼″
- Frame Mount ⅜″ x ⅝″ slots 11¾″ x 11¼″
- Flip Forward Mounting Holes two ⅜″ dia. holes 14″ inside width
- Size 14″ x 15½″ x 1⅛″
- **Shpg. 9 lbs.**

24″ Flat Blade Screwdriver



ITEM 100374 **$8.95**
• New, OLDFORGE screwdriver. Model 5724. Extra long shank to reach screws from a distance. Made in USA.

Deluxe Seat With Armrests & Seatbelt



ITEM 300343
$179.95
• New, gray vinyl seat with flip up armrests. Seat slide rails. Supportive foam cushion. Steel base. Operator presence switch. Document pouch on back of seat. Retractable seatbelt.

SPECIFICATIONS

- Base Cushion 17″ x 15½″
- Backrest Height 16½″
- Width between armrests 16½″
- Travel Range 4″
- Mount Four 5/16″-18, ⅞″ long studs
- Mtg. Pattern 11¼″ x 11″
- Size 24″ x 24″ x 24″
- **Shpg. 80 lbs.** ***Truck freight only.***

10,000 lb. Ratchet Straps w/Hooks



$17.25 each
• Brand new, ratchet strap with hooks at each end. Use to tie down loads on trailers, pickup boxes. Plated steel parts. Not for overhead lifting. Bright yellow nylon strap.

SPECIFICATIONS

- Working Cap. 10,000 lbs.
- Lashing Cap. 3,335 lbs.
- Strap width 2″
- Total length 27 ft.
- Hook Style Flat
- **Shpg. 7 lbs.**

ITEM 300191 Flat hook style
ITEM 300190 J hook style
ITEM 300327 J hook style

3000 lb. Ratchet Strap w/J Hooks



ITEM 300250 ***$6.00***
• Brand new, ratchet strap with J hooks at each end. Use to tie down loads on trailers, pickup boxes. Plated steel parts. Not for overhead lifting. Bright yellow nylon strap.

SPECIFICATIONS

- Working Capacity 3000 lbs.
- Lashing Capacity 1000 lbs.
- Strap width 1½″
- Total length 15 ft.
- Hook Style J
- **Shpg. 3 lbs.**

US Military Ratchet Strap



ITEM 300242
$6.95
• New, CERTIFIED SLINGS. US Military ratchet strap with steel ends. Flat snap hook on adjustable end and J-hook on fixed end. Use to tie down loads on trailers, pickup boxes. Plated steel parts. Not for overhead lifting. Made in the USA.

SPECIFICATIONS

- Strap width 1¾″
- Total length 10 ft.
- Hook Style Adjustable End Flat snap hook
- Hook Style Fixed End J-hook
- Color of Strap Military green
- **Shpg. 5 lbs.**

Bobcat Cab Heater



ITEM 300392
$149.95
• New, Bobcat 7021667 cab heater. Fits Bobcat 3400 UTV.

SPECIFICATIONS

- Brand Bobcat
- Model Number 7021667
- Size 10½″ x 9″ x 5″
- **Shpg 8 lbs.**

California Residents WARNING:Cancer and Reproductive Harm
For more information refer to:www.P65Warnings.ca.gov

800 Lumen 6 LED Flood Light

With RF ⚠ Remote Control



ITEM 500846

$29.95

• Brand new, CREATIVEWERKS Model CWLED-006RF LED flood light. Integrated RF receiver allows this light to control up to 5 other non-RF LED lights (ITEM 500845 below). Terpolymer housing. Minimal current draw. 33″ wire lead. 110° of light output. 6 button RF transmitter included.

SPECIFICATIONS

- Voltage 12 Volt DC
- Amps 0.6 amps
- Lumen Rating 800 lumens
- Lens 5⅛″ x 3⅛″
- Mount M10-1.5 x 1⅛″ stud
- Size 5⅞″ x 2⅞″ x 5¾″
- **Shpg. 2 lbs.**

800 Lumen 6 LED Flood Light ⚠



New Lower Price 1/3 off Previous Price!

ITEM 500845 **$23.95**

• Brand new, CREATIVEWERKS Model CWLED-006 LED flood light. Terpolymer housing. Minimal current draw. 33″ wire lead. 110° of light output. Can be used with ITEM 500846 above.

SPECIFICATIONS

- Voltage 12 Volt DC
- Amps 0.6 amps
- Lumen Rating 800 lumens
- Lens 5⅛″ x 3⅛″
- Mount M10-1.5 x 1⅛″ stud
- Size 5⅞″ x 2⅞″ x 5¾″
- **Shpg. 2 lbs.**

Pair of 6 LED Strobe Light Heads



• Brand new, BUYERS dual hidden LED mini strobe light heads. Intended to be mounted inside of vehicles head and tail lights. Six clear LED's per strobe light head. 15 ft. hard wired cable with weather pack connectors to prevent corrosion at connection. Up to 4 pairs of these strobe light heads can be synchronized for simultaneous or alternating flashes.

SPECIFICATIONS

- 6 LED per head
- 19 Flash Patterns
- Voltage 12 Volt DC
- Amps 1.8 amps/set
- Mount 2 Holes on 1.3″ centers
- Size 1½″ dia. x 1 1/16″
- **Shpg. ¼ lb.**

ITEM 500931 Amber **$140.80**

ITEM 500932 Clear **$152.20**

14′ Long Prewired On/Off Switch w/Strobe Flash Control



ITEM 500998 **$17.05**

• Brand new, BUYERS PRODUCTS model# 6391215 two-wire switch panel. Back of panel can be removed for installation. For use with LED hidden strobe lights.

SPECIFICATIONS

- Wire 1#18 AWG, 3 conductors
- Wire 2#18 AWG, 2 conductors
- Wire End 1 Bullet Connectors
- Wire End 2 Bare
- Rating 10 Amp
- Features On/Off switch, Flash pattern control
- Length 14 ft.
- **Shpg 1 lb.**

12-24 VDC Vehicle Color Observation System

• Brand new, color view kit for trucks, buses, RV's, construction equipment. Improves safety where visibility is restricted. Audio function. Wireless handheld remote control. Multi-language screen display. Extra cameras and cables sold separately to fit your exact needs.

Single View System

With Camera



ITEM 300193 **$281.00**

• Adjustable bracket and rain/sun shade on camera. 18 LED's around camera lens to provide night vision. Furnished with 1 camera, inputs for 2 additional cameras (purchased separately). View from additional cameras can be set for normal or mirrored image. Automatic camera heating below 14°.

SPECIFICATIONS

- Screen 7″ color LCD
- Resolution 800 x 480
- Contrast 500:1
- Inter-connect cable 80″
- Night vision range 5 meters
- Screen format 16:9/4:3
- Camera viewing angle 120°
- Monitor size 7″ x 1″ x 5″
- Camera size 3″ x 2″ x 1¾″
- Cable length 65 ft.
- Size 2¼″ dia. x 13¾″
- **Shpg. 7 lbs.**

Camera Cables



• Brand new, connect camera to monitor. 4 wires for positive, negative, video and audio. Weatherproof threaded connectors.

ITEM	Length	Shpg.	Price
300228	32 ft.	2 lbs.	$16.50
300227	65 ft.	3 lbs.	$25.05

Extra Color Cameras

• Brand new, extra color cameras for ITEM 300193. Four pin wiring harness. Cable sold separately.

Rear Camera



ITEM 300226 **$118.45**

• Adjustable bracket and rain/sun shade. 18 LED's around camera lens to provide night vision. Automatic camera heating below 14°.

SPECIFICATIONS

- Operating Voltage 12-24 DC
- Night Vision Range 5 meters
- Camera Viewing Angle 120°
- Size 3″ x 2″ x 1¾″
- **Shpg. 2 lbs.**

Bullet Camera



ITEM 300223 **$76.20**

• Designed to be installed in 26mm hole in bumper or other holes on vehicle body. 9 LED's around camera lens to provide night vision. Includes hole saw blade to cut mounting hole.

SPECIFICATIONS

- Operating Voltage 12-24 DC
- Size 1¼″ dia. x 1½″
- Camera Viewing Angle 170°
- **Shpg. 1 lb.**

Side Mount Camera



ITEM 300229 **$128.20**

• Waterproof gasketed plastic housing for side mount on vehicle. 9 LED's around camera lens to provide night vision.

SPECIFICATIONS

- Brand Buyers Products
- Model 8883104
- Operating Voltage 12-24 DC
- Camera Viewing Angle 120 degrees
- Ingress Protection IP69K
- Size 1½″ x 3¼″ x 2″
- **Shpg. 1 lb.**

17″ Triple Lens Marker Light Bar



ITEM 500904 **$13.80**

• New BUYERS Model 5621719 red marker light 3 lens with 3 LED's per lens. Wire leads.

SPECIFICATIONS

- Marker Light BAR
- Voltage 12 Volt DC
- LED's 9 Red
- Mount 4 bolt holes on 3¾″ to 12¼″ to 16″ centers
- Size 17″ x 1½″ x 1¾″
- **Shpg. ¾ lb.**

12 VDC 400 Lumens Utility Light



ITEM 500662 **$9.00**

• Brand new, BUYERS model 1492100 utility light. Weather proof hard rubber housing. Incandescent bulb. Sealed lamp. Universal adjustable mounting bracket.

SPECIFICATIONS

- Voltage 12 Volt DC
- Power 35 Watts
- Amps 2.92 amps
- Lumens 400 Lumens
- Connection 2 Wires
- Lens 4″ diameter
- Mount 5/16″ x 9/16″ stud
- Size 5″ x 2¾″ x 6¼″
- **Shpg. 2 lbs.**

12-24 VDC LED Flood Lights


500663
500729


500691
500736


500730


500786


500760


500761
500844


500762
500843


500842

• Brand new, BUYERS LED flood lights. Shock, vibration resistant as well as waterproof.

ITEM	Number of LED's	Lumens	Amps	Lens Dimension	Lens Color	Mount	Housing	Overall Size	Shpg.	Price
500663	54	375	0.3	5″ dia.	Clear	5/16″ Stud	Sealed Rubber	5″ x 3.18″ x 7″	2 lbs.	$28.30
500729	54	375	0.3	5″ dia.	Amber	5/16″ Stud	Sealed Rubber	5″ x 3.18″ x 7″	2 lbs.	$29.80
500691	6	1350	1.5	5″ dia.	Clear	M8-1.25 Stud	Sealed Aluminum	4.56″ x 1.69″ x 5.31″	3 lbs.	$26.35
500730	6	1350	1.5	4¼″ dia.	Amber	M8-1.25 Stud	Sealed Aluminum	4.56″ x 1.69″ x 5.31″	2 lbs.	$36.55
500736 *	6	1350	1.5	4¼″ dia.	Clear	Magnetic	Sealed Aluminum	4.56″ x 1.69″ x 5.31″	2 lbs.	$44.80
* With magnetic base mount. 30 ft. power cord with built in switch and automotive cigarette lighter plug end.										
500786	6	1350	1.5	4¼″ x 1¾″	Clear	M8-1.25 Stud	Sealed Aluminum	5.75″ x 1.75″ x 5″	2 lbs.	$39.00
500760	6	1350	1.5	5¼″ x 3 5/16″	Clear	3/8-16 Stud	Sealed Aluminum	6″ x 5″ x 2″	3 lbs.	$40.40
500761	9	1700	2.25	5″ dia.	Clear	3/8-16 Stud	Sealed Aluminum	5.5″ x 6.62″ x 2″	3 lbs.	$39.15
500762	9	1500	2.25	4¾″ square	Clear	3/8-16 Stud	Sealed Aluminum	5.31″ x 6.75″ x 1.62″	3 lbs.	$44.55
500842	4	780	1	1⅞″ dia.	Clear	M8-1.25 Stud	Sealed Aluminum	3.25″ x 2.75″ x 2.5″	1 lb.	$29.30
500843	16	4320	3	4⅛″ square	Clear	M10-1.5 Stud	Sealed Aluminum	7.13″ x 5″ x 2.88″	3 lbs.	$61.75
500844	14	3780	3	4½″ dia.	Clear	M10-1.5 Stud	Sealed Aluminum	7″ x 4.63″ x 2.75″	3 lbs.	$58.70

12-24 VDC Flood Lights



15 LED's, 900 Lumens

• Brand new, BUYERS model 1492196 LED flood light. Features Temperature Control System, automatically adjusts light for maximum power and lumens depending on temperature. Black powder coated aluminum housing. IP67, IP69K rated for extreme water and dust resistance. Clear polycarbonate lens. Stainless steel mounting bracket and fasteners. 18″ wire leads.

ITEM 501352 **$78.40**

SPECIFICATIONS
- Voltage 12-24 Volt DC
- Power 82 Watts
- Amps 6.8 amps
- Size 5.9″ x 4.8″ x 1.45″
- **Shpg. 2 lbs.**

Model 1492194. 36 LED's, 7920 Lumens

ITEM 501340 **$90.90**

SPECIFICATIONS
- Voltage 12-24 Volt DC
- Amps 4.9 amps
- 11″ wire leads.
- Mount 10mm stud
- Size 6.3″ x 5″ x 3.63″
- **Shpg. 2 lbs.**

1620 Lumen 12 Volt DC 5.5″ Wide LED Floodlight

ITEM 501571



$39.90

• Brand new. BUYERS 5.5″ wide rectangular LED flood light provides 1620 lumens of light across a wide area. Ideal for both on-road and off-road applications.

SPECIFICATIONS
- Brand Buyers Products
- Model Number 1492135
- Voltage 12-24 Volt DC
- Wattage 18 Watts
- Enclosure IP67
- Amp Draw at 12 Volts 1.50 Amps
- Color Clear
- Operating Temperature -4° to 122°F
- Size 5.7″ x 3″ x 2.1″
- **Shpg 3 lbs.**

5.2″ 12 LED Low Profile Wide Angle Strobe Light



ITEM 501354 **$104.20**

• Brand new, BUYERS model 8890302 twelve LED six clear and six amber strobe light. Aluminum housing, polycarbonate lens. Can be wired to strobe or always ON. Can be wired to synchronize or alternate flash pattern with additional lights. Surface mount with gasket. 9.5″ wire leads. SAE J595 Class 1, CA13 Class B Rating. Rated IPX8 for extreme dust resistance and waterproofing.

SPECIFICATIONS
- # LED 12
- 26 Flash Patterns
- Voltage 12-24 Volt DC
- Amps 0.88-1.76 amps
- Clear & Amber Color
- Mount 2 holes on 4.72″ centers
- Size 5.2″ x 1.77″ x 3.15″
- **Shpg. ¼ lb.**

12 VDC, 24 Amber LED Light Bar



8 Flash Patterns

ITEM 500909 **$98.20**

• Brand new, BUYERS Model 8891040 light bar. 24 amber high-power LED's. Two ceramic, rubber covered magnets. Eight selectable flash patterns. 9½ ft. cord with built-in "on-off" and flash pattern selector switches.

SPECIFICATIONS
- Voltage 12 Volt DC
- Connection Cigarette Plug Adapter
- Amps 2 amps
- Size 11″ x 6½″ x 2¼″
- **Shpg. 4 lbs.**

120 Lumen 12 VDC LED Projector Light



ITEM 500752
$23.95

• Brand new, BUYERS 5624433 LED projector light. Three high intensity LED's with clear plastic lens. Mounted to an aluminum heat sink and mounting bracket. Light housing can rotate 180°.

SPECIFICATIONS
- Lumens 120 Lumens
- Voltage 12 Volt DC
- Amps 0.28 amps
- Size 4¼″ x 1⅜″ x 1½″
- Connection Two 7″ long wire leads
- Mount Two bolt on 1½″ centers
- **Shpg. 1 lb.**

12 VDC, 18 LED Mini Light Bar



With 19 FlashPatterns

ITEM 500758 **$274.35**

• Brand new, BUYERS Model 8891090 light bar. 18 amber high-power LED's. Four rubber covered ceramic magnets. 19 selectable flash patterns. 11½ ft. cord with built-in "on-off" and flash pattern selector switches. Multi-unit synchronization capable. Meets SAE J845 Class 1, CA Title 13.

SPECIFICATIONS
- Voltage 12 Volt DC
- Power 38.4 Watts
- Amps 3.2 amps
- Connection Cigarette Plug Adapter
- Size 16¾″ x 6 15/16″ x 2 15/16″
- **Shpg. 9 lbs.**

Combination Spot/Flood Light Bars.

• Brand new, BUYERS LED combination spot and flood dual row light bars. Waterproof and shock/vibration resistant. Clear Lens. Operates on 12-24 Volt DC power. Spreads light over a wide area and delivers a concentrated beam across a long distance. Die-cast black aluminum housing. Stainless steel mounting hardware. Adjustable angle mounting. 36″ wire leads with waterproof whip connector. IP67 waterproof rating.



501328



501335

Spot/Flood Light Bars

ITEM	Length	Lumens	Number of LED'S	Amps	Lens Dimensions	Mount Ctr - Ctr	Shpg.	Price
501335	8″	3240	12	2	6″ x 2″	9.75″	4 lbs.	$72.40
501336	14″	6480	24	4.2	12″ x 2″	15.75″	5 lbs.	$109.95
501328	22″	10800	40	8.2	20″ x 2″	23.75″	8 lbs.	$160.15
501337	32″	16200	60	12	30″ x 2″	34″	11 lbs.	$231.40
501117	50″	25920	96	16.6	48″ x 2″	51.75″	16 lbs.	$319.65

1″3 LED Strobe Lights



• Brand new, BUYERS three LED strobe light. Surface or recessed mount black bezel and gasket included. Aluminum housing, polycarbonate lens. Can be wired to strobe or always ON. Can be wired to synchronize or alternate flash pattern with additional lights. 8″ wire leads. SAE J595 Class 1, CA13 Class B Rating. Rated IPX7.

ITEM 501353 Amber $49.50

ITEM 501115 Clear $49.50

SPECIFICATIONS

- # LED 3
- 12 Flash Patterns
- Voltage 12-24 Volt DC
- Amps 0.47 amps @ 12 VDC
- Mount 2 holes on 1.28″ centers
- Size 1.57″ dia. x 0.7″
- **Shpg. ¼ lb.**

12-24 VDC LED Dome Light



• Brand new, BUYERS model 5625338 LED dome light with motion sensor. Thirty five, LEDs. Plastic housing. Two wire connection.

SPECIFICATIONS

- Voltage 12-24 Volt DC
- Amps 1 amp @ 12 VDC
- Lumens 2200
- Lens 4″ dia.
- Mount Three holes on 4⅝″ dia. BC
- Size 5.1″ dia. x 0.575″
- **Shpg. ½ lbs.**

ITEM 501120 With Motion Sensor $37.70

ITEM 501118 No Switch $33.20

ITEM 501119 With Pushbutton Switch $36.85

12 VDC Amber Rotating Light



ITEM 500676

$18.10

• Brand new, BUYERS Model RL650A magnetic mount revolving emergency light.

SPECIFICATIONS

- Voltage 12 Volt DC
- Mount Magnetic base
- Connection Automotive Cigarette Lighter Plug
- Lens Color Amber
- Cord Length 10″
- Size 7⅝″ x 5″ x 5⅝″
- **Shpg. 2 lbs.**

12-24 Volt LED 14 Pattern Light Bar



ITEM 501438

$194.80

• Brand new light bar. Amber and blue high-power LED's. Magnetic or permanent mount. 14 selectable flash patterns. 15¼ ft. cord. Meets SAE J845 Class 1. IP67 Rated.

SPECIFICATIONS

- Brand Buyers Products
- Model Number 8891068
- Voltage 12-24 Volt DC
- Power 38 Watts
- Amps 4.3 amps @ 12 VDC
- Connection Cigarette Plug Adapter
- Size 15¼″ x 8⅝″ x 3″
- **Shpg. 9 lbs.**

Portable Magnetic Mount Flashing Strobe Light



ITEM 500907

$27.75

• Brand new, BUYERS Model SL475A LED flashing light. Magnetic mount. Operates 300-400 hours on 2 D cell batteries Manual on/off photocell to automatically turn on at night.

SPECIFICATIONS

- Batteries 2 D cell (not included)
- Lens Color Amber
- Bulb type 24 LED
- Flash Rate 60 triple flashes/minute
- Mount 3 magnets
- Size 4.75″ dia. x 4.13″
- **Shpg. 2 lbs.**

12 VDC LED Dot Trailer Lights



500893



500891



500896



500895



500897



500899



500900



500903

• Brand new, BUYERS PRODUCTS 12 VDC LED lights. Rubber grommet around case.

ITEM	Number of LED's	Lens Dimensions	Lens Color	Style	Mount Opening	Lead Lgth.	Overall Size	Shpg.	Price
500892	10	4″ dia.	Amber	Turn-Park light	4″ dia.	12″	5⁹⁄₁₆″ dia. x 1½″	¾ lb.	$12.90
500893	10	4″ dia.	Clear	Backup light	4″ dia.	12″	5⁹⁄₁₆″ dia. x 1½″	¾ lb.	$22.45
500890	10	4″ dia.	Red	Stop-Turn-Tail light	4″ dia.	12″	5⁹⁄₁₆″ dia. x 1½″	¾ lb.	$12.65
500891	18	4″ dia.	Red	Stop-Turn-Tail light	4″ dia.	12″	5⁹⁄₁₆″ dia. x 1½″	1 lb.	$16.30
500896	10	6½″ oval	Amber	Turn-Park light	6½″ x 2⁹⁄₁₆″	12″	7¼″ x 3¼″ x 1⅞″	¾ lb.	$12.90
500894	10	6½″ oval	Red	Stop-Turn-Tail light	6½″ x 2⁹⁄₁₆″	12″	7¼″ x 3¼″ x 1⅞″	¾ lb.	$12.65
500895	20	6½″ oval	Red	Stop-Turn-Tail light	6½″ x 2⁹⁄₁₆″	12″	7¼″ x 3¼″ x 1⅞″	1 lb.	$16.90
500897	24	6½″ oval	Clear	Backup light	6½″ x 2⁹⁄₁₆″	12″	7¼″ x 3¼″ x 1⅞″	¾ lb.	$25.70
500899	4	2½″ dia.	Amber	Marker light	2½″ dia.	6″	3¹¹⁄₁₆″ dia. x 1⅝″	¼ lb.	$ 7.20
500898	4	2½″ dia.	Red	Marker light	2½″ dia.	6″	3¹¹⁄₁₆″ dia. x 1⅝″	¼ lb.	$ 7.20
500901	3	2½″ x 1½″	Amber	Marker light	Surface Mount	6″	2¹³⁄₁₆″ x 1½″ x 1¼″	1 lb.	$ 6.05
500900	3	2½″ x 1½″	Red	Marker light	Surface Mount	6″	2¹³⁄₁₆″ x 1½″ x 1¼″	1 lb.	$ 6.05
500903	3	¾″ dia.	Amber	Marker light	¾″ dia.	7″	0.74″ dia. x 0.961″	¼ lb.	$ 6.70
500902	3	¾″ dia.	Red	Marker light	¾″ dia.	7″	0.74″ dia. x 0.961″	¼ lb.	$ 6.70

12 VDC Surface Mount LED Strobe Lights


500930


500928


500946


500927


500938


500929


500935


500944

• Brand new, BUYERS PRODUCTS 12 VDC surface mount strobe lights.

**** Meet SAE J595 Class 1 Certifications***
***** Meet SAE J595 Class 2 Certifications***
****** Meet IP67 Standards***

ITEM	Number of LED's	Color	# Flash Patterns	Overall Size	Shpg.	Price
500930*	3	Amber	11	2⅝″ x ⅞″ x 1″	½ lb.	$63.15
500948*	3	Clear	11	2⅝″ x ⅞″ x 1″	½ lb.	$63.15
500942**	3	Amber	12	3⅞″ x 1¾″ x 1″	¼ lb.	$32.95
500946**	3	Amber	12	3⅞″ x 1″ x ⅝″	¼ lb.	$50.30
500947**	3	Clear	12	3⅞″ x 1″ x ⅝″	¼ lb.	$53.85
500906	4	Amber	4	4⅞″ x 1⅝″ x 2″	¾ lb.	$35.20
500927	4	Clear	4	4⅞″ x 1⅝″ x 2″	¾ lb.	$37.45
500928	4	Amber & Clear	4	4⅞″ x 1⅝″ x 2″	¾ lb.	$43.65
500936*	4	Amber	19	4½″ x 1¾″ x 1½″	¼ lb.	$40.45
500938*	4	Amber & Clear	19	4½″ x 1¾″ x 1½″	¼ lb.	$40.45
500937*	4	Clear	19	4½″ x 1¾″ x 1½″	¼ lb.	$40.45
500929	6	Amber	19	5″ x 1⅛″ x ½″	¼ lb.	$84.75
500935*	12	Amber	23	5¼″ x 2″ x ¾″	½ lb.	$106.70
500940*	12	Clear	23	5¼″ x 2″ x ¾″	½ lb.	$98.65
500939*	12	Amber & Clear	23	5¼″ x 2″ x ¾″	½ lb.	$98.65
500941*	12	Red	23	5¼″ x 2″ x ¾″	½ lb.	$98.65
500944***	12	Amber	18	5⅜″ x 2¼″ x 2″	½ lb.	$47.05
500945***	12	Amber & Clear	18	5⅜″ x 2¼″ x 2″	½ lb.	$49.90


500910

12 VDC Recessed Mount LED Strobe Lights

• Brand new, BUYERS PRODUCTS recessed mount LED strobe lights. Rubber grommet around case. Meet SAE J595 class 2 certification.


500926

ITEM	Number of LED's	Color	# Flash Patterns	Mount Opening	Overall Size	Shpg.	Price
500910	24	Amber	6	4″ dia.	5⁹⁄₁₆″ dia. x 1½″	¾ lb.	$31.60
500925	24	Amber	6	6½″ x 2⁹⁄₁₆″	7¼″ x 3¼″ x 1⅞″	¾ lb.	$31.30
500926	24	Clear	6	6½″ x 2⁹⁄₁₆″	7¼″ x 3¼″ x 1⅞″	¾ lb.	$37.50

12 VDC LED Light Strips

• Brand new, BUYERS LED light strip. Ideal for compartments, cargo, work spaces of trucks, toolboxes trailers and RV's. Low profile. IP68 rated, completely sealed water proof. Self adhesive back and brackets with screws included. 12 volt DC. Leads 4½″ long at each end.



ITEM	Lgth.	# LED's	Amps	Lumens	Size	Shpg.	Price
500782	18″	27	0.41	360	27″ x ½″ x ¼″	¼ lb.	$16.85
500783	24″	36	0.54	470	33″ x ½″ x ¼″	¼ lb.	$19.20
500784	36″	54	0.81	710	45″ x ½″ x ¼″	½ lb.	$25.10
500785	48″	72	1.12	940	57″ x ½″ x ¼″	½ lb.	$33.65

LED Flood Light With Strobe



ITEM 501622
$115.80

• Brand new, Buyers Products 4″ wide angle edgeless LED work light with strobe. Two lights in one - A white flood light and amber strobe light in a single versatile fixture. Die cast aluminum housing provides superior heat dissipation and corrosion resistance. Rated IP67/IP69K for extreme dust and water resistance. Applications include trucks, trailers, ATVs, and more.

SPECIFICATIONS
- Model Number 1492242
- Voltage 12-24 Volt DC
- Amps 3.2 Amps
- Wattage 38 Watts
- Housing Material Die Cast Aluminum
- Beam Pattern Flood-Spot
- Lens Shape Rectangular
- Lens Material Polycarbonate
- Lumens 8400
- Color Clear with Amber Strobe
- Number of LEDs 40
- IP Rating IPX7
- Type of Plug Blunt Cut
- Lead Length 18″
- Mount Type Permanent (Adjustable bracket, single post)
- Size 3.822″ x 3.39″ x 2.969″
- **Shpg 2 lbs.**

3 Clear LED Flood Light



ITEM 501002
$30.75

• Brand new, BUYERS PRODUCTS model 1492139 surface mount LED flood light. Die cast powder coated aluminum housing. 18″ long wire leads. IP67, RoHS certifications. Includes flat surface and tubular mounts.

SPECIFICATIONS
- Surface Mount Flood Light
- 1260 Lumens
- 12-24 Volt DC
- Amps 0.34 amps @ 12 VDC
- LED's 3 Clear
- Mounts 2 Holes on 2⅛″ centers
- Size 3″ x 1½″ x ⅞″
- **Shpg. ½ lb.**

2″ Round 4 LED Marker Lights

ITEM 501011 **$5.00**

• Brand new BUYERS model 5622154 Red marker light. Does not include rubber grommet or PL-10 connector. FMVSS108 Certifcation.

ITEM 501012 **$5.00**
Amber Lens

SPECIFICATIONS FOR BOTH
- Power 12 Volt DC 0.39 amps
- LED's 4 clear
- Size 2″ dia. x ¾″
- **Shpg. ¼ lb.**



Black Powder Coated Oval LED Mounting Bracket



ITEM 501014 **$6.85**

• Brand new, BUYERS PRODUCTS part number LB1 mounting bracket kit for use with oval LED lights. Powder coated steel. Two holes on top surface along with a ⅜″ x 2¼″ long slot.

SPECIFICATIONS
- Opening 6¾″ x 2½″
- Size 8¼″ x 1⅝″ x 4″
- Mounting holes: Two ⅜″ dia.,6¼″ centers
- **Shpg. 1 lb.**

LED Porch/ Utility Light



ITEM 501134
$9.99

• New, OPTRONICS model# RVPLL8CB LED porch or utlity light with black cover. Acrylic lens.

SPECIFICATIONS
- Voltage 12 Volt DC
- Amps 0.16 amps @ 12 VDC
- Lens 8⅜″ x 1⅞″
- Mount Two 3⁄16″ dia. holes on 8¹⁵⁄16″ centers
- Size 9¾″ x 3½″ x 2⅛″
- **Shpg. 1 lb.**

ITEM 501136 White. Model RVPLL8C

ITEM 501135 Chrome. Model RVPLL8CC

12 Volt DC LED Headlight



ITEM 501008
$7.95

• New, single LED headlight. Originally for tractor style riding mower. Black powder coated aluminum housing. No mounting hardware.

SPECIFICATIONS
- Voltage 12 Volt DC
- Current 0.35 amps
- Lens 2¼″ dia
- Size 3⅝″ dia. x 2½″
- Leads 6″ with connector half
- Mount Two tabs, 1″ gap, ¼″ holes
- **Shpg. 1 lb.**

ITEM 500977 New Takeoff **$4.95**

440 Lumen 12 Volt DC LED Marine Docking Spotlight



ITEM 501007
$21.95

• New, OPTRONICS model DLL50WB LED spotlight. Wide flat beam. Aluminum housing with white epoxy finish. 12″ wire leads with stainless steel hardware.

SPECIFICATIONS
- Voltage 12 Volt DC
- LED'S 2
- Amps 0.6 amps
- Lumen Rating 440 lumens
- Lens 4½″ x 2½″
- Mount Single stud on adjustable bracket
- Size 5″ x 3½″ x 3″
- **Shpg. 2 lbs.**

120 Volt AC 8″ Red Led Traffic Signal Light



ITEM 500698
$11.95

• Removed from service. ECOLUX red 84″ diameter traffic signal light. Multiple red LED assembly provides high intensity light, long life, and low power requirements. Black plastic housing with red lens and rubber gasket.

SPECIFICATIONS
- 120 Volt AC
- 4-6 Watts
- 60 Hertz
- 7¾″ diameter red lens
- Overall size 8⅜″ dia. x 3½″ deep
- **Shpg. 3 lbs.**

12-24 VDC 1350 Lumens Flood Light w/two Swivel Mount



ITEM 500735
$86.95

• Brand new. BUYERS LED utility flood light on two swivel joints. Swivels at base and light. Six, high-powered LEDs. Cast aluminum housing with black powder coat finish. Shock, vibration resistant as well as waterproof. Clear acrylic lens. Weather resistant switch. 32″ pre-wired leads. Handle mounted to top of light for positioning.

SPECIFICATIONS
- Model# 149212
- Voltage 12-24 Volt DC
- Power 12 W
- Amps 1 amp
- Lumens 1350 Lumens
- Lens 5″ Dia.
- Mount 2 bolt on 4″ centers
- Size 7⅛″ x 4½″ x 8⅞″
- **Shpg. 3 lbs.**

Spot Light

ITEM 500734 **$86.95**

5½″ Off-road Halogen Driving Light Kit



ITEM 500917
$29.99

• New, PLATINUM BURNERS SERIES by OPTRONICS. Model MH600-D. Kit has two 55 watt Halogen driving lights, illuminated on/off switch with mounting bracket, wiring harness with fuse. Corrosion proof housing and chromed lens guards.

SPECIFICATIONS
- Voltage 12 Volt DC
- Wattage 55 per light
- Bulb H3
- Size 5½″ dia. x 3″
- **Shpg. 4 lbs.**

2 LED Clear Utility Light



ITEM 501006
$8.95

• New, OPTRONICS model UCL-13C2PG72B surface mount LED utility marker, clearance light. Sealed lens with black backing.

SPECIFICATIONS
- Type Surface Mount Utility Light
- LED's 2
- Voltage 12 VDC
- Amps 0.2 amps
- Mounts 2 Holes on 1⅞″ centers
- Leads 72″ w/polarized plug
- Size 2½″ x 1⅛″ x ¹¹⁄16″
- **Shpg. ½ lb.**

12 VDC Light & Buzzer



ITEM 500718
$16.65

• Brand new, combination LED indicator light and buzzer. Both operate simultaneously to draw attention.

SPECIFICATIONS
- Voltage 12 DC
- Lens color Red
- Terminals Screw
- Mount ¾″ dia. hole
- Overall Size 3″ x 1″ x 2″
- **Shpg. 1 lb.**

Submersible LED Trailer Lighting Kits



ITEM 501137
$39.99

• New, BLAZER INTERNATIONAL LED stop/tail/turn trailer lighting kits. Includes two submersible lights, 20′ wiring harness, license plate bracket, mounting hardware. Ideal for boat, utility, camping, snowmobile, and motorcycle trailers. DOT compliant.

SPECIFICATIONS
- Model# C7423
- Voltage 12 Volt DC
- Amps 0.1 amps @ 12 VDC (each light)
- Front Lens 4⅜″ x 4⅜″
- Trailer width under 80″
- Side Lens 2⅞″ x 2⅛″
- Size 5⅜″ x 5⅜″ x 3⅛″ (each light)
- **Shpg. 3 lbs.**

ITEM 501139
$39.99

SPECIFICATIONS
- Model# C7280
- Amps 0.3 amps @ 12 VDC (each light)
- Front Lens 8″ x 3⅞″
- Trailer width over/under 80″
- Side Lens 2⅞″ x 2″
- Size 8″ x 3″ x 2¹³⁄16″ (each light)
- **Shpg. 3 lbs.**

Utility Light



ITEM 500864
$7.99

• New, 12 Volt DC, 18 watt utility light. 32″ wiring harness with bullet connector for positive and 5⁄16″ ID ring terminal for grounding. Adjustable angle swivel bracket with clamp for 1″ dia. tubing. Sealed clear lens.

SPECIFICATIONS
- Voltage 12 Volt DC
- Wattage 18
- Lens 4″ x 3″
- Size 4¾″ x 2½″ x 3½″
- **Shpg. 2 lbs.**

LED Hazard Light



ITEM 501005
$25.75

• Brand new, LED multi-function rechargeable road flare. Waterproof flare is 4″ dia. x 1½″ with 16 orange LED's. Can be set to use any of 9 light patterns to warn other vehicles. Magnetic mount in base of flare. Furnished with 115 volt AC plug-in and 12 volt DC car adapters for charging with charge indicator.

SPECIFICATIONS
- LED Color Orange
- Light Patterns Rotating, Quad-flash, Single blink, Alternating, SOS, Solid -high, Solid-low, 2 LED flashlight, 4 LED flashlight
- Charger Adapters 115 Volt AC and 12 Volt DC
- Run Time 5-38 hours (depending on pattern)
- Battery Recharge Time 4-5 hours.
- **Shpg. 1 lb.**

4″ 12 Volt DC Stop Turn Tail Stud Mount Light



ITEM 500823
$6.99

• New, PETERSON MANUFACTURING. Model V313-2. Use for Stop, turn and tail light on trailers. Single side red lens. Grounds thru mounting stud.

SPECIFICATIONS
- Voltage 12 DC
- Lens Dia. 4″
- Bulb Type 2057
- Mounting stud ½″ dia. x 1⁹⁄16″
- Size 4⅛″ dia. x 2⅜″
- **Shpg. ½ lb.**

LED Recess Light



ITEM 501131

$5.99

• New, OPTRONICS recess mount LED light. White metal housing, faceted reflector and frosted glass lens. Sold with three mounting screws.

SPECIFICATIONS

- Model# 29002459LB
- Voltage 12 Volt DC
- Amps 0.2 amps @ 12 VDC
- Lens 3⅛″ dia.
- Mount Three ⅛″ dia. holes
- Size 3⅛″ dia. x 1½″
- **Shpg. 1 lb.**

LED Dome Light



ITEM 501140

$11.99

• New, OPTRONICS low-profile LED dome light. Durable housing with polycarbonate lens. Two 8¼″ long wire connections (white for ground, black for power).

SPECIFICATIONS

- Model# ILL124CB
- Voltage 12 Volt DC
- Amps 0.125 amps @ 12 VDC
- Lens 4⅝″ dia.
- Size 6″ dia. x ⅞″
- Effective Lumen Output 450 lumens
- Mount Three 3⁄16″ x ⅛″ slots on 4¾″ centers
- **Shpg. 1 lb.**

12 Volt DC LED Flashing Light



ITEM 500915

$39.99

• New, BLAZER INTERNATIONAL model C48AW LED flashing beacon. Magnetic mount with 12 ft. coiled cord to cigarette lighter plug.

SPECIFICATIONS

- LED count 36
- Voltage 12 Volt DC
- Lens Color Amber
- Flash Rate 120/minute
- Mount 3 magnets
- Size 5″ dia. x 3¾″
- **Shpg. 2 lbs.**

12 Volt DC LED Courtesy Light



ITEM 501359

$5.95

• New, LED courtesy light. Black plastic construction. Hood prevents light from shining upward. Also used for license plate illumination. Separate ground wire allows use on non-metallic surfaces. Bullet connectors on 10″ wire leads.

SPECIFICATIONS

- Voltage 12 Volt DC
- LED Count 3
- Mounting 4 holes 1½″ square pattern
- Required opening 1¾″ dia. x ⅝″ deep
- Size 2¼″ x 2¼″ x ¾″
- **Shpg. ⅛ lb.**

12″ Amber Ultra Thin 12 Volt DC Light Bar



ITEM 501298 Amber $11.95

ITEM 501299 Red $11.95

• New, GRAND GENERAL model# 76310 LED light bar. Water and vibration resistant.

SPECIFICATIONS

- Voltage 12 Volt DC
- LED's 15
- Mounting 2 holes 11⁷⁄16″ c/c
- Size 12″ x ⅝″ x ¼″
- **Shpg. ¼ lb.**

Blue LED Warning Light For Forklifts



ITEM 501436 ⚠

$38.95

• New BUYERS PRODUCTS Blue LED spot light. Projects bright blue pedestrian warning light on floor around forklift. Nine high-powered LED's. Black powder coated waterproof aluminum housing (IP69k). Clear polycarbonate lens. Operates on a wide range of DC voltage. Stainless steel mounting bracket and fasteners.

SPECIFICATIONS

- Voltage 10-80 Volt DC
- Model 1492133
- Amps 2.1 maximum
- LED's 9
- Light Pattern 12° Spot
- Lens 3.5″ x 3.5″
- Mount M10-1.5 x 1″ stud
- Size 3.87″ x 2.79″ x 4.74″
- **Shpg. 2 lbs.**

12 Volt DC Halogen Flood Light



ITEM 501579

$8.95

• New. 12 Volt DC halogen trapezoid flood light.

SPECIFICATIONS

- Model Number 70048847
- Bulb Number Eiko H9411
- Voltage 12 Volt DC
- Power 50 Watts
- Amperage 3.9 Amps
- Lens 5.9″ x 3.6″
- Mount ½″-13 TPI x ½″ stud
- Size 6¾″ x 7½″ x 4″
- **Shpg 3 lbs.**

600 Lumen 12 VDC LED Light



ITEM 501288 Amber $24.95

ITEM 501289 Clear $29.95

• New, TYRI LIGHTS model VL4-120-2 LED flood light. Aluminum housing. Vibration and salt spray tested. Deutsch DT04-2P connector socket. Wide symetrical light pattern. Thru bolt mounting.

SPECIFICATIONS

- LED Count 4
- Voltage 12-48 Volt DC
- Amps 1.2 amps@12 Volts
- Power 15 watts
- Lumen Rating 600 lumens
- Lens 6⅜″ x 1⅛″ Amber
- Mount 2 recessed thru holes 3¼″ c/c
- Size 6⅜″ x 2⅜″ x 1⅛″
- **Shpg. 2 lbs.**

12 Volt DC LED Trailer Light



ITEM 501128 $14.99

• New, BLAZER INTERNATIONAL model# C561RTM LED stop/tail/turn light for use on vehicles over 80" wide. Includes rubber grommet. Ideal for boat, utility, camping, snowmobile, and motorcycle trailers. Mounting and wiring instructions found on back of packaging. Lasts up to 100,000 hours.

SPECIFICATIONS

- Brand Blazer International
- Model Number C561RTM
- Voltage 12 Volt DC
- Amps 0.2 amps @ 12 VDC
- Lens 6¼″ x 2″
- Size 7¼″ x 3″ x 1¾″
- **Shpg. 1 lb.**

12-24 Volt DC Flood Lights



ITEM 501620

$62.10

• Brand new, Buyers Products ultra bright edgeless 3″ wide flood light. Provides 4800 lumens of light across a wide area, brightly illuminating your jobsite or camp ground. The light's edgeless design provides a sleek, modern look. Rated IP67 for water and dust resistance. Versatile stud mount with 18″ lead. Applications include trucks, trailers, ATVs, and more.

SPECIFICATIONS

- Brand Buyers Products
- Model Number 1492236
- Voltage 12-24 Volt DC
- Amps 3.39 Amps
- Housing Material Aluminum
- Lens Shape Square
- Lens Material Polycarbonate
- Color Clear
- Lumens 4800
- IP Rating IP67
- Type of Plug Blunt Cut
- Lead Length 18″
- Mount Type Single Stud Surface Mount
- Size 3.25″ x 3.19″ x 3.06″
- **Shpg 2 lbs.**

ITEM 501621 $50.85

SPECIFICATIONS

- Model Number 1492235
- Voltage 12-24 Volt DC
- Amps 2.04 Amps
- Lens Shape Rectangular
- Lens Material Polycarbonate
- Color Clear
- Lumens 2880
- IP Rating IP67
- Type of Plug Blunt Cut
- Lead Length 18″
- Mount Type Pipe Mount
- Size 6.18″ x 2.36″ x 1.96″
- **Shpg 2 lbs.**

12 Volt DC LED Stop/Turn/ Tail Light 5″ Box Style



ITEM 501350

$17.60

• Brand new BUYERS model 5625117 red Stop-Turn-Tail box light. For trailers under 80″ wide, used to meet FMVSS/CMVSS 108 regulations. Red polycarbonate colored lens and built-in reflector lens. 12″ leads. Grounds through mounting stud.


SPECIFICATIONS

- Stop-Turn-Tail Light
- 12 Volt DC
- LED's 11
- Mount Two ¼″-20 studs on 2″ centers
- Size 5⅜″ x 4¾″ x 2⅞″
- **Shpg. 1 lb.**

ITEM 501351 $19.15

• Same as item 501350 above with license plate light. Model 5625117

Clearance/ Side Marker LED Light



• New, OPTRONICS clearance or side marker LED light. Built in reflex reflector around polycarbonate lens, includes foam mounting gasket. Waterproof housing and submersible lens. DOT compliant.

ITEM 501133 $5.99
Red Lens

ITEM 501132 $5.99
Amber Lens

SPECIFICATIONS

- Voltage 12 Volt DC
- Amps 0.063 amps
- Lens 2″ dia.
- Mount Three 3⁄16″ dia. holes
- Size 3″ dia. x ⅞″
- **Shpg. 1 lb.**

3 Ounce Grease Gun



ITEM 100348

$7.99

• New, compact 3 ounce grease gun. Will work with either 3 ounce cartridges or can be suction loaded. Includes 5″ extension and 9″ flex hose. Output tube can be moved to inline mounting. Plated finish.

SPECIFICATIONS

- Brand BEL-RAY
- Model SV00050
- Max Pressure 2900 PSI
- Volume ½ ounce per stroke
- Size 10″ x 4½″ x 1½″
- **Shpg. 2 lbs.**

3 Ounce Push Type Grease Gun



ITEM 100403

$8.95

• New, DUALCO compact 3 ounce push type grease gun. Hardened needle tip nozzle for flush type grease fittings. Plated finish.

SPECIFICATIONS

- Model 700231
- Priming Type Vacuum
- Max Pressure 3000 PSI
- Needle Nozzle Port 1/32″ dia.
- Size 5¾″ x 4⅛″ x 1¾″
- **Shpg. 1 lb.**

14 Ounce Grease Gun



ITEM 100402

$9.95

• New, BOBCAT 14 ounce grease gun. Three ways to load, cartridge, suction, or bulk. Inline output tube. Non slip vinyl grip. Fits BOBCAT grease tube. Plated finish.

SPECIFICATIONS

- Model 6983102
- Max Pressure 10,000 PSI
- Size 20½″ x 5″ x 2¼″
- **Shpg. 4 lbs.**

12 Volt DC Wiper Motor



ITEM 500716

$19.90

• New, right angle gearmotor with reversing geartrain to give back and forth sweeping motion. Originally for rear window wiper of SUV. Could also be used for animated displays requiring similar movement. Integral park position switching.

SPECIFICATIONS

- Speed 30 cycles/min.
- Voltage 12 Volt DC
- Amperage 0.5 Amps
- Rotation Approximately 165 degree arc.
- Duty Continuous
- Size 7″ x 7½″ x 4″
- Mount 2 angled tabs on bracket & 18mm fine thread on shaft housing.
- Shaft 0.393″ dia. x 0.75″ overall length. Tapered serrated section and M8-1.25 thread to attach wiper arm (not included).
- **Shpg. 3 lbs.**

0.75″-1.00″ Hose Clamp



ITEM 904955

.59¢

• New. Stainless steel hose clamp.

SPECIFICATIONS

- Width ½″
- Hose Size 0.75″-1.00″ O.D.
- **Shpg 0.05 lbs.**

T-Bolt Hose Clamps



904622 904605

• Brand new, HYDRA-STAR T-Bolt hose clamps. Stainless steel band with plated bolt and lock nut. Smooth inner band prevents hose damage. Can be torqued higher than worm gear clamps. 360 clamping on hose for tighter connections.

ITEM	Mfg Model	Nominal Size	Hose OD range	Shpg.	Price
905956	HC075	.75″	1.19″-1.37″	⅛ lb.	$10.05
904605	HC095	1″	1.16″-1.38″	⅛ lb.	$4.95
904606	HC100	1.5″	1.38″-1.56″	⅛ lb.	$4.15
904607	HC125	1.75″	1.65″-1.83″	⅛ lb.	$4.20
904608	HC130	2″	1.73″-1.97″	⅛ lb.	$4.20
904609	HC150	2.13″	1-86″-2.17″	⅛ lb.	$4.30
904610	HC155	2.25″	2.03″-2.34″	⅛ lb.	$4.20
904611	HC160	2.38″	2.16″-2.47″	⅛ lb.	$4.25
904612	HC165	2.50″	2.20″-2.51″	⅛ lb.	$4.50
904613	HC200	2.56″	2.34″-2.65″	⅛ lb.	$4.50
904614	HC205	2.63″	2.41″-2.72″	⅛ lb.	$4.35
904615	HC210	2.75″	2.53″-2.84″	⅛ lb.	$4.35
904616	HC215	2.88″	2.66″-2.97″	⅛ lb.	$4.65
904617	HC220	3″	2.78″-3.09″	¼ lb.	$4.50
904618	HC250	3.13″	2.91″-3.22″	¼ lb.	$4.50
904619	HC260	3.25″	3.03″-3.34″	¼ lb.	$4.60
904620	HC270	3.38″	3.16″-3.47″	¼ lb.	$4.65
904621	HC280	3.50″	3.28″-3.59″	¼ lb.	$4.65
904622	HC295	3.63″	3.41″-3.72″	¼ lb.	$4.75
904623	HC300	3.75″	3.53″-3.84″	¼ lb.	$4.80
904624	HC310	3.88″	3.66″-3.97″	¼ lb.	$4.90
904625	HC400	4″	3.78″-4.09″	¼ lb.	$4.90
904626	HC410	4.25″	4.03″-4.34″	¼ lb.	$5.05
904627	HC500	5″	4.78″-5.09″	¼ lb.	$5.40

Worm Drive Hose Clamps



• Brand new, worm drive hose clamps. Stainless steel band with zinc plated screw. 5/16″ slotted hex head screw. Sold in quantity.

Mini Hose Clamps

ITEM	SAE Size	Width	Clamp Range	Shpg.	Price
900103	4	5/16″	¼″ to 5/8″	1/10 lb.	$0.60
900104	6	5/16″	5/16″ to 7/8″	1/10 lb.	$0.60

Standard Hose Clamps

ITEM	SAE Size	Width	Clamp Range	Shpg.	Price
903971	6	½″	3/8″ to 7/8″	1/10 lb.	$0.95
903972	8	½″	7/16″ to 1″	1/10 lb.	$0.95
903973	10	½″	½″ to 1 1/16″	1/10 lb.	$1.00
903974	12	½″	½″ to 1¼″	⅛ lb.	$1.00
903975	16	½″	13/16″ to 1½″	⅛ lb.	$1.05
903976	20	½″	13/16″ to 1¾″	⅛ lb.	$1.10
903977	24	½″	1″ to 2″	⅛ lb.	$1.15
903978	28	½″	1 5/16″ to 2¼″	⅛ lb.	$1.15
903979	32	½″	1 9/16″ to 2½″	⅛ lb.	$1.20
903980	36	½″	1 13/16″ to 2¾″	⅛ lb.	$1.25

12 Volt DC Clutch



ITEM 604161

$119.95

• New, Warner Electric 141733 12 Volt DC clutch assembly for centrifugal pumps.

SPECIFICATIONS

- Brand Warner Electric
- Model Number 141733
- Voltage 12 Volt DC
- Amps 4.85 AMPS
- Rotation CW
- Pulley Diameter 5.64″
- Belt Type 5.25″ A type
- Max. HP 30
- Max. RPM 5000
- Rated Torque 90 lbs-ft
- Size 5¾″ x 5¾″ x 2¾″
- **Shpg 10 lbs.**

¾″ to 1¼″ Worm Gear Hose Clamp



ITEM 905059

.59¢

• New. Stainless steel worm gear hose clamp.

SPECIFICATIONS

- Width ½″
- **Shpg 0.1 lb.**
- Hose Size ¾″ - 1¼″ 18mm - 32mm O.D.

Hydraulic Study Courses



$44.95 EACH

• Brand new. Published by WOMACK Educational Publications. These texts provide answers to your questions, not just theories of operation. Widely used to train employees and customers regarding basic hydraulic principles. **Shpg. 2 lbs.**

ITEM 900193
INDUSTRIAL FLUID POWER - VOL. I

• Broad coverage of pumps, cylinders, valves and accessories. 288 pages. 350 illus.

ITEM 900194
INDUSTRIAL FLUID POWER - VOL. II

• Specific application data of air and hydraulic cylinders and valves used to control them. 272 pages. 350 illus.

ITEM 900195
INDUSTRIAL FLUID POWER - VOL. III

• Includes applications using hydraulic rotary power. Comprehensive coverage on hydraulic motors, air motors, hydraulic transmissions, and rotary actuators. 248 pages. 250 illus.

ITEM 900196
FLUID POWER IN PLANT AND FIELD

• General reference based on years of experience in hydraulic field. Provides practical information on installation, operation and servicing of hydraulic and pneumatic equipment. 232 pages. 350 illus.

Electrical Control of Fluid Power



ITEM 904569
$44.95

• Brand new. Published by WOMACK Educational Publications. Written as an overview of electric and electronic control of hydraulic and air systems. 257 pages. This is the Eleventh Printing of the Third Edition - April 2013. **Shpg. 2 lbs.**

Pocket Reference



ITEM 100437
$9.70

• Brand new. 768 pages packed full of information yet small enough to fit in a shirt pocket. Chapters on air and gas, carpentry, chemistry, computers, electricity, math, hardware, plumbing, steel and materials, surveying, welding and more. Hundreds of conversion formulas. Size 3¼″ x 5⅜″ x ¾″. **Shpg. ¼ lb.**

Fluid Power Data Book



ITEM 900177
$2.40

• Brand new. 63 pages of valuable information on hyd. cylinders, motors, pumps and systems. Formulas and tables for equipment selection. Also information on electric fans and motors. **Shpg. 0.15 lb.**

Wolverine by Prince MB Series Compact Directional Control Valves



• New, Wolverine by Prince Mfg., MB series directional control valve for operating double acting cylinders. Ideal for small tractor and other low flow applications requiring a compact control valve. Features include monoblock construction, load check, built-in adjustable pressure relief valve, spring centering spool action, open center with enclosed plug to convert to power beyond or closed center, side or top inlet/outlet ports and vertical or horizontal handle mounting.

One Spool Valve				
906927	With Float	9⅛″ x 4″ x 2¼″	**9 lbs.**	***$149.95***
Four Spool Valve				
906928	Model MB41BBBB5C1	7⅝″ x 8 7/16″ x 2¼″	**18 lbs.**	***$229.95***

1 Spool 21 GPM Hydraulic Control Valve



ITEM 904840
$89.95

• New, CHIEF P80-CV1 valve is a versatile 3-way OR 4-way, 3 position directional control valve for use with either double-acting or single-acting cylinders. This valve is for use with open center systems only. Includes adapters to convert 4-way to 3-way valve. Not power beyond convertible.

SPECIFICATIONS

- Open Center
- Spools One
- Flow 21 GPM
- Relief Valve 2500 PSI @ 10 GPM
- Pressure 2500 PSI max
- In/Out Ports SAE 10
- Work Ports SAE 8
- Mount 3 hole base
- Size 10″ x 5″ x 10″
- **Shpg 11 lbs.**

3 Spool 25 GPM Log Splitter Valve



ITEM 906611
$399.95

• New PRINCE. Hydraulic control valve for operating double acting cylinders. Monoblock gray cast iron body. Hard chrome plated spools. Load checks. Convertible to power beyond or closed center by changing conversion plug.

SPECIFICATIONS

- Brand Prince
- Part Number 536CCCEAA5A4B1-30
- Open Center
- Spools Three
- Flow 25 GPM max.
- Pressure 3000 PSI max.
- Relief Valve Factory set at 3000 PSI.
- In/Out Ports SAE 12
- Work Ports SAE 10
- Mount 3 holes thru body
- Size 10″ x 11½″ x 5″
- **Shpg 40 lbs.**

2 Spool 32 GPM Hydraulic Control Valve



ITEM 904841
$199.95

• New, CHIEF directional control valve for operating double acting cylinders. Features include monoblock construction, built-in adjustable pressure relief valve, load check, spring centering spool action, open center, side or top inlet/outlet ports, top work ports and vertical or horizontal handle mounting.

SPECIFICATIONS

- Open Center
- Spools Two
- Flow 32 GPM max
- Pressure 3625 PSI max
- Relief Valve 2500 PSI @ 10 GPM
- In/Out Ports SAE 20 (side), SAE 16 (top)
- Work Ports SAE 12
- Mount 3 hole base
- Size 13″ x 9″ x 15¾″
- **Shpg 46 lbs.**

ITEM 905094
$159.95

• Same as item 904841 except new inventory from a retail store buyback. May have cosmetic imperfections and exterior soiling from retail shelf display.

4 Spool 16 GPM Hydraulic Control Valve



ITEM 903024
$179.95

• New. WALVOIL Model SDS100 four spool valve. Features two individual inlets with first inlet directing oil to spools one and two. Second inlet directing oil to spools three and four. Common outlet. Individual adjustable main line reliefs for each circuit. Load checks on spools one, two and three. Double pilot operated check valves on fourth spool work ports. Ideal for double pumps or dual hydraulic circuit systems for use with a common control valve.

SPECIFICATIONS

- Open Center
- Spools Four
- Flow 16 GPM
- Pressure 4600 PSI
- In Ports SAE 8
- Out Port SAE 12
- Relief Valves Adjustable from 1500 to 3000 PSI set at 1500 PSI
- Work Ports SAE 8
- Size 10″ x 7 1/16″ x 6¼″
- **Shpg. 44 lbs.**

Log Splitter Wedge



ITEM 100229
$19.95

• New, cast iron log splitter wedge. Designed to slide down splitter beam as cylinder extends. Could also be mounted at end of beam to split wood as it is pushed against it. Clevis end to connect to cylinder rod. Additional hardware and plates needed to clamp around beam when used in traveling wedge mode.

SPECIFICATIONS

- Blade Height 6⅝″
- Blade Length 5½″ long, 4½″ wide at back end
- Pin Hole ⅝″ dia.
- Clevis 1¾″ between ears, 2½″ outside ears
- Clevis Pin Centerline Height 3 1/16″
- Bolt Holes 9/16″ ID x 1 1/16″ deep
- Bolt Pattern three hole each side 2¾″ on center x 7⅛″ wide
- Beam Opening 6½″ wide x ½″ deep
- Size 7⅜″ x 8¼″ x 1 1/16″
- **Shpg. 22 lbs.**

1 Spool 30 GPM Log Splitter Valve



ITEM 905061
$79.95

• New, hydraulic control valve for operating double acting cylinders. Use with closed center hydraulic systems on tractors. Common valve used on log splitters. Pressure-release operated detent on return stroke with spool out, spring center on extend with spool in. Work Port A (retract port) closest to handle and work port B (extend port) farthest from handle. Handle has a 40 degree bend and can be positioned for different valve orientations with work ports facing up or down.

SPECIFICATIONS FOR ALL

- Closed Center
- Spools One
- Flow 30 GPM max.
- Pressure 3500 PSI max.
- Relief Valve Adj. set at 3500 PSI
- Size 11″ x 3¾″ x 3″
- Detent Release Pressure 797-1015 PSI
- In/Out Ports ¾″ NPT
- Work Ports ½″ NPT
- Mount (4) M8-1.25 tapped holes in base, 1″ x 2⅝″ bolt centers
- **Shpg. 10 lbs.**

1 Spool 18 GPM Log Splitter Valve



ITEM 906274
$99.95

• New. BRAND log splitter valve. LS 4-way directional control valve is designed primarily for log splitters. The manual adjustable handle provides fine metering to either port. Port flow is directly proportional to the movement of the lever. The tank port must be plumbed directly back to tank.

SPECIFICATIONS

- Model PLS50T4JRSH
- Open Center
- Relief Valve Adjustable set at 2000 PSI
- Spring Center hydraulic Detent 800-1000 PSI kick-out setting
- Flow 18 GPM
- Pressure 3000 PSI
- In/Out Ports ½″ NPT
- Work Ports ½″ NPT
- Mount 3 holes thru body
- Size 9½″ x 5″ x 8½″
- **Shpg. 9 lbs.**

1 Spool Rapid Extend Log Splitter Valve



ITEM 902157
$364.50

• Brand new PRINCE model LSR-3060-3. Specially designed for log splitter use with low flow pumps. Two position handle motion on splitting stroke for either high flow or high pressure with "soft stop" to differentiate between. Open center, built-in relief valve. Pressure-release detent in retract (spool in) adjustable from 1,000 to 2,000 psi.

SPECIFICATIONS

- Flow rate 5 GPM max.
- Relief valve Adjustable to 3500 PSI
- IN/OUT ports ½″ NPT
- Work ports ¾″ NPT
- Mount 3 holes thru body
- Size 9¼″ x 5″ x 3″
- **Shpg. 11 lbs.**

1 Spool, 25 GPM Log Splitter Valve



ITEM 902146
$91.60

• Brand new, hydraulic control valve for operating hydraulic cylinders. Pressure operated detent on return stroke, spring center on extend for use with log splitters or other auto detent applications.

SPECIFICATIONS

- Open Center
- Spools One
- Flow 25 GPM max.
- Pressure 2750 PSI max.
- Relief Valve Adj. set at 2200 PSI
- Detent release pressure 1100 PSI
- In/Out Ports ¾″ NPT
- Work Ports ½″ NPT
- Mount 3 hole base
- Size 9¼ ″x 4⅜″ x 3″
- **Shpg. 12 lbs.**

Prince Auto-Cycle Control Valve



ITEM 900957
$650.70

• Brand new PRINCE. Special Auto-Cycle valve allows operator to completely cycle (out and back) a double acting cylinder by only one handle movement. Ideal for log splitter applications.

• Both levers are pulled out to detent position, cylinder extends and at end of forward stroke one lever automatically returns to neutral and cylinder reverses. When fully retracted second lever returns to neutral. (3 work ports are used, two are tied together and then run to rod end of cylinder, third connects to base end of cylinder).

SPECIFICATIONS

- Open Center
- For 1 DA Cylinder
- Double press. relief detent
- Flow Max 25 GPM
- Pressure Max 3000 PSI
- Size 9½″ x 7½″ x 3¼″
- Relief Adj.1500-3000 PSI factory set @ 2000 PSI
- Detent Pressure Range Adj.1000-2000 PSI
- In/Out Ports ¾″ NPT
- Work Ports ¾″ NPT
- **Shpg 29 lbs.**

with SAE Ports
ITEM 903094 **$669.00**

• Same as our ITEM 900957 except IN/OUT SAE 12, work ports SAE 12.

w/ Power Beyond
ITEM 902345 **$655.50**

• Same as our ITEM 900957 only with power beyond.

Two Spool Log Splitter/ Lifter Valve



ITEM 901981
$580.50

• Brand new PRINCE Model RD522CC-EA5A4B1 control valve. Ideal for use in log splitters equipped with a log lift. First spool has a pressure release detent on the spool-out position and springs to center on the spool-in position. Second spool is 3-position spring to center. Detent pressure preset to 1200 PSI, adjustment range 1000-2000 PSI.

SPECIFICATIONS

- Open center
- 25 GPM max.
- 3000 PSI max.
- IN/OUT ports ¾″ NPT
- Work ports ½″ NPT
- Adjustable relief valve preset to 2000 PSI, adjustable range 1500-3000 PSI
- Size 9½″ x 7½″ x 3¼″
- **Shpg. 29 lbs.**

1 Spool 30 GPM Log Splitter Valve



ITEM 904556
$92.50

• New, PRINCE WLS-800 hydraulic control valve for operating double acting cylinders. Common valve used on log splitters. Pressure-release operated detent on return stroke with spool in, spring center on extend with spool out. Work Port A (retract port) closest to handle and work port B (extend port) farthest from handle. Detailed instructions included.

SPECIFICATIONS

- Open Center
- Spools One
- Flow 30 GPM max.
- Pressure 3265 PSI max.
- Relief Valve Adj. set at 2250 PSI
- Size 10″ x 3⅜″ x 3″
- Detent Release Pressure 700 PSI
- In/Out Ports ¾″ NPT
- Work Ports ½″ NPT
- Mount (4) ⅜″-16 tapped holes in base, 1″ x 2⅝″
- **Shpg. 10 lbs.**

Prince Log Splitter Valves



• Brand new PRINCE LS3000. For control of double acting cylinders. Open center, built-in adjustable relief valve. No load checks.

SPECIFICATIONS

- 25 GPM
- Adj. relief set at 2250 PSI
- PSI 2750 max.
- Size 9¼″ x 5″ x 3″
- IN/OUT ¾″ NPT
- Work ports ½″ NPT
- Pressure release detents adj. 1000-2000 PS

ITEM 900245 **$439.50**

• Pressure release detent in return stroke, spring center on extend. Ideal for operating double acting cylinder on log splitters. **Shpg. 11 lbs.**

ITEM 903629 **$439.50**

• Same as ITEM 900245 except IN/OUT Ports SAE 12 Work Ports SAE 10 **Shpg. 11 lbs.**

ITEM 900335 **$439.50**

• Same as ITEM 900245 except ¾″ NPT ports. **Shpg. 10 lbs.**

ITEM 900277 **$427.50**

• Spring return to neutral. **Shpg. 8 lbs.**

1 Spool, 30 GPM Closed Center Log Splitter Valve



ITEM 902426
$405.00

• Brand new, PRINCE RD5000 series hydraulic control valve. Ideal for use with farm tractors and industrial equipment with variable displacement closed center systems for operating log splitters. Pressure operated detent on return stroke, spring center on extend.

SPECIFICATIONS

- Closed Center
- Spools One
- Flow 30 GPM max.
- Pressure 3000 PSI max.
- Detent Release Pressure 1400 PSI
- Relief Valve No relief
- In/Out Ports ¾″ NPT
- Work Ports ½″ NPT
- Mount 3 hole base
- Size 9½″ x 5″ x 3¼″
- **Shpg. 16 lbs.**

Brand Series 34 Sectional Control Valves

• Brand new. BRAND HYDRAULICS 34 series hydraulic sectional control valves. Select components below for your application. All components sold individually to build complete valves, add to existing assemblies or replacement parts. Work sections are furnished with handles and o-rings to seal between sections. Inlet and outlet sections have top or side ports.
• One to nine section valves can be ordered.
• To order: purchase 1 inlet section, work sections to meet your needs, a bolt kit for the corresponding number of work sections and 1 outlet section. All components furnished separately for easy assembly.

SPECIFICATIONS
- Flow rate 12 GPM (nominal) to 18 GPM
- Pressure 3500 PSI
- Load checks built in on each work section
- Cast Iron with chrome plated spools
- Metering notches for smooth control of load

Ordering Example

1. Three spool valve with open center.
2. First and second spools to control double acting cylinders with spring center and third spool to control a hydraulic motor with detent positions.
3. Order the following:

(1)	905399	Inlet Section
(2)	905393	Work Sections
(1)	905397	Work Section
(1)	905401	Outlet Section
(1)	905406	Tie Bolt Kit

Complete Valve Dimensions

Model	Size	Shpg.
1 Spool	7⅝″ x 6½″ x 3½″	17 lbs.
2 Spool	7⅝″ x 7⅞″ x 3½″	22 lbs.
3 Spool	7⅝″ x 9¼″ x 3½″	27 lbs.
4 Spool	7⅝″ x 10⅝″ x 3½″	32 lbs.
5 Spool	7⅝″ x 12″ x 3½″	37 lbs.
6 Spool	7⅝″ x 13⅜″ x 3½″	42 lbs.
7 Spool	7⅝″ x 14¾″ x 3½″	47 lbs.
8 Spool	7⅝″ x 16⅛″ x 3½″	52 lbs.
9 Spool	7⅝″ x 17½″ x 3½″	57 lbs.



Item Number	Brand Model	SAE Ports	Product Details & Application	Price
Inlet Sections				
905399	34PG2B20	10	Open Center Systems, Adjustable Relief (600-3500 PSI) preset @ 2000 PSI	$46.20
905400	34PG2	10	Closed Center Systems No Relief	$35.15
Work Sections with handle				
905398	34BFT3SB	8	Single Acting Cylinder Spool, spring centered	$120.30
905393	34BFT4SB	8	Double Acting Cylinder Spool, spring centered	$120.30
905395	34BFT4DB	8	Double Acting Cylinder Spool, 3 position detent	$121.10
905394	34BFT4KB	8	Double Acting Cylinder Spool, spring centered w/detented float position	$135.70
905396	34BF04SB	8	Motor Spool, spring centered	$121.10
905397	34BF04DB	8	Motor Spool, 3 positon detent	$121.10
Outlet Sections				
905401	34TG2	10	Open Center Systems	$36.65
905402	34TG2B	10	Open Center Systems w/Power Beyond Port	$57.90
905403	34TG2C	10	Closed Center Systems	$37.45

Bolt Kits

Item Number	Brand Model	Product Details	Price	Item Number	Brand Model	Product Details	Price
905404	34TR1	1 Work Section Bolt Kit	$14.70	905409	34TR6	6 Work Section Bolt Kit	$28.70
905405	34TR2	2 Work Section Bolt Kit	$14.70	905410	34TR7	7 Work Section Bolt Kit	$30.20
905406	34TR3	3 Work Section Bolt Kit	$18.00	905411	34TR8	8 Work Section Bolt Kit	$31.75
905407	34TR4	4 Work Section Bolt Kit	$25.95	905412	34TR9	9 Work Section Bolt Kit	$33.40
905408	34TR5	5 Work Section Bolt Kit	$27.20				

1 Spool 20 GPM Rotary Spool Marine Control Valve



ITEM 905360
$253.95

• Brand new, BRAND HYDRAULICS model MPAO755T4HRE directional control valve with rotary spool. Special epoxy coating to inhibit rust. Stainless steel spool. Rotary friction detent. Use for controlling hydraulic motors.

SPECIFICATIONS
- Open Center
- Spools One
- Flow 20 GPM max.
- Relief Valve Adj to 1500-3000, preset @ 1500 PSI
- Pressure 3000 PSI max.
- In/Out Ports ¾″ NPT
- Work Ports ½″ NPT
- Mount 3 holes thru body
- Size 9″ x 4¼″ x 8″
- **Shpg. 10 lbs.**

SPOOL DETAILS
- Spool 1 Double Acting, rotary motion, Stainless Steel

1 Spool 18 GPM Rotary Spool Marine Control Valve



ITEM 905359
$462.50

• Brand new, BRAND HYDRAULICS model MPTS1120TEHB directional control valve with rotary spool. Special epoxy coating to inhibit rust. Stainless steel spool. Turning spool 90 degrees CW goes to full spool in and 90 degrees CCW to full spool out. Rotary friction detent holds handle in any position. Use for controlling hydraulic motors.

SPECIFICATIONS
- Open Center
- Spools One
- Flow 18 GPM max.
- Pressure 3000 PSI max.
- Relief Valve Adj to 1500-3000, preset @ 2000 PSI
- In/Out Ports SAE 12 (top or side ports)
- Work Ports SAE 10
- Mount 3 holes thru body
- Size 9⅜″ x 4½″ x 2¾″
- **Shpg. 10 lbs.**

SPOOL DETAILS
- Spool 1 Double Acting, Rotary Motion, Stainless Steel, Tandem Center Work Ports Blocked In Neutral

1 Spool 40 GPM Rotary Spool Marine Flow/ Directional Control Valve



ITEM 905358
$731.65

• Brand new, BRAND HYDRAULICS model MDC16TM404HB directional control valve with rotary spool. Special Amerlock epoxy coating to inhibit rust. Stainless steel heat-treated spool. Combines a directional control valve, load-checks, full range pressure compensated by-pass flow control and pilot operated pressure relief valve. The manual rotary handle provides fine metering to either port.

SPECIFICATIONS
- Open Center
- Spools One
- Flow 40 GPM max.
- Relief Valve Adj to 1500-3000, preset @ 1500 PSI
- Pressure 3000 PSI max.
- In/Out Ports SAE 16
- Work Ports SAE 16
- Mount 3 holes thru body
- Size 12⅞″ x 5″ x 4⅛″
- **Shpg. 20 lbs.**

SPOOL DETAILS
- Spool 1 Double Acting, Rotary motion, Heat-Treated Stainless Steel

SV Sectional Control Valve

• Brand new PRINCE SV hydraulic control valves. Select the exact components needed for your application from the chart below. All components sold individually to order complete valves, add to existing assemblies or replacement parts. Work sections are furnished with handles (unless noted) and o-rings to seal between sections. Inlet and Outlet sections ports for either top or side plumbing.
• Electric solenoid operated work sections can be mixed with manual lever sections but require an appropriate outlet section.
• One to ten section valves can be ordered.
• To order: purchase 1 inlet section, work sections to meet your needs, a bolt kit for the corresponding number of work sections and 1 outlet section. All components furnished separately for easy assembly.

SPECIFICATIONS
- Flow rate 12 GPM (nominal) to 16 GPM maximum
- Pressure 3000 PSI maximum
- Cast iron construction with chrome plated spools.
- Load checks with each work section.

Ordering Example

1. Three spool valve with an open center.
2. First and second spools to control double acting cylinders with spring return to neutral; the third spool to control a hydraulic motor with detent positions.
3. Order the following:


(1)	***900503***	***Inlet Section***
(2)	***900507***	***Work Sections***
(1)	***900510***	***Work Section***
(1)	***900500***	***Outlet Section***
(1)	***900108***	***Bolt Kit***

Complete Valve Dimensions

Model	Size	Shpg.
1 Spool	8⅝″ x 5⅞″ x 3¼″	**15 lbs.**
2 Spool	8⅝″ x 7¼″ x 3¼″	**22 lbs.**
3 Spool	8⅝″ x 8¾″ x 3¼″	**29 lbs.**
4 Spool	8⅝″ x 10⅛″ x 3¼″	**36 lbs.**
5 Spool	8⅝″ x 11⅝″ x 3¼″	**42 lbs.**
6 Spool	8⅝″ x 13″ x 3¼″	**48 lbs.**
7 Spool	8⅝″ x 14½″ x 3¼″	**55 lbs.**
8 Spool	8⅝″ x 16″ x 3¼″	**60 lbs.**
9 Spool	8⅝″ x 17½″ x 3¼″	**65 lbs.**
10 Spool	8⅝″ x 19″ x 3¼″	**70 lbs.**



Item Number	Prince model	SAE Ports	Product Details & Application	Price
Inlet Sections				
900626	SVI24	10	Open Center Systems, Adjustable Relief (500-1500 PSI) preset @ 1000 PSI	***$178.50***
900503	SVI15	8	Open Center Systems, Adjustable Relief (1500-3000 PSI) preset @ 2000 PSI	***$162.00***
900878	SVI25	10	Open Center Systems,Adjustable Relief (1500-3000 PSI) preset @ 2000 PSI	***$160.00***
900504	SVI21	10	Closed Center Systems	***$166.05***
Work Sections manual operated		**** SVS series circuit valve sections cannot be used in a closed center valve assembly***		
900506	SVW1AA1	8	Single Acting Cylinder Spool, spring centered	***$220.75***
900507	SVW1BA1	8	Double Acting Cylinder Spool, spring centered	***$203.85***
903803	SVW1BA7	8	Double Acting Cylinder Spool, spring centered, verical handle	***$219.00***
902011	SVW1BA9	8	Double Acting Cylinder Spool, spring centered, no handle, use with joysticks	***$205.50***
900508	SVW1BB1	8	Double Acting Cylinder Spool, 3 position detent	***$297.00***
900509	SVW1CA1	8	Motor spool, spring centered	***$222.75***
900510	SVW1CB1	8	Motor spool, 3 position detent	***$312.00***
900511	SVW1DD1	8	Double Acting Cylinder Spool w/detented float position	***$265.50***
900877	SVL1CA1	8	Double Acting Cylinder Spool w/Locks, spring centered	***$414.45***
Work Sections 12 Volt DC solenoid operated				
902000	SVW1BA-T12Q	8	Double Acting Cylinder Spool (solenoids each end)	***$1000.50***
902015	SVW1CA-T12Q	8	Motor Spool with (solenoids each end)	***$675.00***
902442	SVL1CA-T12Q	8	Double Acting Cylinder Spool with Locks and (solenoids each end)	***$1168.50***
904395	SVW1BA1-S12Q	8	Double Acting Cylinder Spool with solenoid and manual lever	***$741.00***
904396	SVW1CA1-S12Q	8	Motor Spool with solenoid and manual lever	***$706.50***
Outlet Sections				
900500	SVE11	8	Open Center Systems	***$130.30***
900964	SVE21	10	Open Center Systems	***$130.30***
900501	SVE22	10	Open Center Systems w/Power Beyond Port	***$201.00***
900502	SVE23	10	Closed Center Systems with either manual or Solenoid Operated Work Sections	***$147.15***
902016	SVE26	10	Open Center Systems with Solenoid Operated Work Sections	***$218.70***
900627	SVE27	10	Open Center Systems with Solenoid Operated Work Sections and Power Beyond	***$312.00***
Bolt Kits				
900106	660401001		1 Work Section Bolt Kit	***$25.50***
900107	660401002		2 Work Section Bolt Kit	***$31.50***
900108	660401003		3 Work Section Bolt Kit	***$31.50***
900109	660401004		4 Work Section Bolt Kit	***$37.50***
900110	660401005		5 Work Section Bolt Kit	***$37.50***
900111	660401006		6 Work Section Bolt Kit	***$43.50***
900112	660401007		7 Work Section Bolt Kit	***$49.50***
900113	660401008		8 Work Section Bolt Kit	***$52.50***
900114	660401009		9 Work Section Bolt Kit	***$52.50***
900115	660401010		10 Work Section Bolt Kit	***$57.00***

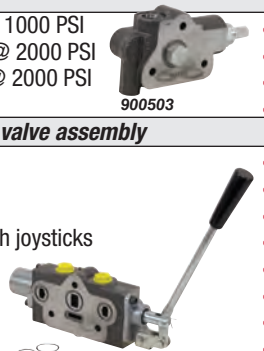

• On the next page many optional accessories including direct mount joystick lever kits, air shift kits, cable operated levers and joysticks are shown.

Quick Order SV Valve Combinations

• The following are some of our most popular configurations of the PRINCE SV valves. They have special item numbers to provide easy ordering. Standard levers on each spool. Furnished unassembled. Includes all necessary bolt kits and seals.

Loader Configuration



ITEM 907114
$731.50
• Open Center, both spools are double acting with spring centering.

Loader Configuration w/float

ITEM 907115 **$793.15**
• Open Center, First spool double acting with detented float position and double acting second spool.

Loader Configuration w/Grapple



ITEM 907116
$935.35
• Open center, all three spools are double acting with spring centering.

Backhoe Configuration w/manual outriggers



ITEM 907117
$1145.20
• Open Center, all four spools are double acting with spring centering.

Backhoe Configuration w/hydraulic outriggers



ITEM 907118
$1558.90
• Open Center, all six spools are double acting with spring centering.



Backhoe Configuration w/Joystick Controls

ITEM 907119 **$2343.00**
• Open Center, all six spools are double acting with spring centering. Two joystick levers for ease of control. Outrigger sections are in the middle and have individual levers.

Prince Valve & Actuator Accessories

Prince Air Shift Kits



• Brand new, air shift kits for PRINCE 20 Series valves. Use compressed air source and control to remotely operate valve. Replaces cover at end opposite control lever. Will shift spool both directions. Lever can still manually operate valve.

SPECIFICATIONS FOR ALL
• Ports ⅛″ NPT • Pressure 150 PSI max • **Shpg. 1 lb.**

ITEM 903052 **$259.50**
For SV Series Stack valves • Size 2½″ x 1½″ x 2″

ITEM 902153 **$232.50**
For RD5000 Monoblock Valves • Size 3⅝″ x 2″ x 2″

Prince SV Handle Kit



ITEM 902927
$28.50
• Replacement handle and linkage kit for Prince SV sectional control valves.

Prince SV Handle Kit with Bracket



ITEM 900100 **$85.50**
• Handle, linkage, spool clevis and bracket for Prince SV sectional control valves.

Vertical Handle Kit



ITEM 903066
$85.50
• Brand new. Vertical handle kit For Prince SV valves.

SPECIFICATIONS
• Brand Prince Mfg • Size 7″ x 3″ x 1″
• Model 660180026 • **Shpg. 0.35 lb.**

Model SV Offset Joystick Handle



ITEM 900360
$388.75
• Brand new, PRINCE part number 660190018 offset joystick handle for use with PRINCE SV stack valves. Allows one lever to control two different work sections. Right/left controls one work section, forward/backward controls the second section. The spools can be operated independently or simultaneously. Spools being controlled must be adjacent to one another. If two joysticks are installed on one stack valve, it is recommended that there be two standard work sections between them to prevent handle interference. **Shpg. 5 lbs.**

Remote Cable Controls for Prince Valves

• Brand new. Remote controls for Prince Models SV (page 26), 20 Series (page 28) and RD5000 Series (pages 30 & 31) control valves. Die-cast metal controller bodies.

Control Levers



ITEM 901267 ***Single lever*** **4 lbs.** **$86.25**
• Operated in one axis and requires one control cable and one connection kit.

ITEM 901268 ***Joystick lever*** **6 lbs.** **$358.50**
• Operated in dual axis and requires two control cables and two connection kits.

ITEM 901982 **6 lbs.** **$400.50**
• Same as ITEM 901268 except with SPST momentary pushbutton switch in handle.

Control Cables



ITEM 903249 ***49″ lgth.*** **3 lbs.** **$97.50**
ITEM 901269 ***59″ lgth.*** **3 lbs.** **$105.00**



Valve Connection Kit

½ lb. each
ITEM 901272 ***RD5000 Valve*** **$97.50**

Wolverine by Prince Hydraulic Stack Valves

• Brand new WOLVERINE by PRINCE 20 Series hydraulic sectional control valves. Replaces Parker/Gresen V20 & Prince Series 20 valves. All valve components are sold individually to build a complete valve or used as replacement parts. Work sections are furnished with between the section o-ring seal kit. Black Phosphate coated cast iron construction with chrome plated spools.
• Inlet has both top and end ports. Outlet has side ports only.
• To order: purchase one inlet section, one inlet section relief valve cartridge, individual work sections, one handle for each work section, one outlet section for open center or one outlet section adding a conversion plug and a stud kit for the corresponding number of work sections. All components furnished separately for easy assembly.

Ordering Example

1. Three spool valve with an open center and 3000 PSI Relief Valve.
2. First and second spools to control double acting cylinders with spring return to neutral; the third spool to control a hydraulic motor with detent positions.
3. Order the following:

(1) 906656	***Inlet Section***
(1) 906658	***Relief Cartridge***
(2) 906661	***Work Sections***
(1) 906663	***Work Section***
(1) 906665	***Outlet Section***
(2) 906673	***Work Section Stud Kit***

SPECIFICATIONS
- Flow rate 25 GPM (nominal)
- Pressure 3000 PSI maximum
- Inlet/Outlet Ports SAE 12
- Work Ports SAE 10



WOLVERINE® By Prince Manufacturing

Complete Valve Dimensions

Model	Size	Shpg.
1 Spool	8⅝″ x 5⅞″ x 3¼″	**15 lbs.**
2 Spool	8⅝″ x 7¼″ x 3¼″	**22 lbs.**
3 Spool	8⅝″ x 8¾″ x 3¼″	**29 lbs.**
4 Spool	8⅝″ x 10⅛″ x 3¼″	**36 lbs.**
5 Spool	8⅝″ x 11⅝″ x 3¼″	**42 lbs.**
6 Spool	8⅝″ x 13″ x 3¼″	**48 lbs.**
7 Spool	8⅝″ x 14½″ x 3¼″	**55 lbs.**
8 Spool	8⅝″ x 16″ x 3¼″	**60 lbs.**


Item	*Prince Model*	*Product Details & Application*	*Price*
Inlet Section & Accessories			
906656	WV20-LC-12	Inlet Cover Body	***$227.50***
906657	WV20-HRP51A-2000	Adjustable Relief Cartridge 500-3500 SET@ 2000 PSI Open Center	***$101.25***
906658	WV20-HRP51A-3000	Adjustable Relief Cartridge 500-3500 SET@ 3000 PSI Open Center	***$101.25***
906659	WV20-K-NR	No Relief Plug Closed Center	***$27.75***
Work Sections			
906660	WV20-10-03	3 Way 3 Position Single Acting w/Spring Return	***$370.60***
906661	WV20-10-04	4 Way 3 Position Double Acting W/Spring Return	***$376.00***
906662	WV20-10-D4	4 Way 3 Position Double Acting w/3 Position Detent	***$388.80***
906664	WV20-10-F4	4 Way 3 Position Motor Spool w/Spring Return	***$365.85***
906663	WV20-10-DF4	4 Way 3 Position Motor Spool w/3 Position Detent	***$385.40***
Handle and Linkage Kit			
906670	WV20-K-HH-B	Horizontal Handle & Linkage Kit	***$33.00***
906681	WV20-K-VH-B	Vertical Handle & Linkage Kit	***$31.50***
Outlet Sections and Accessories			
906665	WV20-RC-12-E	Open Center w/No Power Beyond or Closed Center Option	***$133.65***
906666	WV20-RC-12-E-MY	Open Center w/Power Beyond and Closed Center Option (Add conversion plug below)	***$135.00***
906669	WV20-K-X	Open Center Conversion Plug	***$16.50***
906667	WV20-K-10-Y	Power Beyond Sleeve SAE 10	***$36.75***
906668	WV20-K-C	Closed Center Plug	***$24.00***
Stud Kits			
906671	WV20-K-1	1 Work Section Stud Kit	***$16.50***
906672	WV20-K-2	2 Work Section Stud Kit	***$18.75***
906673	WV20-K-3	3 Work Section Stud Kit	***$22.50***
906674	WV20-K-4	4 Work Section Stud Kit	***$31.50***
906675	WV20-K-5	5 Work Section Stud Kit	***$33.00***
906676	WV20-K-6	6 Work Section Stud Kit	***$42.75***
906677	WV20-K-7	7 Work Section Stud Kit	***$44.25***
906678	WV20-K-8	8 Work Section Stud Kit	***$45.75***


906656


906660


Horizontal Handle & Linkage Kit as shown in complete valve assembly.


906666

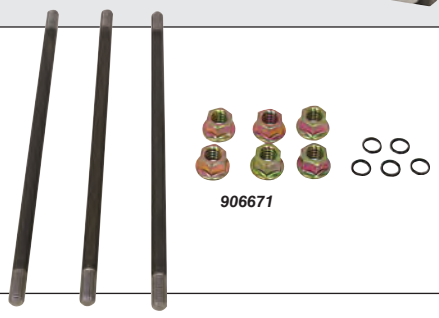
906671

8 GPM Wolverine by Prince MB Series Compact Double Acting Directional Control Valves



• Brand new WOLVERINE by PRINCE MB Series directional control valve for operating double acting cylinders. Ideal for small tractor and other low flow applications requiring a compact control valve. Features include monoblock construction, load check, built-in adjustable pressure relief valve, spring centering spool action, open center with enclosed plug to convert to power beyond or closed center, side or top inlet/outlet ports and vertical or horizontal handle mounting.

SPECIFICATIONS

- Flow 8 GPM max.
- Pressure 3500 PSI max.
- Relief valve 2000 PSI, adj. 2000-3500 PSI
- Reqd. filtration ISO 4406 19/17/14
- Mount 3 hole base
- In/Out ports SAE 8
- Work ports SAE 8
- Open center convertible to power beyond or closed ctr.

Motoring Spool Valves can be found on page 31

# Spools	ITEM	Style	Size	Shpg.	Price
One	902240	DA spring centered	7⅝″ x 4″ x 2¼″	9 lbs.	$169.50
One	903111	DA spring centered w/float	9⅛″ x 4″ x 2¼″	9 lbs.	$284.20
Two	902241	DA spring centered	7⅝″ x 5⁷⁄₁₆″ x 2¼″	12 lbs.	$282.15
Two	902242*	DA spring centered w/float	9⅛″ x 5⁷⁄₁₆″ x 2¼″	12 lbs.	$336.00
Three	902243	DA spring centered	7⅝″ x 6¹³⁄₁₆″ x 2¼″	15 lbs.	$440.10
Four	902244	DA spring centered	7⅝″ x 8⁷⁄₁₆″ x 2¼″	18 lbs.	$392.85
Five	902245	DA spring centered	7⅝″ x 9¹³⁄₁₆″ x 2¼″	21 lbs.	$700.00
Six	902246	DA spring centered	7⅝″ x 11⁷⁄₁₆″ x 2¼″	24 lbs.	$767.50

** First spool detented float*

MB Series Accessory Power Beyond/Closed Center Conversion Plug



ITEM 902248 **$15.00**

• For use with Wolverine MB Series valves. Power beyond plug is necessary to convert valves to closed center. **Shpg. 1/10 lb.**

Joystick Handle Kit

ITEM 902392 **$298.50**

• Brand new, straight joystick handle for use with Wolverine MB Series valves. Allows one lever to control two different adjacent work sections. Spools can be operated independently or simultaneously. If two joysticks are installed on one stack valve, it is recommended that there be two standard work sections between them to prevent handle interference.

SPECIFICATIONS

- Straight handle joystick control
- **Shpg. 2 lbs.**

Compact Double Acting Directional Control Valve



• New CHIEF directional control valve for operating double acting cylinders. Ideal for small tractors and other compact applications. Features include monoblock construction, built-in adjustable pressure relief valve, load check, spring centering spool action, open center, side inlet/outlet ports, top work ports and vertical or horizontal handle mounting.

SPECIFICATIONS

- Open Center
- Double Acting
- Spring Centering
- Flow 10 GPM max.
- Pressure 3600 PSI max.
- Relief Valve Set at 2250 PSI, adj. 1500-3600 PSI
- In/Out Ports SAE 10
- Work Ports SAE 8
- Mount 2 hole base

1 Spool

ITEM 904535 **$69.95**

Size 8¼″x 3⅝″ x 2⁷⁄₁₆″ **Shpg. 8 lbs.**

2 Spool

ITEM 904536 **$119.95**

Size 8¼″x 5⅝″ x 2⁷⁄₁₆″ **Shpg. 12 lbs.**

6 Spool Control Valve



ITEM 904372 **$299.95**

• New, WALVOIL SD6 sectional directional control valve. Features cast iron construction, load check, adjustable flow control, open center, and vertical or horizontal handle mounting.

SPECIFICATIONS

- Open Center
- Spools Six
- Flow 12 GPM max.
- Pressure 4600 PSI max.
- Relief Valve none
- In/Out Ports SAE 8
- Work Ports SAE 8
- Size 12½″ x 11″ x 6½″
- **Shpg. 55 lbs.**

1 Spool Control Valve



ITEM 906137 **$181.05**

• Brand new CROSS SCV1 CONVERTA series directional control valve for operating double-acting or single-acting cylinders. Included with a 3-way port plug and 3-way conversion plug to convert from basic 4-way (double-acting) to a 3-way (single-acting) cylinder.

SPECIFICATIONS

- Brand Cross Mfg.
- Model# SCV1
- Cross Item# 103980
- Open Center
- Spools One
- Flow 25 GPM max.
- Pressure 2000 PSI max.
- Relief Valve 2000 PSI @ 10 GPM
- In/Out Ports ¾″ NPT
- Work Ports ½″ NPT
- Mount Three, ⅜″ dia. holes
- Size 12.62″ x 7.41″ x 4.62″
- **Shpg. 11 lbs.**

Compact 6 Spool Double Acting Directional Control Valve



ITEM 905604 **$399.95**

• New WOLVERINE by PRINCE model W-V-C03, MB series directional control valve for operating double acting cylinders. Ideal for small tractor and other low flow applications requiring a compact control valve. Features include monoblock construction, load check, built-in adjustable pressure relief valve, spring centering spool action, open center with enclosed plug to convert to power beyond or closed center, side or top inlet/outlet ports and vertical or horizontal handle mounting. Painted black.

SPECIFICATIONS

- Open Center Convertible to power beyond or closed center
- Spools Six
- Flow 8 GPM max.
- Pressure 3500 PSI max.
- In/Out Ports SAE 8
- Work Ports SAE 8
- Relief Valve 2500 PSI, adj. 2000-3500 PSI
- Reqd. Filtration ISO 4406 19/17/14
- Mount 3 hole base
- Size 7⅝″ x 11⁷⁄₁₆″ x 2¼″
- **Shpg. 26 lbs.**

California Residents WARNING:Cancer and Reproductive Harm
For more information refer to:www.P65Warnings.ca.gov

Prince Control Valves



• Brand new PRINCE RD5000 Series monoblock control valves. Double acting spools. Cast iron valve body, chrome plate spools. Parallel spool circuit allows any combination of spools to be used simultaneously. All Prince RD 5000 Series valves can be used with the Prince cable controls on page 27. Closed center conversion plug, power beyond sleeve and three position detent kit sold below.

Cylinder Spools - Work ports blocked in neutral. Load checks prevent load from dropping when spool is shifted.

SPECIFICATIONS

- Max. 25 GPM
- Max. 3000 PSI
- Adjustable relief valve 1500-3000 PSI factory set at 2000 PSI
- Spring centering

NPT Ports
- IN/OUT ¾″ NPT, Work Ports ½″ NPT

SAE Ports
- IN/OUT SAE 12 Work Ports SAE 10

Available with your choice of NPT or SAE ports

One Spool Valves — 30 GPM

NPT Ports ITEM	SAE Ports ITEM	Style	Size	Shpg.	Price
901261	900357	DA spring centered	9½″ x 5″ x 3¼″	16 lbs.	$337.50
901262	902288	DA spring centered w/float	9½″ x 5″ x 3¼″	16 lbs.	$414.00

Two Spool Valves — 25 GPM

NPT Ports ITEM	SAE Ports ITEM	Style	Size	Shpg.	Price
901263	901123	DA spring centered	9½″ x 7¼″ x 3¼″	25 lbs.	$492.75
901264	902289	DA spring centered w/float	9½″ x 7¼″ x 3¼″	25 lbs.	$569.05

Three Spool Valves — 25 GPM

NPT Ports ITEM	SAE Ports ITEM	Style	Size	Shpg.	Price
901265	902290	DA spring centered	9½″ x 9½″ x 3¼″	36 lbs.	$694.60
901266	902291	DA spring centered w/float	9½″ x 9½″ x 3¼″	36 lbs.	$768.00

Detent Kit
ITEM 900783 — $85.50
• 3 position manual detent kit. **Shpg. 1 lb.**

Power Beyond Sleeves
• Provides oil to downstream valve. **Shpg. 1 lb.**

ITEM 900569 ¾″ NPT — $85.50
ITEM 902425 SAE 12 — $67.50

Closed Center Plug
ITEM 900833 — $54.00
• Use to convert RD5000 valves to closed center. NOTE: Conversion does not allow for drain-off of standby spool leakage. This can allow a small amount of oil to enter the work ports when valve is in neutral. **Shpg. 1 lb.**

Prince Single Acting Control Valve



ITEM 901439
$342.00

• Brand new PRINCE RD5000 Series. Hydraulic control valve for operating single acting cylinders. Monoblock gray cast iron body. Hard chrome plated spools. Open center. Load checks.

SPECIFICATIONS
- One spool valve
- Max 25 GPM
- Max 3000 PSI
- Inlet/Outlet Ports ¾″ NPT
- Work Port ½″ NPT
- Adjustable relief valve 1500-3000 PSI factory set at 2000 PSI
- Spring centering
- Size 9½″ x 5″ x 3¼″
- **Shpg 16 lbs.**

Single Acting 45 GPM Control Valve



ITEM 902002
$381.50

• Brand new, BRAND HYDRAULICS Model DC16T3LBS high flow directional control valve. Cast iron body with Buna-N O-rings. High lift, ball spring relief valve. Handle included.

SPECIFICATIONS
- Open Center
- Spools One
- Flow 45 GPM max.
- Pressure 3,000 PSI max.
- Relief Valve Adj. set at 1,500 PSI
- Reqd. Filtration 20 micron
- In/Out Ports SAE 16
- Work Port SAE 16
- Mount 4 bolts on 4¾″ x 3⅜″ centers
- Size 10⁵⁄₁₆″ x 5¹⁄₃₂″ x 4¼″
- **Shpg. 18 lbs.**

One Spool, Double Acting 45 GPM Control Valves



• Brand new, BRAND HYDRAULICS high flow directional control valve. Cast iron body with Buna-N O-rings. High lift, ball spring relief valve. Handle included.

SPECIFICATIONS
- Open Center
- Flow 45 GPM max.
- Pressure 3,000 PSI max.
- Relief Valve Adj. set at 1,500 PSI
- Reqd. Filtration 20 micron
- In/Out Ports SAE 16
- Work Ports SAE 16
- Mount 4 bolts on 4¾″ x 3⅜″ centers
- Size 10⁵⁄₁₆″ x 5¹⁄₃₂″ x 4¼″
- **Shpg. 18 lbs.**

ITEM 902003 — $381.50
• Model DC16T4LBS. One double acting cylinder spool, spring-to-center, 3-position.

ITEM 902004 — $380.00
• Model DC16O4LBS. One double acting motor spool, spring-to-center, 3-position.

ITEM 902005 — $381.50
• Model DC16O4LBD. One double acting motor spool, 3-position detent.

Closed Center
ITEM 902006 — $370.80
• Model DC16C4LS. Closed center. One double acting cylinder spool, spring-to-center, 3-position. No relief valve. Size 9¹⁄₁₆″ x 5¹⁄₃₂″ x 4¼″.

One Spool Prince Control Valves



• Brand new PRINCE RD2500 Series. Monoblock high tensile strength gray cast iron body. Hard chrome plated spools. Open center with conversion plug for closed center applications. Load checks.

SPECIFICATIONS
- One spool valve
- Max 20 GPM
- Max 3000 PSI
- Inlet/Outlet Ports ¾″ NPT
- Work Ports ½″ NPT
- Adjustable relief valve 1500-3000 PSI factory set at 1500 PSI
- Spring centering
- Size 9″ x 4¼″ x 3″
- **Shpg 12 lbs.**

Single Acting
ITEM 901443 — $267.30


Double Acting – IN/OUT ½″ NPT
ITEM 901444 — $263.25
• Not convertible to closed center.

Double Acting
ITEM 901445 — $263.25

Detent Kit
ITEM 901134 — $57.00
• 3 position manual detent kit. **Shpg. 1 lb.**

High Flow Motor Control Valves ⚠

w/ Flow Control



$604.25 each

• Brand new, BRAND HYDRAULICS directional control valve with flow control. Combines a 4-way directional control valve with a full range, pressure compensated, by-pass type flow control valve and a pilot operated relief valve. Extremely fine flow metering to the work ports in direct proportion to the handle movement. Cast iron body with Buna-N O-rings. Handle included.

SPECIFICATIONS

- Open Center
- One double acting, metered flow motor spool, friction detent
- Pressure 3,000 PSI max.
- Relief Valve Adj. set at 1,500 PSI
- Reqd. Filtration 20 micron
- In/Out Ports SAE 16
- Work Ports SAE 16
- Mount 4 bolts on 4¾″ x 3⅜″ centers
- Size 9 1/16″ x 5 1/32″ x 4¼″
- **Shpg. 18 lbs.**

ITEM	Model	GPM
902007	DCF16M454LF1	45 max.
901071	DCF16M304LF1	30 max.

Flow/Directional Control ⚠ Valve



ITEM 900882

$336.95

• Brand new BRAND HYDRAULICS. Combines a directional control valve with pressure compensated flow control in one body. Use to control speed and direction on cylinders, motors. Work ports blocked in neutral. Frictional detent on handle to maintain constant speed. Open center.

SPECIFICATIONS

- Flow 18 GPM max.
- Pressure 3000 PSI max.
- Relief valve Adjustable
- In/Out Ports ¾″ NPT
- Work Ports ½″ NPT
- Mount 3 holes thru body
- Size 7⅜″ x 3⅜″ x 3¼″
- **Shpg. 7 lbs.**

Single Spool 18 GPM Control Valve ⚠



ITEM 901992

$336.95

• Brand new, BRAND HYDRAULICS Model SDCF755M184LF1 directional control valve with flow control. Combines a 4-way directional control valve with a full range, pressure-compensated, by-pass type flow control valve, and an adjustable pilot-operated relief valve. Extremely fine flow metering to the work ports in direct proportion to the handle movement. Cast iron body with Buna-N O-rings. Handle included.

SPECIFICATIONS

- Open Center
- One double acting, metered flow motor spool, friction detent
- Flow 18 GPM max.
- Pressure 3000 PSI max.
- Reqd. Filtration 30 micron
- Relief Valve Adj. set at 1500 PSI
- In/Out Ports ¾″ NPT
- Work Ports ½″ NPT
- Mount 3 bolts on 2 5/16″ x 3 11/16″ x 3 15/16″ ctrs
- Size 8⅜″ x 4¼″ x 3⅜″
- **Shpg. 8 lbs.**

Prince Motor Spool Valves



• Brand new PRINCE RD5000 Series monoblock motor spool control valves. Work ports connected to tank in neutral so motor can free wheel. No load checks. Cast iron valve body, chrome plate spools. Parallel spool circuit allows any combination of spools to work simultaneously. Closed center conversion plug, power beyond sleeve and three position detent kit sold on **page 29.**

SPECIFICATIONS

- Max. 25 GPM
- Max. 3000 PSI
- IN/OUT ¾″ NPT, work ½″ NPT
- Spring centering
- Adjustable relief valve 1500-3000 PSI factory set at 2000 PSI

ITEM	Spools	Size	Shpg.	Price
901440	One	9½″ x 5″ x 3¼″	16 lbs.	$340.50
901441	Two	9½″ x 7½″ x 3¼″	25 lbs.	$502.50
901442	Three	9½″ x 9½″ x 3¼″	36 lbs.	$664.50

Walvoil Monoblock Drive Valve Motor Spool



ITEM 903261

$89.95

• New, WALVOIL model# 1EXP12144-U three-position, motor-spool, directional control valve. Monoblock construction. Standard lever box is threaded M10 x 1.5 to accept included handle. Switches at valve end opposite of lever box sense when spool is pushed forward (top switch) or in neutral (bottom switch). SPST switches are closed in these positions.

SPECIFICATIONS

- Type Open-Center
- Spools One
- Flow 32 GPM max.
- Pressure 3600 PSI max.
- Reqd. Filtration ISO 4406 19/16
- Relief Valve None
- In/Out Ports SAE 12
- Work Ports SAE 12
- Mount Two hole
- Size 12¼″ x 4″ x 4⅞″
- **Shpg. 13 lbs.**

Compact 8 GPM Motor Control Valve



ITEM 902239

$209.25

• Brand new WOLVERINE by PRINCE MB Series directional control valve for operating reversible hydraulic motors. Ideal for small tractor and other low flow applications requiring a compact control valve. Features include monoblock construction, built-in adjustable pressure relief valve, three position detent spool action, open center with enclosed plug to convert to power beyond or closed center, side or top inlet/outlet ports and vertical or horizontal handle mounting.

SPECIFICATIONS

- Open Center Convertible to power beyond or closed center
- Spools One
- Flow 8 GPM max.
- Pressure 3500 PSI max.
- Mount 3 hole base
- Relief Valve 2000 PSI, adj. 2000-3500 PSI
- Reqd. Filtration ISO 4406 19/17/14
- In/Out Ports SAE 8
- Work Ports SAE 8
- Size 7⅝″ x 4″ x 2¼″
- **Shpg. 9 lbs.**

Rotary Control Valve



ITEM 902247

$376.50

• Brand new, PRINCE RD512JD5A4B3 directional control valve with rotary spool. Single spool, double acting. Turning spool 90° CW goes to full spool in and 90° CCW to full spool out. Detent in center position. Use for controlling hydraulic motors. No handle.

SPECIFICATIONS

- Open Center
- Spools One
- Flow 30 GPM max.
- Relief Valve Adj to 1500-3000, preset @ 2000 PSI
- Pressure 3000 PSI max.
- In/Out Ports ¾″ NPT
- Work Ports ½″ NPT
- Mount 3 holes thru body
- Size 9½″ x 5″ x 3¼″
- **Shpg. 16 lbs.**

One Spool Prince Motor Control Valves



• Brand new PRINCE RD2500 Series. Monoblock high tensile strength gray cast iron body. Hard chrome plated spools. Open center with conversion plug for closed center applications. Load checks.

SPECIFICATIONS

- One spool valve
- Max 20 GPM
- Max 3000 PSI
- Inlet/Outlet Ports ¾″ NPT
- Work Ports ½″ NPT
- Adjustable relief valve 1500-3000 PSI factory set at 1500 PSI
- Spring centering
- Size 9″ x 4¼″ x 3″
- **Shpg 12 lbs**

Spring Centered

ITEM 901446 **$247.05**

3 Position Detent

ITEM 901447 **$263.25**

California Residents WARNING:Cancer and Reproductive Harm
For more information refer to:www.P65Warnings.ca.gov

2 Spool, 21 GPM Joystick Control Valve



ITEM 906342
$237.60

• Brand new, Chief directional control joystick valve, 4 way 3 position tandem center.

SPECIFICATIONS

- Brand Chief
- Model# 220905
- Open Center
- Spools 2
- Flow 21 GPM
- Pressure 3625 PSI max.
- In Port SAE 10
- Outlet Port SAE 12
- Work Ports SAE 10
- Size 18½″ x 7″ x 3¼″
- **Shpg. 19 lbs.**

2 Spool, 10 GPM Joystick Control Valve



ITEM 906343
$191.90

• Brand new, Chief directional control joystick valve, 4 way 3 position tandem center. For use with double acting cylinders.

SPECIFICATIONS

- Brand Chief
- Model# 220910
- Open Center
- Spools 2
- Flow 10 GPM
- Pressure 3625 PSI max.
- In Port SAE 10
- Outlet Port SAE 10
- Work Ports SAE 8
- Size 18¼″ x 5½″ x 3″
- **Shpg. 13 lbs.**

6 Spool, 10 GPM Joystick Control Valve



ITEM 906344
$497.35

• Brand new, Chief directional control joystick valve, 4 way 3 position tandem center.

SPECIFICATIONS

- Brand Chief
- Model# 220951
- Series 22
- Open Center
- Spools 6
- Flow 10 GPM
- Pressure 3625 PSI max.
- In Port SAE 10
- Outlet Port SAE 10
- Work Ports SAE 8
- Size 18½″ x 10½″ x 4″
- **Shpg. 25 lbs**.

3 Spool, 30 GPM Cross Joystick Valve



ITEM 906215
$667.35

• Brand new, CROSS MFG. Three spool joystick valve for operating double acting cylinders with first spool float and third spool single lever to operate a double acting grapple cylinder. Load checks. Spools can be operated independently or simultaneously.

SPECIFICATIONS

- Brand Cross Mfg
- Cross Item # 150346
- Build Number BA3A11X-AAG3EA3
- Open Center
- Spools Three
- Flow 30 GPM max.
- Relief Valve Set at 2000 PSI, adj. 1500-3000 PSI
- In/Out Ports ¾″ NPT
- Work Ports ½″ NPT
- Size 21″ x 10″ x 2″
- **Shpg. 39 lbs.**

ITEM 906216 **$667.35**
• In/Out Ports SAE 12 Work Ports SAE 10

2 Spool 30 GPM Joystick Control Valve



ITEM 906147
$499.60

•Brand new CROSS BA2A1X-AG3EA3 series joystick directional control valve with first spool float for operating double acting cylinders. The two spools controlled by joystick lever can be operated independently or simultaneously depending on handle movement. Features include built-in adjustable pressure relief valve, open center, side inlet/outlet and top work ports. Intergral load holding check valves. Can be converted to power beyond.

SPECIFICATIONS

- Brand Cross Mfg.
- Model# SBAF2J
- Cross Item# 143430
- Open Center
- Spools Two
- Flow 30 GPM max.
- Pressure 2500 PSI max.
- Relief Valve Adjustable 1500-3000 psi (set at 2000 psi)
- In/Out Ports ¾″ NPT
- Work Ports ½″ NPT
- Mount Three, ⅜″ dia. holes
- Size 13.25″ x 7.3″ x 7.13″
- **Shpg. 24 lbs.**

ITEM 906148 **$381.00**
• In/Out Ports SAE 12 Work Ports SAE 10

2 Spool, 10 GPM Joystick Loader Control Valve ⚠



ITEM 901912
$421.25

• Brand new. BRAND Model LV22RFSTKAB. Compact two spool joystick valve for operating double acting cylinders. Ideal for use on front end loaders on small to medium sized tractors, lift trucks, and other mobile equipment requiring a compact valve. The two spools can be operated independently or simultaneously depending on handle movement. First spool has regenerative feature for rapid extension of cylinder and second spool has float to allow free movement of cylinder. Open center. Optional conversion sleeve for power beyond or plug for closed center operation sold separately. Spring centering spool action with detented fourth position for float or regenerative spools.

SPECIFICATIONS

- Open Center
- Spools Two
- Flow 10 GPM
- Work Ports SAE 8
- Size 5½″ x 2⅜″ x 17⅞″
- Relief Valve Adjustable from 800-3000 PSI set at 2000
- Pressure 3000 PSI In/Out Ports SAE 8
- **Shpg. 14 lbs.**

Power Beyond Sleeve

ITEM 901913 **$27.10**
• Provides oil to a downstream valve. Port SAE 8. **Shpg. ½ lb.**

Closed Center Plug

ITEM 901914 **$26.55**
• For closed center systems with variable displacement pumps. **Shpg. ½ lb.**

3 Spool, 11.9 GPM Joystick Valve



ITEM 904493
$249.95

• New WALVOIL SD5/3-P three spool monoblock directional valve. First spool for operating hydraulic motors, second and third spool for operating double acting cylinders with joystick control. Handles not included.

SPECIFICATIONS

- Brand Walvoil
- Open Center
- Spools Three
- Flow 11.9 GPM
- Pressure 3600 psi max.
- Relif Valve None
- In/Out Ports SAE 8
- Work Ports SAE 6
- Motor Spool Handle thread M8-1.25
- Joystick Handle thread M12-1.75
- Size 8½″ x 7″ x 3¾″
- **Shpg 19 lbs.**

2 Spool Joystick Control Valve ⚠



ITEM 905617
$355.95

• Brand new. BRAND Model LV22TSTKA2B. Compact two spool joystick valve for operating double acting cylinders. Ideal for use on front end loaders. The two spools can be operated independently or simultaneously depending on handle movement. Second spool has float. Open center. Optional conversion sleeve for power beyond or plug for closed center operation sold separately.

SPECIFICATIONS

- Open Center
- Spools Two
- Flow 10 GPM
- Pressure 3000 PSI
- Size 5½″ x 2½″ x 18¾″
- Relief Valve Adjustable from 1200-3000 PSI set at 2000
- In/Out Ports SAE 8
- Work Ports SAE 8
- **Shpg. 15 lbs.**

2 Spool Joystick Loader Control Valve w/Float



ITEM 904561
$275.35

• Brand new, CHIEF compact two spool joystick valve with float feature on first spool for operating double acting cylinders. Ideal for use on front end loaders on small to medium sized tractors. Open center. Load checks. Spring centering spools with detented float.

SPECIFICATIONS

- Model 220957
- Open Center
- Spools Two
- Load Checks Yes
- Flow 10 GPM
- Pressure 3600 PSI
- Relief Valve Adjustable from 1500 to 3600 PSI
- In/Out Ports SAE 10
- Work Ports SAE 8
- Size 5¼″ x 3″ x 18½″
- **Shpg. 12 lbs.**

CHIEF Power Beyond, Closed Center Options

ITEM 904915 **$39.35**
• Power Beyond Sleeve. SAE 10. **Shpg. ¼ lb.**

ITEM 904916 **$23.85**
• Closed Center Plug. **Shpg. ¼ lb.**

Inline Flow Control Valve



• Brand new, WOLVERINE by PRINCE inline flow control valves. Designed to provide flow control and shut-off in one flow direction while providing free flow in the opposite direction. Color bands for easy flow adjustments and fast return to previous setting. Set screw to lock valve to any setting. Carbon steel body.

ITEM	Model	Ports	PSI	GPM	Shpg.	Price
902370	WFC-600	⅜″ NPT	5000	0-8	2 lbs.	$39.85
902371	WFC-800	½″ NPT	5000	0-15	3 lbs.	$50.65

Inline Needle Valves

WOLVERINE By Prince Manufacturing



• Brand new, WOLVERINE by PRINCE inline needle valves. Designed to provide flow control in both directions. Carbon steel body.

ITEM	Model	Ports	PSI	GPM	Shpg.	Price
902375	WNV-600	⅜″ NPT	5000	0-8	2 lbs.	$48.60
902376	WNV-800	½″ NPT	5000	0-15	3 lbs.	$73.60
902377	WNV-1200	¾″ NPT	3000	0-25	4 lbs.	$75.60
902378	WNV-1600	1″ NPT	3000	0-40	7 lbs.	$183.60

Inline Flow Control Valves

• Brand new, DYNAMIC inline flow control valves. Designed to provide flow control and shut-off in one flow direction while providing free flow in the opposite direction. Allen head lock screw to lock valve to any setting. Carbon steel body with black oxide plating and zinc alloy coated handle.



SPECIFICATIONS
• Maxium Pressure 5000 psi
• Temperature Range -4° to 176°F (-20°C to 80°C)

ITEM	Model	Ports	GPM	Shpg.	Price
		NPT			
905980	JPFC-¼-NPT	¼″ NPT	0-10.5	1 lb.	$26.45
905981	JPFC-⅜-NPT	⅜″ NPT	0-15.5	2 lbs.	$29.80
905982	JPFC-½-NPT	½″ NPT	0-22.5	3 lbs.	$33.20
905935	JPFC-¾-NPT	¾″ NPT	0-46.0	3 lbs.	$38.20
905936	JPFC-1-NPT	1″ NPT	0-52.5	6 lbs.	$69.20
905985	JPFC-1¼-NPT	1¼″ NPT	0-79.0	13 lbs.	$123.35
		SAE			
905983	JPFC-SAE-6	SAE 6	0-15.5	2 lbs.	$29.80
905984	JPFC-SAE-8	SAE 8	0-22.5	3 lbs.	$33.15

Inline Needle Valves

• Brand new, DYNAMIC inline needle valves. Designed to provide flow control in both directions. Allen head lock screw to lock valve to any setting. Carbon steel body with black oxide plating and zinc alloy coated handle.

DYNAMIC FLUID COMPONENTS, INC.




SPECIFICATIONS
• Maxium Pressure 5000 psi
• Temperature Range -4° to 176°F (-20°C to 80°C)

ITEM	Model	Ports	GPM	Shpg.	Price
		NPT			
905988	JPNV-¼-NPT	¼″ NPT	0-10.5	1 lb.	$26.45
905989	JPNV-⅜-NPT	⅜″ NPT	0-15.5	1 lb.	$29.85
905990	JPNV-½-NPT	½″ NPT	0-22.5	3 lbs.	$33.15
905986	JPNV-¾-NPT	¾″ NPT	0-46.0	3 lbs.	$40.25
905987	JPNV-1-NPT	1″ NPT	0-52.5	5 lbs.	$69.20
905992	JPNV-1-¼-NPT	1¼″ NPT	0-79.0	10 lbs.	$123.40
905991	JPNV-1-½-NPT	1½″ NPT	0-105.5	19 lbs.	$218.15
		SAE			
905993	JPNV-06-SAE	SAE 6	0-15.5	1 lb.	$29.80

3 Way High Pressure Ball Valves

• Brand new, DYNAMIC DE Series 3-way diverter ball valve. Suitable for hydraulic and water applications. Constructed of high-carbon steel with zinc-chromate plating. Standard POM ball seals with Buna stem seals.

DYNAMIC FLUID COMPONENTS, INC.

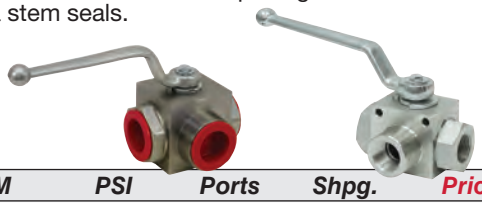

	ITEM	PSI	Ports	Shpg.	Price
NPT	903656	5880	¼″ NPT	1½ lbs.	$ 49.20
	903657	5880	⅜″ NPT	2 lbs.	$ 51.60
	903658	5145	½″ NPT	3 lbs.	$ 55.00
	903659	5145	¾″ NPT	5 lbs.	$ 79.85
	903660	5145	1″ NPT	7 lbs.	$ 96.30
	903668	4500	1¼″ NPT	7 lbs.	$152.85
	903669	4500	1½″ NPT	12 lbs.	$187.35
	903670	4500	2″ NPT	15 lbs.	$220.70
SAE	903662	5880	SAE 4	1½ lbs.	$ 52.90
	903663	5880	SAE 6	2 lbs.	$ 55.55
	903664	5145	SAE 8	3 lbs.	$ 59.80
	903665	5145	SAE 12	5 lbs.	$ 85.70
	903666	5145	SAE 16	7 lbs.	$101.55
	903671	4500	SAE 20	7 lbs.	$152.85
	903672	4500	SAE 24	12 lbs.	$193.00
	903744	4500	SAE 32	15 lbs.	$230.75

High Pressure Ball Valves

• Brand new, DYNAMIC Fluid Components DE2 Series ball valves. Suitable for hydraulic and water applications. Constructed of high-carbon steel with zinc-chromate plating. Standard POM ball seals with Buna stem seals. Temperature range -30 to 212° F.



¼″ - 1″ and SAE 4 - 16

DYNAMIC FLUID COMPONENTS, INC.



1¼″ - 2″ and SAE 20 - 32

	ITEM	PSI	Ports	Shpg.	Price
NPT	901826	7250	¼″ NPT	1½ lbs.	$ 25.85
	901827	7250	⅜″ NPT	2 lbs.	$ 27.45
	901828	7250	½″ NPT	3 lbs.	$ 30.65
	901829	5800	¾″ NPT	5 lbs.	$ 59.05
	901830	5000	1″ NPT	7 lbs.	$ 68.95
	903673	5000	1¼″ NPT	8 lbs.	$ 81.70
	903674	5000	1½″ NPT	10 lbs.	$ 99.95
	903675	5000	2″ NPT	13 lbs.	$141.90
SAE	901831	7250	SAE 4	1½ lbs.	$ 30.00
	901832	7250	SAE 6	2 lbs.	$ 31.90
	901833	7250	SAE 8	3 lbs.	$ 35.75
	901834	5800	SAE 12	5 lbs.	$ 69.60
	901835	5000	SAE 16	7 lbs.	$ 84.30
	903676	5000	SAE 20	8 lbs.	$ 90.45
	903677	5000	SAE 24	12 lbs.	$110.90
	903678	5000	SAE 32	15 lbs.	$149.20

California Residents WARNING:Cancer and Reproductive Harm
For more information refer to:www.P65Warnings.ca.gov

Hydraulic Solenoid Valves



• Brand new EATON VICKERS DG4V-3 Series. Dual solenoid directional valves for operating hydraulic cylinders, motors and other actuators. Spring centering spool action. Manual over-ride on solenoids. Valves ship with four cap-screws for mounting. Requires D03 subplate sold separately on this page. Use with two Hirschmann connectors (not incl.) for wiring.

SPECIFICATIONS

• GPM 10½ • PSI 3000 • Ports D03 subplate mtg. • **Shpg. 6 lbs.**

Voltage	ITEM	Price	Valve Type	Spool Details
12 VDC Amperage 3.5 Size 8¾″ x 1⅞″ x 2⅛″	901041	$232.60	Open center	Work ports blocked in neutral
	901043	$195.30	Closed center	All ports blocked in neutral
	901042	$201.30	Open center	All ports open to tank in neutral
120 VAC Amperage 0.35 Size 7¾″ x 1⅞″ x 2⅛″	901796	$283.45	Open center	Work ports blocked in neutral
	901798	$294.80	Closed center	All ports blocked in neutral
	901797	$292.45	Open center	All ports open to tank in neutral


Solenoid Coil Wire Connector




ITEM 500318 **$7.95**

• Brand new HIRSCHMAN style connector for installation of wires to solenoid coil. Two connectors required for each solenoid valve. **Shpg. 1/10 lb.**

D03 Subplates



Parallel




Series

• Brand new D03 aluminum subplates for solenoid operated valves.
• *Parallel circuit for closed center valves.*
• *Series circuit for open center valves.*

Valves	Parallel ITEM	Parallel Price	Series ITEM	Series Price	Ports	Shpg.
1	900622	$43.50	900622	$43.50	IN SAE 6, OUT SAE 6, Work SAE 6	2 lbs.
2	900623	$90.00	901062	$115.75	IN SAE 10, OUT SAE 12, Work SAE 8	6 lbs.
3	900624	$138.00	901002	$153.25	IN SAE 10, OUT SAE 12, Work SAE 8	7 lbs.
4	903090	$183.00	903091	$196.75	IN SAE 10, OUT SAE 12, Work SAE 8	9 lbs.

Directional Control Valves



• Brand new HYDRAFORCE dual solenoid directional control valves.

SPECIFICATIONS

• Spools one • Pressure 3500 PSI • Mount 2 hole side 2″ c/c
• Flow 5 GPM • In/Out ports SAE 6 • Size 2½″ x 1¾″ x 7¾″
• Work ports SAE 6 • **Shpg. 5 lbs.**

Voltage	ITEM	Price	Valve Type	Spool Details
12 VDC Amperage 1.67	907067	$178.80	Open center	Work ports blocked in neutral
	907068	$170.85	Closed center	All ports blocked in neutral
	907063	$172.00	Open center	All ports open to tank in neutral
115 VAC Amperage 0.18	907069	$236.20	Open center	Work ports blocked in neutral
	907071	$228.25	Closed center	All ports blocked in neutral
	907070	$229.40	Open center	All ports open to tank in neutral

1″ NPT Hydraulic Relief Valve



ITEM 902283
$133.00

• Brand new, BUYERS PRODUCTS model HRV10025 inline (3 port) relief valve. Ball and spring direct acting style. Cast iron body. Three mounting holes for ⅜″ bolts.

SPECIFICATIONS

• Flow Rating 50 GPM max • Ports 1″ NPT
• Relief Range 1501-3000 PSI • Gauge Port ¼″ NPT
• Factory Setting 2000 PSI • Size 9⅜″ x 3½″ x 3¼″
• **Shpg. 10 lbs.**

SAE 12 30 GPM Motor Relief Bypass Valve




ITEM 904002
$261.90

• Brand new, FLUIDTECH four port inline crossover relief and bypass check valve. Provides overload and shut off protection for motor wind down when used with hydraulic control valves that have blocked work ports in neutral. For non reversible applications only. Ideal for use with skid steer loader or tractor valve outlets for operating remote hydraulic motor for overload and shut off protection. Two mounting holes for ⅜″ bolts.

SPECIFICATIONS

• Flow Rating 30 GPM max • Factory Setting 2500 PSI
• Pressure Rating 3000 PSI max • Ports SAE 12
• Relief Range 450-3000 PSI • Size 2½″ x 3⅞″ x 8⅛″
• **Shpg. 7 lbs.**

Electric Flow Control

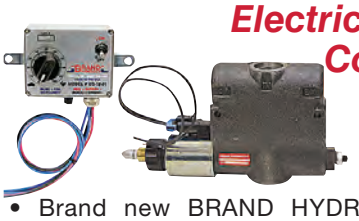

• Brand new BRAND HYDRAULICS. Variable flow control valve with 12 volt DC controller for remote operation. Gives convenient hydraulic motor speed control from tractor cabs.

SPECIFICATIONS

• Control Voltage 12 Volt DC • Ports SAE 12
• Flow Range 0-15 GPM • Size 9½″ x 5″ x 1⅞″
• Pressure 3000 PSI max. • **Shpg. 12 lbs.**

ITEM 900884 ***$852.85***

• Flow range 0 - 15 GPM.

ITEM 902443 ***$852.85***

• Flow range 0 - 30 GPM.

12 VDC & 115 VAC Solenoid Operated Poppet Valves



• Brand new HYDRA-FORCE. Solenoid operated 2 way poppet type valves. Use for starting, stopping, or dumping of hydraulic circuits to 3000 PSI (not a directional control valve). Available in N.O. or N.C. configurations with 12 volt DC or 115 volt AC coils. Continuous rated solenoids with hardened seats for long life and low leakage. Rated 12-15 GPM, ports SAE 8. **Shpg. 2 lbs.**

Voltage	ITEM	Valve Type	Price
12 VDC Amps 1.67	907058	Normally Open	$102.25
	907057	Normally Closed	$91.30
115 VAC Amps 0.18	907075	Normally Open	$130.95
	907074	Normally Closed	$120.00

Flow Control w/ Shutoff Valve



• Brand new, BUYERS dual flow control valve with shutoff for snow spreader equipment, fertilizer applicators and other motor speed control applications. Two pressure compensated flow controls for speed control of auger and spinner motors, relief valve and ON/OFF lever valve.

SPECIFICATIONS

• Flow Inlet 40 GPM max. • Ports In/Tank/Auger ¾″ NPT
• Pressure 2000 PSI max. • Port Spinner ½″ NPT
• Relief Valve 1500 PSI • Size 7¾″ x 5¼″ x 4″
• **Shpg. 9 lbs.**


ITEM 904060 ***$309.35***

• Flow Rate Spinner 0-7 GPM
• Flow Rate Auger 0-15 GPM

ITEM 904061 ***$289.50***

• Flow Rate Spinner 0-10 GPM
• Flow Rate Auger 0-30 GPM

20 GPM Single Selector Valves



$198.00 each


• Brand new PRINCE. Two position two-way selector valves. Directs pump flow to select between two circuits. Also use to select between two different single acting hydraulic cylinders from one valve.

SPECIFICATIONS

- GPM 20
- PSI 2500
- Two position
- Size 5⅛″ x 3¼″ x 2¼″
- **Shpg 6 lbs.**

ITEM	Model	Ports
901036	SS-1A1D	⅜″ NPT
901035	SS-2A1D	½″ NPT

40 GPM Single Selector Valves



• Brand new, CROSS high flow, single selector valves. Use to switch pump flow from one circuit to a different circuit.

SPECIFICATIONS

- Flow 40 GPM max.
- Mount Two holes on 3″ ctrs.
- Size 6⅛″ x 4⅛″ x 2⅝″
- **Shpg. 8 lbs.**

ITEM	Model	Ports	PSI	Price
902281	VS4BKLF7	1″ NPT	2500	$127.00
902282	VS4BKLF9	SAE 16	3000	$126.80
906152	VS4BKLF6	¾″ NPT	2500	$117.95
906153	VS4BKLF8	SAE 12	2500	$122.40

20 GPM Single Selector Valves



• Brand new, CROSS high flow, single selector valves. Use to switch pump flow from one circuit to a different circuit.

SPECIFICATIONS

- Flow 20 GPM max.
- Size 5.33″ x 3.25″ x 2.25″
- Mount Two holes on 2⅛″ ctrs.
- **Shpg. 4 lbs.**

ITEM	Model	Ports	PSI	Price
906154	VS2BKLF2	½″ NPT	2500	$87.00
906155	VS2BKLF4	SAE 8	2500	$87.00

30 GPM Single Selector Valves



ITEM 902280

$231.00

• Brand new, PRINCE Model RD-975 single selector valves. Use to switch pump flow from one circuit to a different circuit.

SPECIFICATIONS

- Flow 30 GPM max.
- Pressure 3000 PSI max.
- Port ¾″ NPT
- Mnt 2 holes on 3⅞″ ctrs.
- Size 4⅝″ x 4⅛″ x 1¾″
- **Shpg. 9 lbs.**

12 VDC Solenoid Operated Double Selector Valves



900873

• Brand new. Dual 12 volt DC solenoid operated double selector/multiplier valve. Use to expand the number of tractor remotes or operate two different circuits consisting of cylinders or motors from a single directional valve. Rated 3000 PSI. Terminal connections are ¼″ spade. Choose between individual or primary circuit types with two different rated flow rates.



902155

Individual Circuit Selector

• Each circuit has its own coil that is energized to allow a directional control valve to operate the circuit selected. When used with “variable flow” or “closed center” systems valve can be used as a selector, or power both solenoids to direct fluid to both circuits at the same time. A SPDT-CO switch or two momentary pushbutton switches are required to operate selector valve.


ITEM	Flow	Ports	Amps	Size	Shpg.	Price
900873	15	SAE 8	1.67	4½″ x 2½″ x 6½″	7 lbs.	$292.05
902155	20	SAE 12	2.6	5¼″ x 3″ x 8⅞″	15 lbs.	$384.25

Primary Circuit Selector

• Primary type allows a directional control valve to operate one circuit with no power to selector valve. To select the other circuit, both solenoids are powered. This operation allows selection to be done by a SPST pushbutton or toggle switch. Ideal for operating a “thumb” on a loader bucket.

ITEM	Flow	Ports	Amps	Size	Shpg.	Price
902154	6	SAE 8	1.67	4½″ x 2½″ x 6½″	7 lbs.	$292.05

Double Selector Valves



$279.45 each

• Brand new PRINCE. Allows one control valve to operate two different double acting cylinders or reversible motors. Also use to select between two different circuits from one hydraulic source. 2500 PSI. **Shpg. 13 lbs.**

ITEM	GPM	Ports
900599	20	½″ NPT
901038	30	¾″ NPT
901039	40	1″ NPT

Double Selector Valve



ITEM 903987

$231.40

• New CROSS allows one control valve to operate two different double acting cylinders or reversible motors. Also use to select between two different circuits from one hydraulic source. Detent on spool holds spool securely in either position.

SPECIFICATIONS

- Model SD4BADA3
- Flow 40 GPM
- Pressure 2500 PSI
- Positions two detented
- Ports SAE 10 (⅞″-14 ORB)
- Size 8″ x 4¼″ x 3¼″
- **Shpg 11 lbs.**

Ordering Information on page 4

12 VDC Double Selector Valve



• Brand new, DYNAMIC Model DSV 12 volt DC solenoid operated double selector valve. Allows one directional valve to operate two independent cylinders. Energizing coil shifts from cylinder 1 to cylinder 2. Ideal for adding a “thumb” to buckets on loaders. Furnished with O-ring so they can be stacked together for even more function choices. Includes Hirschmann wiring connector.

SPECIFICATIONS

- Pressure 3600 PSI max
- Coil Voltage 12 Volt DC
- Current 2.5 amps
- Connector Hirschmann
- Size 7″ x 2½″ x 2¾″
- **Shpg. 10 lbs.**

ITEM 903743 $160.00
13.2 GPM SAE 8 Ports

ITEM 904759 $190.00
24 GPM SAE 10 Ports

12 VDC Solenoid Selector Valve



ITEM 907093

$244.85

• Brand new HYDRAFORCE. Three port 12 volt DC solenoid operated selector valve. Use to switch pump flow from one circuit to a different circuit.

SPECIFICATIONS

- Flow 15 GPM
- Pressure 3500 PSI
- Voltage 12 volt DC
- Amperage 2.8 amps
- Ports SAE 12
- Terminal Connection Wire leads
- Size 4″ x 2¼″ x 8″
- **Shpg. 8 lbs.**

Adjustable Flow Controls

• Brand new PRINCE. Speed remains constant regardless of load. "Controlled flow" port is proportional to orifice diameter that changes from full closed to full open. Pressure compensated OUT flows. Three female threaded ports. 3000 PSI. Size 5″ x 4¼″ x 3″. **Shpg. 8 lbs.**

With Built-in Relief

• Built-in adjustable relief valve set at 1500 PSI for controlled flow circuit.

ITEM	Model	Ports	GPM	Price
900146	RDRS137-8	⅜″ NPT	0-8	$241.50
900147	RDRS150-16	½″ NPT	0-16	$289.60
900148	RDRS175-30	¾″ NPT	0-30	$292.95



With No Relief

• Ideal for closed center systems by plugging excess port.

ITEM	Model	Ports	GPM	Price
900918	RD108-8	SAE 8	0-8	$220.05
900621	RD110-16	SAE 10	0-16	$225.00
900919	RD112-30	SAE 12	0-30	$233.55



Proportional Flow Dividers

• Brand new PRINCE. Divides flow into two equal volume outputs regardless of load variations. Integral check valves allow free return flow through valve in reverse. For hydraulic circuits or motors that operate at same speed. Not for synchronizing cylinder travel. Size 4⅛″ x 4⅝″ x 1¾″.

ITEM	Model	Ports	PSI	GPM	Shpg.	Price
900189	RD337-8	⅜″ NPT	3000	4-8	8 lbs.	$270.00
900190	RD350-16	½″ NPT	3000	8-16	8 lbs.	$392.85
900191	RD375-30	¾″ NPT	3000	16-30	8 lbs.	$345.00



Double Relief Valves

• Brand new PRINCE. Cushion valve or double relief valve. Use to stop or minimize surge, shock and overload in hydraulic circuits. Installs between control valve and motor or cylinder. Bypasses to opposite side to prevent cavitation. 30 GPM max. Size 4½″ x 7″ x 2″. **Shpg. 8 lbs.**

ITEM	Model	Ports	Relief Range	Price
902089	DRV-4LL	½″ NPT	500-1500 PSI	$182.95
900567	DRV-4HH	½″ NPT	1500-3000 PSI	$189.70
902090	DRV-2LL	¾″ NPT	500-1500 PSI	$187.50
900568	DRV-2HH	¾″ NPT	1500-3000 PSI	$168.05



Inline Relief Valves

• Brand new PRINCE. Inline relief valves. Differential poppet design provides smooth and quiet performance with a minimum variation between cracking and full pressure.

SPECIFICATIONS

• GPM 30 • PSI 3000 PSI • Size 3¼″ x 2⅞″ x 5″ • **Shpg. 5 lbs.**

ITEM	Model	Ports	Relief Range	Price
902250	RV-4L	½″ NPT	500-1500 PSI	$139.05
902251	RV-4H	½″ NPT	1500-3000 PSI	$133.00
902252	RV-2L	¾″ NPT	500-1500 PSI	$141.05
901037	RV-2H	¾″ NPT	1500-3000 PSI	$135.00



Adjustable Flow Controls w/Relief Valves

• Brand new WOLVERINE by PRINCE. Pressure compensated flow control to vary the speed of hydraulic motors. Rotate lever to vary flow to controlled flow port. Can be locked in place. Pressure relief for controlled flow port. Excess flow port must be returned to tank for relief to function.

SPECIFICATIONS

• Mount Two ¼″ holes thru body, 3.87″ c/c • PSI 3000 PSI
• Size 4.56″ x 5.78″ x 1.89″ • **Shpg. 9 lbs.**

ITEM	Model	Ports	GPM	Price
904164	WR-1950-16	½″ NPT	0-16	$97.90
904166	WR-1912-30	SAE 12	0-30	$97.90
904163	WR-1937-8	⅜″ NPT	0-8	$97.90



Inline Relief Valves



• Brand new, CROSS inline relief valve. Differential poppet design provides smooth and quiet performance with a minimum variation between cracking and full pressure.

SPECIFICATIONS

• Flow 30 GPM max. • Mount two ¼″ dia. holes on 2.2″ centers
• Factory Setting 2000 PSI
• Size 4.36″ x 3.12″ x 2.44″ • **Shpg. 4 lbs.**

ITEM	Model	Ports	Pressure	Price
906158	RD12D	¾″ NPT	1500-3000	$83.35
906159	RD15D	SAE 12	1500-3000	$83.35
906160	RD12B	¾″ NPT	500-1500	$83.35
906161	RD15B	SAE 12	500-1500	$84.20

Double Relief Valves



SPECIFICATIONS

• Flow 30 GPM max. • Mount two 5⁄16″ dia. holes on 2.5″ centers
• Factory Setting 2000 PSI
• Size 6.44″ x 4.25″ x 1.69″ • **Shpg. 4 lbs.**

ITEM	Model	Ports	Pressure	Price
906162	RC12DD	¾″ NPT	1500-3000	$151.30
906163	RC15DD	SAE 12	1500-3000	$163.25
906164	RC12BB	¾″ NPT	500-1500	$151.30
906165	RC15BB	SAE 12	500-1500	$162.35

Adjustable Priority Flow Dividers



• Brand new PRINCE. Adjustable constant volume priority divider. Use in applications where two circuits are to be supplied by a single pump such as power steering systems. Inlet flow is divided into two flows: priority flow which remains constant, and excess flow to power and auxiliary circuit. Priority flow adjustable from 2 to 14 GPM.

SPECIFICATIONS

• 30 GPM max input • Adj priority 2-14 GPM
• 3000 PSI • Size 5¾″ x 4½″ x 1¾″
• **Shpg 8 lbs.**

ITEM	Model	Ports	Price
900854	RD550	½″ NPT	$231.00
900855	RD575	¾″ NPT	$353.70

Relief Valves



• Brand new PRINCE. Compact adjustable relief valves. Inline (3 port) connection. Hardened ball seat for long life.

SPECIFICATIONS

• 2,500 PSI max • 1,000-2,500 PSI adj. range
• Adj. relief set at 1500 PSI
• Size 1½″ x 1½″ x 4½″ • **Shpg. 3 lbs.**

ITEM	Ports	Max. GPM	Price
900278	½″ NPT	16 GPM	$156.60
900598	¾″ NPT	20 GPM	$156.60



MTE Rotary Flow Dividers

MADE IN USA

• Brand new, MTE 200 series. Hydraulic gear type rotary flow dividers. Accurately divide flow from one source into two or more equal proportionate flows. Relief valves do not limit system pressure, they only limit differential pressure from outlets to inlet.



SPECIFICATIONS

• Adj. relief valve set at 750 PSI • Adj. range 500 to 1000 PSI • PSI max.: Inlet 3000, Outlet 3500 • Factory set PSI differential between sections 750 PSI

2 Section 50:50 Dividers

ITEM	Displ.	Input GPM Min.	Input GPM Max.	Output GPM Per Section Min.	Output GPM Per Section Max.	Ports Inlet	Ports Outlet	Size	Shpg.	Price
903131	0.11	1.8	4.2	0.9	2.1	SAE 8	SAE 8	6.49″ x 3.94″ x 4.66″	11 lbs.	$249.90
903133	0.251	4.3	9.7	2.2	4.8	SAE 10	SAE 10	7.08″ x 3.94″ x 4.66″	12 lbs.	$258.30
903135	0.323	5.9	12.5	2.8	6.3	SAE 10	SAE 10	7.38″ x 3.94″ x 4.66″	13 lbs.	$263.45
903137	0.479	8.3	18.6	4.1	9.3	SAE 10	SAE 10	8.03″ x 3.94″ x 4.66″	15 lbs.	$281.30

4 Section 25:25:25:25

ITEM	Displ.	Input GPM Min.	Input GPM Max.	Output GPM Per Section Min.	Output GPM Per Section Max.	Ports Inlet	Ports Outlet	Size	Shpg.	Price
903132	0.11	3.8	8.6	0.95	2.1	SAE 8	SAE 8	9.77″ x 3.94″ x 4.66″	19 lbs.	$494.65
903134	0.251	8.6	19.5	2.2	4.9	SAE 10	SAE 8	10.94″ x 3.94″ x 4.66″	21 lbs.	$515.80
903136	0.323	11.2	25.7	2.8	6.3	SAE 10	SAE 8	11.55″ x 3.94″ x 4.66″	22 lbs.	$521.10
903138	0.479	16.6	37.3	4.1	9.3	SAE 10	SAE 8	12.84″ x 3.94″ x 4.66″	26 lbs.	$529.95

Inline Check Valves

• Brand new, DYNAMIC HSP series hard seat, inline check valves. Available with NPT or SAE ports with 5 PSI or 65 PSI cracking pressures. Plated steel.



DYNAMIC FLUID COMPONENTS, INC.

	ITEM	PSI Rated (Max)	GPM	Width Ports (Across Flats)	Length	Shpg.	Price
NPT	**5 PSI Cracking**						
	902317	5000	6	¼″ NPT	0.87″	2.44″	½ lb.	$18.65
	902318	5000	10	⅜″ NPT	0.95″	2.87″	½ lb.	$19.40
	902319	5000	18	½″ NPT	1.14″	3.50″	1 lb.	$23.65
	902320	3000	30	¾″ NPT	1.50″	4.25″	2 lbs.	$34.80
	902321	3000	36	1″ NPT	1.69″	5.12″	3 lbs.	$48.95
	902322	3000	50	1¼″ NPT	2.40″	5.56″	7 lbs.	$85.35
	902323	3000	60	1½″ NPT	2.56″	5.56″	8 lbs.	$87.35
	65 PSI Cracking						
	902331	5000	6	¼″ NPT	0.87″	2.44″	½ lb.	$18.65
	902332	5000	10	⅜″ NPT	0.95″	2.87″	½ lb.	$19.40
	902333	5000	18	½″ NPT	1.14″	3.50″	1 lb.	$23.65
	902334	3000	30	¾″ NPT	1.50″	4.25″	2 lbs.	$34.80
	902335	3000	36	1″ NPT	1.69″	5.12″	3 lbs.	$48.95
	902336	3000	50	1¼″ NPT	2.40″	5.56″	7 lbs.	$85.35
	902337	3000	60	1½″ NPT	2.56″	5.56″	8 lbs.	$87.35

	ITEM	PSI Rated (Max)	GPM	Width Ports (Across Flats)	Length	Shpg.	Price
SAE	**5 PSI Cracking**						
	902324	5000	6	SAE 4	0.87″	2.56″	½ lb.	$17.60
	902325	5000	10	SAE 6	0.94″	2.91″	½ lb.	$20.05
	902326	5000	18	SAE 8	1.18″	3.74″	1 lb.	$25.60
	902327	3000	30	SAE 12	1.50″	4.29″	2 lbs.	$38.10
	902328	3000	36	SAE 16	1.81″	5.00″	3 lbs.	$53.50
	902329	3000	50	SAE 20	2.41″	5.20″	7 lbs.	$86.70
	902330	3000	60	SAE 24	2.56″	5.20″	8 lbs.	$89.30
	65 PSI Cracking						
	902338	5000	6	SAE 4	0.87″	2.56″	½ lb.	$17.60
	902339	5000	10	SAE 6	0.94″	2.91″	½ lb.	$20.05
	902340	5000	18	SAE 8	1.18″	3.74″	1 lb.	$25.60
	902341	3000	30	SAE 12	1.50″	4.29″	2 lbs.	$38.10
	902342	3000	36	SAE 16	1.81″	5.00″	3 lbs.	$53.50
	902343	3000	50	SAE 20	2.41″	5.20″	7 lbs.	$86.70
	902344	3000	60	SAE 24	2.56″	5.20″	8 lbs.	$89.30

Pilot Operated Check Valves

MADE IN USA

• Brand new, pilot operated check valves. In one direction oil passes freely through the valve to the cylinder. In the other direction flow is blocked in the cylinder by the valve until pressure is applied at the pilot port allowing flow from the cylinder back through the valve.

Prince



SPECIFICATIONS

• Max. 3000 PSI • Max. 20 GPM inlet • Pilot ratio 4:1 • Decompression ratio 16:1 • Size 5 13/16″ x 1½″ x 2½″ • **Shpg. 3 lbs.**

ITEM 903221 **$250.50**

• Model RD-1608. Ports SAE 8, pilot port SAE 4.

ITEM 903220 **$301.75**

• Model RD-1650. Ports ½″ NPT, pilot port ¼″ NPT.

BRAND HYDRAULICS



ITEM 903222 **$80.15**

SPECIFICATIONS

• Model PC37C • Inlet Port ⅜″ NPT female • Outlet Port ⅜″ NPT male • Pilot Port ¼″ NPT • Max. Pressure 3000 PSI • Max. Flow 8 GPM • Pilot Ratio 4:1 • Size 3 7/16″ x ⅝″ x 1 9/16″ • **Shpg. 1½ lbs.**


ITEM 903219 **$83.70**

SPECIFICATIONS

• Model PC50C • Inlet Port ½″ NPT female • Outlet Port ½″ NPT male • Pilot Port ¼″ NPT • Max. Pressure 3000 PSI • Max. Flow 16 GPM • Pilot Ratio 4:1 • Size 3 15/16″ x ¾″ x 1 29/32″ • **Shpg. 1½ lbs.**

California Residents WARNING:Cancer and Reproductive Harm
For more information refer to:www.P65Warnings.ca.gov

12 VDC Hydraulic Power Packs

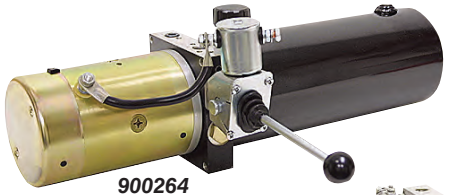
900264


900265


900266


901980

• Brand new SPX STONE. Hydraulic power packs for operating hydraulic cylinders. Steel reservoir tank with inlet strainer, magnet and filtered filler/breather. Built in check valve and adjustable relief valve. See chart for details about control valves, tank size and pressure ratings.

SPECIFICATIONS (all models)

• Flow rate 1.3 GPM at max PSI • 12 Volt DC motor • Needle bearings • Intermittent duty

Stone

ITEM	Valve Type	Ports	Relief Valve Factory Set	Tank Size Cap.	Useable	Size	Shpg.	Price
900264	Single Acting Lever Operated	⅜″ NPT	2500 PSI	3 qt.	2.3 qt.	21″ x 9″ x 7″	38 lbs.	$607.55
900265	Single Acting 12 Volt DC w/handheld remote	SAE 6	2500 PSI	3 qt.	2.3 qt.	21″ x 8″ x 6″	39 lbs.	$645.90
901979	Single Acting 12 Volt DC w/handheld remote	SAE 6	2500 PSI	2.5 gal.	1.6 gal.	25″ x 8 7/16″ x 8″	40 lbs.	$689.25
900266	Double Acting 12 Volt DC (does not include remote)	SAE 6	2500 PSI	3 qt.	2.3 qt.	21″ x 8″ x 7″	40 lbs.	$677.10
901980	Double Acting 12 Volt DC (does not include remote)	SAE 6	2500 PSI	2.5 gal.	1.6 gal.	25″ x 8″ x 7″	41 lbs.	$699.15
901978	None (use with external valve)	SAE 6	2500 PSI	2.5 gal.	1.6 gal.	25″ x 7″ x 8″	40 lbs.	$612.40

2 HP 115/230 VAC Hydraulic Power Packs

• Brand new, SPX hydraulic power packs. All models include motor, gear pump and steel reservoir tank with filtered filler/breather. Horizontal mount. Select from a variety of valve options in chart below.



SPECIFICATIONS (all models)

• 2 HP TEFC motor • 3450 RPM • Continuous duty
• 115/230 VAC, 1 Ph. • 22/11 Amps • Port(s) SAE 6

Stone

ITEM	Pressure/Flow	Relief Valve Factory Set	Valve Type	Tank Size Cap.	Useable	Size	Shpg.	Price
901553	2.5 GPM @ 1000 PSI	1300 PSI	None (use with external valve)	4 gal.	3.03 gal.	39″ x 9″ x 9⅜″	55 lbs.	$838.85
901554	1.3 GPM @ 2000 PSI	2500 PSI	Single Acting release, 115 Volt AC	2.5 gal.	1.6 gal.	30″ x 9″ x 9⅜″	52 lbs.	$908.05
901555	1.3 GPM @ 2000 PSI	2500 PSI	Double Acting 4 way, 115 Volt AC	2.5 gal.	1.6 gal.	30″ x 9″ x 9⅜″	53 lbs.	$1256.55
901552	1.3 GPM @ 2000 PSI	2500 PSI	None (use with external valve)	2.5 gal.	1.6 gal.	30″ x 9″ x 9⅜″	51 lbs.	$839.90

10 ft. Hand Held Remote Controls

for DC Powerpacks



ITEM 900262 $71.20

• For single acting, 3 wire style
900265, 901979 **Shpg. 4 lbs.**

ITEM 900261 $202.70

• For double acting. 3 wire style
900266, 901980 **Shpg. 4 lbs.**

ITEM 903661 $129.20

• Brand new two pushbutton (4 wire) hand held control made for use with double acting hydraulic power packs with two coil solenoid valve. Magnets on back for mounting to steel surfaces. 10 foot power cord. **Shpg. 4 lbs.**

2 HP 230 VAC Hydraulic Powerpack



ITEM 901556 $825.30

• Brand new SPX hydraulic powerpack ideal for use in automobile hoists, lifts and other applications. Cartridge style check valve for load-holding. Momentary "ON" pushbutton switch for raising with a manual lever for lowering. Vertical mount.

SPECIFICATIONS

• 2 HP TENV motor
• 208-230 Volt AC, 1 Ph.
• 15-18 Amps
• Int. duty
• 2.25 GPM @ 2,000 PSI max output
• 2300 PSI maximum
• 2300 PSI fixed relief valve setting
• 4 gallon plastic reservoir (3 gallon usable)
• SAE 6 port
• Mount vertical
• Size 10½″ x 7″ x 31½″
• **Shpg. 60 lbs.**

12 VDC Snow Plow Powerpack



ITEM 903223 $1131.55

• Brand new, SPX Model DC-80SPC. Power pack with built-in 12 volt DC solenoid valves for operating snow plows. Provides power up, hold and gravity down for single acting cylinder blade lift plus left and right control for two single acting cylinders or one double acting cylinder for blade angle. Horizontal mount.

SPECIFICATIONS

• Voltage 12 Volt DC
• Amperage 300 amps
• Duty Intermittent
• Flow 1.7 GPM at 1750 PSI
• Pressure 3500 PSI max.
• Main Relief Valve Adjustable set @ 2000 PSI
• Cross-over Relief Valve 1500 PSI
• Reservoir 1.5 qt. useable
• Ports Cylinder SAE 6
• Mnt 2 bolt base on 3¼″ c/c
• Orientation Horizontal
• Size 14¾″ x 8⅛″ x 7¼″
• **Shpg. 36 lbs.**



12 Volt DC BUCHER WUXI Hydraulics Power Units



• Brand new BUCHER WUXI Hydraulics. Hydraulic power units for operating hydraulic cylinders. Ideal for many applications including dump trailers, flatbed dumps, forklift stackers, lift gates, pallet trucks, aerial lifts , auxiliary power and many other applications. Built-in check and adjustable main relief valves. Double acting units with external control solenoids have adjustable 1500 PSI relief installed on retract port. See chart below for availability details on single or double acting valving, tank size and pressure ratings.

Single Acting Valve ***Power up, hold and gravity/external force lower.***

Double Acting Valve ***Power extend, hold and power retract.***

SPECIFICATIONS
- 12 VDC motor
- 12 VDC solenoid valve
- Intermittent duty

ITEM	Valve Type	Ports	Flow at 1500 PSI	Relief Valve Set	Tank Size Cap.	Tank Size Usable	Size	Shpg	Price
906351	Single Acting 12 Volt DC w/handheld remote	SAE 6	1.4 GPM	3000 PSI	1.3 gal.	1.0 gal.	18¼″ x 8⅝″ x 9½″	40 lbs.	$498.59
904423	Single Acting 12 Volt DC w/handheld remote	SAE 6	1.4 GPM	3000 PSI	3.2 gal.	2.5 gal.	22″ x 8⅝″ x 9½″	45 lbs.	$410.40
904424	Single Acting 12 VOLT DC w/handheld remote	SAE 6	1.4 GPM	3000 PSI	5.3 gal.	4.2 gal.	24¼″ x 10″ x 11¼″	50 lbs.	$442.65
904422	Double Acting Reversible Motor no remote	SAE 4	0.3 GPM	2500 PSI	1.4 qt.	1.1 qt.	14½″ x 6¼″ x 6″	21 lbs.	$325.20
904427	Double Acting 12 Volt DC w/handheld remote	SAE 6	1.4 GPM	3000 PSI	1.1 gal.	0.8 gal.	16″ x 6¾″ x 8¼″	40 lbs.	$448.80
904425	Double Acting 12 Volt DC w/handheld remote	SAE 6	1.4 GPM	3000 PSI	1.6 gal.	1.2 gal.	22″ x 6¾″ x 8¼″	42 lbs.	$463.95
904426	Double Acting 12 Volt DC w/handheld remote	SAE 6	1.4 GPM	3000 PSI	2.1 gal.	1.7 gal.	26¼ ″x 7⅛″ x 8¾″	52 lbs.	$483.95
904428	Double Acting 12 Volt DC w/handheld remote	SAE 6	1.4 GPM	3000 PSI	3.1 qt.	2.5 qt.	21½″ x 7⅛″ x 8¾″	43 lbs.	$509.70

AC Hydraulic Power Units



• Brand new BUCHER WUXI Hydraulics. Ideal for auto lifts, hoists, and other applications that require power up, hold and gravity down. Adjustable lowering flow control. Momentary pushbutton switch for raising and a manual lever for lowering. Vertical mount.

ITEM 904430 $387.90

SPECIFICATIONS
- 1.75 HP MOTOR
- 115 VAC, 1 PH
- 14 Amps
- Intermittent duty
- 0.8 GPM
- 2900 PSI max.
- Relief Set 2900 PSI
- Port SAE 6
- 2 Gallon Reservoir (usable)
- Size 11⅛″ x 9″x 31½″
- **60 lbs.**

ITEM 904431 $403.20

SPECIFICATIONS
- 3 HP MOTOR
- 208/240 VAC, 1 PH
- 16 Amps
- Intermittent duty
- 1.5 GPM
- 2900 PSI max.
- Relief Set 2900 PSI
- Port SAE 6
- 3 Gallon Reservoir (usable)
- Size 11⅛″x 9″ x 31½″
- **60 lbs.**

12 Volt DC Snow Plow Power Unit



ITEM 904429 $781.35

• Brand new, BUCHER WUXI Hydraulics. Power unit with built-in 12 volt DC solenoid valves for operating snow plows. Provides power up, hold and gravity down for single acting cylinder blade lift plus left and right control for two single acting cylinders or one double acting cylinder for blade angle. Features include heavy duty 12 volt motor, 12 volt directional control valves, adjustable main relief valve, steel reservoir, check valves for load holding and adjustable cross-over relief valves on power angle circuit. Horizontal mount. Includes reservoir breather and 12 volt DC motor solenoid.

SPECIFICATIONS
- Voltage 12 VDC
- Amperage 210 amps
- Duty Intermittent
- Flow 1.4 GPM
- Pressure 2600 PSI max.
- Main Relief Valve Adjustable set @ 2600 PSI
- Size 17¾″ x 9″ x 7″
- Cross-over Relief Valve Adj. set @3480 PSI
- Reservoir 2.8 quart usable
- Ports ¼″ NPT
- Mount 2 bolt base on 3¼″ c/c
- Orientation Horizontal
- **Shpg. 40 lbs.**

12 Volt DC Double Acting Power Unit



ITEM 904900 $229.95

• New BUCHER Hydraulics power unit. Built-in check and relief valve. Dual 12 Volt DC solenoid valves for control of double acting cylinder or rotary actuator. **Work ports open to tank in neutral will not provide cylinder load holding. An external pilot operated lock valve must be used for cylinder applications which require load holding.**

SPECIFICATIONS
- Voltage 12 Volt DC
- Amperage 119 Amps max.
- Duty Intermittent
- Flow 0.48 GPM at 2000 PSI
- Pressure 3000 PSI max.
- Relief Valve Setting 3000 PSI
- Ports SAE 4
- Valve Double Acting work ports open to tank in neutral
- Valve Model Number Deltrol DSV-080-34M
- Mounting Horizontal
- Reservoir 31 in^3 usable
- Size 14¾″ x 4″ x 7″
- **Shpg. 15 lbs.**

12 Volt DC Double Acting Power Unit



ITEM 906180 $299.95

• New, HYDRAPOWER 15902887 for operating double acting cylinder. 0.15 GPM "bleed off valve" prevents hydro locking. 2.5 GPM restricter valve for controlling the lift speed when lowering. QC6000-14F female and Q6000-14M male quick couplers. Coupler halfs to connect are not included. Relief valve must be adjusted to working pressure prior to use.

SPECIFICATIONS
- Voltage 12 DC
- Amperage 225
- Duty Intermittent
- Flow 1.14 GPM at 2000 PSI
- Pressure 3250 PSI max.
- Relief Valve Setting Adjustable
- Valve Type Double Acting
- Pendant Control Not included
- Valve Operation 12 Volt DC Solenoid
- Ports ¼″ NPT
- Mounting Horizontal
- Reservoir Size 1.25 Gallon
- Size 19¼″ x 9″ x 7½″
- **Shpg. 30 lbs.**

2 GPM Shaft Drive Power Unit



ITEM 902057 $109.95

• New hydraulic power unit for log splitters, hydraulic tools and other portable equipment. Designed for vertical input with a gas engine. No mounting bracket or coupler provided. Requires external control and pressure relief valves.

SPECIFICATIONS
- Power 5 HP 3600 RPM
- Flow 2 GPM max.
- Pressure 2500 PSI max.
- Reservoir 1.1 gallons
- Shaft ½″ dia. x ⅞″ w/ keyway
- Rotation CW
- Ports ⅜″ NPT pressure
- Return ⅜″ & ¾″ NPT
- Orientation Vertical
- Size 10″ x 10″ x 10″
- **Shpg. 13 lbs.**

12 Volt DC Power Unit



ITEM 904906 $281.35

• Brand new MTE Hydraulics. Hydraulic pump/motor unit. Ideal for many applications including dump trailers, flatbed dumps, forklift stackers, lift gates, pallet trucks, aerial lifts, auxiliary emergency power and many other applications. Includes 12 volt DC relay.

SPECIFICATIONS
- Model D203-4852
- Voltage 12 Volt DC
- Amperage 260 Amps max.
- Duty Intermittent
- Pressure 3000 PSI max.
- Inlet Port SAE 8
- Outlet Port SAE 6
- Horizontal Mounting
- Mount 2 bolt tapped ⅜-16 on 3.25″ centers
- Size 10⅜″ x 5¹¹⁄₁₆″ x 7¼″
- Flow, Pressure, Amperage and Duty Ratings: 2.9 GPM at 500 PSI at 130 Amps with 29% duty 2.0 GPM at 1000 PSI at 170 Amps with 22% duty 1.4 GPM at 1500 PSI at 205 Amps with 29% duty 1.1 GPM at 2000 PSI at 245 Amps with 15% duty
- Relief Valve Setting No Relief
- **Shpg. 30 lbs.**

California Residents ⚠ WARNING:Cancer and Reproductive Harm
For more information refer to:www.P65Warnings.ca.gov

10,000 PSI Air Driven Hydraulic Pump ⚠



MADE IN USA

ITEM 902410
$1075.65

• Brand new, POWER TEAM PA6 Model F air driven hydraulic pump designed to operate single acting cylinders. Compact, lightweight and portable for powering all types of hydraulic equipment. Internal relief valve.

SPECIFICATIONS

- Air Requirement 40-100 PSI
- Air Consumption 20 CFM
- Hydraulic Pressure 10000 PSI
- Flow:
  78 cu. in./min at 500 PSI
  29 cu. in./min at 5000 PS
  10 cu. in./min at 10000 PSI
- Operation Hand/Foot
- Reservoir Size 105 cubic inches
- Sound Level 85 dBA at 10000 PSI
- Air Inlet Port ¼″ NPT
- Hyd. Oulet Port ⅜″ NPT
- Size 9½″ x 5″ x 7¾″
- **Shpg. 18 lbs.**

10,000 PSI, ½ HP 115 VAC Hydraulic Pump ⚠



MADE IN USA

ITEM 902411
$3490.70

• Brand new, POWER TEAM PE172 115 volt AC hydraulic pump designed to operate single acting cylinders. Two speed delivery flow for fast cycle times. Remote ON/OFF pendant control with ten foot cord. Two position valve to either advance cylinder and hold pressure with power off or advance cylinder and release pressure with power off. Valve also used to release pressure when in the hold pressure position.

SPECIFICATIONS

- Power ½ Hp
- Voltage 115 VAC
- Amperage 10 amps
- Pressure 10000 PSI
- Operation Electric
- Reservoir Size 2 gallon
- Reservoir Useable 295 cu. in
- Outlet Port ⅜″ NPT
- Flow:
  290 cu. in./min at 0 PSI
  190 cu. in./min at 100 PSI
  20 cu. in./min at 5000 PSI
  16 cu. in./min at 10000 PSI
- Sound Level 81 dBA at 10,000 PSI
- Size 11⅜″ x 9¼″ x 18½″
- **Shpg. 40 lbs.**

10,000 PSI, ¼″ Hose ⚠



MADE IN USA

• Brand new, POWER TEAM hose for use with Power Team 10,000 PSI hydraulic accessories. Two ply rated hose reinforced with two braids of high tensile steel wire. Rubber covering is oil and weather resistant. MSHA approved. Plastic hose guards on each end with male pipe fittings.

SPECIFICATIONS

- Hose I.D. ¼″
- End fittings ⅜″ NPT
- Pressure:
  operating 10,000 PSI
  burst 20,000 PSI

ITEM 902412 **$138.85**
• Length 6 ft. **Shpg. 2 lbs.**

ITEM 902413 **$176.30**
• Length 10 ft. **Shpg. 4 lbs.**

With Half Coupler

ITEM 902414 **$178.15**
• Coupler half 9798 male. Length 6 ft. **Shpg. 2 lbs.**

Wolverine Hydraulic Hand Pump Heads and Reservoirs

WOLVERINE By Prince Manufacturing

• Brand new, WOLVERINE by PRINCE hydraulic hand pump heads and reservoirs.
• Hand pump head is sold separately from the hydraulic reservoir for greater variety of combinations.

Hand Pump Heads



903241 ***903244***

• Hand pump head bolts to the top of reservoir (sold separately at right).
• Single acting version has large release valve knob to give added control for metering loads down.
• Double acting version has 4 way, 3 position directional control valve.
• Hand pump head and reservoir sold separately.

SPECIFICATIONS

- Pressure 3500 PSI
- **Shpg. 10 lbs.**
- Size 27⁹⁄₁₆″ x 2½″ x 9¼″ including handle
- Outlet port ⅜″ NPT adapter installed in #4 BSPP port

ITEM	Cylinder Operation	cu.-in./cycle Flow	Price
903241	SA	1.5	$155.25
903242	SA	2.1	$172.80
903244	DA	1.5	$186.75
903243	DA	2.1	$186.30

Hand Pump Reservoirs



903245 ***903246***

• Use with Wolverine hand pumps. Pump head (sold separately at left) bolts directly to the top of reservoir. Brass breather cap installed in top of reservoir. Steel construction, side mounting holes.
• Hand pump head and reservoir sold separately.

ITEM	Capacity in Gallons Nominal	Usable	Size	Shpg.	Price
903245	0.25	0.225	5.96″ x 3.94″ x 5.04″	4 lbs.	$47.90
903246	0.8	0.72	5.984″ x 3.94″ x 9.75″	5 lbs.	$57.40

Dynamic Hand Pumps

DYNAMIC FLUID COMPONENTS, INC.

• Brand new DYNAMIC PM-HP hand pump. Operate hydraulic presses, dumps, hydraulic lift tables, frame straighteners etc. Ideal for mobile equipment with a versatile two handle position design which allows for mounting horizontally or vertically. Three position fulcrum handle settings to allow three volume rates and pressure. Use with single acting cylinders. Built-in load check and release valve. Choose between three different reservoir capacities.



SPECIFICATIONS

- Model PM-HP
- Pressure 3000 PSI
- Volume 1.25, 0.915 and 0.60 cu in per stroke
- Port ⅜″ NPT

ITEM	Resevoir Size	Size	Shpg.	Price
906902	0.79 Gallon	12½″ x 6¾″x 8½″	18 lbs	$452.25
906903	1.59 Gallon	19½″ x 6¾″x 8½″	20 lbs	$470.05
906904	2.38 Gallon	25½″ x 6¾″ x 8½″	22 lbs	$499.50

Brand Hand Pumps ⚠

• Brand new, BRAND. Double action hand pump displaces oil on both forward and return motion for rapid cylinder travel. Choice of integral tank (ITEM 900610) or port for use with external tank (ITEM 900580).

BRAND HYDRAULICS

SPECIFICATIONS

- 0.6 cu. in./complete stroke
- 3000 PSI
- Port SAE 6
- Adj. relief valvel
- Lever release

MADE IN USA



ITEM	Model	Tank Capacity	Size (not including handle)	Shpg.	Price
900610	HP61DA80	80 cu. In.	7″ x 4½″ 13½″	16 lbs.	$299.80
900580	HP61DATL	None *	7″ x 4½″ x 5½″	13 lbs.	$304.95

** ¼″ NPT port for use with external reservoir (not included)*

Hydraulic Clutch Pumps

• Brand new. Hydraulic pump driven by 12 volt DC clutch. For use in marine, agricultural and industrial use. Use for remote hydraulics in service trucks, boats, trucks with automatic transmissions, farm tractors, snowplows, etc.

SPECIFICATIONS FOR ALL

- 12 VDC operation
- 3000 RPM max.
- Cast iron foot mount
- CW rotation
- Rear ports: IN SAE 16, OUT SAE 12

Three Styles Available

V-Belt: 7″ diam. 2 belt ½″ A type v-belt clutch
6 Groove Serpentine: 6″ diam., 6 groove serpentine clutch
8 Groove Serpentine: 5.5″ diam., 8 groove serpentine clutch


V-Belt


Serpentine

ITEM		GPM at 2000 RPM	Displ.	PSI	Shpg.	Price
906693	V-Belt	7.4 GPM	0.86 cu. in.	3625	26 lbs.	$768.15
906694	6 Groove	7.4 GPM	0.86 cu. in.	3625	26 lbs.	$792.70
906695	8 Groove	7.4 GPM	0.86 cu. in.	3625	26 lbs.	$802.40
906696	V-Belt	13.2 GPM	1.53 cu. in.	3625	27 lbs.	$802.90
906697	6 Groove	13.2 GPM	1.53 cu. in.	3625	27 lbs.	$827.45
906698	8 Groove	13.2 GPM	1.53 cu. in.	3625	27 lbs.	$837.20
906699	V-Belt	20 GPM	2.32 cu. in.	2900	30 lbs.	$834.90
906700	6 Groove	20 GPM	2.32 cu. in.	2900	30 lbs.	$859.45
906701	8 Groove	20 GPM	2.32 cu. in.	2900	30 lbs.	$869.20

Replacement V-Belt Clutch

ITEM 100440 **$180.25**
• V-belt clutch. **Shpg. 12 lbs.**



Replacement Serpentine Clutches

ITEM 100441 5 Groove **$210.25**
ITEM 100442 8 Groove **$201.65**
• **Shpg. 10 lbs. each**



MTE Hydraulic Pumps

• Brand new, MTE hydraulic pumps. Cast iron body. Made for direct drive, no shaft side-loading. Made in USA.

SPECIFICATIONS

- CW Rotation
- Shaft ½″ diam. x 1½″ w/⅛″ keyway
- 4F17 mount (1.78″ dia. Pilot)
- 3600 RPM



ITEM	Displ.	GPM at 3600 RPM	PSI Cont.	PSI Int.	Ports Inlet	Ports Outlet	Size	Shpg.	Price
903119	0.067	1.04	3000	4000	SAE 6	SAE 6	3.82″ x 2.8″ x 3.66″	5 lbs.	$130.95
903120	0.097	1.51	3000	4000	SAE 6	SAE 6	3.89″ x 2.8″ x 3.66″	5 lbs.	$125.50
903121	0.129	2.00	3000	4000	SAE 8	SAE 6	3.95″ x 2.8″ x 3.66″	5 lbs.	$127.40
903122	0.192	2.98	3000	4000	SAE 8	SAE 6	4.08″ x 2.8″ x 3.66″	5 lbs.	$137.00
903123	0.251	3.92	2300	4000	SAE 8	SAE 8	4.2″ x 2.8″ x 3.66″	5 lbs.	$166.20
903124	0.277	4.32	2100	3500	SAE 8	SAE 8	4.26″ x 2.8″ x 3.66″	5 lbs.	$166.40
903125	0.323	5.04	1900	3000	SAE 10	SAE 8	4.35″ x 2.8″ x 3.66″	6 lbs.	$140.05
903126	0.434	6.76	1600	2500	SAE 10	SAE 10	4.58″ x 2.8″ x 3.66″	6 lbs.	$170.55
903127	0.479	7.46	1300	2250	SAE 10	SAE 10	4.68″ x 2.8″ x 3.66″	6 lbs.	$145.05

0.36/0.36 cu in Hydro-Gear Hydraulic Pump

ITEM 904401
$199.95



• New, HYDRO-GEAR hydraulic double pump. Numbers on pumps TW-QFFB-NFFB-1XBX,/ PC-NNFF-5B1X-AXXX.

SPECIFICATIONS

- Disp.
  Front 0.36 cu. in. / rev.
  Rear 0.36 cu. in. / rev.
- Pump Type Piston
- Rotation CW
- Mount SAE AA
- Pressure:
  750 PSI cont.
  1750 PSI int.
- Speed:
  3600 RPM max
- Flow:
  5.4 GPM cont.
  5.4 GPM cont.
- Shaft ½″ dai. 9 tooth x ¾″
- Inlet Port SAE 6
- Outlet Port SAE 6
- Size 12½″ x 6″ x 6¼″
- **Shpg. 20 lbs.**

Reliance John Deere ⚠ Replacement Hydraulic Pumps

• Brand new RELIANCE replacement pressure compensated radial piston pump for use with many models of John Deere farm tractors and industrial equipment. See our website for a list of John Deere machines this pump is compatible with. Pump is 100% new, not rebuilt or remanufactured and has been run on test bench to check pressures and functionality. Pump carries a 1-year parts and labor warranty.

ITEM 902763 **$1481.75**
• Model NAR94660/NAR101807. Displ. 3.0 cu. in. / rev., flow 24 GPM at 1750 RPM.


902763

ITEM 903569 **$1481.75**
• Model NAR94661. Displ. 4.0 cu. in./ rev., flow 30 GPM at 1750 RPM.


903569

SPECIFICATIONS

- Pump type radial piston
- Inlet port SAE 20
- Rotation CCW
- Inlet/return port SAE 10
- Pressure 2350 PSI max.
- Outlet port SAE 12
- Speed 2800 RPM max.
- Drain port SAE 3
- Mount 4 bolt
- Size 6¼″ x 10″ x 8″
- Shaft 1¼″ dia. 14T spline
- **Shpg. 74 lbs.**

DYNAMIC
FLUID COMPONENTS, INC.

Dynamic Gear Pumps

GP-F10 Series

• Brand new DYNAMIC GP-F10 hydraulic gear pumps. Aluminum housing

SPECIFICATIONS FOR GP-F10 SERIES
• Mount SAE AA 2 bolt
• Shaft ½″ diam. x 1 1/16″ with ⅛″ keyway







ITEM		Displ.	GPM at 2000 RPM	PSI Peak	Ports IN	RPM Max.	Ports OUT	Shpg.	Price
CW Splined	CW Keyed								
901559	901566	0.07	0.56	3770	SAE 8	6000	SAE 6	4 lbs.	$130.15
901560	901567	0.12	0.97	3770	SAE 8	6000	SAE 6	5 lbs.	$130.15
901561	901568	0.16	1.29	3770	SAE 8	5000	SAE 6	5 lbs.	$130.15
901562	901569	0.20	1.61	3770	SAE 8	5000	SAE 6	5 lbs.	$130.15
901563	901570	0.25	2.01	3625	SAE 8	5000	SAE 6	6 lbs.	$141.25
901564	901571	0.31	2.50	3625	SAE 8	4000	SAE 6	6 lbs.	$141.25
901565	901572	0.37	2.98	3480	SAE 8	4000	SAE 6	6 lbs.	$141.25
902164	902165	0.49	3.95	3480	SAE 8	4000	SAE 6	7 lbs.	$141.25
902166	902167	0.55	4.43	3190	SAE 8	3000	SAE 6	8 lbs.	$141.25
902168	902169	0.66	5.31	3190	SAE 8	3000	SAE 6	9 lbs.	$141.25
902170	902171	0.82	6.60	3190	SAE 8	3000	SAE 6	10 lbs.	$141.25

GP-F20 Series

• Brand new DYNAMIC GP-F20 hydraulic gear pumps. Aluminum housing with cast iron end covers.

SPECIFICATIONS FOR GP-F20 SERIES
• Mount: SAE A 2 bolt





ITEM				Displ.	GPM at 2000 RPM	PSI Peak	Ports IN	RPM Max.	Ports OUT	Shpg.	Price
CW Splined	CW Keyed	CCW Splined	CCW Keyed								
902172	902173	902174	902175	0.24	1.93	3650	SAE 12	3600	SAE 10	10 lbs.	$152.35
901589	901573	901597	901581	0.36	2.90	3650	SAE 12	3600	SAE 10	10 lbs.	$152.35
901590	901574	901598	901582	0.48	3.87	3650	SAE 12	3600	SAE 10	10 lbs.	$152.35
901591	901575	901599	901583	0.61	4.91	3650	SAE 12	3600	SAE 10	10 lbs.	$152.35
901592	901576	901600	901584	0.73	5.88	3650	SAE 12	3600	SAE 10	11 lbs.	$152.35
901593	901577	901601	901585	0.85	6.84	3650	SAE 12	3600	SAE 10	11 lbs.	$159.95
901594	901578	901602	901586	0.97	7.81	2900	SAE 12	3600	SAE 10	11 lbs.	$162.25
901595	901579	901603	901587	1.22	9.82	2900	SAE 12	3600	SAE 10	11 lbs.	$163.40
901596	901580	901604	901588	1.52	12.24	2900	SAE 12	3600	SAE 10	12 lbs.	$163.40
902176	902177	902178	902179	1.83	14.74	2300	SAE 16	3600	SAE 12	12 lbs.	$163.40
902180	902181	902182	902183	1.95	15.70	2300	SAE 16	3600	SAE 12	12 lbs.	$163.40

GP-F25 Series

• Brand new DYNAMIC GP-F25 hydraulic gear pumps. Aluminum housing with cast iron end covers.

SPECIFICATIONS FOR GP-F25 SERIES
• Mount: SAE B 2 bolt





ITEM				Displ.	GPM at 2000 RPM	PSI Peak	Ports IN	RPM Max.	Ports OUT	Shpg.	Price
CW Splined	CW Keyed	CCW Splined	CCW Keyed								
904308	904306	904309	904307	1.34	10.79	3625	SAE 16	3000	SAE 12	20 lbs.	$257.60
904312	904310	904313	904311	1.57	12.64	3625	SAE 16	3000	SAE 12	20 lbs.	$257.60
904316	904314	904317	904315	2.07	16.67	3625	SAE 16	3000	SAE 12	22 lbs.	$257.60
904320	904318	904321	904319	2.38	19.16	3625	SAE 16	3000	SAE 12	22 lbs.	$295.70
904324	904322	904325	904323	2.62	21.1	3625	SAE 16	2800	SAE 12	22 lbs.	$295.70
904328	904326	904329	904327	3.11	25.04	3625	SAE 16	2800	SAE 12	23 lbs.	$295.70
904332	904330	904333	904331	3.84	30.92	2900	SAE 16	2800	SAE 12	24 lbs.	$295.70
904336	904334	904337	904335	4.27	34.38	2900	SAE 20	2500	SAE 16	25 lbs.	$313.15
904340	904338	904341	904339	4.76	38.33	2900	SAE 20	2300	SAE 16	26 lbs.	$313.15
904344	904342	904345	904343	5.43	43.72	2600	SAE 20	2000	SAE 16	27 lbs.	$313.15

PTO Drive Hydraulic Gear Pumps

• Brand new PRINCE. Hydraulic PTO gear pump ideal for adding hydraulic power to tractors and landscape equipment not already equipped with hydraulic circuits. Use to power hydraulic motors, front end loaders, mowers, rotary sweepers, etc. Two self-adjusting wear plates. Roller bearings on internally splined shaft.

• Center section available in high strength aluminum alloy for standard duty cycle or high strength cast iron for high duty cycle use.

• PSI 2250. Port adapters are included for hosebarb inlet and NPT outlet. Requires the addition of a restraining torque arm to prevent pump body rotation.

Cast Iron PTO Pumps with Aluminum Center Section



ITEM	Model	Displ.	RPM	Shaft	2000 PSI GPM	2000 PSI Input HP	Ports IN	Inlet Adapter	Ports OUT	Outlet Adapter	Shpg.	Price
900896	HC-PTO-7A	3.6	540	1⅜″ 6T	7.1	11.9	SAE 16	1″	SAE 12	¾″	37 lbs.	$1201.50
900187	HC-PTO-2A	5.7	540	1⅜″ 6T	11.4	18.1	SAE 16	1″	SAE 12	¾″	37 lbs.	$1032.10
901210	HC-PTO-9A	7.8	540	1⅜″ 6T	17.1	27.4	SAE 16	1¼″	SAE 12	¾″	37 lbs.	$1197.25
901211	HC-PTO-8A	3.6	1000	1⅜″ 21T	13.5	22.6	SAE 16	1″	SAE 12	¾″	37 lbs.	$1224.00

Cast Iron PTO Pumps with Cast Iron Center Section

• Same as pumps above except with cast iron center section for increased wear resistance compared to aluminum centers and is recommended when the pump will be powering a hydraulic motor.



ITEM	Model	Displ.	RPM	Shaft	2000 PSI GPM	2000 PSI Input HP	Ports IN	Inlet Adapter	Ports OUT	Outlet Adapter	Shpg.	Price
904513	HC-PTO-9AC	7.8	540	1⅜″ 6T	17.1	27.4	SAE 16	1¼″	SAE 12	¾″	54 lbs.	$1393.50
901214	HC-PTO-8AC	3.6	1000	1⅜″ 21T	13.5	22.6	SAE 16	1″	SAE 12	¾″	46 lbs.	$1233.00

Cast Iron PTO Pumps with Aluminum Center Section Wolverine by Prince



ITEM	Model	Displ.	RPM	Drive Shaft	GPM Output	Ports IN	Inlet Adapter	Ports OUT	Outlet Adapter	Shpg.	Price
905927	WP-PTO-1A	9.8	540	6 Tooth	21	SAE 16	1¼″ Hose	SAE 12	¾″	45 lbs.	$704.70
905925	WP-PTO-2A	5.5	540	6 Tooth	11	SAE 16	1″ Hose	SAE 12	¾″	41 lbs.	$576.45
905924	WP-PTO-7A	3.6	540	6 Tooth	7	SAE 16	1″ Hose	SAE 12	¾″	37 lbs.	$576.45
905929	WP-PTO-8A	3.6	1000	21 Tooth	13	SAE 16	1″ Hose	SAE 12	¾″	38 lbs.	$576.45
905926	WP-PTO-9A	7.6	540	6 Tooth	17	SAE 16	1¼″ Hose	SAE 12	¾″	43 lbs.	$576.45
905932*	WP-PTO-PK11	9.8	1000	21 Tooth	40	SAE 20	2″ Hose	SAE 16	1″	45 lbs.	$624.40

** Ports facing rear of the pump*

540 and 1000 RPM Hydraulic PTO Pumps

• Brand new DYNAMIC model GP-PTO hydraulic power take off PTO gear pumps. Ideal for adding hydraulic power to tractors, landscaping and other mobile equipment not already equipped with hydraulic circuits. Use to power hydraulic motors, front end loaders, mowers, rotary sweepers, etc. Features include cast iron end plates with aluminum center section, self-adjusting wear plates, roller bearings on internally splined shaft, outlet port on both sides for simple plumbing hookup and tapped holes on side for torque arm installation for mounting to prevent pump rotation. Includes a hosebarb adapter for inlet port, NPT adapter for outlet port. Pressure rated 2500 PSI.



ITEM	Model	Displ.	RPM	Shaft	GPM	Ports IN	Inlet Adapter	Ports OUT	Outlet Adapter	Shpg.	Price
904005	GP-PTO-A-3-6-S	3.41	540	1⅜″ 6T	7.4	SAE 16	1″	SAE 12	¾″	37 lbs.	$477.35
904006	GP-PTO-A-5-6-S	5.50	540	1⅜″ 6T	11.9	SAE 16	1″	SAE 12	¾″	41 lbs.	$484.55
904007	GP-PTO-A-7-6-S	7.62	540	1⅜″ 6T	16.6	SAE 16	1″	SAE 12	¾″	43 lbs.	$499.00
904008	GP-PTO-A-9-6-S	9.76	540	1⅜″ 6T	21.2	SAE 16	1″	SAE 12	¾″	45 lbs.	$524.05
904009	GP-PTO-A-3-21-S	3.41	1000	1⅜″ 21T	13.7	SAE 16	1″	SAE 12	1¾″	38 lbs.	$520.95
904010*	GP-PTO-A-9-21-R	9.76	1000	1⅜″ 21T	39.3	SAE 20	2″	SAE 16	1″	45 lbs.	$520.95

** Rear outlet ports*

BUCHER WUXI Hydraulics Two Stage Hydraulic Pumps

• Brand new BUCHER WUXI Hydraulics, two stage HI/LO pressure hydraulic gear pumps.Ideal for applications such as log splitters, presses and other equipment where rapid movement of the cylinder at low pressure is required prior to automatically switching to the high pressure mode to meet load requirements




SPECIFICATIONS FOR ALL

- Pump type gear
- Rotation CW
- Press. 3000 PSI max.
- Speed 3600 RPM max.
- Unloading pressure 650 PSI
- Mount 4 bolt USA 4F17
- Rqd. filtration 25 micron
- Shaft ½″ dia. x 1½″ keyed
- Cast Iron Front and Aluminum Body

ITEM	Flow (GPM) LO Stage	Flow (GPM) HI Stage	Engine Power Required	Inlet	Outlet	Size	Shpg.	Price
904452	11	3.2	5 HP	1″ Hosebarb	½″ NPT	5″ x 5⅛″ x 3⅜″	10 lbs.	$149.95
904453	13	3.2	6.5 HP	1″ Hosebarb	½″ NPT	5⅜″ x 5⅛″ x 3⅜″	11 lbs.	$154.20
904454	16	3.5	8 HP	1″ Hosebarb	½″ NPT	5¾″ x 5⅛″ x 3⅜″	12 lbs.	$162.75

MTE 2 Stage Hydraulic Pumps

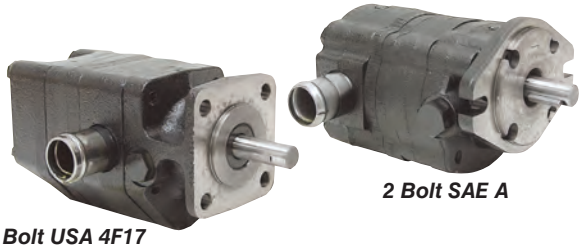

4 Bolt USA 4F17 — 2 Bolt SAE A

• Brand new, MTE HYDRAULICS two stage HI/LO pressure hydraulic gear pump. Ideal for applications such as log splitters, presses and other equipment where rapid movement of the cylinder at low pressure is required prior to automatically switching to the high pressure mode. The change from LO to HI pressure is automatic with the LO stage pressure preset at 700 PSI. Made in USA.


SPECIFICATIONS

- Rotation CW
- Pump type gear
- Speed 3600 RPM max.
- Pressure 3000 PSI max.
- Rqd. filtration 25 micron
- Shaft 1½″ long keyed

ITEM	Flow (GPM) LO Stage	Flow (GPM) HI Stage	Engine Power Required	Unloading Pressure	Inlet	Outlet	Shaft Dia.	Mount	Size	Shpg.	Price
902387	7	1.8	4 HP	500 PSI	¾″ NPT	½″ NPT	½″	4 bolt 4F17	5⁷⁄₁₆″ x 3″ x 3¹¹⁄₁₆″	10 lbs.	$195.80
902388	11	1.8	5 HP	700 PSI	1″ Hosebarb	½″ NPT	½″	4 bolt 4F17	6″ x 4″ x 3¹¹⁄₁₆″	10 lbs.	$196.35
902389	13	3	6.5 HP	500 PSI	1″ Hosebarb	½″ NPT	½″	4 bolt 4F17	6¼″ x 4″ x 3¹¹⁄₁₆″	12 lbs.	$197.05
902390	16	3	8 HP	500 PSI	1″ Hosebarb	½″ NPT	½″	4 bolt 4F17	6⁹⁄₁₆″ x 4″ x 3¹¹⁄₁₆″	12 lbs.	$197.65
902391	22	6.3	12 HP	500 PSI	1¼″ Hosebarb	¾″ NPT	⅝″	2 bolt SAE A	6¼″ x 6¼″ x 4⅝″	22 lbs.	$424.90

DYNAMIC FLUID COMPONENTS, INC.

Dynamic Two Stage Hydraulic Pumps

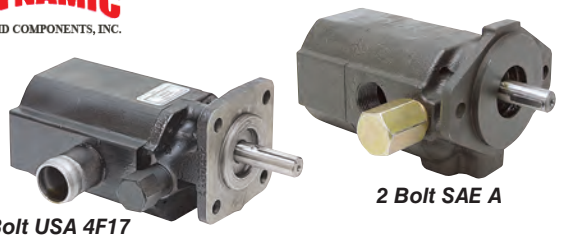

4 Bolt USA 4F17 — 2 Bolt SAE A

• Brand new DYNAMIC, two stage HI/LO pressure hydraulic gear pumps. Ideal for applications such as log splitters, presses and other equipment where rapid movement of the cylinder at low pressure is required prior to automatically switching to the high pressure mode to meet load requirements

SPECIFICATIONS FOR ALL

- Pump type gear
- Rotation CW
- Press. 3000 PSI max.
- Speed 3600 RPM max.
- Unloading pressure 650 PSI
- Overhung shaft load up to 90 lbs.
- Rqd. filtration 25 micron
- Shaft ½″ dia. x 1½″ keyed
- Mount 4 bolt USA 4F17

ITEM	Flow (GPM) LO Stage	Flow (GPM) HI Stage	Engine Power Required	Inlet	Outlet	Shaft Dia.	Mount	Size	Shpg.	Price
902018	8	2	5 HP	1″ Hosebarb	½″ NPT	½″	4 bolt 4F17	4¾″ x 5⅛″ x 3⅜″	10 lbs.	$187.40
902019	11	3.4	5 HP	1″ Hosebarb	½″ NPT	½″	4 bolt 4F17	5¼″ x 5⅛″ x 3⅜″	10 lbs.	$194.25
902020	13	3.4	6.5 HP	1″ Hosebarb	½″ NPT	½″	4 bolt 4F17	5⁹⁄₁₆″ x 5⅛″ x 3⅜″	11 lbs.	$202.00
902021	16	4	8 HP	1″ Hosebarb	½″ NPT	½″	4 bolt 4F17	6″ x 5⅛″ x 3⅜″	12 lbs.	$222.10
902385	22	7	12 HP	1″ NPT	¾″ NPT	⅝″	2 bolt SAE A	6⁹⁄₁₆″ x 6¼″ x 4¹¹⁄₁₆″	22 lbs.	$322.85
902386	28	7	16 HP	1″ NPT	¾″ NPT	⅝″	2 bolt SAE A	6⁹⁄₁₆″ x 6¼″ x 4¹¹⁄₁₆″	23 lbs.	$352.50

• New, two stage HI/LO pressure hydraulic gear pump. Cast iron front with aluminum body. Ideal for applications such as log splitters, presses and other equipment where rapid movement of the cylinder at low pressure is required prior to automatically switching to the high pressure mode to meet load requirements.

New BUCHER WUXI

SPECIFICATIONS FOR BOTH

- Pump type gear
- Rotation CW
- Speed 3600 RPM max.
- Shaft ½″ dia. x 1½″ keyed
- Rated 3000 PSI
- Mount 4 bolt USAF17



ITEM	Flow (GPM) LO Stage	Flow (GPM) HI Stage	Engine Power Required	Unloading Pressure	Inlet	Outlet	Size	Shpg.	Price
905062	14.1	1.7	6.5 HP	400-900 PSI	1″ Hosebarb	½″ NPT	5¼″ x 7″ x 3⅜″	11 lbs.	$89.95
905063	18.5	2.8	9.5 HP	400-900 PSI	1″ Hosebarb	½″ NPT	5⅞″ x 7″ x 3⅜″	13 lbs.	$99.95

Cast Iron Foot Mounts


• Brand new, cast iron foot mounts for hydraulic pumps or motors.


903067 903092 903068 903093

ITEM	Pump Mount	Pilot Dia.	Bolt Holes	Centerline Height	Size	Shpg.	Price
903067	SAE A (4 3/16″ c/c)	3 1/4″	3/8-16	4 1/2″	5 1/8″ x 2 1/4″ x 6 1/2″	5 lbs.	$101.75
903092	SAE A (4 3/16″ c/c)	3 1/4″	3/8-16	2 3/4″	6 1/4″ x 4″ x 5 1/2″	6 lbs.	$74.70
903068	SAE B (5 3/4″ c/c)	4″	1/2-13	3 5/8″	7″ x 3 3/4″ x 7 1/4″	9 lbs.	$97.50
903093	SAE C (7 1/8″ c/c)	5″	5/8-11	4 5/16″	10 1/2″ x 5 1/4″ x 8 1/2″	16 lbs.	$181.00

Hydraulic Pump Mounts

• Brand new, Hydra-Mount aluminum alloy pump mounts. Available as foot mounts, and adapters from gas engines or electric motors to a variety of common pump flanges.

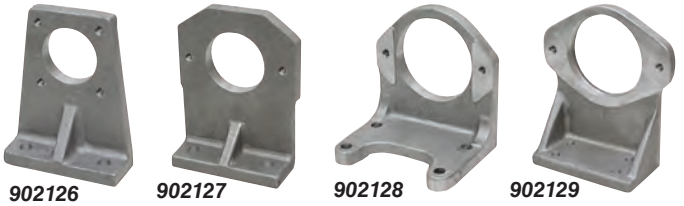
902126 902127 902128 902129


Foot Mounts

ITEM	Pump Flange	Pilot Dia.	Centerline Height	Size	Shpg.	Price
902126	4F17 (2″ sq.)	1.78″	3.59″	3 7/8″ x 1 1/2″ x 4 3/4″	2 lbs.	$38.40
902127	SAE AA (2 bolt, 3 1/4″ c/c)	2″	3.59″	3 7/8″ x 1 1/2″ x 4 3/4″	2 lbs.	$65.40
902128	SAE A (2 bolt, 4 3/16″ c/c)	3.25″	3 1/4″	5 1/8″ x 4 1/8″ x 5 3/4″	3 lbs.	$34.35
902129	SAE B (2 bolt, 5 3/4″ c/c)	4″	5 1/4″	5 1/2″ x 3″ x 8″	4 lbs.	$51.25


902141 902142 903080 902143 902934

Electric Motor to Pump Mounts

ITEM	Pump Flange	Pilot Dia.	Motor Frame	Total Length	Shpg.	Price
907099	4F17 (2″ sq.)	1.78″	56C, 143TC, 145TC	4 1/4″	5 lbs.	$66.10
907100	SAE AA (2 bolt, 3 1/4″ c/c)	2″	56C, 143TC, 145TC	4 1/4″	5 lbs.	$66.10
907096	SAE AA (2 bolt, 3 1/4″ c/c)	2″	56C, 143TC, 145TC	3 1/2″	3 lbs.	$60.00
907101	SAE A (2 bolt, 4 3/16″ c/c)	3.25″	56C, 143TC, 145TC	4 1/4″	5 lbs.	$66.10
907095	SAE A (2 bolt, 4 3/16″ c/c)	3.25″	182TC, 184TC, 213TC 215TC, 254TC, 256TC	5.81″	5 lbs.	$85.45

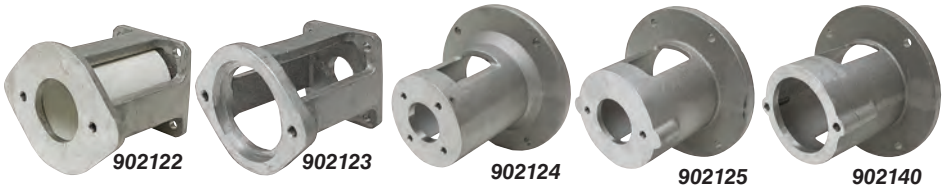
902122 902123 902124 902125 902140

Gas Engine to Pump Mounts

ITEM	Pump Flange	Pilot Dia.	Engine Mount	Total Length	Shpg.	Price
907089	4F17 (2″ sq.)	1.78″	3 5/8″ bolt circle, 1 5/8″ pilot	4.44″	2 lbs.	$45.15
907097	4F17 (2″ sq.)	1.78″	6 1/2″ bolt circle, 5 3/4″ pilot	5 5/8″	4 lbs.	$57.30
907090	SAE AA (2 bolt, 3 1/4″ c/c)	2″	3 5/8″ bolt circle, 1 5/8″ pilot	4.44″	2 lbs.	$64.00
907098	SAE AA (2 bolt, 3 1/4″ c/c)	2″	6 1/2″ bolt circle, 5 3/4″ pilot	5 1/8″	4 lbs.	$62.05
907091	SAE A (2 bolt, 4 3/16″ c/c)	3.25″	3 5/8″ bolt circle, 1 5/8″ pilot	4.69″	2 lbs.	$64.00
907094	SAE A (2 bolt, 4 3/16″ c/c)	3.25″	6 1/2″ bolt circle, 5 3/4″ pilot	5 5/8″	5 lbs.	$71.75
907092	SAE A (2 bolt, 4 3/16″ c/c)	3.25″	6 1/2″ bolt circle, 5 3/4″ pilot	5 1/8″	4 lbs.	$59.35
907103	SAE A (2 bolt, 4 3/16″ c/c)	3.25″	6 1/2″ bolt circle, 5 3/4″ pilot	6″	5 lbs.	$71.75
907104	SAE A (2 bolt, 4 3/16″ c/c)	3.25″	6 1/2″ bolt circle, 5 3/4″ pilot	6 5/8″	6 lbs.	$83.25

Overhung Load Adapters

• Brand new, ZEROMAX overhung load adapters. Cast iron construction. Prevents wear on motor/pump components due to external overhung loads (axial and radial), provides solid mounting. Isolates from contamination in harsh environments. Allows removal of motor/pump while leaving load attached to shaft. Grease zerk for bearings.



Four Hole Input Mount on 3 1/4″ B.C.

SPECIFICATIONS

- Output shaft 1″ dia. x 2 3/4″ w/ 1/4″ keyway
- Base mount four 3/16-16 tapped holes, 2 5/16″ x 1 3/4″
- Max. speed 4400 RPM
- Ball bearings
- Size 3 1/2″ x 2 3/4″ x 3 7/8″
- **Shpg. 9 lbs.**

ITEM	Input Shaft	Price
603001	1″ dia. keyed	$329.95




SAE A 2 Bolt Input Mount

SPECIFICATIONS

- Output shaft 1″ dia. x 2 3/4″ w/ 1/4″ keyway
- Base mount four 3/16-16 tapped holes, 2 5/16″ x 1 3/4″
- Max. speed 4400 RPM
- Ball bearings
- Size 5 1/2″ x 2 3/4″ x 4 1/8″
- **Shpg. 12 lbs.**

ITEM	Input Shaft	Price
603002	1″ dia. keyed	$329.95
603003	5/8″ dia. keyed	$350.60
603004	3/4″ dia. keyed	$373.25



SAE B 2/4 Bolt Input Mount

SPECIFICATIONS

- Output shaft 1 1/2″ dia. x 2 1/2″ w/ 3/8″ keyway
- Base mount four 7/16-14 tapped holes, 3 7/16″ x 3″
- Max. speed 3300 RPM
- Tapered roller bearings
- Size 7″ x 4 1/2″ x 5 1/8″
- **Shpg. 30 lbs.**

ITEM	Input Shaft	Price
603005	7/8-13 spline	$800.85
603006	7/8″ dia. keyed	$787.50

Chief Double Acting Tie-Rod Cylinders



• Brand new, CHIEF TC3 tie-rod hydraulic cylinder rated at 3000 PSI. TC3 cylinders are designed for use in a variety of double-acting applications including agricultural, compact construction and transportation equipment as well as waste and recycling. They provide outstanding performance and use clevis mounts for easy hookup. Featuring SAE O-ring ports for easy hookup every Chief TC3 cylinder is functionally tested and pressurized to 1.5 times the normal working pressure to ensure performance reliability.

2″ BORE

SPECIFICATIONS: Ports SAE 8, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
906485	4″	1.125″	14.25″	18 lbs.	$109.05
906486	6″	1.125″	16.25″	19 lbs.	$102.10
906487	8″	1.125″	18.25″	21 lbs.	$106.15
906488	8″	1.125″	20.25″	22 lbs.	$140.25
906489	10″	1.125″	20.25″	22 lbs.	$114.40
906490	12″	1.125″	22.25″	24 lbs.	$112.60
906491	14″	1.125″	24.25″	25 lbs.	$129.90
906492	16″	1.125″	31.5″	27 lbs.	$162.50
906493	16″	1.125″	26.25″	27 lbs.	$162.20
906494	18″	1.125″	28.25″	29 lbs.	$151.20
906495	20″	1.125″	30.25″	31 lbs.	$124.90
906496	22″	1.125″	32.25″	32 lbs.	$161.60
906497	24″	1.125″	34.25″	34 lbs.	$132.65
906498	30″	1.125″	40.25″	38 lbs.	$159.65
906499	36″	1.125″	46.25″	43 lbs.	$206.20

2½″ BORE

SPECIFICATIONS: Ports SAE 8, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
906501	4″	1.125″	14.25″	19 lbs	$101.35
906502	6″	1.125″	16.25″	21 lbs	$111.60
906503	8″	1.125″	18.25″	23 lbs	$111.25
906504	8″	1.125″	20.25″	23 lbs	$126.70
906505	10″	1.125″	20.25″	24 lbs	$121.00
906506	12″	1.125″	22.25″	26 lbs	$139.60
906507	14″	1.25″	24.25″	30 lbs	$123.35
906508	16″	1.25″	26.25″	32 lbs	$133.75
906509	18″	1.25″	28.25″	34 lbs	$136.25
906510	20″	1.25″	30.25″	36 lbs	$172.70
906511	24″	1.25″	34.25″	39 lbs	$150.55
906512	28″	1.25″	38.25″	43 lbs	$176.35
906513	30″	1.25″	40.25″	45 lbs	$184.90
906514	32″	1.25″	42.25″	47 lbs	$187.70
906515	36″	1.25″	46.25″	50 lbs	$242.95
906516	48″	1.25″	58.25″	61 lbs	$255.95

3″ BORE

SPECIFICATIONS: Ports SAE 8, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
906519	6″	1.25″	16.25″	27 lbs.	$121.70
906520	8″	1.25″	18.25″	30 lbs.	$122.05
906521	8″	1.25″	20.25″	31 lbs.	$129.00
906522	10″	1.25″	20.25″	32 lbs.	$174.30
906523	12″	1.25″	22.25″	34 lbs.	$143.90
906524	14″	1.5″	24.25″	38 lbs.	$213.30
906525	16″	1.5″	26.5″	42 lbs.	$144.65
906526	16″	1.5″	31.5″	51 lbs.	$157.10
906527	18″	1.5″	28.25″	43 lbs.	$179.25
906528	20″	1.5″	30.25″	45 lbs.	$181.60
906529	22″	1.5″	32.25″	48 lbs.	$189.65
906530	24″	1.5″	34.25″	50 lbs.	$197.45
906531	30″	1.5″	40.25″	57 lbs.	$273.85
906532	36″	1.5″	46.25″	65 lbs.	$337.00
906533	48″	1.5″	58.25″	80 lbs.	$303.40
906534	60″	1.5″	70.25″	130 lbs.	$337.05

3½″ BORE

SPECIFICATIONS: Ports SAE 8, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
906537	4″	1.5″	14.25″	31 lbs.	$186.85
906538	6″	1.5″	16.25″	34 lbs.	$170.30
906539	8″	1.5″	18.25″	38 lbs.	$146.05
906540	8″	1.5″	20.25″	37 lbs.	$145.90
906541	10″	1.5″	20.25″	39 lbs.	$153.30
906542	12″	1.5″	22.25″	42 lbs.	$167.00
906543	14″	1.5″	24.25″	46 lbs.	$166.95
906544	16″	1.5″	26.25″	47 lbs.	$171.95
906545 *	16″	1.5″	31.5″	50 lbs.	$177.95
906546	18″	1.5″	28.25″	50 lbs.	$190.05
906547	20″	1.5″	30.25″	53 lbs.	$203.50
906548	24″	1.5″	34.25″	58 lbs.	$208.55
906549	30″	1.5″	40.25″	66 lbs.	$281.65
906550	36″	1.5″	46.25″	75 lbs.	$284.35
906551	48″	1.5″	58.25″	91 lbs.	$324.85

*1¼″ pins

4″ BORE

SPECIFICATIONS: Ports SAE 8, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
906553	4″	1.5″	14.25″	38 lbs.	$184.60
906554	6″	1.5″	16.25″	44 lbs.	$232.95
906555	8″	1.5″	18.25″	45 lbs.	$195.85
906556	8″	1.5″	20.25″	46 lbs.	$226.20
906557	10″	1.5″	20.25″	49 lbs.	$258.05
906558	12″	1.5″	22.25″	52 lbs.	$229.50
906559	14″	2″	24.25	61 lbs.	$341.65
906560	16″	2″	26.25″	63 lbs.	$290.50
906561 *	16″	2″	31.5″	69 lbs.	$325.75
906562	18″	2″	28.25″	70 lbs.	$280.50
906563	20″	2″	30.25″	75 lbs.	$253.35
906564	24″	2″	34.25″	74 lbs.	$451.20
906565	26″	2″	36.25″	85 lbs.	$416.80
906566	30″	2″	40.25″	96 lbs.	$380.65
906567	36″	2″	46.25″	144 lbs.	$591.25
906568	48″	2″	58.25″	170 lbs.	$609.70

*1¼″ pins


5″ BORE

SPECIFICATIONS: Ports SAE 12, 1¼″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
906571	4″	2″	16.25″	75 lbs.	$393.10
906572	6″	2″	18.25″	81 lbs.	$397.90
906573	8″	2″	20.25″	87 lbs.	$351.25
906574	10″	2″	22.25″	93 lbs.	$364.75
906575	12″	2″	24.25″	97 lbs.	$377.95
906576	14″	2″	26.25″	101 lbs.	$458.00
906577	16″	2″	28.25″	107 lbs.	$460.15
906578	16″	2″	31.5″	111 lbs.	$461.80
906579	18″	2″	30.25″	148 lbs.	$491.20
906580	20″	2″	32.25″	152 lbs.	$385.60
906581	24″	2.25″	36.25″	167 lbs.	$507.05
906582	30″	2.25″	42.25″	193 lbs.	$533.80
906583	36″	2.25″	48.25″	203 lbs.	$694.35
906584	48″	2.25″	60.25″	244 lbs.	$694.60

Maxim Double Acting Tie-Rod Hydraulic Cylinders

- Brand new, MAXIM tie-rod hydraulic cylinders. High quality tie-rod cylinders at great savings. Built to perform in the agricultural industry as well as other industries. 2500 PSI working pressure.

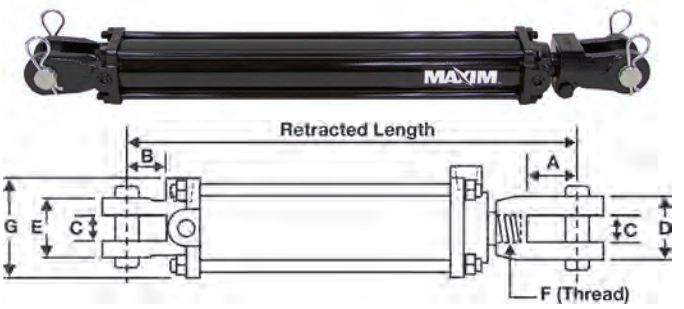

2″ BORE

SPECIFICATIONS: Ports ⅜″ NPT, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
905514	4″	1⅛″	14¼″	16 lbs.	$90.90
905515	6″	1⅛″	16¼″	18 lbs.	$99.85
905516	8″	1⅛″	18¼″	19 lbs.	$97.00
905517	6″	1⅛″	20¼″	20 lbs.	$98.95
905518	10″	1⅛″	20¼″	21 lbs.	$108.00
905519	12″	1⅛″	22¼″	23 lbs.	$112.90
905520	14″	1⅛″	24¼″	24 lbs.	$106.50
905521	16″	1⅛″	26¼″	26 lbs.	$122.20
905522	18″	1⅛″	28¼″	28 lbs.	$131.95
905523	20″	1⅛″	30¼″	29 lbs.	$138.00
905524	24″	1⅛″	34¼″	32 lbs.	$149.70
905525	30″	1⅛″	40¼″	37 lbs.	$165.85
905526	36″	1⅛″	46¼″	41 lbs.	$182.65
905527	48″	1⅛″	58¼″	53 lbs.	$196.05

2½″ BORE

SPECIFICATIONS: Ports ⅜″ NPT, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
905529	4″	1⅛″	14¼″	19 lbs.	$104.70
905530	6″	1⅛″	16¼″	21 lbs.	$108.65
905531	8″	1⅛″	18¼″	22 lbs.	$113.70
905532	8″	1⅛″	20¼″	22 lbs.	$107.00
905533	10″	1⅛″	20¼″	24 lbs.	$116.65
905534	12″	1⅛″	22¼″	25 lbs.	$127.45
905535	14″	1⅛″	24¼″	27 lbs.	$122.05
905536	16″	1⅛″	26¼″	30 lbs.	$115.90
905596	16″	1⅛″	31½″	31 lbs.	$162.15
905537	18″	1⅛″	28¼″	31 lbs.	$146.35
905538	20″	1⅛″	30¼″	33 lbs.	$114.40
905539	24″	1⅛″	34¼″	36 lbs.	$165.50
905540	30″	1¼″	40¼″	44 lbs.	$172.35
905541	36″	1¼″	46¼″	50 lbs.	$205.05
905542	48″	1¼″	58¼″	61 lbs.	$209.95

3″ BORE

SPECIFICATIONS: Ports ½″ NPT, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
905545	4″	1¼″	14¼″	24 lbs.	$120.35
905546	6″	1¼″	16¼″	26 lbs.	$125.80
905547	8″	1¼″	18¼″	28 lbs.	$131.70
905548	8″	1¼″	20¼″	29 lbs.	$130.70
905549	10″	1¼″	20¼″	30 lbs.	$134.30
905550	12″	1¼″	22¼″	32 lbs.	$138.95
905551	14″	1¼″	24¼″	35 lbs.	$134.10
905552	16″	1¼″	26¼″	37 lbs.	$157.55
905553	16″	1¼″	31½″	39 lbs.	$163.85
905554	18″	1¼″	28¼″	38 lbs.	$156.05
905555	20″	1¼″	30¼″	40 lbs.	$177.55
905556	24″	1¼″	34¼″	44 lbs.	$183.30
905557	30″	1½″	40¼″	56 lbs.	$216.50
905558	36″	1½″	46¼″	64 lbs.	$238.50
905559	48″	1½″	58¼″	80 lbs.	$313.65

Dimensional Data for Maxim Cylinders

Bore	Throat Depth A	Throat Depth B	C	D	E	Thread F	G
2″	2.125″	2.000″	1.165″	2.500″	2.500″	1⅛″-12 UNF	2.835″
2½″	2.125″	2.000″	1.165″	2.500″	2.500″	1⅛″-12 UNF	3.150″
3″	2.125″	2.000″	1.165″	2.72″	2.56″	1¼″-12 UNF	3.780″
3½″	2.125″	2.000″	1.165″	2.72″	2.56″	1¼″-12 UNF	4.250″
4″	2.125″	2.000″	1.165″	2.72″	2.76″	1¼″-12 UNF	4.920″

3½″ BORE

SPECIFICATIONS: Ports ½″ NPT, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
905562	4″	1¼″	14¼″	28 lbs.	$139.05
905563	6″	1¼″	16¼″	30 lbs.	$148.80
905564	8″	1¼″	18¼″	32 lbs.	$154.50
905565	8″	1¼″	20¼″	33 lbs.	$157.65
905566	10″	1¼″	20¼″	34 lbs.	$163.15
905567	12″	1¼″	22¼″	37 lbs.	$167.15
905568	14″	1¼″	24¼″	39 lbs.	$177.30
905569	16″	1¼″	26¼″	41 lbs.	$177.45
905570 *	16″	1½″	31½″	50 lbs.	$216.65
905571	18″	1¼″	28¼″	43 lbs.	$170.75
905572	20″	1¼″	30¼″	45 lbs.	$189.85
905573	24″	1½″	34¼″	55 lbs.	$240.75
905574	30″	1½″	40¼″	63 lbs.	$258.40
905575	36″	1½″	46¼″	70 lbs.	$296.50
905576	48″	1½″	58¼″	86 lbs.	$313.85

** 1¼″ pins*

4″ BORE

SPECIFICATIONS: Ports ½″ NPT, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
905579	8″	1½″	18¼″	40 lbs.	$180.70
905580	8″	1½″	20¼″	41 lbs.	$192.10
905581	10″	1½″	20¼″	42 lbs.	$202.50
905582	12″	1½″	22¼″	45 lbs.	$211.50
905583	14″	1½″	24¼″	47 lbs.	$222.30
905584	16″	1½″	26¼″	51 lbs.	$232.10
905585 *	16″	2″	31½″	60 lbs.	$258.60
905586	18″	1½″	28¼″	54 lbs.	$247.35
905587	20″	1½″	30¼″	57 lbs.	$255.90
905588	24″	1½″	34¼″	64 lbs.	$266.10
905589	24″	2″	34¼″	76 lbs.	$326.85
905590	30″	2″	40¼″	87 lbs.	$260.10
905591	36″	2″	46¼″	99 lbs.	$307.05
905592	40″	2″	50¼″	107 lbs.	$407.15
905593	48″	2″	58¼″	124 lbs.	$498.70

** 1¼″ pins*

Brand new, LYNX LH3000 by Lion Hydraulics

- Double acting tie-rod cylinders
- Superior quality
- Built for years of service
- 3000 PSI.



2″ BORE

SPECIFICATIONS: Ports ⅜″ NPT, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
902942	6″	1⅛″	16¼″	16 lbs.	$138.25
902944	8″	1⅛″	18¼″	18 lbs.	$142.15
902943	8″	1⅛″	20¼″	18 lbs.	$139.30
902945	10″	1⅛″	20¼″	19 lbs.	$146.70
902946	12″	1⅛″	22¼″	20 lbs.	$152.40
902947	14″	1⅛″	24¼″	22 lbs.	$159.85
902948	16″	1⅛″	26¼″	24 lbs.	$165.75
902949	18″	1⅛″	28¼″	25 lbs.	$175.50
902950	20″	1⅛″	30¼″	27 lbs.	$187.20
902951	24″	1⅛″	34¼″	30 lbs.	$213.85
902952	30″	1⅛″	40¼″	34 lbs.	$253.90
902953	36″	1⅛″	46¼″	39 lbs.	$269.50
902954	48″	1⅛″	58¼″	48 lbs.	$335.75

2½″ BORE

SPECIFICATIONS: Ports ⅜″ NPT, 1″ dia. pins.


ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
902955	6″	1⅛″	16¼″	18 lbs.	$155.85
902957	8″	1⅛″	18¼″	20 lbs.	$160.05
902956	8″	1⅛″	20¼″	21 lbs.	$159.65
902958	10″	1⅛″	20¼″	22 lbs.	$169.30
902959	12″	1⅛″	22¼″	23 lbs.	$177.95
902960	14″	1⅛″	24¼″	26 lbs.	$188.15
902961	16″	1¼″	26¼″	27 lbs.	$206.50
902962	18″	1¼″	28¼″	29 lbs.	$208.15
902963	20″	1¼″	30¼″	31 lbs.	$219.05
902964	24″	1¼″	34¼″	35 lbs.	$240.70
902965	30″	1¼″	40¼″	40 lbs.	$282.30
902966	36″	1¼″	46¼″	45 lbs.	$312.35
902967	48″	1¼″	58¼″	56 lbs.	$383.15

3″ BORE

SPECIFICATIONS: Ports ½″ NPT, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
902968	6″	1¼″	16¼″	25 lbs.	$171.30
902969	8″	1¼″	18¼″	27 lbs.	$178.90
902970	8″	1¼″	20¼″	28 lbs.	$180.25
902971	10″	1¼″	20¼″	29 lbs.	$188.10
902972	12″	1¼″	22¼″	32 lbs.	$204.25
902973	14″	1¼″	24¼″	34 lbs.	$216.85
902974	16″	1½″	26¼″	39 lbs.	$235.55
902975 *	16″	1½″	31½″	41 lbs.	$254.70
902976	18″	1½″	28¼″	41 lbs.	$249.15
902977	20″	1½″	30¼″	44 lbs.	$255.45
902978	24″	1½″	34¼″	49 lbs.	$286.95
902979	30″	1½″	40¼″	56 lbs.	$351.50
902980	36″	1½″	46¼″	63 lbs.	$400.20
902981	48″	1½″	58¼″	78 lbs.	$495.50

** 1¼″ pins*



Dimensional Data for Lion TH Cylinders

Bore	Throat Depth A	Throat Depth B	Throat Depth C	D	E	Thread F	G
2″	2⅛″	2 1/16″	1⅛″	2½″	2⅜″	1⅛″-12 UNF	2¾″
2½″	2⅛″	2 1/16″	1⅛″	2½″	2½″	1⅛″-12 UNF	3⅛″
3″	2⅛″	2 1/16″	1⅛″	2⅝″	2 9/16″	1¼″-12 UNF	3¾″
3½″	2⅛″	2 1/16″	1⅛″	2⅝″	2 9/16″	1¼″-12 UNF	4½″
4″	2⅛″	2 1/16″	1⅛″	2⅝″	2⅝″	1¼″-12 UNF	5⅛″
5″	2⅛″	2¼″	1 3/16″ *	3″	3½″	1½″-12	6″

* Base end measure 1 5/16″

3½″ BORE

SPECIFICATIONS: Ports ½″ NPT, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
902982	6″	1¼″	16¼″	32 lbs.	$205.60
902983	8″	1¼″	18¼″	35 lbs.	$217.25
902984	8″	1¼″	20¼″	36 lbs.	$210.95
902985	10″	1¼″	20¼″	37 lbs.	$227.70
902986	12″	1¼″	22¼″	40 lbs.	$239.20
902987	14″	1½″	24¼″	45 lbs.	$259.10
902988	16″	1½″	26¼″	48 lbs.	$274.55
902989*	16″	1½″	31½″	50 lbs.	$317.25
902990	18″	1½″	28¼″	51 lbs.	$302.05
902991	20″	1½″	30¼″	54 lbs.	$315.75
902992	24″	1½″	34¼″	60 lbs.	$328.20
902993	30″	1½″	40¼″	69 lbs.	$401.10
902994	36″	1½″	46¼″	78 lbs.	$431.55
902995	48″	1½″	58¼″	96 lbs.	$550.20

**1¼″ pins*

4″ BORE

SPECIFICATIONS: Ports ½″ NPT, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
902996	6″	1½″	16¼″	39 lbs.	$253.10
902997	8″	1½″	18¼″	42 lbs.	$265.80
902998	8″	1½″	20¼″	43 lbs.	$257.65
902999	10″	1½″	20¼″	46 lbs.	$277.20
903000	12″	1½″	22¼″	49 lbs.	$292.80
903001	14″	1½″	24¼″	53 lbs.	$311.35
903002	16″	1¾″	26¼″	59 lbs.	$337.95
903003*	16″	1¾″	31½″	61 lbs.	$374.00
903004	18″	1¾″	28¼″	62 lbs.	$365.25
903005	20″	1¾″	30¼″	66 lbs.	$378.90
903006	24″	1½″	34¼″	69 lbs.	$388.60
903007	24″	1¾″	34¼″	74 lbs.	$419.55
903008	24″	2″	34¼″	79 lbs.	$452.80
903009	30″	2″	40¼″	91 lbs.	$510.05
903010	36″	2″	46¼″	104 lbs.	$582.10
903011	48″	2″	58¼″	128 lbs.	$708.10

**1¼″ pins*

5″ BORE

SPECIFICATIONS: Ports ½″ NPT, 1¼″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
903012	8″	2″	20¼″	76 lbs.	$457.10
903013	10″	2″	22¼″	80 lbs.	$479.00
903014	12″	2″	24¼″	81 lbs.	$510.95
903015	14″	2″	26¼″	90 lbs.	$549.60
903016	16″	2″	28¼″	95 lbs.	$583.75
903017	16″	2″	31½″	99 lbs.	$605.00
903018	18″	2″	30¼″	100 lbs.	$620.00
903019	20″	2″	32¼″	105 lbs.	$658.25
903020	24″	2″	36¼″	115 lbs.	$708.20
903021	30″	2″	42¼″	130 lbs.	$778.90
903022	36″	2″	48¼″	145 lbs.	$862.55
903023	48″	2″	58¼″	175 lbs.	$1039.70

Brand new PRINCE double acting tie-rod cylinders.

- Premium quality with superior materials and workmanship.
- Chrome rod.
- Aircraft quality two-part polyester urethane paint.
- High quality seals and steel components.
- 3000 PSI working pressure.
- 3 year warranty against rust and corrosion.



2″ BORE

SPECIFICATIONS: Ports SAE 8, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
905175	4″	1⅛″	14¼″	24 lbs.	$242.35
905176	6″	1⅛″	16¼″	26 lbs.	$249.10
905177	8″	1⅛″	18¼″	26 lbs.	$256.50
905178	8″	1⅛″	20¼″	26 lbs.	$260.55
905179	10″	1⅛″	20¼″	26 lbs.	$258.50
905180	12″	1⅛″	22¼″	27 lbs.	$265.25
905181	14″	1⅛″	24¼″	28 lbs.	$274.05
905250	16″	1⅛″	26¼″	30 lbs.	$278.75
905182	16″	1⅛″	31½″	32 lbs.	$280.50
905183	18″	1⅛″	28¼″	32 lbs.	$283.50
905184	20″	1⅛″	30¼″	33 lbs.	$287.55
905185	24″	1⅛″	34¼″	36 lbs.	$299.00
905186	30″	1⅛″	40¼″	41 lbs.	$315.25

2½″ BORE

SPECIFICATIONS: Ports SAE 8, 1″ dia. pins.


ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
905187	6″	1¼″	16¼″	28 lbs.	$270.00
905188	8″	1¼″	18¼″	29 lbs.	$277.50
905189	8″	1¼″	20¼″	29 lbs.	$278.75
905190	10″	1¼″	20¼″	30 lbs.	$285.50
905191	12″	1¼″	22¼″	33 lbs.	$292.25
905192	14″	1¼″	24¼″	34 lbs.	$294.30
905251	16″	1¼″	26¼″	37 lbs.	$301.50
905193	16″	1¼″	31½″	39 lbs.	$308.50
905194	18″	1¼″	28¼″	38 lbs.	$312.50
905195	20″	1¼″	30¼″	40 lbs.	$317.25
905196	24″	1¼″	34¼″	44 lbs.	$326.00
905197	30″	1¼″	40¼″	51 lbs.	$351.00

3″ BORE

SPECIFICATIONS: Ports SAE 8, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
905198	6″	1⅜″	16¼″	32 lbs.	$303.75
905199	8″	1⅜″	18¼″	33 lbs.	$307.50
905200	8″	1⅜″	20¼″	33 lbs.	$315.25
905201	10″	1⅜″	20¼″	34 lbs.	$324.00
905202	12″	1⅜″	22¼″	37 lbs.	$326.00
905203	14″	1⅜″	24¼″	39 lbs.	$337.50
905204	16″	1⅜″	26¼″	42 lbs.	$337.50
905205	16″	1⅜″	31½″	43 lbs.	$349.00
905206	18″	1⅜″	28¼″	44 lbs.	$346.95
905207	20″	1⅜″	30¼″	45 lbs.	$362.50
905208	24″	1⅜″	34¼″	50 lbs.	$376.00
905209	30″	1⅜″	40¼″	58 lbs.	$394.20
905210	36″	1⅜″	46¼″	64 lbs.	$425.90
905211	48″	1⅜″	58¼″	77 lbs.	$487.50

Prince

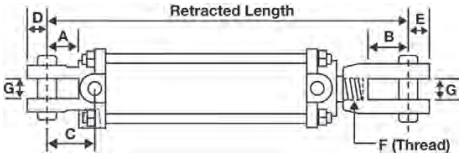

Dimensional Data for Prince Tie Rod Cylinders

Bore	Throat Depth A	Throat Depth B	C	D	E	Thread F	Between Ears G
2″	1 13/16″	1 13/16″	2⅜″	15/16″	1⅛″	1⅛″-12 UNF-3A	1.06″
2½″	1⅞″	1 13/16″	2 13/16″	15/16″	1⅛″	1⅛″-12 UNF-3A	1.06″
3″	1⅞″	1 13/16″	2 7/16″	1 1/16″	1⅛″	1⅛″-12 UNF-3A	1.06″
3½″	1⅞″	1 13/16″	2 7/16″	1¼″	1¼″	1 5/16″-12 UNF-3A	1.06″
4″	1¾″	1⅞″	2 7/16″	1¼″	1¼″	1½″-12 UNF-3A	1.06″
5″	1¾″	2″	2⅝″	1⅜″	1¼″	1½″-12 UNF-3A	1.13″

3½″ BORE

SPECIFICATIONS: Ports SAE 8, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
905212	8″	1⅜″	18¼″	40 lbs.	$339.00
905213	8″	1⅜″	20¼″	40 lbs.	$346.95
905214	10″	1⅜″	20¼″	41 lbs.	$342.25
905215	12″	1⅜″	22¼″	44 lbs.	$355.75
905216	14″	1⅜″	24¼″	47 lbs.	$360.45
905217	16″	1⅜″	26¼″	49 lbs.	$361.50
905218	16″	1⅜″	31½″	52 lbs.	$376.00
905219	18″	1⅜″	28¼″	51 lbs.	$385.40
905220	20″	1⅜″	30¼″	54 lbs.	$405.65
905221	24″	1⅜″	34¼″	59 lbs.	$417.15
905222	30″	1⅜″	40¼″	65 lbs.	$425.90
905223	36″	1⅜″	46¼″	74 lbs.	$450.00
905224	48″	1⅜″	58¼″	90 lbs.	$533.25

4″ BORE


SPECIFICATIONS: Ports SAE 8, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
905225	8″	1¾″	18¼″	55 lbs.	$409.50
905226	8″	1¾″	20¼″	55 lbs.	$427.95
905227	10″	1¾″	20¼″	56 lbs.	$434.70
905228	12″	1¾″	22¼″	59 lbs.	$452.90
905229	14″	1¾″	24¼″	63 lbs.	$465.00
905230	16″	1¾″	26¼″	66 lbs.	$429.00
905231	16″	1¾″	31½″	71 lbs.	$464.40
905232	18″	1¾″	28¼″	71 lbs.	$479.90
905233	20″	1¾″	30¼″	74 lbs.	$486.00
905234	24″	1¾″	34¼″	81 lbs.	$514.35
905235	30″	1¾″	40¼″	93 lbs.	$525.85
905236	36″	1¾″	46¼″	102 lbs.	$573.10
905237	48″	1¾″	58¼″	125 lbs.	$631.80

5″ BORE

SPECIFICATIONS: Ports SAE 10, 1¼″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
905238	8″	2″	20¼″	77 lbs.	$525.85
905239	12″	2″	24¼″	87 lbs.	$552.85
905240	14″	2″	26¼″	91 lbs.	$565.50
905241	16″	2″	28½″	98 lbs.	$588.00
905242	16″	2″	31½″	102 lbs.	$583.50
905243	18″	2″	30¼″	104 lbs.	$608.15
905244	20″	2″	32¼″	109 lbs.	$615.00
905245	24″	2″	36¼″	120 lbs.	$656.80
905246	30″	2″	42¼″	134 lbs.	$747.25
905247	36″	2″	48¼″	150 lbs.	$772.90
905248	48″	2″	60¼″	219 lbs.	$871.45

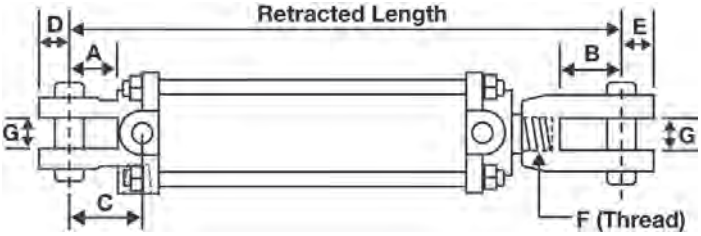

Dimensional Data for Prince Tie Rod Cylinders

Bore	Throat Depth A	Throat Depth B	C	D	E	Thread F	Between Ears G
2″	1 13/16″	1 13/16″	2 3/8″	15/16″	1 1/8″	1 1/8″-12 UNF-3A	1.06″
2½″	1 7/8″	1 13/16″	2 13/16″	15/16″	1 1/8″	1 1/8″-12 UNF-3A	1.06″
3″	1 7/8″	1 13/16″	2 7/16″	1 1/16″	1 1/8″	1 1/8″-12 UNF-3A	1.06″
3½″	1 7/8″	1 13/16″	2 7/16″	1 1/4″	1 1/4″	1 5/16″-12 UNF-3A	1.06″
4″	1 3/4″	1 7/8″	2 7/16″	1 1/4″	1 1/4″	1 1/2″-12 UNF-3A	1.06″
5″	1 3/4″	2″	2 5/8″	1 3/8″	1 1/4″	1 1/2″-12 UNF-3A	1.13″

2″ BORE

SPECIFICATIONS: Ports SAE 8, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
901752	8″	1 1/8″	20 1/4″	26 lbs.	$333.00
902067	8″	1 1/8″	18 1/4″	26 lbs.	$319.50
901753	10″	1 1/8″	20 1/4″	26 lbs.	$333.00
900305	12″	1 1/8″	22 1/4″	27 lbs.	$346.50
900306	14″	1 1/8″	24 1/4″	28 lbs.	$360.00
907045	16″	1 1/8″	31 1/2″	32 lbs.	$379.50
900307	18″	1 1/8″	28 1/4″	32 lbs.	$378.00
900308	20″	1 1/8″	30 1/4″	33 lbs.	$382.50
900309	24″	1 1/8″	34 1/4″	36 lbs.	$414.00
900310	30″	1 1/8″	40 1/4″	41 lbs.	$438.00

2½″ BORE

SPECIFICATIONS: Ports SAE 8, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
900267	8″	1 1/4″	20 1/4″	29 lbs.	$420.00
900268	10″	1 1/4″	20 1/4″	30 lbs.	$400.50
900269	12″	1 1/4″	22 1/4″	33 lbs.	$409.50
900270	14″	1 1/4″	24 1/4″	34 lbs.	$415.50
900271	16″	1 1/4″	31 1/2″	39 lbs.	$454.50
900272	18″	1 1/4″	28 1/4″	38 lbs.	$447.00
900273	20″	1 1/4″	30 1/4″	40 lbs.	$460.50
900274	24″	1 1/4″	34 1/4″	44 lbs.	$486.00
900275	30″	1 1/4″	40 1/4″	51 lbs.	$517.50

3″ BORE

SPECIFICATIONS: Ports SAE 8, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
900312	8″	1 3/8″	20 1/4″	33 lbs.	$427.50
900313	10″	1 3/8″	20 1/4″	34 lbs.	$429.00
900314	12″	1 3/8″	22 1/4″	37 lbs.	$459.00
900315	14″	1 3/8″	24 1/4″	39 lbs.	$465.00
900316	16″	1 3/8″	31 1/2″	43 lbs.	$526.50
900317	16″	1 3/8″	26 1/4″	42 lbs.	$495.00
900318	18″	1 3/8″	28 1/4″	44 lbs.	$505.50
900319	20″	1 3/8″	30 1/4″	45 lbs.	$513.00
900320	24″	1 3/8″	34 1/4″	50 lbs.	$561.00
900321	30″	1 3/8″	40 1/4″	58 lbs.	$601.50
900322	36″	1 3/8″	46 1/4″	64 lbs.	$622.50
900323	48″	1 3/8″	58 1/4″	77 lbs.	$739.50

- Brand new PRINCE Royal Plate Plus double acting tie-rod cylinders. Premium quality with superior materials and workmanship. The Royal Plate Plus cylinder combines two rod coatings to provide excellent wear, hardness and corrosion protection.
- Aircraft quality two-part polyester urethane paint that out performs powder coating for the life of the cylinder.
- High quality seals and steel components.
- 3000 PSI working pressure.
- 7 year warranty against rust and corrosion.



3½″ BORE

SPECIFICATIONS: Ports SAE 8, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
900473	8″	1 3/8″	20 1/4″	40 lbs.	$463.50
900474	10″	1 3/8″	20 1/4″	41 lbs.	$459.00
900475	12″	1 3/8″	22 1/4″	44 lbs.	$486.00
900476	14″	1 3/8″	24 1/4″	47 lbs.	$501.00
907046	16″	1 3/8″	31 1/2″	52 lbs.	$429.00
900477	16″	1 3/8″	26 1/4″	49 lbs.	$414.00
900478	18″	1 3/8″	28 1/4″	51 lbs.	$424.50
900479	20″	1 3/8″	30 1/4″	54 lbs.	$549.00
900480	24″	1 3/8″	34 1/4″	59 lbs.	$586.50
900481	30″	1 3/8″	40 1/4″	65 lbs.	$636.00
907047	36″	1 3/8″	46 1/4″	74 lbs.	$687.00
906778	48″	1 3/8″	58 1/4″	90 lbs.	$768.00

4″ BORE

SPECIFICATIONS: Ports SAE 8, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
900201	8″	1 3/4″	20 1/4″	55 lbs.	$517.50
900202	10″	1 3/4″	20 1/4″	56 lbs.	$510.00
900203	12″	1 3/4″	22 1/4″	59 lbs.	$526.50
900204	14″	1 3/4″	24 1/4″	63 lbs.	$541.50
900205	16″	1 3/4″	31 1/2″	71 lbs.	$619.50
900206	16″	1 3/4″	26 1/4″	66 lbs.	$532.50
900207	18″	1 3/4″	28 1/4″	71 lbs.	$577.50
900208	20″	1 3/4″	30 1/4″	74 lbs.	$597.00
900209	24″	1 3/4″	34 1/4″	81 lbs.	$631.50
900210	30″	1 3/4″	40 1/4″	93 lbs.	$685.50
900211	36″	1 3/4″	46 1/4″	102 lbs.	$726.00
900212	48″	1 3/4″	58 1/4″	125 lbs.	$835.50

5″ BORE


SPECIFICATIONS: Ports SAE 10, 1 1/4″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
900230	8″	2″	20 1/4″	77 lbs.	$627.00
900231	12″	2″	24 1/4″	87 lbs.	$705.00
900232	14″	2″	26 1/4″	91 lbs.	$711.00
900233	16″	2″	31 1/2″	102 lbs.	$754.50
900234	18″	2″	30 1/4″	104 lbs.	$757.50
900235	20″	2″	32 1/4″	109 lbs.	$808.50
900236	24″	2″	36 1/4″	120 lbs.	$849.00
900237	30″	2″	42 1/4″	134 lbs.	$925.50
900238	36″	2″	48 1/4″	150 lbs.	$985.50
900239	48″	2″	60 1/4″	219 lbs.	$1129.50

Wolverine Tie-Rod Cylinders

• Brand new, WOLVERINE by PRINCE double acting tie-rod hydraulic cylinders. High quality tie-rod cylinders at great savings. Black powder coated paint. Plated tie rods. Side port configuration in base end. 2500 PSI.



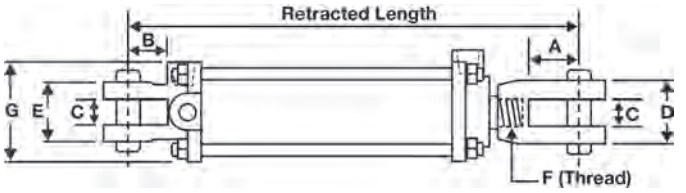

2″ BORE

SPECIFICATIONS: Ports SAE 6, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
903501	4″	1⅛″	14¼″	18 lbs.	$150.55
903502	6″	1⅛″	16¼″	19 lbs.	$157.30
903503	8″	1⅛″	18¼″	19 lbs.	$164.05
903504	8″	1⅛″	20¼″	20 lbs.	$167.40
903505	10″	1⅛″	20¼″	22 lbs.	$176.85
903506	12″	1⅛″	22¼″	23 lbs.	$182.95
903507	14″	1⅛″	24¼″	24 lbs.	$178.50
903508	16″	1⅛″	26¼″	25 lbs.	$201.85
903509	16″	1⅛″	31½″	26 lbs.	$141.75
903510	18″	1⅛″	28¼″	26 lbs.	$209.25
903511	20″	1⅛″	30¼″	28 lbs.	$220.75
903512	24″	1⅛″	34¼″	30 lbs.	$230.20
903513	30″	1⅛″	40¼″	38 lbs.	$250.45
903514	36″	1⅛″	46¼″	43 lbs.	$270.70

2½″ BORE

SPECIFICATIONS: Ports SAE 6, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
903515	4″	1⅛″	14¼″	20 lbs.	$172.15
903516	6″	1⅛″	16¼″	21 lbs.	$179.55
903518	8″	1⅛″	18¼″	22 lbs.	$187.00
903517	8″	1⅛″	20¼″	23 lbs.	$189.70
903519	10″	1⅛″	20¼″	24 lbs.	$195.10
903520	12″	1⅛″	22¼″	26 lbs.	$202.50
903521	14″	1⅛″	24¼″	27 lbs.	$202.50
903522	16″	1⅛″	26¼″	29 lbs.	$229.50
903523	18″	1¼″	28¼″	31 lbs.	$243.00
903524	20″	1¼″	30¼″	33 lbs.	$229.50
903525	24″	1¼″	34¼″	36 lbs.	$268.00
903526	30″	1¼″	40¼″	48 lbs.	$301.05
903527	36″	1¼″	46¼″	59 lbs.	$288.00

3″ BORE

SPECIFICATIONS: Ports SAE 8, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
903528	4″	1¼″	14¼″	22 lbs.	$187.65
903529	6″	1¼″	16¼″	27 lbs.	$195.75
903531	8″	1¼″	18¼″	28 lbs.	$204.50
903530	8″	1¼″	520¼″	29 lbs.	$207.25
903532	10″	1¼″	20¼″	32 lbs.	$222.75
903533	12″	1¼″	22¼″	33 lbs.	$235.60
903534	14″	1¼″	24¼″	34 lbs.	$240.30
903536	16″	1¼″	26¼″	36 lbs.	$261.90
903535 *	16″	1½″	31½″	38 lbs.	$265.95
903537	18″	1½″	28¼″	38 lbs.	$275.40
903538	20″	1½″	30¼″	40 lbs.	$292.25
903539	24″	1½″	34¼″	51 lbs.	$311.20
903540	30″	1½″	40¼″	62 lbs.	$327.40
903541	36″	1½″	46¼″	71 lbs.	$429.30

** 1¼″ pins*

Dimensional Data for Wolverine Cylinders

Bore	Throat Depth A	B	C	D	E	Thread F	G
2″	2.13″	2.00″	1.13″	2.625″	2.50″	1⅛″-12 UNF	2.82″
2½″	2.13″	2.00″	1.13″	2.625″	2.50″	1⅛″-12 UNF	3.38″
3″	2.13″	2.00″	1.13″	2.625″	2.50″	1¼″-12 UNF	3.90″
3½″	2.13″	2.00″	1.13″	2.625″	2.50″	1¼″-12 UNF	4.62″
4″	2.13″	2.00″	1.13″	2.625″	2.50″	1½″-12 UNF	4.75″

3½″ BORE

SPECIFICATIONS: Ports SAE 8, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
903542	8″	1¼″	20¼″	35 lbs.	$259.90
903543	10″	1¼″	20¼″	33 lbs.	$264.60
903544	12″	1¼″	22¼″	36 lbs.	$282.15
903545	14″	1¼″	24¼″	38 lbs.	$295.00
903547	16″	1¼″	26¼″	40 lbs.	$307.80
903546 *	16″	1½″	31½″	42 lbs.	$314.55
903548	18″	1¼″	28¼″	43 lbs.	$320.65
903549	20″	1½″	30¼″	45 lbs.	$304.50
903550	24″	1½″	34¼″	54 lbs.	$387.00
903551	30″	1½″	40¼″	63 lbs.	$423.00

** 1¼″ pins*

4″ BORE

SPECIFICATIONS: Ports SAE 8, 1″ dia. pins.


ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
903552	4″	1½″	14¼″	32 lbs.	$261.25
903553	8″	1½″	20¼″	39 lbs.	$293.65
903554	10″	1½″	20¼″	40 lbs.	$303.75
903555	12″	1½″	22¼″	43 lbs.	$317.25
903556	14″	1½″	24¼″	44 lbs.	$303.00
903558	16″	1½″	26¼″	51 lbs.	$345.60
903557 *	16″	2″	31½″	50 lbs.	$378.70
903559	18″	1½″	28¼″	54 lbs.	$379.35
903560	20″	1½″	30¼″	56 lbs.	$358.50
903561	24″	2″	34¼″	74 lbs.	$493.40
903562	30″	2″	40¼″	91 lbs.	$490.50
903563	36″	2″	46¼″	102 lbs.	$602.80

** 1¼″ pins*

Prince "Royal" Line Cylinders

Brand new, double acting welded cylinders made by PRINCE MFG. 2500 PSI working pressure. Fully chromed piston rod.



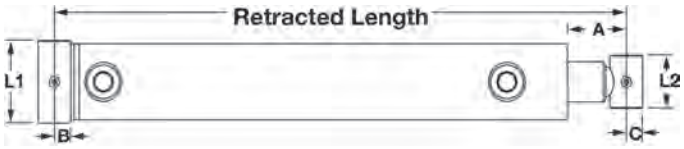

Dimensional Data for Prince "Royal" Cylinders

Bore	A	B	C	Crosstube Width L1	Crosstube Width L2
2½″	2 9/16″	9/16″	¾″	3″	1⅜″
3″	2 5/16″	1 1/16″	1″	3½″	1½″
3½″	1 11/16″	1 1/16″	1″	4″	1½″
4″	2⅛″	15/16″	1⅛″	4½″	2″

2½″ BORE — SPECIFICATIONS: Ports ⅜″ NPT, ¾″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
900325	8″	1⅜″	16″	20 lbs.	$297.00
900326	12″	1⅜″	20″	23 lbs.	$303.10
900327	16″	1⅜″	24″	27 lbs.	$313.20
900328	20″	1⅜″	28″	30 lbs.	$322.00
900329	24″	1⅜″	32″	35 lbs.	$330.10
900330	30″	1⅜″	38″	40 lbs.	$361.80
900331	32″	1⅜″	40″	42 lbs.	$378.00
900332	36″	1⅜″	44″	45 lbs.	$405.65
900333	42″	1⅜″	50″	52 lbs.	$430.65

3″ BORE — SPECIFICATIONS: Ports ½″ NPT, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
900293	8″	1½″	16″	25 lbs.	$324.00
900294	12″	1½″	20″	30 lbs.	$333.45
900295	16″	1½″	24″	33 lbs.	$344.95
900296	20″	1½″	28″	37 lbs.	$376.65
900297	24″	1½″	32″	41 lbs.	$383.40
900298	30″	1½″	38″	47 lbs.	$388.80
900299	32″	1½″	40″	50 lbs.	$366.00
900300	36″	1½″	44″	53 lbs.	$428.65
900301	40″	1½″	48″	59 lbs.	$459.00
900302	42″	1½″	50″	61 lbs.	$461.05
900303	48″	1½″	56″	69 lbs.	$515.05

3½″ BORE — SPECIFICATIONS: Ports ½″ NPT, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
900135	8″	1½″	16″	30 lbs.	$364.50
900136	12″	1½″	20″	34 lbs.	$370.60
900137	16″	1½″	24″	40 lbs.	$391.50
900138	20″	1½″	28″	43 lbs.	$393.00
900139	24″	1½″	32″	47 lbs.	$413.80
900140	30″	1½″	38″	51 lbs.	$434.70
900141	32″	1½″	40″	57 lbs.	$468.00
900142	36″	1½″	44″	62 lbs.	$463.05
900143	40″	1½″	48″	66 lbs.	$443.15

4″ BORE — SPECIFICATIONS: Ports ½″ NPT, 1¼″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
900117	8″	2″	17″	43 lbs.	$454.30
900118	12″	2″	21″	49 lbs.	$477.25
900119	16″	2″	25″	56 lbs.	$504.25
900120	20″	2″	29″	62 lbs.	$517.05
900121	24″	2″	33″	69 lbs.	$531.90
900122	30″	2″	39″	81 lbs.	$560.90
900123	32″	2″	41″	82 lbs.	$569.70
900124	36″	2″	45″	91 lbs.	$596.70
900125	40″	2″	49″	95 lbs.	$594.00
900126	42″	2″	51″	99 lbs.	$620.35
900127	48″	2″	57″	106 lbs.	$720.90
900128	60″	2″	69″	127 lbs.	$772.90

Cylinder Definitions


Bore - Inside diameter of cylinder

Stroke - How far a cylinder extends out

R-length - Distance in inches between pin centers when cylinder is retracted

Rod Diameter - Diameter of cylinder rod

Single Acting - Cylinder is powered one way

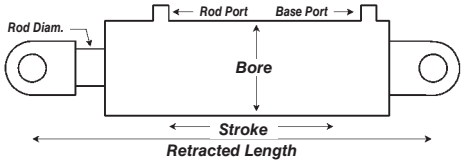

Double Acting - Cylinder is powered both ways (two way)

Crosstube End - Round tube welded perpendicular to cylinder

Single Eye End - For mounting between two mounting ears.

Clevis End - Two mounting ears

Prince Heavy Duty Magnum Cylinders



• Brand new, PRINCE Magnum 3000 series double acting hydraulic cylinders. Heavy-duty welded design with unitized piston. Chrome, ground and polished piston rod. Crosstube ends with grease zerks. Rated 3000 PSI maximum working pressure.

5″ BORE

SPECIFICATIONS: Ports SAE 12, 1½″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
907018	8″	2.5″	19'	78 lbs.	$799.90
907019	12″	2.5″	23″	89 lbs.	$857.95
907020	16″	2.5″	27″	101 lbs.	$915.95
907021	20″	2.5″	31″	115 lbs.	$931.50
907053	24″	2.5″	35″	127 lbs.	$1003.70
907022	30″	2.5″	41″	145 lbs.	$1075.30
907023	36″	2.5″	47″	195 lbs.	$1142.10
907024	48″	2.5″	59″	231 lbs.	$1380.00
907025	54″	2.5″	61″	250 lbs.	$1489.50
907026	60″	2.5″	71″	266 lbs.	$1499.40

6″ BORE

SPECIFICATIONS: Ports SAE 12, 1½″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
907027	8″	3″	19″	107 lbs.	$1279.15
907028	12″	3″	23″	117 lbs.	$1325.70
907029	16″	3″	27″	132 lbs.	$1482.30
907030	24″	3″	35″	190 lbs.	$1456.55
907031	30″	3″	41″	210 lbs.	$1511.35
907032	36″	3″	47″	230 lbs.	$1665.70
907033	48″	3″	59″	280 lbs.	$1528.80
907034	54″	3″	65″	305 lbs.	$1587.60
907035	60″	3″	71″	330 lbs.	$1884.40

8″ Bore Prince Standard Duty Welded Cylinders

• Brand new PRINCE 3000 PSI standard duty double acting cylinders. Features include welded construction, fully chromed piston rod, ductile iron piston and thread-in gland and crosstube ends on both ends with grease zerks.



8″ BORE

SPECIFICATIONS: Ports SAE 16, 2½″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
903231	8″	4″	24″	250 lbs.	$2783.20
903232	12″	4″	28″	275 lbs.	$2982.00
903233	24″	4″	40″	350 lbs.	$3668.00
903234	30″	4″	46″	385 lbs.	$3942.40
903235	36″	4″	52″	425 lbs.	$3816.40
903236	54″	4″	73″	540 lbs.	$4548.60
903237	60″	4″	80″	580 lbs.	$5429.20

Chief WT Heavy Duty Cylinders



• Brand new. Chief WT welded , external thread cap double acting hydraulic cylinder. Featuring welded cross-tube mounts with grease zerk on the rod and base ends. Heavy-duty piston with piston stem, complete with wear rings to reduce friction.

5″ BORE

3000 PSI Ports SAE 12 1½″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
906224	8″	2½″	19″	74 lbs.	$696.40
906225	10″	2½″	21″	79 lbs.	$725.35
906226	12″	2½″	23″	83 lbs.	$749.95
906227	14″	2½″	25″	83 lbs.	$764.60
906228	16″	2½″	27″	94 lbs.	$779.95
906229	18″	2½″	29″	99 lbs.	$787.75
906230	20″	2½″	31″	105 lbs.	$789.95
906231	24″	2½″	35″	116 lbs.	$838.25
906232	30″	2½″	41″	131 lbs.	$914.80
906233	36″	2½″	47″	150 lbs.	$980.30
906234	48″	2½″	61″	182 lbs.	$1024.95
906235	54″	2½″	68″	201 lbs.	$1193.90
906236	60″	2½″	75″	220 lbs.	$1186.20



6″ BORE

3000 PSI Ports SAE 12 1½″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
906237	8″	3″	19″	110 lbs.	$824.05
906238	10″	3″	21″	112 lbs.	$940.85
906239	12″	3″	23″	115 lbs.	$949.95
906240	16″	3″	27″	127 lbs.	$979.95
906241	20″	3″	31″	140 lbs.	$1043.25
906242	24″	3″	35″	153 lbs.	$1079.95
906243	30″	3″	41″	178 lbs.	$1093.35
906244	36″	3″	47″	198 lbs.	$1141.25
906245	40″	3″	51″	213 lbs.	$1276.00
906246	48″	3″	61″	243 lbs.	$1282.80
906247	54″	3″	68″	260 lbs.	$1595.55
906248	60″	3″	75″	280 lbs.	$1767.25



8″ BORE

3000 PSI Ports SAE 16 2½″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
906249	8″	4″	24″	243 lbs.	$1909.05
906250	12″	4″	28″	268 lbs.	$2012.35
906251	16″	4″	32″	295 lbs.	$2104.30
906252	20″	4″	36″	317 lbs.	$2195.90
906253	24″	4″	40″	345 lbs.	$2206.20
906254	30″	4″	46″	383 lbs.	$2337.90
906255	36″	4″	52″	421 lbs.	$2552.85
906256	48″	4″	66″	497 lbs.	$3112.80
906257	60″	4″	80″	573 lbs.	$3470.00

• Brand new, WOLVERINE by PRINCE double acting 3000 PSI rated cylinders. Features include 100% tested for quality assurance, North American sourced seals, hard chromed rod, cast steel ends with grease zerks, o-ring ports, thread-in gland and black paint.



Dimensional Data

Bore	Barrel OD	Base to Pin Ctr	Gland to Pin Ctr	Crosstube Width Base	Crosstube Width Rod
1½″	2″	1¼″	2⅝″	2¼″	2″
2″	2½″	1½″	2¼″	2¾″	2¼″
2½″	3″	1½″	2¼″	3¼″	2¼″
3″	3½″	1½″	2¼″	3¾″	2¼″
3½″	4″	2″	4″	4¼″	2¼″
4″	4½″	2¼″	3¾″	4¾″	2½″

1½″ BORE

SPECIFICATIONS: Ports SAE 4, ¾″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
903811	4″	1″	12″	8 lbs.	$117.45
903812	6″	1″	14″	9 lbs.	$123.55
903813	8″	1″	16″	10 lbs.	$128.95
903814	10″	1″	18″	11 lbs.	$123.00
903815	12″	1″	20″	13 lbs.	$141.05
903816	14″	1″	22″	14 lbs.	$135.00
903817	16″	1″	24″	15 lbs.	$152.55
903818	18″	1″	26″	16 lbs.	$145.50

2″ BORE

SPECIFICATIONS: Ports SAE 6, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
903819	4″	1¼″	12″	12 lbs.	$147.80
903820	6″	1¼″	14″	13 lbs.	$155.25
903821	8″	1¼″	16″	15 lbs.	$162.70
903822	10″	1¼″	18″	17 lbs.	$176.85
903823	12″	1¼″	20″	19 lbs.	$177.55
903824	14″	1¼″	22″	20 lbs.	$185.65
903825	16″	1¼″	24″	22 lbs.	$193.05
903826	18″	1¼″	26″	24 lbs.	$200.50
903827	20″	1¼″	28″	25 lbs.	$207.90
903828	24″	1¼″	32″	29 lbs.	$222.75
903829	30″	1¼″	38″	34 lbs.	$245.00
903830	32″	1¼″	40″	36 lbs.	$253.80
903831	36″	1¼″	44″	39 lbs.	$270.00

2½″ BORE

SPECIFICATIONS: Ports SAE 8, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
903832	4″	1½″	12″	16 lbs.	$180.25
903833	6″	1½″	14″	18 lbs.	$189.70
903834	8″	1½″	16″	20 lbs.	$199.80
903835	10″	1½″	18″	22 lbs.	$209.25
903836	12″	1½″	20″	25 lbs.	$218.00
903837	14″	1½″	22″	27 lbs.	$227.50
903838	16″	1½″	24″	29 lbs.	$236.95
903839	18″	1½″	26″	31 lbs.	$247.05
903840	20″	1½″	28″	34 lbs.	$256.50
903841	24″	1½″	32″	38 lbs.	$274.75
903842	30″	1½″	38″	45 lbs.	$303.10
903843	32″	1½″	40″	47 lbs.	$286.50
903844	36″	1½″	44″	51 lbs.	$333.45

3″ BORE

SPECIFICATIONS: Ports SAE 8, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
903845	4″	1½″	12″	19 lbs.	$211.95
903846	6″	1½″	14″	22 lbs.	$216.70
903847	8″	1½″	16″	24 lbs.	$232.90
903848	10″	1½″	18″	27 lbs.	$243.70
903849	12″	1½″	20″	29 lbs.	$253.80
903850	14″	1½″	22″	32 lbs.	$263.95
903851	16″	1½″	24″	34 lbs.	$274.75
903852	18″	1½″	26″	36 lbs.	$274.75
903853	20″	1½″	28″	39 lbs.	$295.00
903854	24″	1½″	32″	44 lbs.	$315.25
903855	30″	1½″	38″	51 lbs.	$346.25
903856	32″	1½″	40″	54 lbs.	$343.60
903857	36″	1½″	44″	59 lbs.	$378.70
903858	40″	1½″	48″	63 lbs.	$399.60
903859	42″	1½″	50″	65 lbs.	$418.50
903860	48″	1½″	56″	73 lbs.	$403.50

3½″ BORE


SPECIFICATIONS: Ports SAE 8, 1¼″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
903861	8″	1¾″	18″	33 lbs.	$265.50
903862	10″	1¾″	20″	36 lbs.	$289.60
903863	12″	1¾″	22″	39 lbs.	$288.00
903864	14″	1¾″	24″	42 lbs.	$300.00
903865	16″	1¾″	26″	45 lbs.	$340.20
903866	18″	1¾″	28″	48 lbs.	$353.00
903867	20″	1¾″	30″	51 lbs.	$365.85
903868	24″	1¾″	34″	57 lbs.	$391.50
903869	30″	1¾″	40″	67 lbs.	$390.00
903870	32″	1¾″	42″	70 lbs.	$402.00
903871	36″	1¾″	46″	76 lbs.	$465.75
903872	40″	1¾″	50″	82 lbs.	$448.50
903873	42″	1¾″	52″	85 lbs.	$466.50
903874	48″	1¾″	58″	94 lbs.	$514.35

4″ BORE

SPECIFICATIONS: Ports SAE 8, 1½″ dia. pins

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
903875	8″	2″	18″	41 lbs.	$351.65
903876	10″	2″	20″	45 lbs.	$367.90
903877	12″	2″	22″	49 lbs.	$382.75
903878	14″	2″	24″	52 lbs.	$363.00
903879	16″	2″	26″	56 lbs.	$411.75
903880	18″	2″	28″	60 lbs.	$426.60
903881	20″	2″	30″	63 lbs.	$441.45
903882	24″	2″	34″	71 lbs.	$471.15
903883	30″	2″	40″	82 lbs.	$469.50
903884	32″	2″	42″	85 lbs.	$483.00
903885	36″	2″	46″	93 lbs.	$510.00
903886	40″	2″	50″	100 lbs.	$588.60
903887	42″	2″	52″	104 lbs.	$609.55
903888	48″	2″	58″	115 lbs.	$648.65
903889	54″	2″	64″	126 lbs.	$656.80
903890	60″	2″	70″	137 lbs.	$727.65
903891	72″	2″	82″	159 lbs.	$933.00
903892	84″	2″	94″	181 lbs.	$1311.90
903893	96″	2″	106″	203 lbs.	$1421.90

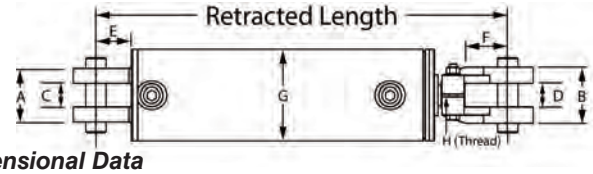

Dimensional Data

Bore	Clevis Width A	B	Inside Width C	D	Throat Depth E	F	Barrel O.D. G	Thread H
1½″	1.75″	2.00″	0.88″	0.88″	1.63″	1.62″	2.00″	⅞″-14 UNF
2″	2.13″	2.63″	1.13″	1.13″	2.13″	2.12″	2.50″	1⅛″-12 UNF
2½″	2.13″	2.63″	1.13″	1.13″	2.13″	2.13″	3.00″	1⅛″-12 UNF
3″	2.63″	2.63″	1.13″	1.13″	1.88″	2.13″	3.50″	1¼″-12 UNF
3½″	2.63″	2.75″	1.13″	1.13″	1.88″	2.13″	4.00″	1½″-12 UNF
4″	2.63″	2.75″	1.13″	1.13″	1.75″	2.13″	4.50″	1½″-12 UNF

1½″ BORE

SPECIFICATIONS: Ports SAE 6, ¾″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
903894	4″	1″	14¼″	10 lbs.	$124.90
903895	6″	1″	16¼″	11 lbs.	$130.95
903896	8″	1″	18¼″	12 lbs.	$137.05
903897	8″	1″	20¼″	12 lbs.	$137.05
903898	10″	1″	20¼″	13 lbs.	$142.45
903899	12″	1″	22¼″	15 lbs.	$148.50
903900	14″	1″	24¼″	16 lbs.	$154.55
903901	16″	1″	26¼″	17 lbs.	$160.65
903902	18″	1″	28¼″	18 lbs.	$167.40

2″ BORE

SPECIFICATIONS: Ports SAE 8, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
903903	4″	1⅛″	14¼″	16 lbs.	$161.30
903904	6″	1⅛″	16¼″	17 lbs.	$168.05
903905	8″	1⅛″	18¼″	19 lbs.	$175.50
903906	8″	1⅛″	20¼″	19 lbs.	$175.50
903907	10″	1⅛″	20¼″	20 lbs.	$182.25
903908	12″	1⅛″	22¼″	22 lbs.	$189.70
903909	14″	1⅛″	24¼″	24 lbs.	$180.00
903910	16″	1⅛″	26¼″	25 lbs.	$203.85
903911	18″	1⅛″	28¼″	27 lbs.	$210.60
903912	20″	1⅛″	30¼″	28 lbs.	$218.00
903913	24″	1⅛″	34¼″	31 lbs.	$231.50
903914	30″	1⅛″	40¼″	36 lbs.	$253.15
903915	36″	1⅛″	46¼″	41 lbs.	$273.40

2½″ BORE

SPECIFICATIONS: Ports SAE 8, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
903916	4″	1¼″	14¼″	19 lbs.	$171.00
903917	6″	1¼″	16¼″	21 lbs.	$194.40
903918	8″	1¼″	18¼″	23 lbs.	$203.20
903919	8″	1¼″	20¼″	23 lbs.	$203.20
903920	10″	1¼″	20¼″	24 lbs.	$211.25
903921	12″	1¼″	22¼″	26 lbs.	$219.40
903922	14″	1¼″	24¼″	28 lbs.	$208.50
903923	16″	1¼″	26¼″	30 lbs.	$236.25
903924	18″	1¼″	28¼″	32 lbs.	$223.50
903925	20″	1¼″	30¼″	34 lbs.	$253.15
903926	24″	1¼″	34¼″	38 lbs.	$246.00
903927	30″	1¼″	40¼″	44 lbs.	$270.00
903928	36″	1¼″	46¼″	49 lbs.	$294.00
903929	48″	1¼″	58¼″	60 lbs.	$340.50



• Brand new, WOLVERINE by PRINCE double acting 3000 PSI rated welded clevis cylinders. High quality cylinders that are 100 percent tested for quality assurance. Features include North American sourced seals, hard chromed rod, cast steel clevis ends with threaded on rod clevis, o-ring top ports, thread-in gland and high luster black paint.

3″ BORE

SPECIFICATIONS: Ports SAE 8, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
903930	4″	1½″	14¼″	24 lbs.	$229.50
903931	6″	1½″	16¼″	26 lbs.	$240.30
903932	8″	1½″	18¼″	29 lbs.	$250.45
903933	8″	1½″	20¼″	29 lbs.	$250.45
903934	10″	1½″	20¼″	31 lbs.	$258.50
903935	12″	1½″	22¼″	34 lbs.	$247.50
903936	14″	1½″	24¼″	36 lbs.	$281.50
903937	16″	1½″	26¼″	39 lbs.	$291.60
903938	18″	1½″	28¼″	41 lbs.	$276.00
903939	20″	1½″	30¼″	43 lbs.	$312.50
903940	24″	1½″	34¼″	48 lbs.	$304.50
903941	30″	1½″	40¼″	56 lbs.	$331.50
903942	36″	1½″	46¼″	63 lbs.	$361.50

3½″ BORE

SPECIFICATIONS: Ports SAE 8, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
903943	4″	1¾″	14¼″	29 lbs.	$268.00
903944	6″	1¾″	16¼″	32 lbs.	$256.50
903945	8″	1¾″	18¼″	35 lbs.	$267.00
903946	8″	1¾″	20¼″	36 lbs.	$282.85
903947	10″	1¾″	20¼″	38 lbs.	$288.90
903948	12″	1¾″	22¼″	41 lbs.	$291.00
903949	14″	1¾″	24¼″	44 lbs.	$301.50
903950	16″	1¾″	26¼″	47 lbs.	$313.50
903951	18″	1¾″	28¼″	50 lbs.	$355.05
903952	20″	1¾″	30¼″	53 lbs.	$336.00
903953	24″	1¾″	34¼″	59 lbs.	$394.20
903954	30″	1¾″	40¼″	68 lbs.	$393.00
903955	36″	1¾″	46¼″	78 lbs.	$427.50

4″ BORE

SPECIFICATIONS: Ports SAE 8, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
903956	4″	2″	14¼″	35 lbs.	$301.05
903957	6″	2″	16¼″	38 lbs.	$332.75
903958	8″	2″	18¼″	42 lbs.	$316.50
903959	8″	2″	20¼″	43 lbs.	$346.95
903960	10″	2″	20¼″	46 lbs.	$361.80
903961	12″	2″	22¼″	49 lbs.	$376.65
903962	14″	2″	24¼″	53 lbs.	$357.00
903963	16″	2″	26¼″	57 lbs.	$405.65
903964	18″	2″	28¼″	60 lbs.	$420.55
903965	20″	2″	30¼″	64 lbs.	$411.10
903966	24″	2″	34¼″	71 lbs.	$465.10
903967	30″	2″	40¼″	83 lbs.	$465.00
903968	36″	2″	46¼″	94 lbs.	$504.00

Double Rod Steering Cylinders



• Brand new double rod, steering type hydraulic cylinder. Both rod ends are drilled and tapped to accept a standard ¾″-16 tie rod end. A pair of 1″ thick steel mounting blocks are welded to cylinder body. Retracted length is measured end of rod to end of rod.

SPECIFICATIONS

- PSI 3000 max.
- Ports SAE 6
- ⅜″ mounting holes
- Both ends tapped ¾″-16 x 1⅝″ RH
- Wrench flats at rod ends
- Square ring gland retainer

ITEM	Bore	Stroke	R. Diam.	R. Lgth	Mnt. Ctrs.	Shpg.	Price
901459	2″	8″	1¼″	23″	11½″ x 3⅛″	22 lbs.	$320.55
901460	2″	10″	1¼″	27″	13½″ x 3⅛″	24 lbs.	$332.85
901216	2½″	8″	1½″	22½″	11½″ x 3⅝″	24 lbs.	$345.50
901461	2½″	10″	1½″	26½″	13½″ x 3⅝″	26 lbs.	$365.85

1½″ Bore Cylinders



• Brand new, LION Hydraulics WX welded cylinder. Internal threaded gland with wrench flats for easy service. Cast steel cross tubes at each end.

SPECIFICATIONS

- Double acting
- PSI 3000 max.
- Ports SAE 6
- Crosstube ends: rod 1½″ w., base 1⅞″ w.
- Rod diam. 1″
- Pin holes ¾″

1½″ BORE	ITEM	Stroke	R. Lgth	Shpg.	Price
	901818	8″	16″	12 lbs.	$181.90
	901819	10″	18″	13 lbs.	$186.40
	901820	12″	20″	14 lbs.	$193.50
	901821	14″	22″	15 lbs.	$199.75
	901822	16″	24″	16 lbs.	$206.15
	901823	18″	26″	17 lbs.	$212.90
	901824	20″	28″	18 lbs.	$219.25
	901825	24″	32″	20 lbs.	$232.25

2″ x 10″ x 1.25″ Grapple Cylinder



ITEM 904964 **$103.50**

• Brand New. PRINCE. Ideal size for use as a grapple cylinder and for other implement attachments. Grease zerk on each crosstube.

SPECIFICATIONS


- Double Acting
- Bore/Stroke 2″ x 10″
- Pressure 3000 PSI
- Rod dia. 1.25″
- Ports SAE 6
- Retracted Length 17″
- Crosstube Ends
- Widths 3″
- Pin Holes 1¼″
- **Shpg. 18 lbs.**

COLUMBUS HYDRAULICS

FLUID POWER IN ACTION.

• Brand new, internal gland with wire-lock retaining ring. Pin-hole thru rod and cross-tube at base end. Made in USA. Rated 3000 PSI.



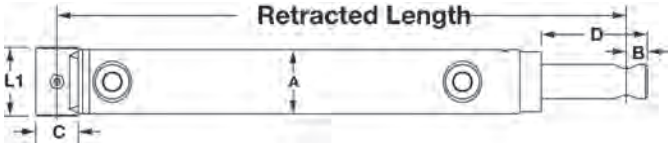

Dimensional Data for Welded Cylinders

Bore	A	B	C	D	Crosstube Width L1
1½″	1⅞″	⅝″	1¼″	3⅛″	2″
2″	2⅜″	¾″	1¼″	4″	2½″

1½″ BORE	SPECIFICATIONS: Rod dia. 1″, ports SAE 6, pin holes ⅝″.				
	ITEM	Retracted Stroke	Retracted Lgth.	Shpg.	Price
	902099	4″	11″	9 lbs.	$142.75
	902100	6″	13″	10 lbs.	$150.90
	902101	8″	15″	11 lbs.	$161.50
	902102	10″	17″	12 lbs.	$168.90
	902103	12″	19″	13 lbs.	$177.75

2″ BORE	SPECIFICATIONS: Rod dia. 1¼″, ports SAE 8, pin holes ¾″.				
	ITEM	Retracted Stroke	Retracted Lgth.	Shpg.	Price
	902098	8″	16″	15 lbs.	$178.65
	902104	10″	18″	17 lbs.	$192.15
	902105	16″	24″	21 lbs.	$219.85
	902106	20″	28″	24 lbs.	$231.00
	902107	24″	32″	27 lbs.	$258.50
	902108	30″	38″	31 lbs.	$293.85
	902109	32″	40″	33 lbs.	$306.00
	902110	36″	44″	36 lbs.	$321.85
	902111	42″	50″	40 lbs.	$374.75
	902112	48″	56″	44 lbs.	$402.95
	902113	60″	68″	53 lbs.	$451.70
	902114	72″	80″	62 lbs.	$595.95

Cylinders Definitions


Bore - Inside diameter of cylinder

Stroke - How far a cylinder extends out

R-length - Distance in inches between pin centers when cylinder is retracted

Rod Diameter - Diameter of cylinder rod

Single Acting - Cylinder is powered one way

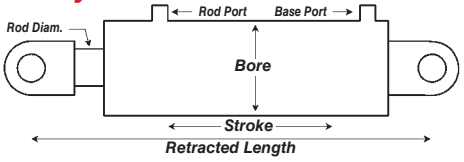

Double Acting - Cylinder is powered both ways (two way)

Crosstube End - Round tube welded perpendicular to cylinder

Single Eye End - For mounting between two mounting ears.


Clevis End - Two mounting ears

Swivel Ball End Cylinders

• Brand new, WOLVERINE by PRINCE double acting cylinders with swivel eyes. Heavy duty welded construction with thread-in gland design. Top port design with SAE O-ring ports for reliable and leak free connection. Spherical ball end swivel eye mount on both ends to allow for angular misalignment. 3000PSI



WOLVERINE® By Prince Manufacturing

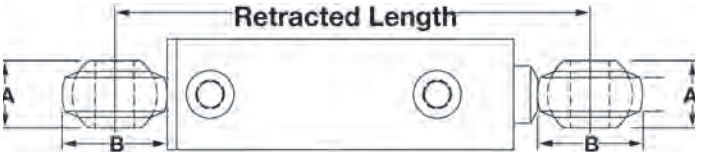

Bore	Ball End Width A	Ball End O.D. B
1″	1″	2″
1½″	1″	2″
2″	1″	2¾″
2½″	1″	2¾″
3″	1¾″	3.13″

1″ BORE

SPECIFICATIONS: Ports SAE 6, ½″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
904269	4″	⅝″	10″	5 lbs.	$112.75
904270	6″	⅝″	12″	5 lbs.	$118.15
904271	8″	⅝″	14″	6 lbs.	$124.20
904272	10″	⅝″	16″	7 lbs.	$129.60
904273	12″	⅝″	18″	7 lbs.	$135.70

1½″ BORE

SPECIFICATIONS: Ports SAE 6, ¾″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
904274	4″	1″	11¼″	6 lbs.	$113.40
904275	6″	1″	13¼″	7 lbs.	$113.40
904276	8″	1″	15¼″	9 lbs.	$130.95
904277	10″	1″	17¼″	10 lbs.	$147.80
904278	12″	1″	19¼″	11 lbs.	$165.40
904279	14″	1″	21¼″	12 lbs.	$182.25
904280	16″	1″	23¼″	13 lbs.	$199.80

2″ BORE

SPECIFICATIONS: Ports SAE 8, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
904281	6″	1¼″	13½″	15 lbs.	$141.75
904282	8″	1¼″	15½″	16 lbs.	$157.95
904283	10″	1¼″	17½″	17 lbs.	$172.80
904284	12″	1¼″	19½″	19 lbs.	$188.35
904285	16″	1¼″	23½″	22 lbs.	$218.70
904286	20″	1¼″	27½″	24 lbs.	$244.35
904287	24″	1¼″	31½″	27 lbs.	$270.70
904288	30″	1¼″	37½″	32 lbs.	$301.05

2½″ BORE

SPECIFICATIONS: Ports SAE 8, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
904289	6″	1½″	13½″	17 lbs.	$192.40
904290	8″	1½″	15½″	19 lbs.	$209.25
904291	10″	1½″	17½″	21 lbs.	$226.80
904292	12″	1½″	19½″	23 lbs.	$238.25
904293	16″	1½″	23½″	27 lbs.	$272.70
904294	20″	1½″	27½″	30 lbs.	$301.05
904295	24″	1½″	31½″	34 lbs.	$336.15

3″ BORE

SPECIFICATIONS: Ports SAE 8, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
904296	6″	1½″	14¼″	20 lbs.	$216.00
904297	8″	1½″	16¼″	22 lbs.	$230.85
904298	10″	1½″	18¼″	24 lbs.	$234.00
904299	12″	1½″	20¼″	26 lbs.	$276.75
904300	16″	1½″	24¼″	31 lbs.	$305.10
904301	20″	1½″	28¼″	36 lbs.	$303.10
904302	24″	1½″	32¼″	41 lbs.	$334.15

Clevis End Cylinders

COLUMBUS HYDRAULICS FLUID POWER IN ACTION.



• Brand new COLUMBUS HYDRAULICS. Double acting cylinders with formed clevis ends. Made in USA.

1″ BORE

SPECIFICATIONS: Working pressure 1500 PSI, rod dia. ½″, ports ¼″ NPT, pin holes ½″.

ITEM	Stroke	Retracted Lgth.	Shpg.	Price
900287	4″	10½″	6 lbs.	$156.80
900288	6″	12½″	6 lbs.	$141.15
900289	8″	14½″	7 lbs.	$149.25
900290	10″	16½″	7 lbs.	$163.65
900291	12″	18½″	8 lbs.	$170.85

1½″ Bore Cylinders

COLUMBUS HYDRAULICS FLUID POWER IN ACTION.



• Brand new COLUMBUS HYDRAULICS. Welded double acting cylinders with crosstube ends. Internal gland with snap ring. Made in USA.

1½″ BORE

SPECIFICATIONS: Max. 2000 PSI, rod dia. ¾″, ports ⅜″ NPT, pin holes ¾″.

ITEM	Stroke	Retracted Lgth.	Shpg.	Price
900684	4″	9½″	8 lbs.	$150.00
900685	6″	11½″	9 lbs.	$159.90
900686	8″	13½″	10 lbs.	$169.35
900687	10″	15½″	11 lbs.	$179.40
900688	12″	17½″	12 lbs.	$189.15
900766	14″	19½″	12 lbs.	$202.20
900767	16″	21½″	13 lbs.	$207.30
900768	18″	23½″	14 lbs.	$216.90

Prince Rephasing Tie-Rod Cylinders

• Brand New PRINCE rephasing double acting cylinders for series applications where multiple cylinders extend and retract equally. Two or more cylinders are plumbed in series, with bore and rod diameters sized so all rods extend or retract in unison. The rephase bypass allows oil to bypass piston on full cylinder extension to fill the next cylinder during initial synchronization or to compensate for internal leakage.

• The Royal Plate cylinder combines two rod coatings to provide excellent wear, hardness and corrosion protection.

Not to be used as single cylinder at full pressure due to column buckling!



2½″ and 2¾″ Bore Cylinders

SPECIFICATIONS: Rod dia. 1⅛″, ports SAE 8, 3000 PSI, clevis pin 1″ dia.

Bore Size	ITEM	Stroke	R. Lgth	Shpg.	Price
2½″ Bore	902296	8″	20¼″	28 lbs.	$468.00
	902297	12″	24¼″	31 lbs.	$385.50
2¾″ Bore	902298	8″	20¼″	32 lbs.	$468.00
	902299	10″	22¼″	33 lbs.	$487.50

3″ and 3¼″ and 3½″ Bore Cylinders


SPECIFICATIONS: Rod dia. 1¼″, ports SAE 8, 3000 PSI, clevis pin 1″ dia

Bore Size	ITEM	Stroke	R. Lgth	Shpg.	Price
3″ Bore	900579	8″	20¼″	32 lbs.	$511.50
	902300	10″	22¼″	33 lbs.	$544.50
	902301	12″	24¼″	36 lbs.	$531.00
	902302	16″	28¼″	43 lbs.	$567.00
3¼″ Bore	900705	8″	20¼″	38 lbs.	$529.50
	902303	10″	22¼″	40 lbs.	$552.00
	901008	12″	24¼″	42 lbs.	$552.00
3½″ Bore	902305	8″	20¼″	38 lbs.	$570.00
	902304	10″	22¼″	40 lbs.	$540.00
	901009	12″	24¼″	42 lbs.	$534.00
	902305	16″	28¼″	49 lbs.	$570.00

3¾″ and 4″ Bore Cylinders

SPECIFICATIONS: Rod dia. 1⅜″, ports SAE 8, 3000 PSI, clevis pin 1″ dia.

Bore Size	ITEM	Stroke	R. Lgth	Shpg.	Price
3¾″ Bore	902306	8″	20¼″	51 lbs.	$598.50
	901010	10″	22¼″	53 lbs.	$634.50
	900993	12″	24¼″	57 lbs.	$585.00
	902307	16″	28¼″	67 lbs.	$675.00
4″ Bore	902308	8″	20¼″	49 lbs.	$585.00
	901011	10″	22¼″	53 lbs.	$621.00
	900994	12″	24¼″	57 lbs.	$636.00
	902309	16″	28¼″	64 lbs.	$661.50

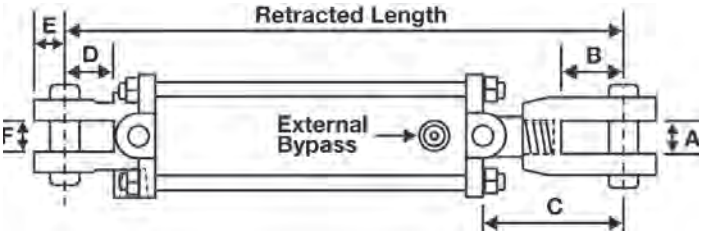

Dimensional Data for Prince Rephasing Cylinders

Bore	A	Throat Depth B	C	Throat Depth D	E	F
2½″	1 1/16″	1 13/16″	5 9/32″	1 7/8″	15/16″	1 1/16″
2¾″	1 1/16″	1 13/16″	5 23/32″	1 7/8″	15/16″	1 1/16″
3″	1 1/16″	1 13/16″	5 27/32″	1 7/8″	15/16″	1 1/16″
3¼″	1 1/16″	1 13/16″	5 27/32″	1 7/8″	1 1/4″	1 1/16″
3½″	1 1/16″	1 13/16″	5 27/32″	1 7/8″	1 1/4″	1 1/16″
3¾″	1 1/8″	1 7/8″	5 11/32″	1 3/4″	1 1/4″	1 1/16″
4″	1 1/8″	1 7/8″	5 11/32″	1 3/4″	1 1/4″	1 1/16″
4½″	1 1/8″	1 7/8″	4 1/32″	1 3/4″	1 1/4″	1 1/8″
4¾″	1 1/8″	1 13/16″	4 1/32″	1 3/4″	1 1/4″	1 1/8″
5″	1 1/8″	1 13/16″	4 1/32″	1 3/4″	1 1/4″	1 1/8″

4½″ Bore Cylinders

SPECIFICATIONS: Rod dia. 2″, ports SAE 8, 3000 PSI, clevis pin 1″ dia.

Bore Size	ITEM	Stroke	R. Lgth	Shpg.	Price
4½″ Bore	902310	8″	20¼″	63 lbs.	$690.00
	901012	10″	22¼″	67 lbs.	$717.00
	901791	12″	24¼″	72 lbs.	$742.50

4¾″ and 5″ Bore Cylinders

SPECIFICATIONS: Rod dia. 1½″, ports SAE 8, 3000 PSI, clevis pin 1″ dia.

Bore Size	ITEM	Stroke	R. Lgth	Shpg.	Price
4¾″ Bore	902311	10″	22¼″	80 lbs.	$721.50
	902312	16″	28¼″	99 lbs.	$807.00
5″ Bore	902313	8″	20¼″	75 lbs.	$706.50
	902314	10″	22¼″	80 lbs.	$724.50
	902315	12″	24¼″	86 lbs.	$748.50
	902316	16″	28¼″	99 lbs.	$805.50

RectorSeal Tru-Blu+ High Pressure Thread Sealant



• New. RECTORSEAL Tru-Blu pipe thread sealant with PTFE plus synthetic fibers. These fibers dispersed in a resinous base combined with inert mineral fillers provide maximum sealing performance. Its low coefficient of friction allows tighter joint makeup with lower torque. It also breaks out easily without galling, seizing, or damaging threads. It is excellent for service where immediate pressurization is necessary. RectorSeal® BLUE+ is non-toxic in accordance with NSF Standard 61. In addition, it is CSA Certified. Applications include a variety of metal and plastic piping including iron, galvanized steel, stainless steel, brass, copper, aluminum, polyethylene, reinforced fiberglass, PVC, ABS and CPVC including FlowGuard Gold®*. Certified to IAPMO PS-36 for use with PE, PVC, ABS and CPVC. Not recommended for oxygen, chlorine and other oxidizers.

ITEM 100424 **$32.60**
• 1 pint (437ML) Can. **Shpg. 2 lbs.**

ITEM 100425 **$20.50**
• 8 oz (237ML) Can. **Shpg. 0.7 lb.**

SPECIFICATIONS
- Brand ReactorSeal
- Color Blue
- Pressure up to 10,000 PSI (liquids) and 2,000 PSI (gases)
- Wt/Gal @ 77° ~9.5 lbs/gal
- VOC 0 g/l
- Flash Point SETA CC Greater than 300° F (149° C)
- Non-volatiles 100%
- Federal Specification TT-S-1732






ITEM 100247 **$4.70**
• Low Pressure 1.75 oz (50g) **Shpg 0.1 lb.**

SPECIFICATIONS
- Brand ReactorSeal
- Color Blue
- Pressure less than 100 PSI
- VOC 317 g/l
- Density Approoxiamately 10.6 lbs/gal
- Flash Point SETA CC Greater than 150° F (62° C)

Prince 3¼″ Hydraulic Clevis Pin Pair



• New, PRINCE zinc plated steel hydraulic cylinder clevis pin pair. Includes cotter pins.

ITEM 905821 **$19.50**

SPECIFICATIONS
- Part number 1904K0004
- Diameter 1″
- Usable Length 3¼″
- Over Length 4″
- **Shpg 3 lbs.**

ITEM 905822 **$21.00**

SPECIFICATIONS
- Yellow zinc plated
- Part number 1904K0035
- Diameter 1″
- Usable Length 3¼″
- Over Length 4″
- **Shpg 3 lbs.**

ITEM 905823 **$27.00**

SPECIFICATIONS
- Yellow zinc plated
- Part number 1906K0024
- Diameter 1¼″
- Usable Length 3¼″
- Over Length 4″
- **Shpg 4 lbs.**

Inline Weld On Cylinder Ports

Brand new, BAILEY INTERNATIONAL, inline cylinder weld-on port. Steel construction.

	ITEM	Port Size	Overall Length	O.D.	Shpg.	Price
NPT	905903	¼″ NPT	0.594″	0.854″	0.1 lb.	$2.20
	905904	⅜″ NPT	0.587″	0.991″	0.1 lb.	$3.90
	905905	½″ NPT	0.79″	1.245″	0.2 lb.	$4.80
	905901	¾″ NPT	0.79″	1.497″	0.25 lb.	$5.20
	905902	1″ NPT	1.189″	1.772″	0.45 lb.	$5.50
SAE	905909	SAE 4	0.56″	0.742″	0.05 lb.	$2.30
	905910	SAE 5	0.62″	0.869″	0.1 lb.	$2.20
	905911	SAE 6	0.69″	0.858″	0.1 lb.	$2.55
	905912	SAE 8	0.69″	1.131″	0.15 lb.	$1.20
	905906	SAE 10	0.868″	1.242″	0.15 lb.	$3.65
	905907	SAE 12	0.99″	1.493″	0.25 lb.	$6.50
	905908	SAE 16	1.25″	1.768″	0.4 lb.	$6.50





90 Degree Weld On Cylinder Ports

Brand new, BAILEY INTERNATIONAL, 90 degree cylinder weld-on port. Steel construction.

	ITEM	Port Size	Overall Length	O.D.	Shpg.	Price
NPT	905914	¼″ NPT	1.195″	1.262″	0.3 lb.	$5.60
	905915	⅜″ NPT	1.443″	1.252″	0.35 lb.	$6.15
	905916	½″ NPT	1.633″	1.612″	0.65 lb.	$6.50
	905913	¾″ NPT	1.754″	2.003″	2 lbs.	$9.10
SAE	905919	SAE 4	1.13″	1.14″	0.2 lb.	$3.55
	905920	SAE 6	1.25″	1.249″	0.2 lb.	$6.50
	905921	SAE 8	1.632″	1.631″	0.7 lb.	$7.80
	905917	SAE 10	1.886″	1.752″	0.9 lb.	$15.65
	905918	SAE 12	1.999″	2.137″	2 lbs.	$12.30





Plastic Port Plugs and Caps

Brand new CAPLUGS tapered T-series cap/plug. Designed to be used as a cap or a plug, the T Series is tapered to fit a wide range of applications to protect from contaminants and debris. May be used for MIL Spec, SAE-type and NPT threaded fittings. Made of low-density polyethylene (LDPE), red in color. Service temperature range -94 F to 175 F. See www.surpluscenter.com for more specifications. **Shpg. 0.01 lbs.**





ITEM	Size		Price
	Plug	Cap	
905858	⅛″ NPT	-	$0.10
905856	SAE 2	-	$0.10
905857	SAE 3	SAE 2	$0.10
903101	SAE 4, JIC 4	-	$0.06
903095	¼″ NPT, SAE 5, JIC 5	⅛″ NPT	$0.06
900578	⅜″ NPT	SAE 6, JIC 6	$0.10
903102	SAE 6, JIC 6	SAE 5, JIC 5	$0.06
903096	½″ NPT	-	$0.10
903103	SAE 8, JIC 8	-	$0.10
903104	SAE 10, JIC 10	-	$0.10
902937	¾″ NPT, SAE 12, JIC 12	-	$0.10
905859	1″ NPT	-	$0.20
903097	SAE 16, JIC 16	-	$0.10
903098	1¼″ NPT, SAE 20, JIC 20	-	$0.15
903099	1½″ NPT	-	$0.25
905860	SAE 24	-	$0.30
903100	2″ NPT	-	$0.25
905862	SAE 32	2″ NPT	$0.65

Clevis Pins With Clips


904366


905880

• Brand new, zinc plated steel hydraulic cylinder clevis pin. Includes R style pin clips. Usable length is between pin clips. **Shpg.1 lb.**

ITEM	Dia.	Lgth.	Price
904366	1″	2⅞″	$4.70
905879	1″	2¼″	$5.00
905880	1″	2¾″	$5.40
905881	1″	3″	$5.60
905882	1″	3¼″	$6.10
905883	1¼″	3¼″	$9.40

Cylinder Clevis




• Brand new. Use as direct replacement on many brands of cylinders. 1″ clearance between ears except ITEM 900636 which has 1 1/16″ and 900961 which has 1⅛″ clearance. Cast iron.

ITEM	Pin	Thread	Shpg.	Price
900358	1″	1⅛″-12	4 lbs.	$34.50
900961	1″	1¼″-12	4 lbs.	$34.50
900359	1″	1½″-12	4 lbs.	$73.50
900636	1¼″	1½″-12	4 lbs.	$79.50

Prince Magnum Welded Crosstube Cylinders



• Brand new, PRINCE Magnum 3000 double acting hydraulic cylinders. Heavy duty welded design with unitized piston. Chrome, ground and polished piston rod. Crosstube ends with grease zerks. Rated 3000 PSI maximum working pressure.

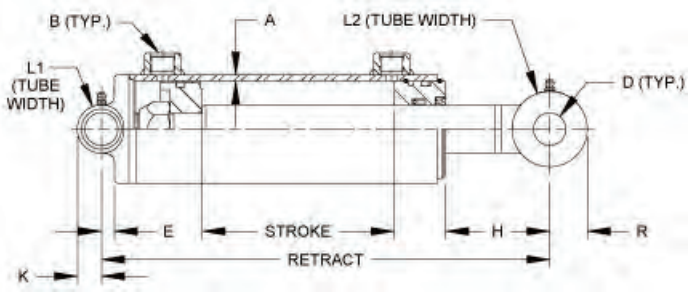

Dimensional Data

Bore	Rod Dia.	Crosstube Base D	E	K	L1	Crosstube Rod D	H	L2	R
2″	1.125″	1.000″	-	1.00″	2.38″	1.015″	3.29″	1.125″	0.75″
2.5″	1.375″	1.000″	0.28″	0.63″	3.00″	1.015″	3.65″	1.375″	0.88″
3″	1.500″	1.030″	0.40″	0.75″	3.50″	1.015″	3.26″	1.500″	1.17″
3.5″	1.750″	1.030″	0.53″	0.75″	4.00″	1.015″	3.13″	1.750″	1.17″
4″	2.000″	1.265″	0.78″	1.00″	4.50″	1.265″	3.83″	2.000″	1.29″

2″ BORE — **SPECIFICATIONS:** Ports SAE 8, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
905008	8″	1⅛″	16″	16 lbs.	$258.00
905009	10″	1⅛″	18″	18 lbs.	$277.50
905010	12″	1⅛″	20″	19 lbs.	$283.50
905011	16″	1⅛″	24″	22 lbs.	$292.50
905012	20″	1⅛″	28″	24 lbs.	$303.10
905013	24″	1⅛″	32″	27 lbs.	$309.00

2½″ BORE — **SPECIFICATIONS:** Ports SAE 8, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
905014	8″	1⅜″	16″	19 lbs.	$304.50
905015	12″	1⅜″	20″	22 lbs.	$325.50
905016	14″	1⅜″	22″	23 lbs.	$336.00
905017	16″	1⅜″	24″	25 lbs.	$304.50
905018	20″	1⅜″	28″	29 lbs.	$342.00
905019	24″	1⅜″	32″	32 lbs.	$351.00
905020	30″	1⅜″	38″	37 lbs.	$364.50

3″ BORE — **SPECIFICATIONS:** Ports SAE 8, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
905021	8″	1½″	16″	24 lbs.	$349.50
905022	12″	1½″	20″	27 lbs.	$360.00
905023	14″	1½″	22″	30 lbs.	$331.50
905024	16″	1½″	24″	32 lbs.	$369.00
905025	20″	1½″	28″	36 lbs.	$379.50
905026	24″	1½″	32″	40 lbs.	$390.00
905027	30″	1½″	38″	46 lbs.	$418.50
905028	32″	1½″	40″	47 lbs.	$424.50
905029	36″	1½″	44″	51 lbs.	$447.00
905030	40″	1½″	48″	55 lbs.	$429.00
905031	48″	1½″	56″	65 lbs.	$490.50

3½″ BORE — **SPECIFICATIONS:** Ports SAE 8, 1¼″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
905032	8″	1¾″	16″	27 lbs.	$424.50
905033	12″	1¾″	20″	32 lbs.	$442.50
905034	14″	1¾″	22″	34 lbs.	$450.00
905035	16″	1¾″	24″	36 lbs.	$388.50
905036	20″	1¾″	28″	41 lbs.	$477.00
905037	24″	1¾″	32″	45 lbs.	$495.00
905038	30″	1¾″	38″	51 lbs.	$517.50
905039	32″	1¾″	40″	53 lbs.	$480.00
905040	36″	1¾″	44″	57 lbs.	$553.50
905041	40″	1¾″	48″	61 lbs.	$517.50
905042	42″	1¾″	50″	63 lbs.	$531.00
905043	48″	1¾″	56″	72 lbs.	$606.00

4″ BORE — **SPECIFICATIONS:** Ports SAE 10, 1¼″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
905044	8″	2″	17″	39 lbs.	$535.50
905045	12″	2″	21″	45 lbs.	$600.00
905046	16″	2″	25″	51 lbs.	$619.50
905047	20″	2″	29″	57 lbs.	$645.00
905048	24″	2″	33″	63 lbs.	$609.00
905049	30″	2″	39″	74 lbs.	$571.50
905050	32″	2″	41″	75 lbs.	$580.50
905051	36″	2″	45″	81 lbs.	$600.00
905052	40″	2″	49″	87 lbs.	$676.50
905053	42″	2″	51″	90 lbs.	$741.00
905054	48″	2″	57″	104 lbs.	$714.00
905055	60″	2″	69″	127 lbs.	$835.50


MADE IN USA

Prince

Prince Magnum Welded Clevis Cylinders



- Brand new, PRINCE Magnum 3000 double acting hydraulic cylinders. Heavy duty welded design with unitized piston. Chrome, ground and polished piston rod. Clevis ends with pins. Rated 3000 PSI maximum working pressure.

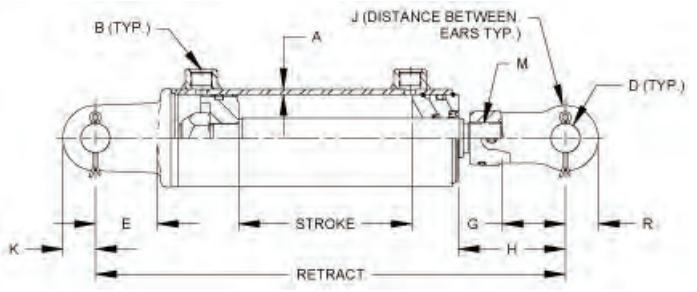

2″ BORE

SPECIFICATIONS: Ports SAE 8, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
904968	8″	1⅛″	18¼″	18 lbs.	$280.50
904969	8″	1⅛″	20¼″	18 lbs.	$282.15
904970	10″	1⅛″	20¼″	19 lbs.	$284.20
904971	16″	1⅛″	26¼″	24 lbs.	$321.00
904972	16″	1⅛″	31½″	24 lbs.	$299.00
904973	20″	1⅛″	30¼″	29 lbs.	$309.15
904974	24″	1⅛″	34¼″	32 lbs.	$319.25

Dimensional Data

Bore	Rod Dia.	Clevis Base D	E	K	Clevis Rod D	G	H	J	M	R
2″	1.125″	1.015″	2.12″	1.00″	1.015″	2.15″	3.67″	1.06″	1⅛″-12	1.13″
2.5″	1.250″	1.015″	2.14″	1.00″	1.015″	2.15″	3.97″	1.06″	1⅛″-12	1.13″
3″	1.375″	1.015″	2.13″	1.13″	1.015″	2.15″	3.70″	1.06″	1⅛″-12	1.13″
3.5″	1.375″	1.015″	2.13″	1.25″	1.015″	2.18″	3.70″	1.06″	1 5⁄16″-12	1.25″
4″	1.750″	1.015″	2.13″	1.25″	1.015″	2.19″	3.65″	1.06″	1½″-12	1.25″

2½″ BORE

SPECIFICATIONS: Ports SAE 8, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
904975	8″	1¼″	18¼″	22 lbs.	$313.50
904976	8″	1¼″	20¼″	22 lbs.	$315.25
904977	10″	1¼″	20¼″	23 lbs.	$317.25
904978	12″	1¼″	22¼″	24 lbs.	$333.45
904979	16″	1¼″	26¼″	30 lbs.	$357.00
904980	16″	1¼″	31½″	30 lbs.	$335.50
904981	20″	1¼″	30¼″	35 lbs.	$354.00
904982	24″	1¼″	34¼″	39 lbs.	$366.50

3″ BORE

SPECIFICATIONS: Ports SAE 8, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
904983	8″	1⅜″	18¼″	26 lbs.	$340.50
904984	8″	1⅜″	20¼″	26 lbs.	$313.50
904985	10″	1⅜″	20¼″	27 lbs.	$324.00
904986	12″	1⅜″	22¼″	30 lbs.	$328.05
904987	16″	1⅜″	26¼″	36 lbs.	$394.50
904988	16″	1⅜″	31½″	36 lbs.	$331.50
904989	20″	1⅜″	30¼″	38 lbs.	$345.60
904990	24″	1⅜″	34¼″	42 lbs.	$354.40

3½″ BORE

SPECIFICATIONS: Ports SAE 8, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
904991	8″	1⅜″	18¼″	33 lbs.	$355.50
904992	8″	1⅜″	20¼″	33 lbs.	$356.40
904993	10″	1⅜″	20¼″	34 lbs.	$346.95
904994	12″	1⅜″	22¼″	36 lbs.	$366.50
904995	16″	1⅜″	26¼″	43 lbs.	$420.00
904996	16″	1⅜″	31½″	43 lbs.	$429.00
904997	20″	1⅜″	30¼″	45 lbs.	$408.00
904998	24″	1⅜″	34¼″	49 lbs.	$409.75

4″ BORE

SPECIFICATIONS: Ports SAE 10, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
904999	8″	1¾″	18¼″	43 lbs.	$453.00
905000	8″	1¾″	20¼″	43 lbs.	$396.00
905001	10″	1¾″	20¼″	44 lbs.	$434.70
905002	12″	1¾″	22¼″	47 lbs.	$441.45
905003	16″	1¾″	26¼″	57 lbs.	$534.00
905004	16″	1¾″	31½″	57 lbs.	$498.00
905005	20″	1¾″	30¼″	60 lbs.	$469.80
905006	24″	1¾″	34¼″	66 lbs.	$483.30
905007	30″	1¾″	40¼″	76 lbs.	$519.10

Swivel Ball End Cylinders

MAXIM

• Brand new Maxim double acting hydraulic cylinder with swivel eyes. Great option for use on compact equipment. These cylinders are designed for demanding applications and are built to ensure maximum reliability and performance, exceeding the highest standards. 3000PSI.



1″ BORE — **SPECIFICATIONS:** Ports SAE 6, ½″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
906750	4″	0.625″	10″	5 lbs.	$131.15
906751	6″	0.625″	12″	6 lbs.	$150.75
906752	8″	0.625″	18″	6 lbs.	$148.55
906748	10″	0.625″	16″	7 lbs.	$139.50
906749	12″	0.625″	18″	7 lbs.	$155.30

1½″ BORE — **SPECIFICATIONS:** Ports SAE 6, ¾″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
906756	4″	1″	11.25″	7 lbs.	$146.75
906757	6″	1″	13.25″	9 lbs.	$154.40
906758	8″	1″	15.25″	10 lbs.	$149.50
906753	10″	1″	17.25″	11 lbs.	$140.15
906754	12″	1″	19.25″	13 lbs.	$179.15
906755	14″	1″	21.25″	14 lbs.	$155.75

2″ BORE — **SPECIFICATIONS:** Ports SAE 8, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
906764	6″	1.25″	13.5″	15 lbs.	$175.15
906765	8″	1.25″	15.52″	16 lbs.	$179.15
906759	10″	1.25″	17.5″	18 lbs.	$151.05
906760	12″	1.25″	19.5″	19 lbs.	$184.05
906761	20″	1.25″	27.52″	25 lbs.	$212.85
906762	24″	1.25″	31.5″	28 lbs.	$216.30
906763	30″	1.25″	37.5″	33 lbs.	$278.50

2½″ BORE — **SPECIFICATIONS:** Ports SAE 8, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
906770	6″	1.5″	13.5″	16 lbs.	$230.75
906771	8″	1.5″	15.5″	20 lbs.	$221.90
906766	10″	1.5″	17.5″	22 lbs.	$232.90
906767	12″	1.5″	19.5″	24 lbs.	$214.15
906768	20″	1.5″	27.5″	32 lbs.	$310.05
906769	24″	1.5″	31.5″	35 lbs.	$290.75

3″ BORE — **SPECIFICATIONS:** Ports SAE 8, 1″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
906776	8″	1.5″	16.25″	24 lbs.	$264.35
906772	10″	1.5″	18.25″	26 lbs.	$220.65
906773	12″	1.5″	20.25″	29 lbs.	$297.80
906774	20″	1.5″	28.25″	38 lbs.	$291.30
906775	24″	1.5″	32.25″	42 lbs.	$349.00

Hydraulic Cylinder Clevis Mounting Tabs

Brand new. Mounting tabs for hydraulic cylinder clevis. 1″ Thick A36 Hot-Rolled Steel. Pin hole is drilled.



Item Number	Pin Hole	Size	Bottom Length	Pin Hole Center Height	Shpg	Price
906191	1″	4″ x 3¼″ x 1″	4″	2″	4 lbs.	$24.00
906192	1″	5″ x 5″ x 1″	5″	3½″	6 lbs.	$31.05
906193	1¼″	5″ x 5″ x 1″	4″	3½″	6 lbs.	$31.05
906194	1¼″	5″ x 5½″ x 1″	5″	4″	7 lbs.	$32.40

Weld On Clevis

Brand new, Columbus Hydraulics weld on formed steel clevis ends. Designed for use with 1″ pins (not included).



Item Number	Pin Hole	Size	Throat Depth	Outside Width	Inside Width	Shpg	Price
906285	1″	3.375″ x 1.88″ x 2″	1.75	1.88″	1.13″	2 lbs.	$23.40
906295	1″	3.25″ x 1.78″ x 2″	1.5	1.78″	1.03″	2 lbs.	$24.45
906296	¾″	3″ x 1.63″ x 2″	1.25	1.63″	0.88″	2 lbs.	$22.95
906297	½″	1.75″ x 1.05″ x 1″	0.75	1.05″	0.88″	0.2 lbs.	$12.45
906298	1″	3.81″ x 1.88″ x 2″	2.25	1.88″	1.132″	2.5 lbs.	$22.65
906299	½″	4″ x 1.88″ x 1.125″	2.25	1.88″	1.137″	2 lbs.	$19.35
906300	1″	3.13″ x 1.63″ x 2″	1.5	1.63″	0.88″	2 lbs.	$22.05

Great Savings on Tie Rod Cylinders!

New, Lion Hydraulics double acting hydraulic tie rod cylinders.
Rated 2500 PSI. Standard NPT ports. Includes pins and clips.

Bore	Item Number	Bore	Stroke	Rod Dia	Retracted Length	Ports NPT	Shpg	Price
2½″	904360	2½″	24″	1¼″	34¼″	⅜″	36 lbs	$74.95
3½″	904362	3½″	16″	1½″	31½″	½″	42 lbs	$99.95


904360

904362

New, Grizzly double acting hydraulic tie rod cylinders.
Rated 2500 PSI. Standard NPT ports. Includes pins and clips.

Bore	Item Number	Rod Bore	Retracted Stroke	Ports Dia	Length	NPT	Shpg	Price
2½″	904361	2½″	24″	1¼″	34¼″	⅜″	36 lbs	$74.95
3½″	904363	3½″	16″	1½″	31½″	½″	42 lbs	$99.95


904361


904363

New, double acting hydraulic tie rod cylinders. Rated 2500 PSI.

Bore	Item Number	Rod Bore	Retracted Stroke	Pin Dia	Ports	Length	Holes	Shpg	Price
3½″	904498	3.5″	16″	1¼″	½″ NPT	31½″	1¼″	54 lbs	$112.60
3¾″	905968	2″	8″	1⅛″	SAE 8	18¼″	1″	16 lbs	$89.95


904498


905968

NEW, hydraulic tie-rod cylinders.

2500 PSI working pressure. Standard 1″ pins. Top quality cylinders discounted by the manufacturer because of a paint adhesion issue. Cylinders are susceptible to scratches, chips and lifting paint from removing mfg decal.


905652


905653

Bore	Item Number	Rod Bore	Retracted Stroke	Ports Dia	Length	SAE	Shpg	Price
2½″	905652	2½″	4″	1⅛″	14¼″	6	19 lbs.	$59.95
	905653	2½″	8″	1⅛″	20¼″	6	23 lbs.	$64.95

Swivel Ball End Cylinders

• Brand new, welded cylinder with wire-lock gland retainer. Swivel ball joints at both ends allow for angular motion. 3000PSI



1″ BORE — **SPECIFICATIONS:** Ports SAE 6, ½″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
901806	4″	⅝″	10″	5 lbs.	$147.70
901807	6″	⅝″	12″	5 lbs.	$156.00

1½″ BORE — **SPECIFICATIONS:** Ports SAE 6, ¾″ dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
901808	4″	1″	11¼″	6 lbs.	$130.05
901809	6″	1″	13¼″	7 lbs.	$153.60
901810	8″	1″	15¼″	9 lbs.	$162.75

Single Acting Telescoping Cylinders

• Brand new, MAXIM, single-acting, three-stage, telescoping cylinders.

SPECIFICATIONS For All
- Single Acting, Telescoping
- Number of Stages 3
- Pressure 2500 PSI max.
- Base End Male Trunnion
- 7 Ton 1¼″ Male Pin
- 12 Ton 1½″ Male Pin
- Rod Dia. 2″
- Port ½″ NPT
- Retracted Length 6″
- Rod End Pin Hole 1″

Truck freight only.



7 Ton

ITEM	Bore	Stroke	Shpg.	Price
905828	3″	78″	122 lbs.	$543.35
905831	3″	90″	132 lbs.	$615.40
905832	3″	108″	146 lbs.	$668.45

12 Ton

ITEM	Bore	Stroke	Shpg.	Price
905834	3.625″	78″	170 lbs.	$878.70
905835	3.625″	90″	184 lbs.	$853.95
905836	3.625″	108″	210 lbs.	$1059.50
905837	3.625″	120″	222 lbs.	$1172.90

• Brand new. Mounting brackets for our **90582** and **90583** series cylinders. Requires two brackets for mounting cylinder.



SPECIFICATIONS For Both
- Dimensions 5″ x 5″ x ¼″
- Bore Thru Length 1½″
- Mounting Holes 7/16″ dia. on 4″ x 4″ centers
- **Shpg. 4 lbs.**

ITEM 905833 Pin Hole 1.25″ **$21.35**

ITEM 905838 Pin Hole 1.51″ **$24.50**

8˝ Stroke Rephasing Cylinders

• Brand new, Cross Mfg. tie-rod, rephasing, double acting hydraulic cylinders. For series applications where multiple cylinders extend and retract equally. Two or more cylinders are plumbed in series, with bore and rod diameters sized so all rods extend or retract in unison. The rephase bypass allows oil to bypass piston on full cylinder extension to fill the next cylinder during initial synchronization or to compensate for internal leakage. May be used as master or slave units in a series circuit.



SPECIFICATIONS: Ret. Length 20.25˝, Ports SAE 8, 2500 PSI, Clevis ends

ITEM	Bore Size	Rod Dia.	Pin Size	Shpg.	Price
906327	3˝	1.25˝	1˝	27 lbs.	$314.25
906328	3.25˝	1.25˝	1˝	28 lbs.	$344.20
906329	3.5˝	1.25˝	1˝	34 lbs.	$344.20
906330	3.75˝	1.38˝	1˝	38 lbs.	$432.10
906331	4˝	1.38˝	1˝	41 lbs.	$417.95
906332	4.25˝	1.38˝	1.25˝	49 lbs.	$473.35
906333	4.5˝	1.5˝	1.25˝	56 lbs.	$549.35
906334	4.75˝	1.5˝	1.25˝	63 lbs.	$591.00
906335	5˝	1.5˝	1.25˝	70 lbs.	$579.00

1˝ x 8˝ Single Acting Cylinder w/ Plunger Pump



ITEM 902427 $89.99

• New. Originally intended for use in barber chairs. Both ports at base end of cylinder. ⅛ NPT breather in rod end gland. Spring plunger assembly mounted to cartridge block acts as pump to extend and retract cylinder. Retract cylinder by pushing plunger in at any time

SPECIFICATIONS

- Single Acting
- Bore x Stroke 1˝ x 8˝
- Pressure 925 PSI max.
- Rod Dia. ¾˝
- Cylinder and Pump Ports: SAE 4
- Retracted Length 14½˝
- Rod End Threaded
- Thread size-Pitch ⅝˝-18
- Base End Four Tapped Mounting Holes
- **Shpg. 12 lbs.**

1.25˝ x 5˝ x 0.625˝



ITEM 906439 $79.95

SPECIFICATIONS

- Double Acting
- Bore x Stroke 1.25˝ x 5.06˝
- Pressure 3000 PSI max.
- Rod Dia. 0.625˝
- Rod End: Threaded
- Thread Length 1.5˝
- Thread size-Pitch ½˝-20 TPI
- Base: End Thru-Hole
- Width 1.25˝
- Pin Hole 0.75˝
- Ports ⅛˝ NPT
- Retracted Length 11.58˝
- **Shpg. 5 lbs.**

1.5˝ x 16˝ x 0.875˝



ITEM 906637 $49.95

SPECIFICATIONS

- Double Acting
- Bore x Stroke 1.5˝ x 16˝
- Pressure 3000 PSI max.
- Rod Dia. 0.875˝
- Ports SAE 6
- Retracted Length 24"
- Clevis Ends
- Pin Holes 0.625˝
- **Shpg. 14 lbs.**

1.5˝ x 30˝ x 1˝



ITEM 906821 $149.95

SPECIFICATIONS

- Double Acting
- Bore x Stroke 1.5˝ x 30˝
- Pressure 3000 PSI max.
- Rod Dia. 1˝
- Ports SAE 6
- Retracted Length 32˝
- Clevis Ends
- Rod End: Outside Width 2˝ Inside Width 0.87˝
- Base End: Outside Width 2.44˝ Inside Width 0.87˝
- Pin Holes 0.75˝
- **Shpg. 30 lbs.**

1.75˝ x 6˝ x 1.5˝



ITEM 906793 $69.95

SPECIFICATIONS

- Double Acting
- Bore x Stroke 1.75˝ x 6˝
- Pressure 3000 PSI max.
- Rod Dia. 1.5˝
- Ports ¼" NPT
- Retracted Length 13˝
- Thru-Hole Ends
- Rod End: Width1.25˝
- Base End: Width 1.56˝
- Pin Holes 0.75˝
- **Shpg. 13 lbs.**

1.75˝ x 14.25˝ x 1˝



ITEM 904062 $79.95

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 1¾˝ x 14¼˝
- Crosstube Ends
- Width 1⅞˝
- O.D. 2˝
- Pin Hole ¾˝
- Pressure 3000 PSI max.
- Rod Dia. 1˝
- Ports SAE 6
- Retracted Length 28¼˝
- **Shpg. 18 lbs.**

2˝ x 4˝ x 1˝



ITEM 906402 $119.95

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 2˝ x 4˝
- Pressure 3000 PSI max.
- Rod Dia. 1˝
- Ports SAE 6
- Retracted Length 11.25˝
- Swivel-Eye Ends
- Rod End: Width 0.724˝
- Swivel Eye Width 1
- Rod End Width 0.724˝
- Swivel Eye Width 1˝
- Pin Holes 0.75˝
- **Shpg. 8 lbs.**

2˝ x 4.375˝ x 1˝



ITEM 906841 $129.95

SPECIFICATIONS

- Double Acting
- Bore x Stroke 2˝ x 4.375˝
- Pressure 3000 PSI max.
- Rod Dia. 1˝
- Ports SAE 6
- Retracted Length 20˝
- Tapped Ends
- Thread Size-Pitch 1 1/16˝-18 TPI
- Thread Depth 2.25˝
- **Shpg. 29 lbs.**

2˝ x 5˝ x 1.125˝



ITEM 906639 $69.95

SPECIFICATIONS

- Double Acting
- Bore x Stroke 2˝ x 5˝
- Pressure 2500 PSI max.
- Rod Dia. 1.125˝
- Ports ⅜˝ NPT
- Retracted Length 15.25˝
- Clevis Ends
- Pin Holes 1˝
- **Shpg. 13 lbs.**

2˝ x 6˝ x 1.125˝



ITEM 906456 $79.95

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 2˝ x 6˝
- Pressure 3000 PSI max.
- Rod Dia. 1.25˝
- Ports ¾˝ NPT
- Retracted Length 14.124˝
- Rod End: Threaded
- Thread size-Pitch 1⅛˝-12 TPI
- Thread Length 1¼˝
- Base End: Clevis
- Pin Hole 1˝
- **Shpg. 16 lbs.**

2˝ x 8˝ x 1.125˝



ITEM 905656 $79.95

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 2˝ x 8˝
- Pressure 2500 PSI max.
- Rod Dia. 1.125˝
- Ports SAE 8
- Retracted Length 18.25˝
- Clevis Ends
- Pin Holes 1˝
- **Shpg. 16 lbs.**

2˝ x 8˝ x 1.125˝



ITEM 906621 $69.95

SPECIFICATIONS

- Double Acting
- Bore x Stroke 2˝ x 8˝
- Pressure 2500 PSI max.
- Rod Dia. 1.125˝
- Ports SAE 8
- Retracted Length 18.25˝
- Clevis Ends
- Pin Holes 1˝
- **Shpg. 16 lbs.**

2˝ x 8˝ x 1.125˝



ITEM 906799 $89.95

SPECIFICATIONS

- Double Acting
- Bore x Stroke 2˝ x 8˝
- Pressure 3000 PSI max.
- Rod Dia. 1.125˝
- Ports SAE 8
- Retracted Length 18.25˝
- Clevis Ends
- Pin Holes 1˝
- **Shpg. 22 lbs.**

2˝ x 8˝ x 1.125˝



ITEM 906445 $79.95

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 2˝ x 8˝
- Pressure 3000 PSI max.
- Rod Dia. 1.125˝
- Ports ¼˝ NPT
- Retracted Length 13.81˝
- Rod End Threaded M18 x 1.5
- Base End Pin Hole ¾˝
- **Shpg. 21 lbs.**

2″ x 8″ x 1.125″



ITEM 906950 **$119.95**

SPECIFICATIONS

- Double Acting
- Bore x Stroke 2″ x 8″
- Pressure 3000 PSI max.
- Rod Dia. 1.125″
- Ports SAE 8
- Retracted Length 16″
- Cross-Tube Ends
- Rod End: Outside Width 1.75″ Inside Width 2″
- Base End: Outside Width 2.75″
- Pin Holes 1″
- **Shpg. 16 lbs.**

2″ x 10″ x 1.125″



ITEM 907017 **$89.95**

SPECIFICATIONS

- Double Acting
- Bore x Stroke 2″ x 10″
- Pressure 2500 PSI max.
- Rod Dia. 1.125″
- Ports ⅜″ NPT
- Retracted Length 20.25″
- Clevis Ends
- Pin Holes 1″
- **Shpg.22 lbs.**

2″ x 10″ x 1.125″



ITEM 905942 **$119.95**

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 2″ x 10″
- Pressure 2500 PSI max.
- Rod Dia. 1.125″
- Ports SAE 6
- Retracted Length 20.25″
- Clevis Ends
- Throat Depth 2.06″
- Pin Holes 1″
- **Shpg. 23 lbs.**

2″ x 12″ x 1.125″



ITEM 906405 **$119.95**

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 2″ x 12″
- Pressure 3000 PSI max.
- Rod Dia. 1.125″
- Ports SAE 6
- Retracted Length 22.25″
- Clevis Ends
- Pin Holes 1″
- **Shpg. 24 lbs.**

2″ x 12″ x 1.25″



ITEM 905896 **$209.95**

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 2″ x 12″
- Pressure 2500 PSI max.
- Rod Dia. 1.25″
- Ports SAE 4
- Retracted Length 19.125″
- Tang Ends
- Rod End: Width 1.391″
- Base: Width 1.363″
- Pin Holes 1.5″
- **Shpg. 18 lbs.**

2″ x 14.5″ x 1″



ITEM 906325 **$89.95**

SPECIFICATIONS

- Unused old inventory
- Bore x Stroke 2″ x 14.5″
- Pressure 2500 PSI max.
- Rod Dia. 1″
- Ports ¼″ NPT
- Retracted Length 22.75″
- Thru-Hole Ends
- Rod End: Width 2.875″
- Pin Hole 0.75″
- Base End: Width 1.875″
- Pin Hole 1″
- **Shpg. 26 lbs.**

2″ x 14.5″ x 1″



ITEM 906324 **$89.95**

SPECIFICATIONS

- Unused old inventory
- Double Acting
- Bore x Stroke 2″ x 14.5″
- Pressure 2500 PSI max.
- Rod Dia. 1″
- Ports ¼″ NPT
- Retracted Length 22.75″
- Thru-Hole Ends
- Rod End: Width 2.625″
- Pin Hole 0.75″
- Base End: OWidth 1.875″
- Pin Hole 1″″
- **Shpg. 26 lbs.**

2″ x 14″ x 1.25″



ITEM 906782 **$89.95**

SPECIFICATIONS

- Double Acting
- Bore x Stroke 2″ x 14″
- Pressure 3000 PSI max.
- Rod Dia. 1.25″
- Ports SAE 6
- Retracted Length 22″
- Cross-Tube Ends
- Rod End: Width 2.25″
- Base End: Width 2.75″
- Pin Holes 1″
- **Shpg. 21 lbs.**

2″ x 18″ x 1.25″



ITEM 906709 **$89.95**

SPECIFICATIONS

- Double Acting
- Bore x Stroke 2″ x 18″
- Pressure 2500 PSI max.
- Rod Dia. 1.25″
- Ports SAE 6
- Retracted Length 25″
- Cross-Tube Ends
- Rod End: Width 2″
- Base End: Width 3″
- Pin Holes 0.75″
- **Shpg. 27 lbs.**

2″ x 18″ x 1.25″



ITEM 905717 **$149.95**

SPECIFICATIONS

- Unused old inventory
- Double Acting
- Bore x Stroke 2″ x 18″
- Pressure 2500 PSI max.
- Rod Dia. 1.25″
- Extend Port ¼″ NPT
- Retract Port SAE 4
- Retracted Length 26″
- Rod End: Thru-Hole
- Width 1.25″
- Base End: Cross-Tube
- Width 5.456″
- Pin Holes 0.75″
- **Shpg. 24 lbs.**

2″ x 24″ x 1.25″



ITEM 905658 **$149.95**

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 2″ x 24″
- Pressure 3000 PSI max.
- Rod Dia. 1.25″
- Extend Port SAE 6
- Retract Port SAE 4
- Retracted Length 32.875″
- Thru-Hole Ends
- Rod End: Width 1.25″
- Base End: Width 2.386″
- Pin Holes 0.75″
- **Shpg. 29 lbs.**

2″ x 30″ x 1.125″



ITEM 906788 **$89.95**

SPECIFICATIONS

- Double Acting
- Bore x Stroke 2″ x 30″
- Pressure 2500 PSI max.
- Rod Dia. 1.125″
- Ports SAE 8
- Retracted Length 40.25″
- Clevis Ends
- Pin Holes 1″
- **Shpg. 39 lbs.**

2.16″ x 12.55″ x 1.18″



ITEM 905165 **$69.95**

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 2.16″(55mm) x 12.55″(319mm)
- Pressure 3000 PSI
- Rod Dia.1.18″ (30mm)
- Ports M14-1.5
- Retracted Length 20.35″
- Rod End Width 0.75″
- Base End Width 1.125
- Pin Holes 0.98″(25mm)
- **Shpg. 24 lbs.**

2.25″ x 14.125″ x 1.25″



ITEM 905707 **$109.95**

SPECIFICATIONS

- Unused old inventory
- Double Acting
- Bore x Stroke 2.25″ x 14.125″
- Pressure 2500 PSI max.
- Rod Dia. 1.25″
- Ports JIC 6
- Retracted Length 24.375″
- Rod End: Tang
- Width 1.801″
- Base End: Thru-Hole
- Width 2.625″
- Pin Holes 1.25″
- **Shpg. 27 lbs.**

2.25″ x 20″ x 1.5″



ITEM 906707 **$89.95**

SPECIFICATIONS

- Double Acting
- Bore x Stroke 2.25″ x 20″
- Pressure 2500 PSI max.
- Rod Dia. 1.5″
- Ports SAE 6
- Retracted Length 36″
- Cross-Tube Ends
- Rod End: Width 2.25″
- Base End: Width 3.65″
- Pin Holes 1″
- **Shpg. 44 lbs.**

2.25″ x 22.75″ x 1.5″



ITEM 906710 **$119.95**

SPECIFICATIONS

- Double Acting
- Bore x Stroke 2.25″ x 22.75″
- Pressure 2500 PSI max.
- Rod Dia. 1.5″
- Ports SAE 6
- Retracted Length 32″
- Cross-Tube Ends
- Rod End: Width 2.25″
- Base End: Width 3.625″
- Pin Holes 1″
- **Shpg. 42 lbs.**

2.25″ x 27.88″ x 1.5″



ITEM 906708 **$149.95**

SPECIFICATIONS

- Double Acting
- Bore x Stroke 2.5″ x 27.88″
- Pressure 2500 PSI max.
- Rod Dia. 1.5″
- Ports SAE 6
- Retracted Length 35.625″
- Cross-Tube Ends
- Rod End: Width 2.25″
- Pin Hole 1″
- Base End: Width 1.65″
- Pin Hole 1.25″
- **Shpg. 46 lbs.**

2.36″ x 16.125″ x 1.25″



ITEM 906954 **$249.95**

SPECIFICATIONS

- Double Acting
- Bore x Stroke 2.36″ x 16.125″
- Pressure 2500 PSI max.
- Rod Dia. 1.25″
- Ports SAE 3
- Retracted Length 25″
- Rod End: Tang
- Width 1.653″
- Base End: Thru-Hole
- Width 2.75″
- Pin Holes 1.175″
- **Shpg. 31 lbs.**

2.45″ x 4.25″ x 1.375″



ITEM 906952 **$149.95**

SPECIFICATIONS

- Double Acting
- Bore x Stroke 2.45″ x 4.25″
- Pressure 2500 PSI max.
- Rod Dia. 1.375″
- Ports JIC 6
- Retracted Length 16.25″
- Rod End: Tang
- Width 2.195″
- Base End: Thru-Hole
- Width 2.875″
- Pin Holes 1.175″
- **Shpg. 23 lbs.**

2.45″ x 36″ x 1.25″



ITEM 905781 **$249.95**

SPECIFICATIONS

- Double Acting
- Bore x Stroke 2.45″ x 36″
- Pressure 5000 PSI max.
- Rod Dia. 1.25″
- Ports SAE 6
- Retracted Length 47.25″
- Clevis Ends
- Rod End: Pin Hole 1.446″
- Base End: Pin Hole 1.125″
- **Shpg. 48 lbs.**

2.466″ x 2.375″ x 0.976″



ITEM 906398 **$69.95**

SPECIFICATIONS

- Unused old inventory
- Bore x Stroke 2.466″ x 2.375″
- Pressure 2500 PSI max.
- Rod Dia. 0.976″
- Ports ⅜″ NPT
- Retracted Length 13.5″
- Swivel Eye Ends
- Swivel Eye Width 0.875″
- Pin Holes 0.985″(25MM)″
- **Shpg. 18 lbs.**

2.5″ x 4″ x 1.125″



ITEM 901160 **$131.50**

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 2.5″ x 4″
- Pressure 3000 PSI
- Rod Dia.1⅛″
- Ports SAE 8
- Retracted Length 14.25″
- Clevis Ends
- Pin Holes 1″
- **Shpg. 19 lbs.**

2.5″ x 6″ x 1.125″



ITEM 906441 **$109.95**

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 2.5″ x 6″
- Pressure 2500 PSI max.
- Rod Dia. 1.125″
- Ports SAE 4
- Retracted Length 12.125″
- Cross-Tube Ends
- Rod End: Width 2″
- Base End: Width 3″
- Pin Holes 0.75″
- **Shpg. 15 lbs.**

2.5″ x 6″ x 1.5″



ITEM 906403 **$149.95**

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 2.5″ x 6″
- Pressure 3000 PSI max.
- Rod Dia. 1.5″
- Ports SAE 6
- Retracted Length 13.5″
- Swivel Eye Ends
- Swivel Eye Width 1.75″
- Pin Holes 1″
- **Shpg. 18 lbs.**

2.5″ x 8″ x 1.125″



ITEM 906794 **$89.95**

SPECIFICATIONS

- Double Acting
- Bore x Stroke 2.5″ x 8″
- Pressure 2500 PSI max.
- Rod Dia. 1.125″
- Ports AE 8 & ⅜″ NPT
- Retracted Length 18.25″
- Clevis Ends
- Pin Holes 1″
- **Shpg.24 lbs.**

2.5″ x 14″ x 1.25″



ITEM 905477 **$59.95**

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 2½″ x 14″
- Pressure 3000 PSI max.
- Rod Dia. 1¼″
- Ports SAE 6
- Retracted Length 24¼″
- Clevis Ends
- Pin Holes 1″
- **Shpg. 27 lbs.**

2.5″ x 16.625″ x 1.5″



ITEM 906280 **$159.95**

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 2.5″ x 16.625″
- Pressure 3000 PSI max.
- Rod Dia. 1.5″
- Ports JIC 6
- Retracted Length 25.25″
- Rod End: Tang
- Width 2.255″
- Base End: Thru-Hole
- Width 2.75″
- Pin Holes 1.25″
- **Shpg. 36 lbs.**

2.5″ x 20″ x 1.25″



ITEM 905657 **$99.95**

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 2.5″ x 20″
- Pressure 2500 PSI max.
- Rod Dia. 1.25″
- Rod Thickness 1.25″
- Ports ¼″ NPT
- Retracted Length 30.5″
- Clevis Ends
- Pin Holes 1″
- **Shpg. 29 lbs.**

2.5″ x 24″ x 1.5″



ITEM 902092 **$159.99**

SPECIFICATIONS

- New, Double Acting
- Bore/Stroke 2½″ x 24″
- Pressure 3000 PSI
- Rod dia. 1½″
- Ports SAE 8
- Retracted Length 50¼″
- Rod crosstube 2¾″ wide pin hole 1½″
- Base tang 1½″ wide pin hole 2⅜″
- **Shpg. 62 lbs.**

2.5″ x 26″ x 1.125″



ITEM 906786 **$99.95**

SPECIFICATIONS

- Double Acting
- Bore x Stroke 2.5″ x 26″
- Pressure 2500 PSI max.
- Rod Dia. 1.125″
- Ports SAE 8
- Retracted Length 36.25″
- Clevis Ends
- Pin Holes 1″
- **Shpg. 35 lbs.**

2.75″ x 15.75″ x 1.75″



ITEM 902585 **$119.95**

SPECIFICATIONS

- Unused old inventory
- Double Acting
- Bore/Stroke 2¾″ x 15¾″
- Pressure 3000 PSI
- Rod dia. 1¾″
- Ports SAE 4
- Retracted lgth. 40⅞″
- Rod ends thru-hole, both 27/32″ wide
- Pin hole ¾″
- Cylinder body mount 4 bolt 19⅜₁₆″ x 3⅛″ center ⅜″-16 tapped mtg. holes
- **Shpg. 45 lbs.**

2.75″ x 21.25″ x 1.5″



ITEM 906615 **$149.95**

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 2.75″ x 21.25″
- Pressure 3000 PSI max.
- Rod Dia. 1.5″
- Ports SAE 8
- Retracted Length 28.75″
- Rod End: Tang
- Width 2″
- Base End: Crosstube
- Width 3.5″
- Pin Holes 1.5″
- **Shpg. 40 lbs.**

2.75″ x 23.75″ x 1.5″



ITEM 906745 **$149.95**

SPECIFICATIONS

- Double Acting
- Bore x Stroke 2.75″ x 23.75″
- Pressure 2500 PSI max.
- Rod Dia. 1.5″
- Ports SAE 8
- Retracted Length 31.75″
- Rod End: Tang Width 2.375”
- Base End: Thru-Hole Width 3.25”
- Pin Holes 1.5″
- **Shpg. 48 lbs.**

2.75″ x 30″ x 1.5″



ITEM 906616 **$199.95**

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 2.75″ x 30″
- Pressure 3000 PSI max.
- Rod Dia. 1.5″
- Ports SAE 8
- Retracted Length 39″
- Rod End: Tang
- Width 2.875″
- Base End: Crosstube
- Width 3.25″
- Pin Holes 1.5″
- **Shpg. 50 lbs.**

Double Acting Hydraulic Trunnion Cylinder

• Double acting with trunnion mount on gland end. Two SUN counterbalance valves installed on rod end manifold block.

2.75″ x 186″ x 2″



ITEM 900959 **$599.95**

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 2¾″ x 186″
- Pressure 2500 PSI
- Rod Dia. 2″
- Ports SAE 8
- Base to pin retracted lgth. (pin next to gland) 211″
- Counterbalance valves set at 1000 and 1200 PS
- Trunnion to crosstube pin retracted lgth. 6⅛″ (pin next to gland)
- Base end plain w/bracket
- Rod end steel manifold block Block dimensions 8¾″ x 8″ x 3½″ Two pin holes 1¼″ Pin centers 3″
- Trunnion end rectangle male pins Outside pin width 10½″ Pin size 1⅞″ x 2¼″ Pin length 1¼″
- Overall lgth. 215½″
- Actual Weight 290 lbs.
- **Shpg. 400 lbs.**

Truck freight only

3″ x 2.5″ x 1.5″



ITEM 905971 **$129.95**

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 3″ x 2.5″
- Pressure 3000 PSI max.
- Rod Dia. 1.5″
- Ports SAE 8
- Retracted Length 12.75″
- Clevis Ends
- Pin Holes 1″
- **Shpg. 21 lbs.**

3″ x 6.125″ x 1.5″



ITEM 900406 **$76.50**

SPECIFICATIONS

- Unused, old inventory
- Double acting
- Bore/stroke 3″ x 6⅛″
- Retracted lgth. 21¾″
- 1⅜″ self aligning
- Swivel eye both ends
- Pressure 2500 PSI
- Rod end width 2″
- Rod dia. 1½″
- Base end width 2½″
- Ports SAE 8
- **Shpg. 45 lbs.**

3″ x 6.125″ x 1.5″



ITEM 905476 **$76.50**

SPECIFICATIONS

- Unused old inventory
- Double Acting
- Bore x Stroke 3″ x 6⅛″
- Pressure 2500 PSI max.
- Rod Dia. 1½″
- Ports SAE 8
- Retracted Length 21¾″
- Tang Ends
- Pin Holes 1″
- **Shpg. 45 lbs.**

3″ x 8″ x 1.5″



ITEM 906941 **$89.95**

SPECIFICATIONS

- Double Acting
- Bore x Stroke 3″ x 8″
- Pressure 3000 PSI max.
- Rod Dia. 1.5″
- Ports SAE 8
- Retracted Length 16″
- Cross-Tube Ends
- Rod End: Width 2.25″
- Base End: Width 3.5″
- Pin Holes 1″
- **Shpg. 24 lbs.**

3″ x 8″ x 1.25″



ITEM 906622 **$89.95**

SPECIFICATIONS

- Double Acting
- Bore x Stroke 3″ x 8″
- Pressure 3000 PSI max.
- Rod Dia. 1.25″
- Ports SAE 8
- Retracted Length 20″
- Clevis Ends:
- Pin Holes 1″
- **Shpg. 30 lbs.**

3″ x 8″ x 1.25″



ITEM 906795 **$109.95**

SPECIFICATIONS

- Double Acting
- Bore x Stroke 3″ x 8″
- Pressure 2500 PSI max.
- Rod Dia. 1.25″
- Ports ½″ NPT
- Retracted Length 18.25″
- Clevis Ends:
- Pin Holes 1″
- **Shpg. 30 lbs.**

3″ x 8.75″ x 1.5″



ITEM 905715 **$129.95**

SPECIFICATIONS

- Unused old inventory
- Double Acting
- Bore x Stroke 3″ x 8.75″
- Pressure 2500 PSI max.
- Rod Dia. 1.5″
- Ports JIC 6
- Retracted Length 8.25″
- Rod End: Tang
- Width 2.102″
- Pin Hole 1.5″
- Base End: Male Trunnion
- Pin Outside/Inside Width 7.25″ / 4.75″
- Pin-Center-To-Rod Pin Center 8.25″
- Pin Center To Base End 8″
- Pin Diamter 1.5″
- **Shpg. 35 lbs.**

3″ x 10″ x 1.25″



ITEM 905943 **$69.95**

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 3″ x 10″
- Pressure 3000 PSI max.
- Rod Dia. 1.25″
- Ports SAE 8
- Retracted Length 20.25″
- Flat Ends
- **Shpg. 25 lbs.**

3″ x 15″ x 1.5″



ITEM 901864 **$109.99**

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 3″ x 15″
- Pressure 3200 PSI max.
- Rod Dia. 1.5″
- Port SAE 8
- Retracted Length 61″
- Crosstube Ends
- Rod End Outside Width 2.69″
- Base End Outside Width 5″
- Pin Holes 1.25″
- **Shpg. 60 lbs.**

3″ x 15″ x 1.5″



ITEM 901865 **$109.99**

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 3″ x 15″
- Pressure 3200 PSI max.
- Rod Dia. 1.5″
- Port SAE 8
- Retracted Length 61″
- Crosstube Ends
- Rod End Outside Width 2.69″
- Base End Outside Width 5″
- Pin Holes 1.25″
- **Shpg. 60 lbs.**

3″ x 15″ x 1.5″



ITEM 901866 **$109.99**

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 3″ x 15″
- Pressure 3200 PSI max.
- Rod Dia. 1.5″
- Port SAE 8
- Retracted Length 61″
- Crosstube Ends
- Rod End Outside Width 2.69″
- Base End Outside Width 5″
- Pin Holes 1.25″
- **Shpg. 60 lbs.**

3″ x 16″ x 1.5″



ITEM 905108 **$149.95**

SPECIFICATIONS

- Unused old inventory
- Double Acting
- Bore x Stroke 3″ x 16″
- Pressure 2500 PSI
- Rod Dia.1.5″
- Ports SAE 8
- Retracted Length 36″
- Swivel Eye Ends
- Rod End: Width 1.71″
- Base End: Width 1.76″
- Swivel Eye Width 1.375″
- Pin Holes 1½″
- **Shpg. 66 lbs.**

3″ x 16″ x 1.75″



ITEM 902472 **$69.95**

- Two independent 3″ x 16″ x 1.75″ welded cylinders joined in the middle. Four SUN model CACA-LHN adjustable, atmospherically-referenced, vented counterbalance valves.

SPECIFICATIONS

- Unused, old inventory
- Double Acting
- Bore x Stroke 3″ x 16″
- Rod Ends Tapped
- Thread size-Pitch 1⅛″-12
- Thread Depth 3″
- Pressure 2500 PSI max.
- Rod Dia. 1¾″
- Ports SAE 6, See Above
- Overall Length 92½″
- **Shpg. 190 lbs.**

Truck freight only

3″ x 16″ x 1.75″



ITEM 902473 **$69.95**

- Two independent 3″ x 16″ x 1.75″ welded cylinders joined in the middle. Four SUN model CACA-LHN adjustable, counter balance valves.

SPECIFICATIONS

- Unused, old inventory
- Double Acting
- Bore x Stroke 3″ x 16″
- Rod Ends Tapped
- Thread size-Pitch 1⅛″-12
- Thread Depth 3″
- Pressure 2500 PSI max.
- Rod Dia. 1¾″
- Ports SAE 6, See Above
- Retracted Length 92½″
- **Shpg. 190 lbs.**

Truck freight only

3″ x 16″ x 1.75″



ITEM 902657 **$69.95**

- Tandem welded cylinder. Two independent cylinders joined in the middle. Four counterbalance valves. Each cylinder has two bleeder valves.

SPECIFICATIONS

- Unused, old inventory
- Double Acting
- Bore x Stroke 3″ x 16″
- Pressure 3000 PSI max.
- Rod dia. 1¾″
- Ports SAE 6
- Overall lgth. 62″
- Rod tapped 1⅛″-12 x 3″
- **Shpg. 107 lbs.**

Truck freight only

3″ x 20″ x 1.5″



ITEM 906943 **$129.95**

SPECIFICATIONS

- Double Acting
- Bore x Stroke 3″ x 20″
- Pressure 2500 PSI max.
- Rod Dia. 1.5″
- Ports SAE 8
- Retracted Length 28″
- Coss-Tube Ends
- Rod End: Width 2.25″
- Base End: Width 3.5″
- Pin Holes 1″
- **Shpg. 38 lbs.**

3″ x 20″ x 1.5″



ITEM 905597 **$89.95**

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 3″ x 20″
- Pressure 3000 PSI max.
- Rod Dia. 1½″
- Ports SAE 8
- Retracted Length 28.125″
- Rod End: Threaded
- Thread size-Pitch 1¼″-12″
- Base End: Clevis
- Pin Hole 1″
- **Shpg. 43 lbs.**

3″ x 24″ x 2″



ITEM 906783 **$109.95**

SPECIFICATIONS

- Double Acting
- Bore x Stroke 3″ x 24″
- Pressure 3000 PSI max.
- Rod Dia. 2″
- Ports SAE 8
- Retracted Length 34.25″
- Clevis Ends
- Pin Holes 1″
- **Shpg. 62 lbs.**

3″ x 27.31″ x 1.75″



ITEM 906438 **$149.95**

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 3″ x 27.31″
- Pressure 4000 PSI max.
- Rod Dia. 1.75″
- Ports SAE 8
- Retracted Length 39.38″
- Cross-Tube Ends
- Rod End: Width 4″
- Base End: Width 4.75″
- Pin Holes 1.25″
- **Shpg. 66 lbs.**

3″ x 30″ x 1.5″



ITEM 906801 **$169.95**

SPECIFICATIONS

- Double Acting
- Bore x Stroke 3″ x 30″
- Pressure 3000 PSI max.
- Rod Dia. 1.5″
- Ports SAE 8
- Retracted Length 38″
- Cross-Tube Ends
- Rod End: Width 2.25″
- Base End: Width 3.75″
- Pin Holes 1″
- **Shpg. 56 lbs.**

3″ x 30″ x 1.75″



ITEM 906613 **$199.95**

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 3″ x 30″
- Pressure 3000 PSI max.
- Rod Dia. 1.75″
- Ports SAE 8
- Retracted Length 39″
- Rod End: Tang
- Width 2.875″
- Base End: Crosstube
- Width 2.875″
- Pin Holes 1″
- **Shpg. 65 lbs.**

3.139″ x 7.25″ x 1.572″



ITEM 906339 **$79.95**

SPECIFICATIONS

- Unused old inventory
- Double Acting
- Bore x Stroke 3.139″(80mm) x 7.25″(184mm)
- Pressure 2500 PSI max.
- Rod Dia. 1.572″(40mm)
- Ports M18 x 1.5
- Retracted Length 22″
- Tapped Ends
- Rod End: Thread size-Pitch M18 X 1.5
- Thread Depth 3.375″
- Base End: Thread size-Pitch M18 X 1.5
- Thread Depth 3.375″
- Mount Two, M24 x 3.0 threaded holes on 9.375″ centers
- **Shpg. 52 lbs.**

3.24″ x 21.375″ x 1.5″



ITEM 906953 **$299.95**

SPECIFICATIONS

- Double Acting
- Bore x Stroke 3.24″ x 21.375″
- Pressure 2500 PSI max.
- Rod Dia. 1.5″
- Ports JIC 8
- Retracted Length 29.5″
- Cross-Tube Ends
- Rod End: Tang Width 2″
- Base End: Thru-Hole Width 3.875″
- Pin Holes 1.25″
- **Shpg. 52 lbs.**

3.25″ x 13″ x 1″



ITEM 902604 **$102.95**

• Mounting blocks on each end of cylinder with two 0.450″ dia. holes on 2¾″ centers. Mounting blocks measure 3¾″ long, 1¼″ wide, and 1″ thick at bolt holes.

SPECIFICATIONS

- New, old inventory
- Double Acting
- Bore x Stroke 3¼″ x 13″
- Pressure 2500 PSI max.
- Rod Dia. 1″
- Wall thickness ⅛″
- Ports ½″ NPT
- Retracted Length 20⅜″
- Rod end tapped ¾-16 x 1⅞₁₆
- Base end blank
- **Shpg. 29 lbs.**

3.25″ x 16″ x 1.25″



ITEM 902640 **$119.95**

SPECIFICATIONS

- New, double acting
- Bore x Stroke 3¼″ x 16″
- Pressure 3000 PSI max.
- Rod Dia. 1¼″
- Ports SAE 6
- Retracted Length 29⅛″
- Rod thread-on clevis 2¾″ w
- Base end clevis 2¾″ w.
- Pin holes 1″
- **Shpg. 37 lbs.**

3.25″ x 16″ x 1.25″



ITEM 902516 **$119.95**

• Port block on rod end of barrel with two SUN counterbalance valves with 3:1 pilot ratio.

SPECIFICATIONS

- Unused, old inventory
- Double Acting
- Bore x Stroke 3¼″ x 16″
- Pressure 3000 PSI max.
- Rod Dia. 1¼″
- Wall thickness ³⁄₁₆″
- Port SAE 6
- Retracted Length 29¼″
- Rod end thread-on clevis assembly 2¾″ wide
- Base end clevis 2¹¹⁄₁₆″ w
- Pin Holes 1″
- **Shpg. 43 lbs.**

3.5″ x 6″ x 1.75″



ITEM 904947 **$79.95**

SPECIFICATIONS

- Unused, old inventory
- Double Acting
- Bore/Stroke 3½″ x 6″
- 3000 PSI max
- Rod dia. 1.75″
- Ports SAE 8
- Retracted Length 16″
- Crosstube Ends
- Rod End: Width 1.75″
- Base End: Width 4″
- Pin holes 1″
- **Shpg. 36 lbs.**

3.5″ x 6″ x 1.25″




ITEM 906803 **$109.95**

SPECIFICATIONS

- Double Acting
- Bore x Stroke 3.5″ x 6″
- Pressure 2500 PSI max.
- Rod Dia. 1.25″
- Ports SAE 8
- Retracted Length 16.25″
- Clevis Ends
- Pin Holes 1″
- **Shpg. 35 lbs.**

Retracted Length



3.5″ x 10″ x 1.75″



ITEM 904946 **$89.95**

SPECIFICATIONS

- New, Double Acting
- Bore/Stroke 3.5″ x 10″
- Pressure 3000 PS
- Rod dia. 1.75″
- Ports SAE 8
- Retracted Length 18″
- Crosstube Ends
- Rod End: Width 1.75″ Pin Hole 1″
- Base End: Width 4″ Pin Hole ¾″
- **Shpg. 39 lbs.**

3.5″ x 11.12″ x 1.5″



ITEM 901867 **$109.99**

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 3.5″ x 11.12″
- Pressure 3200 PSI max.
- Rod Dia. 1.5″
- Port SAE 8
- Retracted Length 63.5″
- Crosstube Ends
- Rod End Outside Width 2.69″
- Base End Outside Width 5″
- Pin Holes 1.25″
- **Shpg. 65 lbs.**

3.5″ x 11.125″ x 1.5″



ITEM 901868 **$109.95**

SPECIFICATIONS

- New, Double Acting
- Bore/Stroke 3.5″ x 11.125″
- Pressure 3200 PSI max.
- Rod Dia. 1.5″
- Ports SAE 8
- Retracted Length 63.5″
- Crosstube Ends
- Rod End: Outside width 2.69″
- Base End: Outside width 5″
- Pin Holes 1.25″
- **Shpg. 65 lbs.**

3.5″ x 14″ x 1.75″



ITEM 906800 **$139.95**

SPECIFICATIONS

- Double Acting
- Bore x Stroke 3.5″ x 14″
- Pressure 3000 PSI max.
- Rod Dia. 1.75″
- Ports SAE 8
- Retracted Length 24″
- Cross-Tube Ends
- Rod End: Width 2.25″
- Base End: Width 4.25″
- Pin Holes 1.25″
- **Shpg. 46 lbs.**

3.5″ x 15″ x 1.5″



ITEM 900970 **$109.95**

SPECIFICATIONS

- New, double acting
- Bore x Stroke 3½″ x 15″
- Pressure 2500 PSI
- Ports 2 bolt manifold with ⅛″ auxiliary ports (manifold not available)
- Rod Dia. 1½″
- Retracted Length 26¾″
- Single eye rod pin hole 2¹³⁄₁₆″
- Crosstube base 4¹⁵⁄₁₆″ w.
- Pin holes 1¾″
- **Shpg. 51 lbs.**

3.5″ x 16″ x 1.75″



ITEM 905970 **$189.95**

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 3.5″ x 16″
- Pressure 3000 PSI max.
- Rod Dia. 1.75″
- Ports SAE 8
- Retracted Length 24″
- Cross-Tube Ends
- Rod End: Width 2.5″
- Base End: Width 4″
- Pin Holes 1″
- **Shpg. 46 lbs.**

3.5″ x 18″ x 1.5″



ITEM 906791 **$169.95**

SPECIFICATIONS
- Double Acting
- Bore x Stroke 3.5″ x 18″
- Pressure 3000 PSI max.
- Rod Dia. 1.5″
- Ports SAE 8
- Retracted Length 28.5″
- Clevis Ends
- Pin Holes 1″
- **Shpg. 53 lbs.**

3.5″ x 20″ x 1.75″



ITEM 906945 **$149.95**

SPECIFICATIONS
- Double Acting
- Bore x Stroke 3.5″ x 20″
- Pressure 3000 PSI max.
- Rod Dia. 1.5″
- Ports SAE 8
- Retracted Length 28″
- Cross-Tube Ends
- Rod End: Width 2.25″″
- Base End: Width 4″″
- Pin Holes 1.25″
- **Shpg. 47 lbs.**

3.5″ x 24″ x 1.5″



ITEM 906790 **$169.95**

SPECIFICATIONS
- Double Acting
- Bore x Stroke 3.5″ x 24″
- Pressure 2500 PSI max.
- Rod Dia. 1.5″
- Ports SAE 8
- Retracted Length 34.25″
- Clevis Ends
- Pin Holes 1″
- **Shpg. 63 lbs.**

3.5″ x 30″ x 1.5″



ITEM 906443 **$159.95**

SPECIFICATIONS
- New, Double Acting
- Bore x Stroke 3.5″ x 30″
- Pressure 2500 PSI max.
- Rod Dia. 1.5″
- Ports SAE 8
- Retracted Length 40.25″
- Clevis Ends
- Pin Holes 1″
- **Shpg. 70 lbs.**

3.5″ x 33″ x 1.375″



ITEM 902641 **$234.95**

SPECIFICATIONS
- Unused, old inventory
- Double acting
- Bore x Stroke 3½″ x 33″
- Pressure 3000 PSI max.
- Ports SAE 8
- Rod Dia. 1⅜″
- Retracted Length 26⅜″
- Rod clevis 3″ wide
- Pin hole 1¼″
- Male trunnion trunnion pin width outside 7″, inside 5″ pin ctr to rod pin ctr 16⅞″ pin ctr to base end 26⅜″ trunnion pin 1″ dia. x 1″
- **Shpg. 68 lbs.**

3.5″ x 36″ x 1.5″



ITEM 905967 **$149.95**

SPECIFICATIONS
- New, Double Acting
- Bore x Stroke 3.5″ x 36″
- Pressure 2500 PSI max.
- Rod Dia. 1.5″
- Ports ½″ NPT
- Retracted Length 46″
- Clevis Ends
- Pin Holes 1″
- **Shpg. 47 lbs.**

Find more cylinders at www.surpluscenter.com

3.5″ x 36″ x 1.5″



ITEM 906620 **$149.95**

SPECIFICATIONS
- Double Acting
- Bore x Stroke 3.5″ x 36″
- Pressure 2500 PSI max.
- Rod Dia. 1.5″
- Ports ½″ NPT
- Retracted Length 46″
- Clevis Ends
- Pin Holes 1″
- **Shpg. 59 lbs.**

3.5″ x 36″ x 1.5″



ITEM 906784 **$139.95**

SPECIFICATIONS
- Double Acting
- Bore x Stroke 3.5″ x 36″
- Pressure 2500 PSI max.
- Rod Dia. 1.5″
- Ports SAE 8
- Retracted Length 46.5″
- Clevis Ends
- Pin Holes 1″
- **Shpg. 83 lbs.**

3.5″ x 46″ x 2.5″



ITEM 902510 **$299.95**

• Counter-balance valve with 3:1 pilot ratio.

SPECIFICATIONS
- New, old inventory
- Double acting
- Bore x Stroke 3½″ x 46″
- Pressure 3000 PSI max.
- Ports SAE 6
- Rod Dia. 2½″
- Retracted Length 60″
- Crosstube ends 11⅝″ wide
- Pin holes 1½″
- **Shpg. 240 lbs.**

Truck freight only

3.5″ x 54″ x 2″



ITEM 905323 **$349.95**

SPECIFICATIONS
- Unused old inventory
- Double Acting
- Bore x Stroke 3.5″ x 54″
- Pressure 3000 PSI
- Rod Dia. 2″
- Ports SAE 8
- Retracted Length 19.375″
- Rod End: SwivelBall Ball Width 2.95″
- Base End: Male Trunnion Pin Outside/Inside Width 8.75″ / 5.52″ Pin Center To Rod Pin Center 19.375″ Pin Center To Base End 44.25″ Pin Dia. 2⅜″
- **Shpg. 145 lbs.**

Truck freight only.


3.536″ x 9.25″ x 1.769″



ITEM 906386 **$89.95**

SPECIFICATIONS
- Unused old inventory
- Double Acting
- Bore x Stroke 3.536″(90MM) x 9.25″(235MM)
- Pressure 2500 PSI max.
- Rod Dia. 1.769″(45MM)
- Ports M18 x 1.5
- Retracted Length 24″
- Tapped Ends
- Thread size-Pitch M26 x 1.5
- Thread Depth 2.365″
- **Shpg. 41 lbs.**

Retracted Length

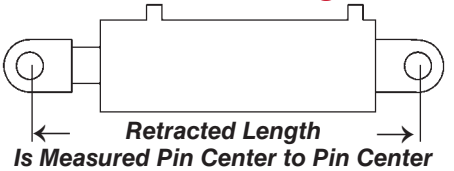

Retracted Length Is Measured Pin Center to Pin Center

3.75″ x 192″ x 2.75″



ITEM 902465 **$594.95**

• Two SAE 16 ports in manifold block in rod end for cartridge valves (not incl.)

SPECIFICATIONS
- Unused, old inventory
- Double Acting
- Bore x Stroke 3¾″ x 192″
- Pressure 2000 PSI max.
- Rod Dia. 2¾″, Hollow
- Ports SAE 8 see above
- Retracted Length 15″
- Rod crosstube 8⅛″ w.
- Pin hole 1½″
- Female trunnion trunnion pin width outside 6¾″, inside 4″ pin ctr. to rod pin ctr. 15″ trunnion 1½″ dia.
- **Shpg. 475 lbs.**

Truck freight only

3.88″ x 18″ x 1.97″



ITEM 905283 **$119.95**

SPECIFICATIONS
- Unused old inventory Double Acting
- Bore x Stroke 3.88″(100mm) x 18″(457mm)
- Pressure 3000 PSI
- Rod Dia. 1.97″(50mm)
- Ports ½″ NPT
- Retracted Length 35.75″
- Swivel Eye Ends
- Rod End: Width 2.26″
- Base End: Width 1.62″
- Swivel Eye Width 1.5″
- Pin Hole 1.97″(50mm)
- **Shpg. 143 lbs.**

Truck freight only.

3.89″ x 18″ x 1.97″



ITEM 905284 **$119.95**

SPECIFICATIONS
- Unused old inventory
- Double Acting
- Bore x Stroke 2.89″(100m) x 18″(457mm)
- Pressure 3000 PSI
- Rod Dia. 1.97″(50mm)
- Ports ½″ NPT
- Retracted Length 35.75″
- Swivel Eye Ends
- Rod End: Width 1.27″
- Base End: Width 1.59″
- Swivel Eye Width 1.5″
- Pin Hole 1.97″(50mm)
- **Shpg. 146 lbs.**

Truck freight only.

3.91″ x 17″ x 1.97″



ITEM 904737 **$199.95**

SPECIFICATIONS
- Unused old inventory
- Double Acting
- Bore x Stroke 3.91″(100mm) x 17″(42mm)
- Pressure 3000 PSI max.
- Rod Diam. 1.97″(50mm)
- Ports M22 x 1.5, 24° flare
- Swivel Eye Ends
- Pin Hole 2.76″(70mm)
- Pin Hole 1.77″(45mm)
- **Shpg. 139 lbs.**

Truck freight only.

3.94″ x 18″ x 1.97″



ITEM 905310 **$199.95**

SPECIFICATIONS
- Unused old inventory
- Double Acting
- Bore x Stroke 3.94″(100mm) x 18″(457mm)
- Pressure 3000 PSI
- Rod Dia. 1.97″(50mm)
- Ports ½″ NPT
- Retracted Length 35.75″
- Swivel Eye Ends
- Rod End: Width 1.27″
- Base End: Width 1.58″
- Swivel Eye Widths 1.5″
- Pin Holes 1.97″(50mm)
- **Shpg. 141 lbs.**

Truck freight only.

3.94″ x 18.875″ x 1.97″



ITEM 904819 **$179.95**

SPECIFICATIONS

- Unused old inventory
- Double Acting
- Bore/Stroke 3.94″ x 18.875″
- 3000 PSI max
- Rod dia. 1.97″
- Ports JIS 12″
- Retracted Length 36.25″
- Tang Ends
- Swivel Eye Widths 2.25″
- Rod End: Width 2.39″
- Base End: Width 2.37″
- Pin holes 1.97″
- **Shpg. 98 lbs.**

Truck freight only.

3.94″ x 33″ x 3.94″



ITEM 904933 **$149.95**

SPECIFICATIONS

- Unused old inventory
- Single Acting
- Bore x Stroke 3.94″(100mm) x 33″(840mm)
- Pressure 2500 PSI max.
- Rod Dia. 3.94″(100mm)
- Rod Thickness 0.236″
- Ports JIC 16
- Retracted Length 16.25″
- Rod End ThruHole Width 1.75″ Pin Hole 7⁄16″
- Base End: Mounting Stud Dimensions 1″ dia. x ½″ long
- **Shpg. 111 lbs.**

Truck freight only.

4″ x 7.25″ x 1.25″



ITEM 901757 **$149.95**

SPECIFICATIONS

- Unused old inventory
- Double Acting
- Bore x Stroke 4″ x 7.25″
- Pressure 3000 PSI max.
- Rod Dia. 1.25″
- Ports SAE 10
- Retracted Length 21.75″
- Swivel Eye Ends
- Rod End: Width 1.405″
- Swivel Eye Width 1.532″
- Base End: Width 1.41″
- Swivel Eye Width 1.53″
- Pin Holes 1.75″
- **Shpg. 52 lbs.**

4″ x 8″ x 1.125″



ITEM 906808 **$99.95**

SPECIFICATIONS

- Double Acting
- Bore x Stroke 4″ x 8″
- Pressure 2500 PSI max.
- Rod Dia. 1.125″
- Ports ½” NPT
- Retracted Length 18.25″
- Clevis Ends
- Pin Holes 1″
- **Shpg. 43 lbs.**

4″ x 10″ x 2″



ITEM 906442 **$149.95**

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 4″ x 10″
- Pressure 3000 PSI max.
- Rod Dia. 2″
- Ports ½″ NPT
- Retracted Length 18.5″
- Rod End: Thru-Hole
- Width 1.5″
- Pin Center to Base End 1″
- Base End: Tang
- Width 1.25″
- Pin Holes 1″
- **Shpg. 44 lbs.**

4″ x 14″ x 1.5″



ITEM 905598 **$149.95**

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 4″ x 14″
- Pressure 3000 PSI
- Rod Dia. 1.5″
- Ports SAE 8
- Retracted Length 24.25″
- Clevis Ends
- Pin Holes 1″
- **Shpg. 50 lbs.**

4″ x 16″ x 2″



ITEM 905730 **$199.95**

SPECIFICATIONS

- Unused old inventory
- Double Acting
- Bore x Stroke 4″ x 16″
- Pressure 3000 PSI max.
- Rod Dia. 2″
- Ports SAE 12
- Retracted Length 28.5″
- Cross-Tube Ends
- Width 5″
- Pin Holes 2.5″
- Actual Weight. 115 lbs.
- **Shpg. 155 lbs.**

Truck freight only.

4″ x 16″ x 2″



ITEM 905731 **$199.95**

SPECIFICATIONS

- Unused old inventory
- Double Acting
- Bore x Stroke 4″ x 16″
- Pressure 3500 PSI max.
- Rod Dia. 2″
- Ports SAE 12
- Retracted Length 28.5″
- Gland Face to Rod Pin Center 4″
- Cross-Tube Ends
- Rod End: Width 5″
- Base End: Width 5″
- Pin Holes 2.5″
- Actual Weight 100 lbs
- **Shpg. 140 lbs.**

Truck freight only.

4″ x 18″ x 2″



ITEM 903762 **$194.95**

- Both ports in rod end.

SPECIFICATIONS

- Unused, old inventory
- Double Acting
- Bore x Stroke 4″ x 18″
- Pressure 3000 PSI
- Rod Dia. 2″, hollow
- Rod thickness 7⁄16″
- Ports ¼″ NPT
- Retracted Length 29⅝″
- Thru-hole ends rod 2⅞″ w., base 2″ w.
- Pin Holes rod 1⅛″, base 1¼″
- **Shpg. 67 lbs.**

4″ x 18.625″ x 2″



ITEM 906341 **$174.95**

SPECIFICATIONS

- Unused old inventory
- Double Acting
- Bore x Stroke 4″ x 18.625″
- Pressure 2500 PSI max.
- Rod Dia. 2″
- Ports SAE 10
- Retracted Length 33.5″
- Rod End: Clevis
- Pin Hole 2″
- Base End: Tang
- Width 1.889″
- Pin Hole 3.185″
- **Shpg. 99 lbs.**

4″ x 23.625″ x 2″



ITEM 902681 **$159.95**

SPECIFICATIONS

- Unused old inventory Double Acting
- Bore x Stroke 4″ x 23⅝″
- Pressure 3000 PSI max.
- Rod Dia. 2″
- Extend Port JIC 12 and JIC 4
- Retract Port Two SAE 12 ports
- Rod End: Tang w/ Swivel Eye
- Max Thickness 1 15⁄16″ Pin Center to Tang End 2 9⁄16″ Pin Hole 2″
- Trunnion: Female Pin Outside Width 9½″ Pin Inside Width 8⅜″ Pin Center to Base End 41½″ Pin Diameter 2″
- Retracted Length 43½″
- **Shpg. 135 lbs.**

Truck freight only.

4″ x 24″ x 1.75″



ITEM 906357 **$349.95**

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 4″ x 24″
- Pressure 2500 PSI max.
- Rod Dia. 1.75″
- Ports SAE 8
- Retracted Length 34.5″
- Clevis Ends
- Pin Holes 1″
- **Shpg. 67 lbs.**

4″ x 24″ x 2″



ITEM 906947 **$299.95**

SPECIFICATIONS

- Double Acting
- Bore x Stroke 4″ x 24″
- Pressure 3000 PSI max.
- Rod Dia. 2″
- Ports SAE 10
- Retracted Length 33″
- Cross-Tube Ends:
- Rod End: Width 3.25″
- Base End: Width 4.5″
- Pin Holes 1.25″
- **Shpg. 70 lbs.**

4″ x 24″ x 2″



ITEM 906787 **$199.95**

SPECIFICATIONS

- Double Acting
- Bore x Stroke 4″ x 24″
- Pressure 2500 PSI max.
- Rod Dia. 2″
- Ports SAE 8
- Retracted Length 34.25″
- Clevis Ends
- Rod End: Outside Width 2.72″
- Inside Width 1.14″
- Base End: Outside Width 2.72″
- Inside Width 1.14″
- Pin Holes 1″
- **Shpg. 83 lbs.**

4″ x 24″ x 2″



ITEM 903993 **$414.00**

SPECIFICATIONS

- Brand New
- Double acting
- Bore x Stroke 4″ x 24″
- PSI Max. 3,000
- Rod End Thru-Hole
- Pin hole ⅝″
- Base End Clevis
- Inner width 1⅛″
- Outer width 2⅝″
- Pin hole 1″
- Rod Dia. 2″
- Ports SAE 8
- Retracted length 32″
- **Shpg. 68 lbs.**

4″ x 24″ x 2″



ITEM 906711 **$279.95**

SPECIFICATIONS

- Double Acting
- Bore x Stroke 4″ x 24″
- Pressure 3000 PSI max.
- Rod Dia. 2″
- Ports SAE 8
- Retracted Length 34.25″
- Clevis Ends
- Pin Holes 1″
- **Shpg. 71 lbs.**

Bore - Inside diameter of cylinder

Stroke - How far a cylinder extends out

R-length - Distance in inches between pin centers when cylinder is retracted

Rod Diameter - Diameter of cylinder rod

Single Acting - Cylinder is powered one way

Double Acting - Cylinder is powered both ways (two way)

Crosstube End - Round tube welded perpendicular to cylinder

Single Eye End - For mounting between two mounting ears.

Clevis End - Two mounting ears

4″ x 26″ x 2.75″



ITEM 906440 **$279.95**

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 4″ x 26″
- Pressure 3000 PSI max.
- Rod Dia. 2.75″
- Ports SAE 20
- Retracted Length 36″
- Rod End: Thru-Hole
- Width 2.4″
- Base End: Cross-Tube
- Width 6.25″
- Pin Holes 1.25″
- **Shpg. 144 lbs.**

Truck freight only.

4″ x 32″ x 2″



ITEM 900872 **$612.00**

SPECIFICATIONS

- SAE-64032 Model
- Double Acting
- Bore x Stroke 4″ x 32″
- 3000 PSI max
- 2 Rod dia.
- Ports SAE 10
- 42″ Retracted Length
- 3¼″ Rod End Crosstube width
- 4¾″ Base End Crosstube width
- Pin holes 1¼″
- **Shpg. 89 lbs.**

4″ x 45.375″ x 2″



ITEM 902236 **$399.99**

SPECIFICATIONS

- Unused, old inventory
- Double Acting
- Bore x Stroke 4″ x 45⅜″
- Pressure 3000 PSI
- Rod Dia. 2″
- Ports SAE 12
- Retracted Length 57½″
- Rod crosstube 3⅝″ w.
- Base clevis 2 15/16″ w.
- Pin Holes 1½″
- **Shpg. 128 lbs.**

Truck freight only.

4″ x 45″ x 2″



ITEM 902188 **$199.95**

SPECIFICATIONS

- New, Double acting
- Bore x Stroke 4″ x 45″
- Pressure 3000 PSI max.
- Rod Dia. 2″
- Ports SAE 16/12 Ext/Ret
- Retracted Length 63″
- Rod tang w/ swivel ball O.D. 4 9/16″
- Base tang 4″ wide
- Pin holes 2″
- **Shpg. 214 lbs.**

Truck freight only.

4.066″ x 15.25″ x 2.362″



ITEM 906406 **$179.95**

SPECIFICATIONS

- Unused old inventory
- Double-Acting
- Bore x Stroke 4.066″(105MM) x 15.25″(387MM)
- Pressure 2500 PSI max.
- Rod Dia. 2.362″(60MM)″
- Extend Port BSPP 6
- Retract Port JIC 6
- Retracted Length 33″
- Tang Ends
- Rod End Width 2.565″
- Base End Width 2.557″
- Pin Holes 2.168(55MM)
- **Shpg. 126 lbs.**

Truck freight only

4.125″ x 5.5″ x 1.375″



ITEM 902515 **$119.99**

- Multi-stage with double piston.

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 4⅛″ x 5½″
- Pressure 2500 PSI max.
- Rod Dia.1⅜″
- Ports SAE 6
- Retracted Length 22″
- Clevis ends 3 1/16″ wide
- Pin holes: rod 1 1/16″, base 1″
- **Shpg. 63 lbs.**

4.25″ x 257″ x 3.5″



ITEM 902461 **$995.95**

- SAE 16 ports for cartridge valves, sold with plugs only. All ports common in this configuration.

SPECIFICATIONS

- Unused, old inventory
- Double Acting
- Bore x Stroke 4.25″ x 257″
- Pressure 3000 PSI max.
- Rod Dia. 3½″, Hollow
- Ports SAE 8
- Retracted Length 15″
- Rod End Cross-Tube
- Rod End Width 11½″
- Rod End Pin Hole 1½″
- Trunnion Male
- Pin Outside Width 8 1/16″
- Pin Inside Width 5¼″
- Pin Center to Rod Pin Center 15″
- Pin Center to Base End 283″
- Pin Diameter 2½″, Hollow
- **Shpg. 770 lbs.**

Truck freight only.

4.33″ x 79″ x 3.15″



ITEM 904764 **$849.95**

SPECIFICATIONS

- Double Acting
- Unused old inventory
- Bore x Stroke 4.33″(110mm) x 79″(2007mm)
- Pressure 3000 PSI
- Rod Dia. 3.15″(80mm)
- Extend Port BSPP 16
- Retract Port ORFS 10
- Retracted Length 96.5″
- Rod End: Male Stud
- Length/Width 3.25″/1.97″ Snap Ring Groove 0.088″ Tapped M12-1.75 x 1.18″(30mm)
- Base End: Thru-Hole
- Thru-Hole Width 2.38″
- Pin Hole ⅝″
- **Shpg. 369 lbs.**

Truck freight only.

4.5″ x 2.5″ x 2″



ITEM 905969 **$199.95**

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 4.5″ x 2.5″
- Pressure 3000 PSI max.
- Rod Dia. 2″
- Ports SAE 8
- Retracted Length 12.75″
- Rod End: Cross-Tube
- Width 2.743″
- Base: End Clevis
- Pin Holes 1.25″
- **Shpg. 44 lbs.**

4.5″ x 28″ x 2″



ITEM 905312 **$229.95**

SPECIFICATIONS

- Unused old inventory
- Double Acting
- Bore x Stroke 4.5″ x 28″
- Ports SAE 6
- Pressure 3000 PSI
- Rod Dia. 2″
- Retracted Length 52.25″
- Rod End: Clevis
- Pin Hole 1.26″ (32mm)
- Base End: Flange Dimensions: Four M12-1.75 tapped holes on 4.375″ bolt centers
- **Shpg. 143 lbs.**

Truck freight only.

4.5″ x 28.9375″ x 2″



ITEM 903985 **$299.95**

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 4½″ x 28 15/16″
- Pressure 2500 PSI max.
- Crosstube Ends
- Width Rod End 3.346″
- Pin Hole 1¾″
- Width Base End 5.906″
- Rod Dia. 2″
- Port Extend SAE 12
- Port Retract SAE 10
- Retracted Length 43⅛″
- **Shpg. 126 lbs.**

Truck freight only.

4.5″ x 32″ x 2″



ITEM 902051 **$449.95**

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 4½″ x 32″
- Pressure 3000 PSI max.
- Rod Dia. 2″
- Ports SAE 16
- Retracted Length 54½″
- Tang ends 2¾″ wide
- Pin Holes 2″
- **Shpg. 145 lbs.**

Truck freight only.

4.5″ x 33.5″ x 2.356″



ITEM 902569 **$194.95**

SPECIFICATIONS

- Unused old inventory Double Acting
- Bore x Stroke 4.5″ x 33.5″
- Pressure 2500
- Ports Clip retained 0.712″(18mm) I.D.
- Retracted Length 26″ (side mount center to pin center)
- Rod Dia. 2.356″(60mm)
- Rod End: Swivel Eye Thickness, Max 1.23″ Thruhole Width 1.23″ Pin Hole 1.779″(45mm)
- Base End: Sidemount Dimensions 1¼″ thick x 6¾″ long
- **Shpg. 276 lbs.**

Truck freight only.

4.5″ x 46″ x 2″



ITEM 902468 **$349.95**

SPECIFICATIONS

- Unused old inventory
- Double Acting
- Bore x Stroke 4.5″x 46″
- Pressure 3000 PSI
- Rod Dia. 2″
- Extend Port SAE 16
- Retract Port SAE 12
- Retracted Length 63″
- Tang Ends
- Pin Hole 2″
- **Shpg. 213 lbs.**

Truck freight only.

4.52″ x 37.75″ x 2.36″



ITEM 904833 **$299.95**

SPECIFICATIONS

- Unused old inventory
- Double Acting
- Bore x Stroke 4.52″(115mm) x 37.75″(959mm)
- Pressure 3000 PSI
- Rod Dia. 2.36″(60mm)
- Ports 4 bolt ¾″ code 62 flange size 12
- Pin Hole 2.36″ (60mm)
- Retracted Length 34.25″ (trunnion)
- Base End: Male Trunnion
- Pin Outside/Inside Width 10″ / 6.1″
- Pin-Center-To-Rod Pin Center 34.25″
- Pin Center To Base End 20.75″
- Pin Hole 2.56″(65mm)
- **Shpg. 330 lbs.**

Truck freight only.

4.75″ x 45.5″ x 2.125″



ITEM 902496 **$379.95**

SPECIFICATIONS

- Unused old inventory
- Double Acting
- 4¾″ x 45½″
- Pressure 3000 PSI
- Rod Dia.2⅛″
- Ports SAE 6
- Retracted Length 58 5/16″
- Rod End: Crossblock Width 7¾″
- Base End: Crossblock Pin Holes 1½″
- **Shpg. 300 lbs.**

Truck freight only.

5″ x 10″ x 2.5″



ITEM 906833 **$329.95**

SPECIFICATIONS

- Double Acting
- Bore x Stroke 5″ x 10″
- Pressure 3000 PSI max.
- Rod Dia. 2.5″
- Ports SAE 12
- Retracted Length 22″
- Cross-Tube Ends
- Rod End: Width 3.25″
- Base End: Width 5.75″
- Pin Holes 1.75″
- **Shpg. 85 lbs.**

5″ x 12″ x 2.5″



ITEM 905066 **$720.00**

SPECIFICATIONS

- Double Acting
- Bore x Stroke 5″ x 12″
- Pressure 3000 PSI max.
- Rod Dia. 2.5″
- Ports SAE 12
- Retracted Length 23″
- Cross-Tube Ends
- Rod End: Width 4″
- Base End: Width 5.75″
- Pin Holes 1.5″
- **Shpg. 89 lbs.**

5″ x 20″ x 2.5″



ITEM 905068 **$837.00**

SPECIFICATIONS

- Double Acting
- Bore x Stroke 5″ x 20″
- Pressure 3000 PSI max.
- Rod Dia. 2.5″
- Ports SAE 12
- Retracted Length 31″
- Cross-Tube Ends
- Rod End: Width 4″
- Base End: Width 5.75″
- Pin Holes 1.5″
- **Shpg. 115 lbs.**

Truck freight only.

5″ x 24″ x 2″



ITEM 902228 **$556.50**

• Brand new, FISHER HYDRAULICS hydraulic cylinder used on many popular brands of log splitters.

SPECIFICATIONS

- Double acting
- Bore x Stroke 5″ x 24″
- Pressure 3500 PSI max.
- Push Force 34 tons
- Rod dia. 2″
- Pin hole 1¼″
- Retract port ½″ NPTM
- Retracted lgth. 31⅞″
- Rod thru-hole 1½″ w.
- Pin hole 9⁄16″
- Push port JIC 8 M
- **Shpg. 74 lbs.**

5″ x 24″ x 2″



ITEM 906306 **$349.95**

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 5″ x 24″
- Pressure 2500 PSI max.
- Rod Dia. 2″
- Ports SAE 8
- Retracted Length 32″
- Rod End: Thru-Hole
- Width 2″
- Pin Hole 0.656″
- Base End: Clevis
- Pin Hole 1.25″
- **Shpg. 88 lbs.**

5″ x 30″ x 2.25″



ITEM 905754 **$499.95**

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 5″ x 30″
- Pressure 3000 PSI max.
- Rod Dia. 2.25″
- Ports SAE 12
- Retracted Length 42.25″
- Clevis Ends
- Pin Holes 1.25″
- **Shpg. 166 lbs.**

Truck freight only.

5″ x 30″ x 2.5″



ITEM 902577 **$489.95**

• Load checks in both directions. Retracted length measured from base end to rod pin center.

SPECIFICATIONS

- Unused, old inventory
- Double Acting
- Bore x Stroke 5″ x 30″
- Pressure 3000 PSI max.
- Rod Dia. 2½″
- Ports ¼″ NPT
- Retracted Length 52 3⁄32″
- Rod End: Tang Pin Hole 3 3⁄16″
- Base End: Solid Round 3 7⁄16″ O.D. x 6″
- **Shpg. 250 lbs.**

Truck freight only

5″ x 30″ x 2.5″



ITEM 906610 **$399.95**

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 5″ x 30″
- Pressure 3000 PSI max.
- Rod Dia. 2.5″
- Ports SAE 12
- Retracted Length 39.25″
- Rod End: Thru-Hole
- Width 2″
- Pin Hole 0.56″
- Base End: Clevis
- Pin Hole 1.25″
- **Shpg. 125 lbs.**

Truck freight only.

5″ x 34.5″ x 2.25″



ITEM 906638 **$299.95**

SPECIFICATIONS

- Double Acting
- Bore x Stroke 5″ x 34.5″
- Pressure 3000 PSI max.
- Rod Dia. 2.25″
- Ports SAE 6
- Retracted Length 48.25″
- Clevis Ends
- Pin Holes 1.25″
- **Shpg. 170 lbs.**

Truck freight only.

5″ x 36″ x 2.5″



ITEM 905072 **$1022.65**

SPECIFICATIONS

- Double Acting
- Bore x Stroke 5″ x 36″
- Pressure 3000 PSI max.
- Rod Dia. 2.5″
- Ports SAE 12
- Retracted Length 47″
- Cross-Tube Ends
- Rod End: Width 4″
- Base End: Width 5.75″
- Pin Holes 1.5″
- **Shpg. 152 lbs.**

Truck freight only.

5″ x 42″ x 2″



ITEM 906446 **$479.95**

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 5″ x 42″
- Pressure 3000 PSI max.
- Rod Dia. 2″
- Ports SAE 6
- Retracted Length 53.06″
- Rod End: Clevis
- Pin Hole 1″
- Base: End Tang
- Width 1.63″
- Pin Hole 2″
- **Shpg. 217 lbs.**

Truck freight only.

5″ x 54″ x 2.5″



ITEM 904591 **$599.95**

SPECIFICATIONS

- New, Double Acting
- Bore/Stroke 5″ x 54″
- 3000 PSI max.
- Rod dia. 2½″
- Ports SAE 12
- Retracted Length 68″
- Pin Holes 1½″
- Crosstube Ends
- Rod End: width 4″
- Base End: width 5¾″

Shpg. 251 lbs.

Truck freight only

5″ x 60″ x 2.5″



ITEM 905075 **$1439.10**

SPECIFICATIONS

- Double Acting
- Bore x Stroke 5″ x 60″
- Pressure 3000 PSI max.
- Rod Dia. 2.5″
- Ports SAE 12
- Retracted Length 75″
- Cross-Tube Ends
- Rod End: Width 4″
- Base End: Width 5.75″
- Pin Holes 1.5″
- **Shpg. 265 lbs.**

Truck freight only.

6″ x 8″ x 3″



ITEM 905076 **$870.00**

SPECIFICATIONS

- Double Acting
- Bore x Stroke 6″ x 8″
- Pressure 3000 PSI max.
- Rod Dia. 3″
- Ports SAE 12
- Retracted Length 19″
- Cross-Tube Ends
- Rod End: Width 4″
- Base End: Width 4″
- Pin Holes 1.5″
- **Shpg. 107 lbs.**

6″ x 12″ x 2.5″



ITEM 905687 **$549.95**

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 6″ x 12″
- Pressure 2500 PSI max.
- Rod Dia. 2.5″
- Ports ¾″ NPT
- Retracted Length 23.875″
- Rod End: Clevis
- Pin Hole 1.25″
- Base End: Cross-Tube
- Width 6.75″
- Pin Hole 1.5″
- **Shpg. 147 lbs.**

Truck freight only.

6″ x 24″ x 3″



ITEM 905079 **$1097.55**

SPECIFICATIONS

- Double Acting
- Bore x Stroke 6″ x 24″
- Pressure 3000 PSI max.
- Rod Dia. 3″
- Ports SAE 12
- Retracted Length 35″
- Cross-Tube Ends
- Rod End: Width 4″
- Base End: Width 4″
- Pin Holes 1.5″
- **Shpg. 190 lbs.**

Truck freight only.

6″ x 56″ x 3.5″



ITEM 905945 **$999.95**

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 6″ x 56″
- Pressure 2500 PSI max.
- Rod Dia. 3.5″
- Ports ¾″ NPT
- Retracted Length 70″
- Rod End: Thru-Hole
- Width 3.196″
- Base End: Cross-Tube
- O.D. 2.522″
- Width 6.5″
- Pin Holes 1.5″
- **Shpg. 362 lbs.**

Truck freight only.

7″ x 29″ x 3.5″



ITEM 905705 **$679.95**

SPECIFICATIONS

- Unused old inventory
- Double Acting
- Bore x Stroke 7″ x 29″
- Pressure 2500 PSI max.
- Rod Dia. 3.5″
- Ports SAE 8
- Retracted Length 46.25″
- Clevis Ends
- Pin Holes 3″
- **Shpg. 386 lbs.**

Truck freight only.

Cross High Speed Hydraulic Gear Motors ⚠

• Brand new CROSS hydraulic gear motors. Pressure balanced loading plates for high efficiency. Aluminum body for good heat dissipation. Pressure lubricated Teflon impregnated sleeve bearings. Internal check valves eliminate need for case drain at shaft seal pressures under 250 PSI.



40 Series

SPECIFICATIONS

- PSI 3000 max.
- RPM 3000 max. cont
- Reversible rotation
- Shaft ⅝″ x 1¼″ keyed
- Mount SAE A 2 Bolt
- Ports SAE 12 drain port ¼″ NPT bolt
- **Shpg 9 lbs.**

50 Series

SPECIFICATIONS

- PSI 3000 max.
- RPM 3000 max. cont
- Reversible rotation
- Shaft ⅞″ x 1⅝″ keyed
- Mount SAE B 2 Bolt
- Ports SAE 16 drain port SAE 5
- **Shpg 19 lbs.**



40 Series *HP and torque specifications listed at 2500 PSI*

ITEM	Displ.	GPM for 1800 RPM	Torque	HP at 1800 RPM	Price
901471	0.50	4.4	180 in-lbs.	4.8	$332.95
901472	0.75	6.5	280 in-lbs.	7.5	$348.35
901473	1.00	8.8	375 in-lbs.	10	$363.70
901474	1.25	10.9	475 in-lbs.	13.5	$379.65
901475	1.50	13	575 in-lbs.	16	$395.00
901476	1.80	15.5	700 in-lbs.	20	$410.35

50 Series *HP and torque specifications listed at 2500 PSI*

ITEM	Displ.	GPM for 1800 RPM	Torque	HP at 1800 RPM	Price
901477	1.95	17	775 in-lbs.	18	$584.05
901478	2.32	20	900 in-lbs.	23	$599.20
901479	2.74	23.75	1050 in-lbs.	28	$613.60
901480	3.30	28.5	1275 in-lbs.	33	$669.50
901481	3.80	33	1450 in-lbs.	38	$669.50
901482	5.20	45	2000 in-lbs.	65	$896.20

Compact, Hi-Torque Hydraulic Motors

• Brand New, DYNAMIC BMM series hydraulic motor. Compact frame with Rotortorc gear set to provide highly efficient low speed high torque output for limited space applications. Can be used in parallel or series hydraulic systems




SPECIFICATIONS

- Reversible rotation
- Ports SAE 6, Case Drain SAE 3
- Shaft ⅝″ dia. x 1 5/16″ w/ 0.18″ keyway
- Two Mounting Choices:
  3 hole face mount,tapped ¼″-28 on 1.77″ Bolt Circle, side ports
  or
  2 hole flange 3.15″ bolt centers, 2.48″ pilot, rear ports

3 Bolt Mount ITEM #	2 Bolt Mount ITEM #	Displ.	PSI Cont.	PSI Int.	Torque in lbs. Cont.	Torque in lbs. Int.	RPM Cont.	RPM Int.	GPM Cont.	GPM Int.	Shpg	Price
904255	904262	0.5	1450	2030	97	132	1950	2450	3.96	5.28	6 lbs.	$193.40
904256	904263	0.76	1450	2030	141	203	1550	1940	5.28	6.6	6 lbs.	$195.90
904257	904264	1.21	1450	2030	221	310	1000	1250	5.28	6.6	7 lbs.	$199.70
904258	904265	1.93	1450	2030	354	504	630	800	5.28	6.6	7 lbs.	$202.60
904259	904266	2.43	1233	1740	398	620	500	630	5.28	6.6	7 lbs.	$205.15
904261	904267	3.07	1015	1450	407	779	400	500	5.28	6.6	7 lbs.	$208.50

Parker MGG Hydraulic Motors

• Brand new, PARKER MGG Series. Gerotor design hydraulic motor. Heavy duty roller bearings, aluminum case, Buna-N seals. Can also be used as a pump up to 3500 RPM max. Wide range of displacement, mounting and port location options to fit specific applications.

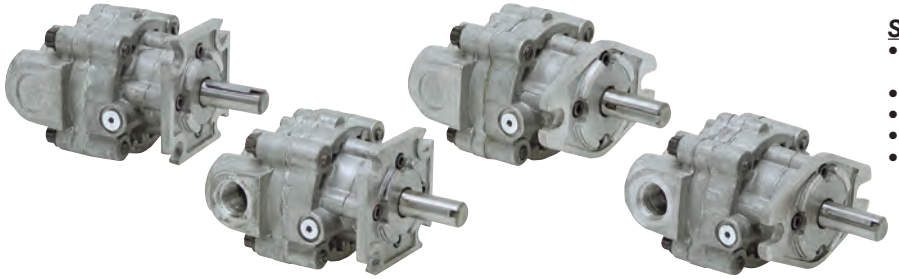

SPECIFICATIONS FOR ALL

- Speed: 5000 RPM max as motor, 3500 RPM max as pump
- Rotation reversible
- Shaft 9/16″ x 1½″ w/ ⅛″ keyway
- Size 5½″ x 3½″ x 3⅜″
- **Shpg. 5 lbs.**
- 2 Mounting Choices:
  4 Bolt on 2″ square pattern with 1.78″ dia. pilot
  or
  2 Bolt 3.25″ Bolt Centers 2″ dia. pilot

Displ. cu. in.	Motor Model	4 Bolt Mount Rear Ports ITEM	4 Bolt Mount Rear Ports Model	4 Bolt Mount Side Ports ITEM	4 Bolt Mount Side Ports Model	2 Bolt Mount Rear Ports ITEM	2 Bolt Mount Rear Ports Model	2 Bolt Mount Side Ports ITEM	2 Bolt Mount Side Ports Model	Price	GPM for Max. RPM	PSI Cont.	PSI Int.	Torque in. lbs.	Port
0.218	MGG20010	903475	BB1A3	900798	BB1B3	900214	BA1A3	901132	BA1B3	$386.10	4.75	2000	2500	70	SAE 8
0.372	MGG20016	903476	BB1A3	900799	BB1B3	900215	BA1A3	901170	BA1B3	$404.75	8.05	2000	2500	118	SAE 8
0.45	MGG20020	903477	BB1A3	900800	BB1B3	900216	BA1A3	901171	BA1B3	$412.85	9.75	2000	2500	144	SAE 8
0.58	MGG20025	903478	BB1A3	900801	BB1B3	900217	BA1A3	901172	BA1B3	$431.30	12.55	2000	2500	184	SAE 10
0.7	MGG20030	903479	BB1A3	900802	BB1B3	900218	BA1A3	900968	BA1B3	$438.65	15.15	1500	2000	222	SAE 10



Hydro Custom

BMM Motors



• Brand new HYDRO CUSTOM BMM series hydraulic motors. Gerolor power element. Reversible rotation. ⅝″ x 1.102″ long keyed shaft, w/0.188″ wide parallel key, end tapped ¼″-28. Choice of mount & port combination: Three mounting holes tapped ¼″-28 on 1.771″ B.C. with 1.240″ O.D. pilot with SAE 6 side ports & SAE 3 side case drain or two 0.35″ mounting holes on 3.150″ centers with 2.48″ O.D. pilot with SAE 6 rear ports & SAE 3 rear case drain.

3 Bolt Side Ports ITEM #	2 Bolt Rear Ports ITEM #	Displ.	PSI Cont.	PSI Int.	Torque in lbs. Cont.	Torque in lbs. Int.	Speed in lbs. Cont.	Speed in lbs. Int.	GPM Cont.	GPM Int.	Shpg	Price
906027	906034	0.48	1450	2030	97	132	1950	2450	4.2	5.2	5 lbs.	$175.40
906022	906028	0.76	1450	2030	141	203	1550	1940	5.2	6.6	5 lbs.	$175.40
906023	906029	1.22	1450	2030	221	309	1000	1250	5.2	6.6	6 lbs.	$175.40
906024	906031	1.95	1450	2030	354	504	630	800	5.6	6.6	6 lbs.	$166.05
906025	906032	2.44	1305	2030	398	619	500	630	5.2	6.6	7 lbs.	$179.15
906026	906033	3.05	1015	2030	407	778	400	500	5.2	6.6	7 lbs.	$179.15



Hydro Custom

BM1 Motors



• Brand new, HYDRO CUSTOM BM1 series hydraulic motors. Gerolor power element. Interchangeable with Char-Lynn H series and Danfoss DH series motors.½″ NPT ports, SAE 4 case drain. Reversible rotation. 1″ x 1.535″ long keyed shaft, with ¼″ wide woodruff key, end tapped ¼″-20. Choice of mounts: 4 Bolt on 3.25″ B.C. or SAE A 2 Bolt

4 Bolt Mount Item #	4 Bolt Mount Price	SAE 2 Bolt Mount Item #	SAE 2 Bolt Mount Price	Disp. Cu in	PSI Cont.	PSI Int.	Torque in. lbs. Cont.	Torque in. lbs. Int.	RPM Cont.	RPM Int.	GPM Cont.	GPM Int.	Shpg.
906040	$179.25	906051	$172.90	2.19	2030	2537	513	664	1138	1250	11.9	15.9	16 lbs.
906042	$168.60	906053	$154.70	3.05	2030	2537	734	955	1100	1350	15	20	17 lbs.
906043	$168.60	906054	$168.60	4.88	2030	2537	1140	1503	820	900	15	20	17 lbs.
906044	$154.70	906045	$154.70	6.1	2030	2537	1423	1874	550	673	15	20	18 lbs.
906035	$154.70	906046	$168.60	7.62	2030	2537	1812	2343	450	560	15	20	18 lbs.
906036	$154.70	906047	$154.70	9.76	2030	2537	2166	3014	360	430	15	20	18 lbs.
906037	$157.50	906048	$171.70	12.2	2030	2537	2519	3448	280	350	15	20	19 lbs.
906038	$163.20	906049	$181.60	15.25	1595	2030	3182	4022	220	270	15	20	19 lbs.
906039	$168.85	906050	$184.05	19.22	1305	2030	3589	4464	189	236	15	20	21 lbs.
906041	$179.25	906052	$168.85	24.4	1015	1522	3845	4694	140	180	15	20	22 lbs.



Hydro Custom

BM2 Motors



• Brand new HYDRO CUSTOM BM2 series motors. Gerolor power element. Interchangeable with Char-Lynn ″S″ series motors. Reversible rotation. SAE 10 ports with SAE 4 case drain. 1″ x 1.535″ long keyed shaft, with ¼″ wide woodruff key, end tapped ¼″-20. Choice of mounts: 4 bolt on 3.25″ B.C. or SAE A 2 bolt

4 Bolt Mount Item #	4 Bolt Mount Price	SAE 2 Bolt Mount Item #	SAE 2 Bolt Mount Price	Disp. Cu in	PSI Cont.	PSI Int.	Torque in. lbs. Cont.	Torque in. lbs. Int.	RPM Cont.	RPM Int.	GPM Cont.	GPM Int.	Shpg.
906062	$208.65	906071	$189.05	3.05	2030	2537	884	1105	755	970	10.5	13.2	18 lbs.
906063	$189.05	906072	$189.05	4.88	2030	2900	1414	1680	750	940	15.8	20	20 lbs.
906055	$189.05	906064	$189.05	6.1	2030	2900	1759	2122	600	750	15.8	20	20 lbs.
906056	$189.05	906065	$189.05	7.62	2030	2900	2210	2581	475	600	15.8	20	20 lbs.
906057	$189.05	906066	$189.05	9.76	2030	2900	2829	3359	375	470	15.8	20	21 lbs.
906058	$195.55	906067	$195.55	12.2	1558	2900	2917	3960	300	375	15.8	20	22 lbs.
906059	$195.55	906068	$195.55	15.25	1595	2900	3403	4844	240	300	15.8	20	23 lbs.
906060	$202.05	906069	$202.05	19.22	1235	1667	3403	4880	190	240	15.8	20	24 lbs.
906061	$208.60	906070	$208.60	24.4	1235	1667	4287	5923	160	200	15.8	20	25 lbs.



BM5 Motors



• Brand new HYDRO CUSTOM BM5 hydraulic motors. Gerolor power element. Interchangeable with Char-Lynn 2000 series motors. Double tapered roller bearings permit high radial loads. Reversible rotation. SAE 10 ports with SAE 4 case drain. SAE A 2 bolt mounts. Choice of Shafts: 1″ x 1.615″ long with ¼″ wide parallel key, end tapped ¼″-20 or 1.25″ x 1.811″ long with 5⁄16″ wide woodruff key, end tapped ⅜″-16

1″ Keyed Shaft		1.25″ Keyed Shaft		Disp.	PSI		Torque in. lbs.		RPM		GPM		
Item #	Price	Item #	Price	Cu in	Cont.	Int.	Cont.	Int.	Cont.	Int.	Cont.	Int.	Shpg.
906081	$309.60	906090	$309.60	4.88	2980	4350	2033	2555	799	908	20	22	25 lbs.
906073	$309.60	906082	$309.60	6.1	3045	4350	2564	3359	742	924	20	25	26 lbs.
906074	$309.60	906083	$309.60	7.62	3045	4350	3182	4243	576	720	20	25	27 lbs.
906075	$309.60	906084	$309.60	9.76	3045	3770	4058	4685	460	713	20	30	28 lbs.
906076	$309.60	906085	$309.60	12.2	3045	3770	4791	5622	365	577	20	30	29 lbs.
906077	$309.60	906086	$309.60	15.25	2900	3770	5658	6895	294	462	20	30	30 lbs.
906078	$309.60	906087	$319.40	18.61	2900	3480	5967	6851	246	365	20	30	30 lbs.
906079	$319.40	906088	$319.40	24.4	2320	2465	7337	8044	183	287	20	30	32 lbs.
906080	$322.80	906089	$322.80	30.51	1740	2030	7470	8398	148	230	20	30	34 lbs.



BM6 Motors




• Brand new HYDRO CUSTOM BM6 series hydraulic motors. Gerolor power element. Double tapered roller bearings permit high radial loads. Interchangeable with Char-Lynn 6000 series motors. Reversible rotation. SAE C 4 bolt mount. 1.50″ x 3.110″ long keyed shaft with ⅜″ wide parallel key, end tapped ⅜″-16. Ports SAE 16, case drain SAE 4.

ITEM	Displ. Cu. In.	PSI Cont.	PSI Int.	Torque in. lbs. Cont.	Torque in. lbs. Int.	RPM Cont.	RPM Int.	GPM Cont.	GPM Int.	Shpg	Price
906091	11.89	2975	4500	5083	7602	775	866	40	45	57 lbs.	$576.05
906092	14.95	2975	4500	6497	10440	615	834	40	55	61 lbs.	$630.50
906093	18.91	2975	4500	8212	11934	485	689	40	60	62 lbs.	$646.35
906094	24.1	2975	4500	10051	14453	383	563	40	60	65 lbs.	$653.05
906095	29.9	2450	3990	10723	16619	307	454	40	60	70 lbs.	$690.10
906096	38.13	2030	2465	11731	12155	241	355	40	60	70 lbs.	$721.65
906097	48.81	1740	2030	12483	14551	184	276	40	60	74 lbs.	$756.65
906098	60.1	1740	2030	13852	16540	153	230	40	60	74 lbs.	$762.80



BMEW Motors



• Brand new HYDRO CUSTOM BMEW series hydraulic wheel motors. Gerolor power element. Needle bearings allow for high axial and radial loads. Reversible rotation. Wheel mount has four bolt holes on 5.81″ B.C. with 3¼″ O.D. pilot. 1¼″ x 4.094″ long tapered shaft with 5⁄16″ wide parallel key, end threaded 1″-20 with castle nut. Ports SAE 10, no case drain.

ITEM	Displ. Cu. In.	PSI Cont.	PSI Int.	Torque in. lbs. Cont.	Torque in. lbs. Int.	RPM Cont.	RPM Int.	GPM Cont.	GPM Int.	Shpg	Price
906100	7.62	3000	3480	3088	3611	336	450	11.8	15.8	28 lbs.	$364.45
906101	9.76	3000	3480	4159	4850	350	440	15.8	19.8	28 lbs.	$397.25
906102	12.2	3000	3480	4708	5328	330	425	18.4	22.4	29 lbs.	$379.90
906103	14.03	3000	3480	5531	6284	290	365	18.4	22.4	29 lbs.	$379.90
906104	15.25	3000	3480	6195	6992	290	350	19.8	23.7	30 lbs.	$414.05
906105	18.3	3000	3480	7169	8231	250	315	21.1	25.1	30 lbs.	$414.05
906106	21.35	3000	3480	8009	9160	215	365	21.1	25.1	31 lbs.	$417.45
906107	22.88	3000	3480	8762	10089	200	240	19.8	23.7	32 lbs.	$420.80
906108	28.98	2540	2750	9824	10691	150	180	19.8	23.7	33 lbs.	$389.15
906109	32.95	2030	2540	8673	10974	140	170	19.8	23.7	34 lbs.	$427.55
906110	45.76	1520	1740	9293	10443	100	120	19.8	23.7	37 lbs.	$441.00

Dynamic Hydraulic Motors

DYNAMIC FLUID COMPONENTS, INC.



BMPH Series

• Brand new DYNAMIC BMPH series hydraulic motors. Gerotor power element. Interchangeable with the following motor lines: Char-Lynn H, Danfoss DH, White RS, Parker/Ross MG/TB.

SPECIFICATIONS FOR BMPH SERIES

- Reversible rotation
- Ports ½″ NPT
- Shaft 1″ x 1.57″ diam. ¼″woodruff key tapped ¼″-20
- SAE 4 case drain

2 Bolt ITEM	4 Bolt ITEM	Displ.	PSI Cont.	PSI Int.	Torque in. lbs. Cont.	Torque in. lbs. Int.	RPM Cont.	RPM Int.	GPM Cont.	GPM Int.	Size	Shpg.	Price
904517	904518	2.2	1813	2393	487	673	1500	1650	14.5	15.8	5½″ x 3¼″ x 3¼″	15 lbs.	$192.55
901492	901483	3.15	2031	2538	885	1133	1150	1450	15.8	19.8	5 9⁄16″ x 3¼″ x 3¼″	16 lbs.	$192.55
901493	901484	4.74	2031	2538	1292	1646	770	960	15.8	19.8	5⅝″ x 3¼″ x 3¼″	17 lbs.	$197.15
901494	901485	5.87	2031	2538	1611	2009	615	770	15.8	19.8	5¾″ x 3¼″ x 3¼″	17 lbs.	$198.45
901495	901486	7.20	2031	2538	2089	2567	490	615	15.8	19.8	5 15⁄16″ x 3¼″ x 3¼″	17 lbs.	$206.00
901496	901487	9.51	2031	2538	2673	3275	383	475	15.8	19.8	6⅛″ x 3¼″ x 3¼″	18 lbs.	$212.30
901497	901488	11.59	2031	2538	3186	3894	310	385	15.8	19.8	6 5⁄16″ x 3¼″ x 3¼″	18 lbs.	$219.80
901498	901489	14.66	2031	2538	4071	5045	250	310	15.8	19.8	6 9⁄16″ x 3¼″ x 3¼″	19 lbs.	$226.15
901499	901490	19.03	1813	2031	4204	4912	192	240	15.8	19.8	7¾″ x 3¼″ x 3¼″	19 lbs.	$231.15
901500	901491	23.61	1450	1813	4337	5133	155	190	15.8	19.8	7⅜″ x 3¼″ x 3¼″	20 lbs.	$237.45

DYNAMIC FLUID COMPONENTS, INC.



BMRS Series

• Brand new DYNAMIC BMRS series hydraulic motors. Gerolor power element. Interchangeable with the following motor lines: Char-Lynn S, Danfoss DS, White RS, Parker/Ross MG/TB.

SPECIFICATIONS FOR BMRS SERIES

- Reversible rotation
- Ports SAE 10
- Shaft 1″ x 1.57″ diam. ¼″woodruff key tapped ¼″-20
- SAE 4 case drain

2 Bolt ITEM	4 Bolt ITEM	Displ.	PSI Cont.	PSI Int.	Torque in. lbs. Cont.	Torque in. lbs. Int.	RPM Cont.	RPM Int.	GPM Cont.	GPM Int.	Size	Shpg.	Price
901510	901501	3.15	2031	2538	885	1115	960	1150	13.2	15.8	5 11⁄16″ x 3¼″ x 3¾″	18 lbs.	$237.45
901511	901502	4.97	2321	2900	1726	1947	750	940	15.8	19.8	5 15⁄16″ x 3¼″ x 3¾″	19 lbs.	$247.10
901512	901503	6.22	2321	2900	2124	2478	600	750	15.8	19.8	6 1⁄16″ x 3¼″ x 3¾″	19 lbs.	$251.30
901513	901504	7.76	2321	2900	2655	3009	475	600	15.8	19.8	6¼″ x 3¼″ x 3¾″	19 lbs.	$255.90
901514	901505	9.59	2321	2900	3186	3805	378	475	18.8	19.8	6⅝″ x 3¼″ x 3¾″	20 lbs.	$263.45
901515	901506	11.87	2321	2900	3186	3894	310	385	15.8	19.8	6⅞″ x 3¼″ x 3¾″	21 lbs.	$272.25
901516	901507	15.46	2321	2900	3451	4336	240	300	15.8	19.8	7¼″ x 3¼″ x 3¾″	22 lbs.	$281.05
901517	901508	19.36	2031	2538	3451	4735	190	240	15.8	19.8	7¾″ x 3¼″ x 3¾″	23 lbs.	$286.15
901518	901509	23.27	1450	2031	3230	4381	155	190	15.8	19.8	8 3⁄16″ x 3¼″ x 3¾″	24 lbs.	$297.45



BMSY Series

DYNAMIC FLUID COMPONENTS, INC.

• Brand new DYNAMIC BMSY series hydraulic motors. Gerolor power element. Tapered roller bearings on output shaft for high axial and radial load capacity. Interchangeable with the following motor lines: Char-Lynn 2000, Danfoss OMS/OMSS, White RE/DH, Parker/Ross MB/TF.

SPECIFICATIONS FOR BMS SERIES

- Reversible rotation
- Ports SAE 10
- Mount 2 bolt SAE A
- SAE 4 case drain
- Woodruff keyed shafts in sizes shown

1″x 1.64″ Shaft ITEM	1¼″ x 1.89″ Shaft ITEM	Displ.	PSI Cont.	PSI Int.	Torque in. lbs. Cont.	Torque in. lbs. Int.	RPM Cont.	RPM Int.	GPM Cont.	GPM Int.	Size	Shpg.	Price
901519	901527	4.92	2973	3265	1991	2212	800	988	17.1	21.1	6⅝″ x 5 3⁄16″ x 4 1⁄16″	26 lbs.	$371.70
901520	901528	6.15	2973	3265	2566	2832	748	900	19.8	23.7	6¾″ x 5 3⁄16″ x 4 1⁄16″	26 lbs.	$375.90
901521	901529	7.63	2973	3265	3230	3540	600	720	19.8	23.7	7″ x 5 3⁄16″ x 4 1⁄16″	27 lbs.	$379.65
901522	901530	9.39	3045	3265	4292	4778	470	560	19.8	23.7	7¼″ x 5 3⁄16″ x 4 1⁄16″	28 lbs.	$383.85
901523	901531	11.8	3045	3265	5185	5707	375	450	19.8	23.7	7 9⁄16″ x 5 3⁄16″ x 4 1⁄16″	29 lbs.	$387.65
901524	901532	14.8	2900	3265	6265	7142	300	360	19.8	23.7	8″ x 5 3⁄16″ x 4 1⁄16″	31 lbs.	$403.15
901525	901533	18.9	2900	3265	7787	8495	240	280	19.8	23.7	8 7⁄16″ x 5 3⁄16″ x 4 1⁄16″	31 lbs.	$435.05
901526	901534	24.0	2320	2563	7786	8495	185	225	19.8	23.7	8 15⁄16″ x 5 3⁄16″ x 4 1⁄16″	32 lbs.	$466.95
904519	904520	28.9	2030	2175	8053	8495	155	185	19.8	23.7	9⅜” x 5 13⁄16” x 4 1⁄16”	34 lbs.	$539.10

Compact, Hi-Torque Hydraulic Motors




• Brand new CHAR-LYNN "J" Series. Use on machine tools, augers, drilling/tapping machines, conveyors, sweepers, fans, etc. Compact size fits almost anywhere.

SPECIFICATIONS

- Rotation reversible
- Ports SAE 6; Case drain SAE 3
- Shaft ⅝″ dia. x 1⅜″ w/ keyway
- Mount 5 bolts on 1.775″ dia. BC, 1.241″ dia. pilot
- Size 2⅜″ x 4⅞″
- **Shpg. 7 lbs.**

ITEM	Model	Displ.	PSI Cont.	PSI Int.	Torque in. lbs. Cont.	Torque in. lbs. Int.	RPM Cont.	RPM Int.	GPM Cont.	GPM Int.	Price
900356	129-0001	0.50	2030	2400	141	164	1992	2458	4.5	5.5	**$630.20**
900198	129-0002	0.79	2030	2400	225	263	1575	1859	5.5	6.5	**$634.70**
900199	129-0003	1.21	2030	2400	333	405	1043	1226	5.5	6.5	**$644.55**
900200	129-0004	1.93	1750	2175	446	546	650	767	5.5	6.5	**$661.05**
903488	129-0458	3.0	1400	2030	549	743	393	465	5.5	6.5	**$724.95**

Char-Lynn Hydraulic Motors
H Series

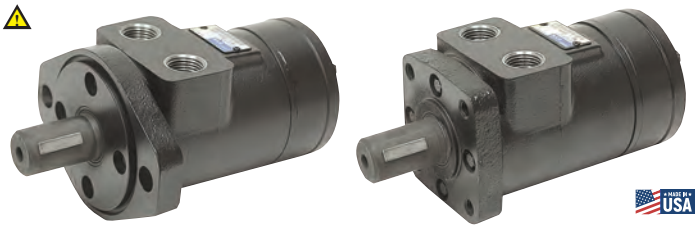

• Brand new CHAR-LYNN H series hydraulic motors. Gerotor power element. Interchangeable with the following motor lines: Dynamic BMPH, Danfoss DH, White RS, Parker/Ross MG/TB.

SPECIFICATIONS FOR H SERIES

- Reversible rotation
- Ports ½″ NPT
- Shaft 1″ dia. woodruff keyed

2 Bolt Mount Item #	2 Bolt Mount Price	4 Bolt Mount Item #	4 Bolt Mount Price	Displ.	PSI Cont.	PSI Int.	Torque in. lbs. Cont.	Torque in. lbs. Int.	RPM Cont.	RPM Int.	GPM Cont.	GPM Int.	Size	Shpg.
900584	**$524.55**	**900484**	**$483.05**	2.8	1800	2400	650	876	969	1127	12	14	5¼″ x 3⁵⁄₁₆″ x 3⁵⁄₁₆″	**13 lbs.**
900492	**$510.00**	**900485**	**$495.60**	4.5	1800	2400	1044	1401	760	904	15	18	5⅜″ x 3⁵⁄₁₆″ x 3⁵⁄₁₆″	**13 lbs.**
900493	**$523.45**	**900486**	**$509.05**	5.9	1800	2400	1368	1829	585	701	15	18	5½″ x 3⁵⁄₁₆″ x 3⁵⁄₁₆″	**14 lbs.**
900589	**$603.50**	**900487**	**$590.15**	9.7	1650	2250	2059	2824	353	471	15	20	5¹³⁄₁₆″ x 3⁵⁄₁₆″ x 3⁵⁄₁₆″	**15 lbs.**
900714	**$628.80**	**900488**	**$615.50**	11.3	1600	2150	2343	3151	304	405	15	20	6″ x 3⁵⁄₁₆″ x 3⁵⁄₁₆″	**15 lbs.**
900494	**$619.70**	**900489**	**$606.15**	14.1	1450	2000	2669	3671	243	324	15	20	6¼″ x 3⁵⁄₁₆″ x 3⁵⁄₁₆″	**16 lbs.**
900590	**$656.25**	**900490**	**$641.85**	17.9	1350	1800	3110	4121	192	256	15	20	6⁹⁄₁₆″ x 3⁵⁄₁₆″ x 3⁵⁄₁₆″	**16 lbs.**
900570	**$712.05**	**900491**	**$697.65**	22.6	1250	1500	3604	4283	152	202	15	20	7″ x 3⁵⁄₁₆″ x 3⁵⁄₁₆″	**16 lbs.**

Char-Lynn 2000 Series Low Speed Motors



• Brand new CHAR-LYNN 2000 series hydraulic motors. Geroler power element. Tapered roller bearings on output shaft for high axial and radial load capacity. Interchangeable with the following motor lines: Dynamic BMS, Danfoss OMS/OMSS, White RE/DH, Parker/Ross MB/TF.

SPECIFICATIONS FOR 2000 SERIES

- Reversible rotation
- Ports SAE 12
- Mount 2 bolt SAE A
- SAE 4 case drain
- 1″ dia. shafts woodruff keyed
- 1¼″ dia. shafts straight keyed

1″ Shaft Item #	1″ Shaft Price	1¼″ Shaft Item #	1¼″ Shaft Price	Displ.	PSI Cont.	PSI Int.	Torque in. lbs. Cont.	Torque in. lbs. Int.	RPM Cont.	RPM Int.	GPM Cont.	GPM Int.	Size	Shpg.
900149	**$1020.15**	**900155**	**$1020.15**	4.9	3000	4000	2065	3035	908	908	20	20	7⁵⁄₁₆″ x 5⅛″ x 4¼″	**28 lbs.**
900150	**$1002.00**	**900156**	**$1002.00**	6.2	3000	4000	2630	3950	742	924	20	25	7½″ x 5⅛″ x 4¼″	**28 lbs.**
900151	**$1062.55**	**900157**	**$1043.10**	8.0	3000	4000	3420	4970	576	720	20	25	7¾″ x 5⅛″ x 4¼″	**28 lbs.**
900560	**$1033.95**	**900562**	**$1046.95**	9.6	3000	3750	4040	5040	477	713	20	30	7¾″ x 5⅛″ x 4¼″	**28 lbs.**
900152	**$1030.70**	**900158**	**$1030.70**	11.9	3000	3750	4780	5890	385	577	20	30	8″ x 5⅛″ x 4¼″	**28 lbs.**
900561	**$1052.70**	**900563**	**$1052.70**	14.9	3000	3750	5850	7250	308	462	20	30	8⅜″ x 5⅛″ x 4¼″	**29 lbs.**
900153	**$1080.45**	**900159**	**$1080.45**	18.7	3000	3750	6750	7820	246	365	20	30	8⅞″ x 5⅛″ x 4¼″	**31 lbs.**
900154	**$1178.70**	**900160**	**$1122.55**	24.0	2250	2500	6840	8170	191	287	20	30	9⁷⁄₁₆″ x 5⅛″ x 4¼″	**32 lbs.**

DYNAMIC FLUID COMPONENTS, INC.

PTO Drive Motors




• Brand new, hydraulic motor with agricultural standard 6 tooth splined shaft. Gerolor power element. Tapered roller bearings on output shaft for high axial and radial load capacity. Shaft has retention groove centered 1½″ from shaft end.
• Interchangeable with the following motor lines: Char-Lynn 2000, Danfoss OMS/OMSS, White RE/DH, Parker-Ross MB/TF.

SPECIFICATIONS FOR ALL
• Rotation reversible
• Case drain SAE 4
• Ports SAE 10
• Shaft 1⅜″ x 4″ 6T spline
• Mount 2 bolt SAE A
• Size 7⅜″ x 5³⁄₁₆″ x 4¹⁄₁₆″

ITEM	Displ. cu. in.	PSI Cont.	PSI Int.	Torque in. lbs. Cont.	Torque in. lbs. Int.	RPM Cont.	RPM Int.	GPM Cont.	GPM Int.	GPM at 540RPM at Cont. PSI	HP Con	HP Int.	Shpg.	Price
902066	4.95	2576	3091	1682	2124	800	990	17.1	21	12.8	21.3	26.9	26 lbs.	$390.15
901871	6.15	2576	3091	2124	2655	748	900	19.7	23.6	15.9	25.2	31.5	27 lbs.	$394.35
901872	7.63	2576	3091	2744	3275	600	720	19.7	23.6	21.2	26.1	31.1	28 lbs.	$398.55
901873	9.59	2208	3091	2780	3805	470	560	19.7	23.6	23.8	20.9	28.4	29 lbs.	$402.75

DYNAMIC FLUID COMPONENTS, INC.



• Brand new, DYNAMIC BMT series hydraulic motor with agricultural standard six tooth splined shaft. Heavy duty with high flow capacity. ROLORTORC power element. Tapered roller bearings on output shaft for high axial and radial load capacity. Shaft has retention groove centered 1½" from shaft end. Interchangeable with DANFOSS OMT motors.

SPECIFICATIONS FOR BOTH
• Rotation reversible
• Case drain SAE 4
• Ports SAE 12
• Shaft 1⅜″ x 5″ 6T spline
• Mount 4 bolt SAE C

ITEM	Model	Displ. cu. in.	PSI Cont.	PSI Int.	Torque in. lbs. Cont.	Torque in. lbs. Int.	RPM Cont.	RPM Int.	GPM Cont.	GPM Int.	Size	Shpg.	Price
905382	BMT-160-K6-SL-S	9.83	2944	3533	4168	5071	614	770	26.42	33.02	7½″ x 5⅝″ x 5⅝″	47 lbs.	$629.70
905383	BMT-200-K6-SL-S	12.29	2944	3533	5213	6354	615	743	33.02	39.63	7⅝″ x 5⅝″ x 5⅝″	48 lbs.	$637.15

DYNAMIC FLUID COMPONENTS, INC.



Heavy Duty Hydraulic Motors

• Brand new, DYNAMIC BMK6 heavy duty hydraulic motors. Interchangeable with Char-Lynn 6000 series motors.

SPECIFICATIONS
• Rotation reversible
• Mount SAE C 4 bolt, 6⅜″ bolt circle, 5″ pilot dia.
• Shaft 1½″ dia. x 3.01″ shaft with ⅜″ key, tapped ⅜″-16
• Ports SAE 16

ITEM	Displ.	PSI Cont.	PSI Int.	Torque in.lbs. Cont.	Torque in.lbs. Int.	RPM Cont.	RPM Int.	GPM Cont.	GPM Int.	Size	Shpg.	Price
903758	11.93	2900	4350	5000	7434	765	865	39.6	44.9	10.43″ x 5.75″ x 5.75″	61 lbs.	$690.20
903757	15.01	2900	4350	6284	9558	610	830	39.6	54.1	10.67″ x 5.75″ x 5.75″	62 lbs.	$703.05
903756	19.01	2900	4350	8142	11727	480	690	39.6	59.4	10.94″ x 5.75″ x 5.75″	64 lbs.	$705.85
903755	23.87	2900	4350	10266	14382	382	570	39.6	59.4	11.30″ x 5.75″ x 5.75″	65 lbs.	$734.35
903754	29.95	2900	3985	12789	16639	304	455	39.6	59.4	11.73″ x 5.75″ x 5.75″	68 lbs.	$789.35
903753	38.01	2535	3260	13099	13726	240	360	39.6	59.4	12.32″ x 5.75″ x 5.75″	71 lbs.	$805.00
903752	48.96	2030	2245	13984	16639	186	280	39.6	59.4	13.11″ x 5.75″ x 5.75″	75 lbs.	$831.05
903751	59.9	2030	2030	14824	16462	152	230	39.6	59.4	13.89″ x 5.75″ x 5.75″	79 lbs.	$881.60

DYNAMIC FLUID COMPONENTS, INC.



Hydraulic Wheel Motors

• Brand new, DYNAMIC BMER-2 series wheel mount hydraulic motors. Interchangeable with PARKER and WHITE motors.

SPECIFICATIONS
• Rotation reversible
• Mount 4 bolt wheel 5.812″ bolt circle, 3¼″ pilot dia.
• Shaft 1¼″ tapered x 4.21″ shaft w/⁵⁄₁₆″ key and threaded end
• Ports SAE 10

ITEM	Displ. cu. in.	PSI Cont.	PSI Int.	Torque in.lbs. Cont.	Torque in.lbs. Int.	RPM Cont.	RPM Int.	GPM Cont.	GPM Int.	Size	Shpg.	Price
903635	7.2	2970	3480	2876	3363	360	490	14.0	15.8	4.68″ x 5.24″ x 5.43″	29 lbs.	$387.45
903636	9.52	2970	3480	3983	4646	375	470	15.8	19.8	4.80″ x 5.24″ x 5.43″	30 lbs.	$391.60
903637	11.96	2970	3480	4691	5310	330	425	17.9	22.4	4.94″ x 5.24″ x 5.43″	31 lbs.	$396.50
903638	13.91	2970	3480	5531	6284	290	365	17.9	22.4	5.04″ x 5.24″ x 5.43″	31 lbs.	$413.80
903639	15.68	2970	3480	6195	6992	290	350	19.8	23.7	5.14″ x 5.24″ x 5.43″	32 lbs.	$418.65
903640	18.08	2970	3480	7169	8231	250	315	19.8	25	5.30″ x 5.24″ x 5.43″	32 lbs.	$422.80
903641	21.05	2970	3480	8009	9160	220	270	19.8	25.0	5.43″ x 5.24″ x 5.43″	33 lbs.	$436.65
903642	22.63	2970	3480	8762	10089	200	240	19.8	23.7	5.53″ x 5.24″ x 5.43″	34 lbs.	$476.85
903643	28.18	2535	2973	9602	10443	160	195	19.8	23.7	5.83″ x 5.24″ x 5.43″	35 lbs.	$503.90
903644	32.94	2030	2535	8673	10974	140	170	19.8	23.7	6.14″ x 5.24″ x 5.43″	36 lbs.	$512.90
903645	45.45	1520	1740	9293	10443	100	120	19.8	23.7	6.93″ x 5.24″ x 5.43″	40 lbs.	$548.95

25.07 cu. in. Hydraulic Motor



ITEM 905600

$449.95

• New, SAUER DANFOSS model TMT 400 V hydraulic motor. Heavy duty with high flow capacity.

SPECIFICATIONS

- Family TMT
- Displacement 25.07 cu. in. / rev.
- Motor Type Orbital
- Rotation Reversible
- Pressure: 3360 PSI cont. 5080 PSI int.
- Power: 50 Hp cont. 68 Hp int.
- Torque: 13450 in-lbs. cont. 18760 in-lbs. int.
- Speed: 305 RPM cont. 360 RPM int.
- Flow: 33 GPM cont. 39.6 GPM int.
- Mount 4 bolt SAE C 6.375″ bolt circle, 5″ pilot dia.
- Shaft 1½″ dia. 17 tooth spline, tapped ⅜″-16 x 1.12″
- Ports SAE 12
- Case Drain SAE 6
- Size 9¾″ x 6⅞″ x 6¾″
- **Shpg. 69 lbs.**

5 Bolt Wheel Hub



ITEM 700113

$69.95

• Brand new, machined cast iron hub for use in drive wheel applications. Mounts on 1¼″ tapered keyed shaft.

SPECIFICATIONS

- Bolt holes tapped ½″-20
- 5⁄16″ wide hub keyway
- 2½″ dia. wheel pilot
- 1¼″ I.D. hub tapers 1½″ per ft.
- Size 5⅜″ dia. x 1½″ thick
- **Shpg. 6 lbs.**

Hydraulic Brake



ITEM 905102


$89.95

• New. DANFOSS 9225650K3031AAAAAS hydraulic brake. Shaft length measurement is measured from back mounting face to end of shaft.

SPECIFICATIONS

- Holding Torque 5750 in. lbs.
- Release Pressure 290 PSI
- Max Pressure 3,000 PSI
- Release Volume 0.55 cu.in.
- Speed 250 RPM max.
- Port SAE 4
- Shaft 1½″ tapered dia. x 5.925″ long w/ 5⁄16″ key-way and 1⅛″-18 threaded w/ castle nut
- Mount Four, 0.53″ holes on 6.25″ B.C. w/ 4″ pilot
- Size 7″ x 7″ x 6.25″
- **Shpg. 26 lbs.**

0.835 cu. in. Hydraulic Motor



ITEM 902238

$29.95

• New, MARZOCCHI model 1AMS20STNGP043 uni-directional hydraulic motor. Side ports.

SPECIFICATIONS

- Disp. 0.835 cu. in./rev.
- Motor Type Gear
- Rotation CCW
- Mount 4 bolt USA 4F17
- Pressure: 2200 PSI cont. 2800 PSI peak
- Speed: 1725 rpm @ 6.234 GPM 2000 rpm max
- Shaft 0.172″ thick tang
- Ports SAE 10
- Case Drain N/A
- Size 5½″ x 2 15⁄16″ x 3½″
- **Shpg. 6 lbs.**

2.13 cu in Hydraulic Piston Motor



ITEM 904896

$169.95 ⚠

• New, AUBURN GEAR model# A6VM-107DA1/63W-VZB027B piston motor. Variable displacement. Pilot operated servo controls speed.

SPECIFICATIONS

- Disp. Range 0.92-2.13 cu. in. / rev.
- Pilot Control : 203-1000 PSI
- Pressure : 2030 PSI Cont. 4350 PSI Max.
- Flow 33 GPM max.
- Torque 347in. lbs./1000 psi.
- Speed 5300 RPM max.
- Rotation Reversible
- Mount: 2 bolt on 155mm (6.1″) bolt circle with 165mm (5.315″) pilot
- Pilot Ext.: 83mm (3.267″)
- Shaft 1″ dia. 1st spline
- Work Ports SAE 12
- Pilot Control Port SAE 6
- Case Drain SAE 4
- Size 11½″ x 7½″ x 13¼″
- **Shpg. 36 lbs.**

7.9 cu in Hydraulic Motor



ITEM 903776 **$139.99**

• New, WHITE DRIVE PRODUCTS hydraulic motor. Unpainted mounting surface. Roller stator motor design increases performance in demanding light-duty applications where considerable sideload is present. Optimal needle roller bearing placement and heavy-duty drive link satisfy a variety of applications.

SPECIFICATIONS

- Brand White Drive Products
- Model 281130A6321BAAAA
- Family WG
- Case Drain None
- Displacement 7.9 cu. in. / rev.
- Motor Type Roller Stator
- Rotation Reversible
- Pressure: 2000 PSI cont. 2750 PSI int.
- Torque: 2135 in-lbs. cont. 2960 in-lbs. int.
- Speed: 350 RPM cont. 440 RPM int.
- Flow: 12 GPM cont. 15 GPM int.
- Mount: Two-bolt SAE A
- Shaft 32mm dia. x 2 1⁄16″ long, keyed
- Ports ½″ BSPP and Manifold Ports, Offset
- Size 7 3⁄16″ x 5⅛″ x 4 1⁄16″
- **Shpg. 18 lbs.**

58.5 cu in Hydraulic Wheel Motor



ITEM 906217 **$399.95**

• New, PARKER TG0960LS0800AARD hydraulic wheel motor. Rugged construction throughout. The entire powertrain is continually washed in cool, high flow fluid to assure long life. Roller vanes and sealed commutator maintain high efficiency and provide smooth low speed performance.

SPECIFICATIONS

- Family TG
- Displacement 58.5 cu. in. / rev.
- Motor Type LSHT Torqmotor
- Rotation Reversible
- Case Drain None
- Pressure: 1000 PSI cont. 1500 PSI int.
- Torque: 6843 in-lbs. cont. 11227 in-lbs. int.
- Speed: 118 RPM @ Max intermittent flow.
- Flow: 20 GPM cont. 30 GPM int.
- Mount Four-bolt wheel front brake
- Shaft 1¼″ Tapered x 2⅜″ shaft w/ 5⁄16″ key and threaded end w/ castle nut
- Ports SAE 10 Side ports
- Size 14″ x 5½″ x 5½″
- **Shpg. 52 lbs.**

80 GPM Oil Cooler



ITEM 906118

$299.95

• New. AKG oil cooler.

SPECIFICATIONS

- Manufacturer AKG
- Model Number 1103082300, 3703.579.1000
- Pressure 250 PSI max.
- Temperature 250° F
- Flow 80 GPM
- Ports SAE 20
- Mount Four 5⁄16″ slotted holes on 5⅞″ x 12⅝″ centers
- Drain/Temperature Sensor Port Size SAE 8
- Overall Depth (in.) 3.74″
- Overall Width (in.) 15.5″
- Overall Height (in.) 11.75″
- **Shpg 28 lbs.**

50 GPM 12 VDC Oil Cooler ⚠



ITEM 905109

$359.25

• Brand new. AKG DS1-12 oil cooler that features tube and fin aluminum design, and 12 Volt DC fan.

SPECIFICATIONS

- Model DS1-12
- Pressure 232 PSI max
- Temperature 250º
- Flow 50 GPM
- Fan Motor Voltage 12 VDC
- Amps 5.8
- Airflow Direction Pull
- Port Size SAE 16
- Drain/Temperature Sensor Port SAE 8
- Mount Four holes on 7.87″ x 3.94″ centers
- Size 11″ x 5.25″ x 8.87″
- **Shpg 9 lbs.**

38 GPM Oil Cooler



ITEM 906376

$149.95

• New, AKG aluminum oil cooler. Used for hydraulic, engine, transmission, and diesel system coolers.

SPECIFICATIONS

- Brand AKG
- Model Number 1102425700
- Pressure 203 PSI max.
- Temperature 250° F (121° C)
- Construction Alumimum
- Flow Range 2-38 GPM
- HP Removal Unknown
- Ports SAE 12
- Overall Width 24⅞″
- Overall Height 8¼″
- Overall Depth 2⅜″
- Mount: Vertical: Four, 0.43″ holes on 1½″ x 23⅝″ centers Horizontal: Four, 0.4″ slotted holes on 3″ x 24″ centers
- **Shpg. 8 lbs.**

26 GPM Oil Cooler



ITEM 906374

$89.95

• New, AKG aluminum oil cooler.Used for hydraulic, engine, transmission,and diesel system coolers.

SPECIFICATIONS

- Brand AKG
- Model Number 1102453100
- Pressure 203 PSI max.
- Temperature 250° F (121° C)
- Construction Alumimum
- Flow Range 2-26 GPM
- HP Removal Unknown
- Ports SAE 8
- Overall Width 17″
- Overall Height 4¾″
- Overall Depth 2⅜″
- Mount: Vertical: Four, 0.43″ holes on 1½″ x 15¾″ centers Horizontal: Four, 0.4″ slotted holes on 3″ x 16¼″ centers
- **Shpg. 4 lbs.**

ITEM 906375




$129.95

SPECIFICATIONS SAME AS ABOVE EXCEPT

- Ports SAE 12
- Overall Width 20⅞″
- Overall Height 5″
- **Shpg. 5 lbs.**
- Mount: Vertical: Four, 0.43″ holes on 1½″ x 23½″ centers Horizontal: Four, 0.4″ slotted holes on 3″ x 24″ centers

California Residents ⚠ WARNING:Cancer and Reproductive Harm
For more information refer to:www.P65Warnings.ca.gov

Square Head Magnetic Plugs



• Brand new. Square head magnetic steel plug. Ideal for use as a drain plug in hydraulic reservoirs. **Shpg. ¼ lb.**

⅜″ NPT
ITEM 905376 **$2.20**
½″ NPT
ITEM 905377 **$2.00**
¾″ NPT
ITEM 905378 **$3.30**
1″ NPT
ITEM 905379 **$4.00**

25 Gallon Side Mount Aluminum Hydraulic Oil Reservoir



ITEM 904807
$717.70

• Brand new, BUYERS PRODUCTS model SMC25AR side mount aluminum hydraulic reservoir and mounting brackets. Intended for truck and trailer applications. Internal baffle to reduce sloshing and lower operating temperatures. Lightweight and corrosion resistant, 11 gauge aluminum construction. Heavy duty steel brackets that wrap underneath of the reservoir for superior stability and support. Provided with rubber covers for the stainless steel bands that secure reservoir to brackets. Contains, uninstalled, combination fluid sight level gauge and thermometer that can be mounted on either side of reservoir, ½″ NPT magnetic drain plug, ¼ turn chrome breather cap with strainer basket, and all necessary mounting hardware included.

SPECIFICATIONS
- Oil Capacity 25 Gallon
- Rear Ports: 1¼″ NPT x two, offset
- Mount Side Mount
- Mounting Holes
- Size 26½″ x 15½″ x 27″
- **Shpg. 115 lbs.**

Truck freight only.

Magnetic Drain Plugs



• Brand new. Square head magnetic steel plug. Ideal for use as a drain plug in hydraulic reservoirs. **Shpg. ¼ lb.**

ITEM 905371 ½″ NPT **$4.30**
ITEM 902769 ¾″ NPT **$3.50**

Press-On Breather Caps



• Brand new, BUYERS PRODUCTS press-on breather caps. Provides a free flow of clean air into reservoir. Push-on installation over an 1½″ outside diameter tube on top of reservoir.

SPECIFICATIONS
- Brand Buyers Products Co.
- Chrome Model BEC061A
- Black Model BEC061AB
- Filtration Rating 40 Micron
- Flow Rating 15-16 CFM Max
- Installs On To 1.50″ O.D. tubing
- Material Carbon steel housing
- Size 2¹¹⁄₁₆″ O.D. x 2″ tall including spring clips
- **Shpg. 0.15 lb.**

ITEM 905713 Chrome **$6.30**
ITEM 905712 Black ⚠ **$8.50**

Weld-On Filler Breather Riser Adapter



ITEM 904577
$9.65

• Brand new, BUYERS PRODUCTS TAF001A. Weld-on adapter for mounting common hydraulic filler-breather assemblies. Unpainted 18 gauge aluminum.

SPECIFICATIONS
- Mounting Holes Six 0.165″ dia. holes on 2.88″ B.C.
- Center Hole 2.125″ dia.
- Size 4″ O.D. x 1.0625″
- **Shpg. 0.2 lb.**

¾″ NPT Reservoir Breather ⚠



ITEM 905361 **$20.35**

• Brand New ZINGA RB071000N breather that mounts in hydraulic reservoir top port to prevent debris from being drawn into reservoir.

SPECIFICATIONS
- Connection ¾″ NPTM
- Size 3¼″ dia. x 3½″
- **Shpg. ¼ lb.**

Chrome-Plated Air Breather Caps



• Brand new, DYNAMIC FLUID COMPONENTS 40 micron screw-on air breather Chrome-plated steel cap, galvanized steel connector.

ITEM 905340 **$15.95**
SPECIFICATIONS
- Connection ¼″ NPT
- Flow 40 GPM
- Size 1.85″ dia. x 1.77″
- **Shpg. 0.2 lb.**

ITEM 905341 **$13.75**
SPECIFICATIONS
- Connection ⅜″ NPT
- Flow 79 GPM
- Size 1.85″ dia. x 1.77″
- **Shpg. 0.2 lb.**

ITEM 905342 **$15.50**
SPECIFICATIONS
- Connection ½″ NPT
- Flow 119 GPM
- Size 3.12″ dia. x 2.71″
- **Shpg. 0.3 lb.**

ITEM 905343 **$20.55**
SPECIFICATIONS
- Connection ¾″ NPT
- Flow 198 GPM
- Size 3.12″ dia. x 2.71″
- **Shpg. 0.5 lb.**

ITEM 905344 **$19.70**
SPECIFICATIONS
- Connection 1″ NPT
- Flow 225 GPM
- Size 3.12″ dia. x 2.87″
- **Shpg. 0.7 lb.**

¾″ NPT Outlet Tank Strainer



ITEM 905058
$8.95

• New, compact size tank strainer. Mount in hydraulic reservoir to keep debris from being drawn into pump. Ideal size for two stage log splitter reservoirs and other applications.

SPECIFICATIONS
- Tank Thread 1½″ NPT
- Outlet Thread ¾″ NPT
- Flow Rate 16 GPM max
- Overall Length 3⅛″
- Screen 60 mesh (250 micron)
- Exposed Screen Size: 1½″ dia. x 1⅝″
- **Shpg. ½ lb.**

Coupler Adapters ⚠

SafeWay CUSTOM FLUID TRANSFER

• Brand New SAFEWAY hydraulic coupler adapters. Allows interconnect of non-compatible tips and bodies. **Shpg. 1 lb.**

ITEM	Picture	Model Number	End 1 Male	End 2 Female	Price
904868	A	FAE49-56-4	ISO 5675 (Pioneer Universal Ag ½″)	Flush Face ISO 16028	$76.25
904869	B	FAE56-49-4	Flush Face ISO 16028	ISO 5675 (Pioneer Universal Ag ½″)	$58.70
904870	C	S25-4-1	John Deere (Old Style)	ISO 5675 (Pioneer Universal Ag ½″)	$22.35
904871	D	S25-4-2	International Harvester (Old Style)	ISO 5675 (Pioneer Universal Ag I ½″)	$25.45
904872	E	S25-4-3	ISO 5675 (Pioneer Universal Ag ½″)	John Deere Cone (Old Style)	$44.25
904873	F	S25-4-3D	John Deere New Style ISO Casting	John Deere Cone (Old Style)	$53.05
904874	G	S25-4-4	International Harvester (Old Style)	John Deere Cone (Old Style)	$41.40
904875	H	S25-4-5	John Deere Cone (Old Style)	International Harvester (Old Style)	$33.45
904876	I	S25-4-6	J.I. Case Old Style	ISO 5675 (Pioneer Universal Ag ½″)	$37.25
904878	J	S25-4-7D	ISO 5675 (Pioneer Universal Ag ½″)	International Harvester (Old Style)	$34.35
904879	K	S25-4-9	J.I. Case Old Style	John Deere Cone (Old Style)	$30.70






Hydraulic Quick Couplers and Tips ⚠

• Brand new SAFEWAY. Two piece couplers. ITEM 901097 and 900471 are two way sleeve type. Can be disconnected by pulling sleeve either direction. Ball check design prevents leakage when disconnected.

* Safeway coupler adapters for common quick coupler brands on page 80.

	Complete Coupler							Extra Tip			
Thread	ITEM	Flow	PSI	Model	Type	Shpg	Price	ITEM	Model	Shpg.	Price
¼″ NPT	900285	3	5000	S10-2	Poppet	1 lb.	$40.10	901107	S101-2	½ lb.	$14.60
¼″ NPT	907086	3	3000	S40-2	Ball	1 lb.	$23.85	901004	S41-2	½ lb.	$6.15
⅜″ NPT	901105	6	3000	S20-3	Ball	1 lb.	$26.70	901108	S41-3	½ lb.	$7.90
½″ NPT	900469	12	3000	S20-4	Ball	1½ lbs.	$25.00	900470	S71-4	½ lb.	$8.80
¾″ NPT	900471	12	3000	S40-6	Ball	1½ lbs.	$37.65	900472	S71-6	1 lb.	$12.00

Flush Face ISO 16028 Quick Coupler & Accessories ⚠

• Brand new, HORIZON KSP1 Series flush face quick coupler. Includes body and tip. Used on skid-steer loaders, construction and agricultural equipment. Plated steel construction. Interchangeable with other brands that conform to ISO 16028.Temp. range -25° C to 125° C. Pressure: Working 3000 PSI max., Burst 12000 PSI






Complete Coupler						Body Only		Extra Tip		Dust Cap		Dust Plug	
ITEM	Body Size	Ports	GPM	Shpg.	Price	ITEM	Price	ITEM	Price	ITEM	Price	ITEM	Price
907084	¼″	¼″ NPT	3.17	1 lb.	$37.45	904348	$26.05	904349	$11.40	904742	$2.10	904743	$2.30
907085	⅜″	⅜″ NPT	6.07	1.5 lbs.	$39.95	904350	$30.75	904351	$14.50	904744	$2.20	904745	$2.75
907064	½″	½″ NPT	11.9	3 lbs.	$54.50	903043	$36.80	903042	$17.70	903117	$2.35	903118	$2.45
907065	¾″	¾″ NPT	26.4	4 lbs.	$112.95	903071	$72.85	903070	$40.10	903116	$2.75	903115	$2.70
907082	1″	1″ NPT	49.9	6 lbs.	$162.00	903793	$105.20	903792	$56.80	904752	$2.90	904753	$2.95

Thread-To-Connect Couplings & Accessories ⚠

• Brand new, HORIZON KST Series thread-to-connect coupling. Includes body and tip. Thread-to-connect design can be connected under pressure, with little or no spillage. Interchangeable half-for-half with the following: Parker 6100, Perfecting W, Faster FB, Safeway S51, Snaptite 78, Tomco A51 And Aeroquip 5100. Pressure: working 3000 PSI max., burst 9000 PSI.






Complete Coupler						Body Only		Extra Tip		Dust Cap		Dust Plug	
ITEM	Body Size	Ports	GPM	Shpg.	Price	ITEM	Price	ITEM	Price	ITEM	Price	ITEM	Price
907083	¾″	¾″ NPT	16.3	3 lbs.	$90.30	904352	$45.15	904353	$45.15	904746	$12.50	904747	$12.30
907066	1″	1″ NPT	42.2	5 lbs.	$113.10	903073	$59.05	903072	$54.05	903113	$21.10	903114	$19.25
907087	1¼″	1¼″ NPT	58.1	5 lbs.	$153.95	904354	$79.45	904355	$74.50	904748	$20.05	904749	$19.15
907088	1½″	1½″ NPT	79	7 lbs.	$217.15	904356	$102.05	904357	$115.10	904750	$50.75	904751	$22.00

Hydraulic Hose Sleeve



• Brand new, PROTEC Black Nylon Hose Sleeve. Self-renewing, abrasion-resistant fabric sleeve meets ISO 6945 abrasion standards and MSHA IC 171/1 flame resistance approval. Provides limited burst and containment protection. Installs over hose securing the ends with nylon cable ties or clamps. Ends should be heat sealed to prevent fraying. Temperature Range -40° to 194°F Available for hydraulic hose sizes ¼″ to 2″. Sold by the foot or 300 ft. rolls.

By the Foot					300 Ft. Roll	
Item Number	I.D.	Hose Size	Shpg per ft.	Price per ft.	Item Number	Price
904581	0.90″	¼″	1/10	$1.10	905605	$250.00
904582	1.00″	⅜″	1/10	$1.20	905606	$265.00
904583	1.25″	½″	⅛	$1.25	905607	$295.00
904584	1.53″	¾″	⅛	$1.50	905608	$355.00
904585	1.75″	1″	⅛	$1.65	905609	$385.00
904586	2.07″	1¼″	¼	$1.85	905611	$430.00
904576	2.38″	1½″	¼	$2.25	905610	$535.00
904587	2.96″	2″	¼	$2.70	905612	$760.00

Hose Wraps



• Brand new, TOMPKINS PROWRAP PLUS polyethylene wraps. Provides protection against abrasive wear and crushing damage, resistant to chemical attack and suitable for use with all hydraulic fluids including glycol and phosphate ester based products. Installs easily without disconnecting any lines. Wrap individual lines or bundle hoses.

ITEM	Fits	Length.	I.D.	O.D.	Price
906119	⅜″ - 7/16″ O.D. Hose	165′	0.38″	0.5″	$202.95
906120	7/16″ - ⅝″ O.D Hose	66′	0.49″	0.63″	$93.10
906121	⅝″ - ⅞″ O.D. Hose	66′	0.63″	0.79″	$114.85
906122	⅞″ - 1⅜″ O.D. Hose	66′	0.83″	0.99″	$128.70
906123	1⅛″ -1⅜″ O.D. Hose	66′	1.06″	1.26″	$157.45
906124	1½″ -1⅝″ O.D. Hose	66′	1.34″	1.58″	$202.00
906125	1¾″ -2½″ O.D. Hose	66′	1.73″	2.05″	$244.55
906126	2″ - 3″O.D. Hose	66′	2.17″	2.49″	$364.35
906127	2 1/32″-3⅛″ O.D. Hose	66′	2.6″	2.96″	$500.95
906128	3″ - 5″ O.D. Hose	66′	3.11″	3.55″	$763.30
906129	3⅞″ - 6″ O.D. Hose	40′	3.9″	4.34″	$715.80

Steel Hydraulic Reservoirs


902359

Side or Base Mount

• Brand new BUYERS. Constructed of 10 & 12 gauge black powder coated steel. All sides are ported, allowing multiple position mounting. Suction ports on opposing sides and bottom. Return ports on the other two sides and top. Plastic breather cap included. Plastic 1″ NPTM to ¾″ NPTF bushing for breather cap.

ITEM	Model	Capacity (Gallons)	Ports NPT Return/Filler	Drain	Size	Shpg.	Price
902359	SMR7S	7	1″ (3)	¾″ (1)	15¾″ x 14⅞″ x 11¾″	43 lbs.	$309.95


902360


903750

Side Mount

• Brand new BUYERS welded side mount, heavy duty steel reservoirs. Features include black powder coated steel construction, welded side mount brackets, oil level temperature gauge, magnetic drain plug, internal baffle and chrome plated breather cap with filler basket strainer.

ITEM	Model	Capacity (Gallons)	Ports NPT Suction	Ports NPT Return	Ports NPT Drain	Wall Thickness	Size	Shpg.	Price
902360	SMR15S	11	2″ (2)	1¼″ (2)	¾″	13 gauge	15⁹⁄₁₆″ x 13½″ x 17½″	59 lbs.	$339.55
902361	SMR25S	18	2″ (2)	1¼″ (2)	¾″	13 gauge	20″ x 14¹³⁄₁₆″ x 20¹⁄₁₆″	71 lbs.	$379.00
903633	SMR25S	18	2″ (2)	1″ (1)	¾″	13 gauge	24⅜″ x 24″ x 17″	76 lbs.	$457.40
902362*	SMR30S	30	2″ (2)	1¼″ (2)	¾″ & 1″	13 gauge	24⅜″ x 16″ x 22″	92 lbs.	$494.95
903750	BH36SF10	30	2″ (2)	1″ (1)	¾″	12 gauge	46″ x 9½″ x 30½″	210 lbs.	$961.65

** Also has accessory port ¼″ NPT*


905299


905300

Side Mount

• Brand new BUYERS side mount, heavy duty 13 gauge steel reservoirs. Features include black powder coated steel construction, oil level temperature gauge, magnetic drain plug, internal baffle and chrome plated breather cap with filler basket strainer.

ITEM	Model	Capacity (Gallons)	Outlet Port	Return Port	Other Ports	Size	Shpg Wt.	Price
905299*	SMR37SQ	37	2″ NPT	1¼″ NPT	¾″ NPT, ½″ NPT	24″ x 22″ x 26″	108 lbs.	$750.05
905300	SMR50SQ	50	2″ NPT	2″ NPT	none	23″ x 25″ x 26″	150 lbs.	$674.50
905301	SMR70SQ	70	2″ NPT	2″ NPT	none	23″ x 34″ x 26″	180 lbs.	$662.70
** Includes welded on brackets.*								
902447	Mounting Brackets and straps for item 905300 and 905301.							$265.70

Base Mount

• Brand new BUYERS base mount, heavy duty 12 gauge steel reservoirs. Features include black powder coated steel construction, welded base brackets with mounting kit, oil level temperature gauge, magnetic drain plug, internal baffle and chrome plated breather cap with filler basket strainer.


902363


902364

ITEM	Model	Capacity (Gallons)	Ports NPT Suction	Ports NPT Return	Drain	Size	Shpg.	Price
902363	UR50S	50	2″ (1)	1¼″ (1)	¾″ (1)	34″ x 14¾″ x 25½″	157 lbs.	$728.50
902364	UR70S	67.5	2″ (1)	1¼″ (1)	¾″ (1)	49¼″ x 14¾″ x 25⁷⁄₁₆″	227 lbs.	$1064.35

Polymer Hydraulic Reservoirs


902450


902449


902448

• Brand new, BUYERS hydraulic reservoirs. Max. fluid temperature 150° F., duty cycle 5 minutes. Lightweight and corrosion proof construction. Sight level gauge and thermometer, chrome breather cap.

ITEM 902448 and **902450**: Includes mounting brackets and hardware.
ITEM 902449: Includes mounting hardware and straps.
ITEM 902449 and **902450**: Includes return line diffuser.

ITEM	Model	Mount	Capacity (Gallons)	Ports	Ports Location	Drain Plug	Internal Baffle	Size	Shpg.	Price
902448	SMR25P	Side	25	2″ (2)	Bottom	Yes	Yes	15⁹⁄₁₆″ x 13½″ x 17½″	77 lbs.	$401.30
902449	SMR50P	Side	50	2″ (2)	Side	No	No	31″ x 23″ x 23⅞″	136 lbs.	$675.95
902450	UR50P	Base	50	2″ (2)	Bottom	No	No	38″ x 16½″ x 29″	115 lbs.	$655.70

5 Gallon Hydraulic Log Splitter Reservoir



ITEM 903226 **$162.45**

• Brand new, superior quality log splitter hydraulic or general purpose reservoir. Constructed of 14 gauge, black powder-coated steel. Breather has 10 micron foam filter. Integral mounting foot on each end. Made in USA.

SPECIFICATIONS

- Oil capacity:
  5.5 gallons nominal
  5 gallons usable
- Ports: 1½″ NPT x one, ¾″ NPT x one
- Mount 4 bolts 19¹⁄₁₆″ x 7¹⁄₁₆″ c/c
- Mounting holes ⅜″ dia.
- Tank size w/o feet or filler 18″ x 9½″ x 9⁵⁄₁₆″
- Tank height to breather cap top 12″
- Footprint 19⅞″ x 9½″
- **Shpg. 23 lbs.**

Hydraulic Reservoirs



• Brand new, superior quality hydraulic reservoirs. Constructed of 12 gauge, black powder-coated steel. Internal baffle.

• One suction port, one return port and one ¾″ NPT drain with steel plug. Filler-breather has 10 micron foam filter, quarter-turn cap, mesh basket. Integral mounting foot on each end, four ⅜″ mounting holes.

• Select a reservoir with useable capacity at least equal to pump flow GPM (e.g. 20 gallon reservoir minimum for system with 20 GPM pump). Made in USA.

With Baffle

ITEM	Useable Capacity (Gallons)	Ports	Overall Size including feet & filler	Shpg.	Price
903045	10	1½″ NPT and 1″ NPT	21¼″ x 15″ x 13⅝″	45 lbs.	$278.85
903046	15	2″ NPT and 1½″ NPT	25¾″ x 15″ x 15⅝″	57 lbs.	$310.05
903047	20	2″ NPT and 1½″ NPT	26¾″ x 16⅜″ x 17⅞″	72 lbs.	$338.90
902885	25	2″ NPT and 1½″ NPT	26¾″ x 17½″ x 20⅛″	83 lbs.	$384.25

No Baffle

• ¾″ NPT fill port with breather.

ITEM	Useable Capacity (Gallons)	Ports	Overall Size including feet & filler	Shpg.	Price
903229	3	1¼″ NPT and ¾″ NPT	12¼″ x 11¼″ x 10⅛″	24 lbs.	$163.70
903230	5	1¼″ NPT and ¾″ NPT	16¾″ x 12½″ x 10⅛″	31 lbs.	$181.75

Internal Tank Strainers ⚠




• Brand new, ZINGA TFS series tank strainer. Mount in hydraulic reservoir to keep debris from being drawn into pump. Relief valve allows oil to bypass if screen becomes clogged to prevent pump cavitation. 100 mesh. 3 PSI by-pass valve.

ITEM	NPTM Tank Threads	NPTF Hose Connect	GPM Cap.	Mesh Size	Overall Lgth.	Shpg.	Price
901844	1″	½″	5	1⅛″ d. x 3½″	5¼″	1 lb.	$27.45
901845	1¼″	¾″	8	1½″ d. x 5½″	7″	1 lb.	$25.15
901846	1½″	1″	14	1¾″ d. x 5⁹⁄₁₆″	7⅛″	1 lb.	$28.25
901847	2″	1¼″	23	2¼″ d. x 7¹⁄₁₆″	9⅛″	2 lbs.	$30.20
901848	3″	2″	53	2¼″ d. x 7⁵⁄₁₆″	9½″	3 lbs.	$66.45
901849	4″	3″	116	4¼″ d. x 6⅞″	9⁵⁄₁₆″	5 lbs.	$83.70

SAE 24 Tank Strainer & Accessories

ITEM 902254
$9.99



• New, tank strainer. Mount in hydraulic reservoir to keep debris from being drawn into pump.

SPECIFICATIONS

- Tank Thread SAE 24 male
- Outlet Thread SAE 20 female
- Flow Rate 20 GPM max
- Screen 100 mesh
- Exposed Screen Size 1⅝″ dia. x 6½″
- Overall Length 8¼″
- **Shpg. 1 lb.**

Hosebarb to SAE20M Fitting




ITEM 900819 1¼″ hosebarb **$18.55**
ITEM 900820 1½″ hosebarb **$21.20**

Weld-in Port Flanges



Forged Steel





Stamped Steel

• Brand new. Weld-in port flanges. Ideal for building or modifying hydraulic reservoirs. Available in forged steel or stamped steel.

Forged Steel Weld-In Port Flanges


ITEM	Port Size	Flange O.D.	Pilot Hole Required	Shpg.	Price
902191	¼″ NPT	1⁵⁄₁₆″	1″	⅛ lb.	$2.80
902192	⅜″ NPT	1⁵⁄₁₆″	1″	⅛ lb.	$2.65
902193	½″ NPT	1⅝″	1¼″	⅛ lb.	$2.95
902194	¾″ NPT	2″	1⁷⁄₁₆″	¼ lb.	$4.00
902195	1″ NPT	2⅜″	1¾″	¼ lb.	$3.90
902196	1¼″ NPT	2⅝″	2³⁄₁₆″	¼ lb.	$4.50
902197	1½″ NPT	2⅞″	2⅜″	¼ lb.	$5.95
902198	2″ NPT	3⅜″	2¹¹⁄₁₆″	½ lb.	$5.90
902199	2½″ NPT	4⅛″	3³⁄₁₆″	1¼ lbs.	$9.00
902200	3″ NPT	4⅝″	3¹¹⁄₁₆″	1½ lbs.	$10.95
902201	4″ NPT	5⅞″	4¹³⁄₁₆″	3 lbs.	$15.95

Stamped Steel Weld-In Port Flanges

ITEM	Port Size	Flange O.D.	Pilot Hole Required	Shpg.	Price
902202	⅛″ NPT	1.750″	0.471″	⅛ lb.	$3.20
902203	¼″ NPT	1.750″	0.605″	⅛ lb.	$3.20
902204	⅜″ NPT	1.743″	0.755″	⅛ lb.	$3.20
902205	½″ NPT	1.750″	0.900″	⅛ lb.	$3.20
902206	¾″ NPT	2.360″	1.110″	⅛ lb.	$4.25
902207	1″ NPT	2.340″	1.380″	⅛ lb.	$4.65
902208	1¼″ NPT	2.635″	1.720″	¼ lb.	$4.60
902209	1½″ NPT	3.205″	1.945″	½ lb.	$6.00
902210	2″ NPT	3.665″	2.475″	½ lb.	$6.40

Thermal Transfer DH Series Oil Coolers

• Brand new THERMAL TRANSFER DH series oil coolers are an excellent choice for radiator face mount oil cooling and other oil cooling applications. Interchangeable with Hayden.

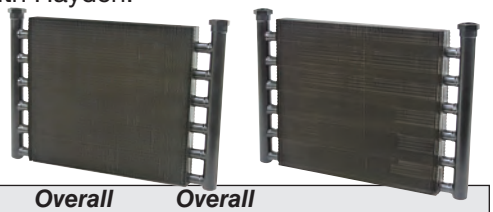

SPECIFICATIONS
- Pressure 300 PSI max.
- Temperature 350° F max.
- Tubes Copper
- Fins Aluminum
- Turbulators Aluminum
- Manifolds Copper
- Port Connection Brass

TTP AN API HEAT TRANSFER COMPANY

ITEM	Model Number	# of Mtg kits	Flow Range GPM	HP Removal	Ports	Overall Width (in.)	Overall Height (in.)	Overall Depth (in.)	Shpg.	Price
904718	DH-051-2-1	2	1-8	1-2	SAE 10	15	4.5	1.5	8 lbs.	$176.55
904719	DH-062-2-1	4	1-15	1-2	SAE 10	15	6.5	1.5	10 lbs.	$213.70
904720	DH-073-2-1	4	2-15	1-3	SAE 10	18	6.5	1.5	10 lbs.	$217.80
904721	DH-084-2-1	4	2-12	2-4	SAE 10	24	6.5	1.5	11 lbs.	$227.70
904722	DH-095-2-1	4	2-15	2-4	SAE 10	18	8.5	1.5	11 lbs.	$249.15
904723	DH-106-2-1	4	2-15	2-4	SAE 10	21	8.5	1.5	12 lbs.	$255.75
904724	DH-117-2-1	4	3-30	3-5	SAE 10	24	8.5	1.5	12 lbs.	$277.20
904725	DH-194-2-1	4	2-15	2-5	SAE 12	18	12.73	1.5	13 lbs.	$334.15
904726	DH-205-2-1	4	3-25	3-6	SAE 12	21	12.73	1.5	15 lbs.	$340.75
904727	DH-216-2-1	4	3-26	4-7	SAE 12	24	12.73	1.5	16 lbs.	$366.30
904728	DH-227-2-1	4	3-30	5-8	SAE 12	24	14.73	1.5	17 lbs.	$396.00
904729	DH-249-2-1	6	4-40	6-10	SAE 12	24	18.73	1.5	20 lbs.	$500.80
904730	DH-326-2-1	8	6-50	8-14	SAE 16	24	25	1.5	24 lbs.	$626.20
904731	DH-337-2-1	8	6-45	11-20	SAE 16	30	25	1.5	29 lbs.	$679.80
904732	DH-348-2-1	8	6-55	11-20	SAE 16	24	31	1.5	28 lbs.	$765.60
904733	DH-359-2-1	8	7-50	12-20	SAE 16	30	31	1.5	33 lbs.	$894.30
904734	DH-370-2-1	8	7-60	15-28	SAE 16	36	31	1.5	37 lbs.	$991.65
904735	DH-425-2-1	8	8-82	15-28	SAE 20	30	37.41	1.5	41 lbs.	$1006.50
904736	DH-447-2-1	8	10-80	23-41	SAE 20	42	41.41	1.5	53 lbs.	$1348.05

Mounting Kits

• Brand new. THERMAL TRANSFER PRODUCTS mounting kit designed for use with DH series oil coolers. Provides vibration isolation to enhance oil cooler life. Includes rubber squeeze block, and hardware.

ITEM 905296 — **With Strap** — **$33.85**

SPECIFICATIONS
- Model Number L-84741
- Rubber Block Dimensions 1 15/16″ x 1 3/16″ x 7/8″ with 0.34″ hole
- Strap Dimensions 7″ long with seven 0.34″ dia. holes
- **Shpg. 0.3 lb.**

ITEM 905297 — **Without Strap** — **$25.60**

SPECIFICATIONS
- Model Number L-84740
- Rubber Block Dimensions 1 15/16″ x 1 3/16″ x 7/8″ with 0.34″ hole
- **Shpg. 0.15 lb.**

AKG C Series Oil Coolers ⚠

MADE IN USA

• Brand new AKG C series rugged bar and plate construction oil coolers that feature aluminum construction, leak-free SAE O-Ring connections and mounting tabs. Cooler performance in chart is based on 1,000 SFPM (Square Feet Per Minute) cooling air flow.



SPECIFICATIONS
- Pressure 250 PSI max.
- Temperature 250° F max.
- Construction Aluminum

AKG®

ITEM	Model Number	Flow GPM	Heat Removed based on 50 Deg F *ETD. (BTU/HR)	Port Size	Overall Height (in.)	Overall Width (in.)	Overall Depth (in.)	Shpg. Weight	Price
904708	C8	17	14603	SAE 12	6.57	19.15	1.77	15 lbs.	$280.50
904709	C12	30	20208	SAE 12	11.61	13.78	2.56	20 lbs.	$351.00
904710	C14	30	18417	SAE 12	10.88	19.15	1.77	19 lbs.	$363.00
904711	C18	50	23644	SAE 16	13.47	15.75	2.56	23 lbs.	$392.25
904712	C20	30	20275	SAE 12	15.17	19.15	1.77	23 lbs.	$444.00
904713	C32	80	29070	SAE 20	18.31	19.68	2.56	32 lbs.	$576.75
904714	C48	80	32559	SAE 20	22	23.62	2.56	46 lbs.	$715.50
904715	C66	80	35294	SAE 20	25.74	27.56	2.56	55 lbs.	$914.25
904716	C82	125	37459	SAE 24	27.6	31.5	2.56	70 lbs.	$1131.00
904717	C120	125	40449	SAE 24	38.66	31.5	2.56	94 lbs.	$1695.00

* ETD - Entering Temperature Difference

AKG DCS Series Oil Coolers with DC Fan

• Brand new AKG DCS series oil coolers that feature aluminum construction, 12 or 24 Volt DC fan, leak-free SAE O-Ring connections, with or without internal pressure bypass and mounting tabs.

SPECIFICATIONS
- Pressure 250 PSI max.
- Temperature 250° F max.
- Construction Aluminum



DROP SHIP ** Products drop-shipped from the manufacturer are not returnable.*

* ETD - Entering Temperature Difference

ITEM	Model Number	Flow GPM	Fan Motor Voltage	Amps	Heat Removed based on 50 Deg F *ETD. (BTU/HR)	Port Size	Overall Height (in.)	Overall Width (in.)	Overall Depth (in.)	Shpg. Weight	Price
904682	DCS10-12	30	12V	5	11751	SAE 12	11.69	13.78	6.3	25 lbs.	$495.00
904683*	DCS10-24	30	24V	3	11751	SAE 12	11.69	13.78	6.3	25 lbs.	$495.00
904684	DCS16-12	50	12V	10	17058	SAE 16	13.5	15.74	6.5	30 lbs.	$555.75
904685	DCS20-12	80	12V	19	35991	SAE 16	18.3	19.88	7.2	36 lbs.	$794.25
904686	DCS20-24	80	24V	10	35991	SAE 20	18.3	19.88	7.2	36 lbs.	$794.25
904687	DCS30-12	80	12V	19	45077	SAE 20	22	23.62	7.2	58 lbs.	$982.50
904688	DCS45-12	80	12V	17	75634	SAE 20	18.31	33.46	7.2	72 lbs.	$1549.50
904689	DCS60-12	80	12V	19	79717	SAE 20	22	35.43	7.2	121 lbs.	$1824.75
Items below ending in BP include 65 PSI internal bypass											
904690	DCS10-12-BP65	30	12V	5	11751	SAE 12	11.69	13.78	6.3	25 lbs.	$649.50
904691	DCS16-12-BP65	50	12V	10	17058	SAE 16	13.5	15.74	6.5	30 lbs.	$710.25
904692	DCS20-12-BP65	80	12V	19	35991	SAE 20	18.3	19.88	7.2	36 lbs.	$948.75
904693	DCS30-12-BP65	80	12V	19	45077	SAE 20	22	23.62	7.2	58 lbs.	$1137.00
904694	DCS45-12-BP65	80	12V	17	75634	SAE 20	18.31	33.46	7.2	72 lbs.	$1704.00
904695	DCS60-12-BP65	80	12V	19	79717	SAE 20	22	35.43	7.2	121 lbs.	$1979.25

Temperature Control Switches

• Brand new, for use in AKG "C" and "DCS" series oil coolers that are equipped with a drain/temperature sensor port.

ITEM 904849 — $114.75

SPECIFICATIONS
- Manufacturer Index
- Model 8037455 115NO or AKG TC-115-WL
- Fixed Set Point (°F) 115° F
- Thread Size SAE 8 (¾″-16 ORB)
- Circuit SPST-NO
- Current Rating 7 Amps Resistive, 4 Amps Inductive
- Wire leads with a DT04-2P connector
- System Voltage 12-32 Volts DC
- Set Point Direction Rising
- Wire Length 16″
- Operating Temperature Range -40° F to 250° F
- Exposure Temperature Range -40° F to 350° F
- Size 2¼″ x 1″ x 1″
- **Shpg. 0.5 lb.**

ITEM 904850 — $114.75

SPECIFICATIONS
- Manufacturer Index
- Model 8037456 145NO or AKG TC-140-WL
- Fixed Set Point (°F) 145° F
- Set Point Tolerance (°F) +/-4° F
- Thread Size SAE 8 (¾″-16 ORB)
- Circuit SPST-NO
- Current Rating 5 Amps
- System Voltage 12-24 Volts DC
- Set Point Direction Rising
- Wire Length 18″
- Maximum Operating Temperature 250° F
- Size 2¼″ x 1″ x 1″
- **Shpg. 0.5 lb.**

AKG AR Series Oil Coolers with AC Fan

• Brand NEW AKG AR series oil coolers that feature aluminum construction, 115/230 Volt AC 1 phase or 230/460 Volt AC 3 phase fan, leak-free SAE O-Ring connections, zinc plated steel fan guard and powder painted steel shroud and mounting brackets.

SPECIFICATIONS
- Pressure 377 PSI max.
- Temperature 250° F max.
- Construction Aluminum cooler and steel shroud/mounting brackets

* ETD - Entering Temperature Difference



ITEM	Model Number	Flow GPM	HP	Phase	Fan Motor Voltage	Amps	Heat Removed based on 50 Deg F *ETD. (BTU/HR)	Port Size	Overall Height (in.)	Overall Width (in.)	Overall Depth (in.)	Shpg. Weight	Price
904702	AR5-1	30	⅓	1	115/230	5.6/2.5	12510	SAE 12	13.74	13.78	12.56	42 lbs.	$988.50
904703	AR8-1	30	⅓	1	115/230	5.6/2.5	14676	SAE 12	14.25	13.78	13.27	48 lbs.	$1053.00
904704	AR10-1	50	½	1	115/230	7/3.5	27033	SAE 16	15.91	15.75	14.5	51 lbs.	$1116.00
904705	AR15-1	50	½	1	115/230	7/3.5	31725	SAE 16	15.91	16.54	16	62 lbs.	$1221.75
904706	AR20-1	80	½	1	115/230	7/3.5	45186	SAE 20	19.6	21.65	15.5	72 lbs.	$1318.50
904707	AR30-1	80	1	1	115/230	12.8/6.4	78150	SAE 20	24.03	25.59	16.75	147 lbs.	$1752.00
904696	AR5-3	30	⅓	3	230/460	1.1	12510	SAE 12	13.74	13.78	12.56	42 lbs.	$948.75
904697	AR8-3	30	⅓	3	230/460	1.1	14676	SAE 12	14.25	13.78	13.27	48 lbs.	$1014.75
904698	AR10-3	50	½	3	230/460	1.6	27033	SAE 16	15.91	15.75	14.5	51 lbs.	$1078.50
904699	AR15-3	50	½	3	230/460	1.6	31725	SAE 16	15.91	16.54	16	62 lbs.	$1236.00
904700	AR20-3	80	½	3	230/460	1.8	45186	SAE 20	19.6	21.65	15.5	72 lbs.	$1338.00
904701	AR30-3	80	1	3	230/460	3.8	78150	SAE 20	24.03	25.59	16.75	147 lbs.	$1734.00

Guidelines for sizing and selection of coolers at www.surpluscenter.com

California Residents WARNING:Cancer and Reproductive Harm
For more information refer to:www.P65Warnings.ca.gov

Reservoir Filler/ Breather Cap



ITEM 902367 **$15.90**

• Brand new, BUYERS Model TFA005715 reservoir filler and breather cap. Chrome plated steel twist-on cap. Opening size on base is 1½″. Installs into 2″ hole with gaskets and screws (all included).

SPECIFICATIONS

- 40 micron filter in cap
- 30 mesh strainer basket
- Basket 1⅞″ dia. x 3″
- Six bolt holes on 2⅞″ bolt circle
- Size 3¼″ dia. x 5″
- **Shpg. 1½ lbs.**

Reservoir Sight Level Gauges



• Brand new, ZINGA series SG reservoir sight level gauge. Dual scale thermometer. Aluminum guard. For use with petroleum and water base hydraulic fluids.

SPECIFICATIONS

- ½″-13 UN bolts
- **Shpg. 1 lb.**
- Thermometer range 30° F to 210° F 0° C to 100° C.

ITEM 901840 **$23.90**

• 3″ mtg. centers. Size 4½″ x 1 13/16″ x 1⅞″.

ITEM 901841 **$22.90**

• 5″ mtg. centers. Size 6⅞″ x 1 13/16″ x 1⅞″.

ITEM 901842 **$34.80**

• 10″ mtg. centers. Size 11⅞″ x 1 13/16″ x 1⅞″.

Threaded Breather Cap



ITEM 904117
$1.99

• New, plastic vented breather cap.

SPECIFICATIONS

- Connection 1.25-5 thread, ½″ long
- Size 2½″ dia. x 1″
- **Shpg. ¼ lb.**


Low Profile Breathers



• Brand new. MIDLAND INDUSTRIES brass breather. Used to prevent dirt and foreign particles from entering port open to atmosphere. Typically used on single acting cylinders. Other uses are for vacuum relief or pressure equalization on storage vessels or tanks. **Shpg. ¼ lb.**

ITEM 900629	⅛″ NPTM	**$2.95**
ITEM 900630	¼″ NPTM	**$3.35**
ITEM 900631	⅜″ NPTM	**$4.25**
ITEM 900632	½″ NPTM	**$24.00**
ITEM 900633	¾″ NPTM	**$12.60**

Reservoir Filler/Breather Cap Assembly



ITEM 901839
$22.75

• Brand new, ZINGA series WSFB reservoir filler and breather cap. Black painted steel weather resistant twist-on cap with padlock hasp. 1½″ opening on base. Installs into 2″ hole with gaskets and self-tapping screws (included).

SPECIFICATIONS

- 10 micron foam filter
- 6″ dipstick
- 30 mesh epoxy basket
- 6 bolt holes on 2.88″ BC
- Basket 1 15/16″ dia. x 5¾″
- Size 3 5/16″ dia. x 8 1/16″
- **Shpg. 1½ lbs.**

ITEM 903054 **$22.75**

• Same as ITEM 901839 above except 4″ dipstick length, basket length is 3¾″ and overall size is 3 5/16″ dia. x 6 1/16″.

¾″ NPT Reservoir Breather



ITEM 903251
$25.15

• Brand new ZINGA TBN310 breather that mounts in hydraulic reservoir top port to prevent debris from being drawn into reservoir. Provides better protection and air displacement than ordinary push-in breather caps.

SPECIFICATIONS

- Connection ¾″ NPTM
- Filtration size 10 micron
- Air flow cap. 40 SCFM
- Size 3¾″ dia. x 5″
- **Shpg. 2 lbs.**

¾″ NPT Breather Cap



ITEM 902365
$5.20

• Brand new, BUYERS PRODUCTS Model HBF12P plastic breather cap. These units act as ventilators to provide a free flow of clean, fresh air into hydraulic fluid reservoirs. Large oil resistant filter elements filter dirt and dust particles as small as 40 micron.

SPECIFICATIONS

- Connection ¾″ NPTM
- Size 1 1/16″ dia. x 1⅞″
- **Shpg. ¼ lb.**

1½″ Push-On Breather Cap



ITEM 900577
$6.50

• Brand new, push-on plastic breather cap for 1½″ outside diameter smooth filler tube on hydraulic reservoirs. Black plastic construction with foam filter. Size 2¾″ diameter x 1½″. **Shpg. ½ lb.**

Tank Clean-out Cover



• Brand new FLEENOR hydraulic tank clean-out cover. Ideal tank accessory for access to clean and provide maintenance on hydraulic reservoirs. Includes zinc plated grade 50 steel outer cover and inner backing plate, single bolt for installation with o-ring and Buna-N cover seal. Recommended for 12 gauge and heavier wall tanks.

ITEM 904054 **$32.90**
- Model FCC-06-YZ-BN
- Outside Diameter 6″
- Nominal Hole Size 5″
- **Shpg. 4 lbs.**

ITEM 904055 **$44.35**
- Model FCC-08-YZ-BN
- Outside Diameter 8″
- Nominal Hole Size 6″
- **Shpg. 6 lbs.**

ITEM 904056 **$59.20**
- Model FCC-10-YZ-BN
- Outside Diameter 10″
- Nominal Hole Size 8″
- **Shpg. 9 lbs.**

ITEM 904057 **$74.00**
- Model FCC-12-YZ-BN
- Outside Diameter 12″
- Nominal Hole Size 10″
- **Shpg. 11 lbs.**

ITEM 904058 **$90.25**
- Model FCC-14-YZ-BN
- Outside Diameter 14″
- Nominal Hole Size 12″
- **Shpg. 14 lbs.**

½″ NPT Breather Dipstick



ITEM 904113
$3.99

• New screw-in breather/dipstick made for use with hydraulic reservoirs. 3¾″ from bottom of threads to end of dipstick. "Add" mark ½″ from end, "Full" at 2½″ from end. There may be superficial rust on some of the diptsticks.

SPECIFICATIONS

- Overall size 1½″ dia. x 5¼″ long
- Threads ½″ NPT
- **Shpg. ¼ lb.**

Fluid Level Sight Glass



ITEM 901843
$9.40

• Brand new, ZINGA series OE oil eye fluid level sight glass. Weld into reservoir side for quick visual reference of reservoir's fluid level. Clear nylon sight glass and non-plated steel base.

SPECIFICATIONS

- 400 PSI max.
- Temp. -65° F to 150° F
- Fits into 15/16″ dia. hole
- Size 1¼″ dia. x 1 3/16″ tall
- **Shpg. ½ lb.**

Filler-Breather Weld Flange Adapter



ITEM 902770
$8.90

• Brand new. Weld-on adapter for mounting common hydraulic filler-breather assemblies. Unpainted 12 gauge steel.

SPECIFICATIONS

- Mtg. holes six 0.175″ dia. holes on 2.88″ B.C.
- Center hole 2.125″ dia.
- Size 4″ O.D. x 1.125″
- **Shpg. ½ lb.**

Optional ⅛″ NPT Condition Indicator Gauge ⚠



ITEM 900698 **$12.30**

• For use on ITEMS 900161, 901909, 900704 suction line filters only. **Shpg. ½ lb.**

Zinga Spin-On Filter Assemblies ⚠



• Brand new, ZINGA spin-on type element. Full flow filtering up to bypass cracking point, partial filtering beyond. 250° F max. Suction line filters have ⅛″ NPT port for optional condition indicator.

Filter Assemblies (Head and Element)										Replacement Elements	
Ports	ITEM	Application	GPM	Max. PSI	Bypass PSI	Micron Rating	Size	Shpg.	Price	ITEM	Price
¾″ NPT	907072	Return Line	20	100	25	10	7½″ x 3¾″ x 3½″	3 lbs.	$27.35	900132	$11.35
	907054	Suction Line	9	100	5	25	7½″ x 3¾″ x 3½″	3 lbs.	$27.10	900133	$11.05
1¼″ NPT	907055	Return Line	70	200	25	10	5⅜″ dia. x 9⅜″	6 lbs.	$40.80	900701	$18.30
	907056	Suction Line	25	200	5	25	5⅜″ dia. x 9⅜″	6 lbs.	$41.95	900702	$18.30
1½″ NPT	907060	Return Line	70	200	25	10	5⅛″ dia. x 13⅞″	6 lbs.	$58.90	901858	$24.35
	907061	Suction Line	25	200	5	25	5⅛″ dia. x 13⅞″	6 lbs.	$60.00	901859	$24.35

1 Quart Hydrostatic Tank w/Filter



ITEM 904116
$49.99

• New, extruded aluminum with deep fins for cooling. Use as expansion tank/cooler on dual hydrostatic pump mowers. Connects to case drain and charge pump ports on hydrostatic pumps. Fill port on top. Internal markings for hot and cold oil levels. Furnished with 90 degree adapters to ⅜″ ID Push-Lok hose.

SPECIFICATIONS
- Oil Capacity 1 quart
- Filter Rating 10 micron
- Ports (4) SAE 6
- Size 5″ x 5″ x 12½″
- **Shpg. 8 lbs.**

⅜″ NPT Zinga Return Inline Filter



ITEM 907076
$23.95

• Brand new, ZINGA.

SPECIFICATIONS
- 10 micron return line application
- 7 GPM return line
- 200 PSI max.
- Ports ⅜″ NPT
- 250° F max.
- Built-in 18 PSI by-pass
- Size 3⅛″ dia. x 4½″
- **Shpg. 1½ lbs.**

Replacement Filter Element
ITEM 901855 10 micron ⚠ **$11.65**

1½″ NPTM To 1″ NPTF Tank Strainer



ITEM 906308
$16.95

• New, Model 790470 mesh tank strainer. Mount in hydraulic reservoir to keep debris from being drawn into pump.

SPECIFICATIONS
- Male threads into tank 1½″ NPT
- Female hose connection 1″ NPT
- Flow Rating 16 GPM
- Exposed mesh dimension 1½″ dia. x 2⅜″
- Overall length 3⅞″
- **Shpg. 0.7 lbs.**

High Pressure Inline Filter ⚠



ITEM 901851
$260.10

• Brand new, ZINGA series HP3000 high pressure inline filter. Ductile iron housing. Buna-N Seals. Visual differential pressure indicator.

SPECIFICATIONS
- 10 micron filter
- 60 GPM
- SAE 12 ports
- 3000 PSI max.
- By-pass valve setting 50 PSI
- Size 3″ dia. x 9¾″
- **Shpg. 11 lbs.**

Replacement Filter Element
ITEM 901852 ⚠ 10 micron **$16.05**

Inline High Pressure Filter ⚠



ITEM 901860
$116.75

• Brand new, ZINGA Series CF-90 high pressure filter. Designed for use as final filter to protect control valves, not as total system filter.

SPECIFICATIONS
- 12 GPM
- 10 micron
- SAE 8 ports
- 3000 PSI max.
- By-pass valve setting 50 PSI
- Size 5″ x 2½″ x 2″
- **Shpg. 3 lbs.**

Replacement Filter Element
ITEM 901861 ⚠ 10 micron **$42.50**

Tank Clean-Out Cover



ITEM 904541
$24.90

• Brand new, BUYERS model CPA56 hydraulic tank clean-out filter flange with cover assembly. Ideal tank accessory for access to clean and provide maintenance on hydraulic reservoirs or installing a filter. Includes ⅛″ thick steel plate with 5″ opening to weld to reservoir, 4 bolt galvanized cover plate and gasket.

SPECIFICATIONS
- Nominal Hole Size 5″
- Plate Dimensions 7¾″ x 7¾″ x ⅛″
- Cover Bolt Hole Dimensions 4 bolt on 6¼″ bolt circle
- **Shpg. 4 lbs.**

High Pressure Inline Filter ⚠



ITEM 901853
$211.50

• Brand new, ZINGA Series P3000 high pressure inline filter. Ideal for external charge pump filtration and high shock return line filtration. Buna-N Seals. Visual differential pressure indicator.

SPECIFICATIONS
- 10 micron filter
- 30 GPM
- SAE 12 ports
- 3000 PSI max.
- Size 4″ dia. x 13½″
- Operating temp. -40° to 250° F
- By-pass valve setting 50 PSI
- **Shpg. 6 lbs.**

Replacement Filter Element
ITEM 901854 ⚠ 10 micron **$41.95**

1¼″ NPT 50 GPM In-Tank Filter Filter



ITEM 904542
$122.75

• Brand new, BUYERS PRODUCTS high volume return line filter model HFA51025. Discharges out bottom of housing. Aluminum construction with plastic filter housing. The assembly comes with the filter head and a 10 micron filter element.

SPECIFICATIONS
- Manufacturer Buyers Products
- Model Number HFA51025
- Application Return Line
- Port 1¼″ NPT
- Flow Rate 50 GPM
- Filtration 10 micron
- Filter Media Cellulose
- Pressure 100 PSI max.
- Bypass 25 PSI
- Temperature Range -22°F to 212° F
- Tank Opening Required 4⅞″
- Bolt Pattern Four 7⁄16″ holes on 6¼″ bolt circle
- Depth in Tank 9″
- Size 6⅝″ x 6″ x 13″
- **Shpg. 9 lbs.**

ITEM 904543 **$110.75**


• Same as ITEM above except 25 micron

Replacement Filter Element
ITEM 904544 10 micron **$20.35**

Replacement Filter Element
ITEM 904545 25 micron **$20.35**

California Residents ⚠ WARNING:Cancer and Reproductive Harm
For more information refer to:www.P65Warnings.ca.gov

NPT Hydraulic Hose Lengths ⚠



• Brand new. Top quality, wire braid with NPT male fittings each end.

One Wire Braid Hose

Lgth.	¼″ ID • 100R17, ¼″ NPT solid male fittings • Working/burst 3000/12,000 PSI			⅜″ ID • 100R17, ⅜″ NPT solid male fittings • Working/burst 3000/12,000 PSI			½″ ID • 100R17, ½″ NPT solid male fittings • Working/burst 3000/12,000 PSI		
	ITEM	Shpg.	Price	ITEM	Shpg.	Price	ITEM	Shpg.	Price
12″	900444	1 lb.	$5.75	900411	1 lb.	$6.70	900424	1 lb.	$7.65
18″	900447	1 lb.	$7.25	900414	1 lb.	$8.45	900427	1 lb.	$9.05
24″	900448	1 lb.	$8.35	900415	1¼ lbs.	$9.35	900428	1¼ lbs.	$11.00
30″	900449	1¼ lbs.	$9.10	900416	1¼ lbs.	$10.70	900429	1½ lbs.	$12.50
36″	900450	1¼ lbs.	$10.25	900417	1½ lbs.	$12.05	900430	1½ lbs.	$13.50
48″	900451	1½ lbs.	$12.45	900418	1½ lbs.	$14.75	900431	2 lbs.	$16.40
60″	900452	1½ lbs.	$14.65	900419	2 lbs.	$17.40	900432	2 lbs.	$19.85
72″	900453	1¾ lbs.	$16.90	900420	2 lbs.	$20.10	900433	3 lbs.	$22.25
84″	900454	1¾ lbs.	$19.10	900421	3 lbs.	$22.80	900434	3 lbs.	$25.25
96″	900455	2 lbs.	$21.70	900422	4 lbs.	$25.45	900435	4 lbs.	$28.15
108″	900443	3 lbs.	$23.55	900410	5 lbs.	$28.15	900423	5 lbs.	$27.05
120″	900445	4 lbs.	$26.15	900412	6 lbs.	$30.80	900425	6 lbs.	$34.00
144″	900446	5 lbs.	$30.25	900413	7 lbs.	$36.20	900426	7 lbs.	$39.90
180″	900974	6 lbs.	$36.90	900977	8 lbs.	$44.25	900983	8 lbs.	$48.70
240″	900975	8 lbs.	$48.05	900978	10 lbs.	$57.65	900984	11 lbs.	$63.40
300″	900976	9 lbs.	$59.15	900979	12 lbs.	$71.10	900985	14 lbs.	$78.10

Suction Return Line Hose ⚠



• Brand new. Top quality. Connect reservoir to pump, low pressure return lines to reservoir. Meets SAE spec. 100-R4. Textile fiber and wire spiral reinforced. Tough, oil-proof rubber cover.

ITEM 900229 $6.05 PER FT.
• ¾″ ID. Rated 300 PSI.
Shpg. 7 oz./ft.

ITEM 900246 $6.50 PER FT.
• 1″ ID. Rated 250 PSI.
Shpg. 10 oz./ft.

ITEM 900402 $8.30 PER FT.
• 1¼″ ID. Rated 300 PSI.
Shpg. 12 oz./ft.

ITEM 900403 $10.70 PER FT.
• 1½″ ID. Rated 300 PSI.
Shpg. 16 oz./ft.

Two Wire Braid Hose

Lgth.	⅜″ ID • 100R16, ⅜″ NPT solid male fittings • Working/burst 4800/19,200 PSI			½″ ID • 100R16, ½″ NPT solid male fittings • Working/burst 4000/16,000 PSI			¾″ ID • 100R16, ¾″ NPT solid male fittings • Working/burst 3100/12,400 PSI			1″ ID • 100R17, 1″ NPT solid male fittings • Working/burst 3000/12,000 PSI		
	ITEM	Shpg.	Price	ITEM	Shpg.	Price	ITEM	Shpg.	Price	ITEM	Shpg.	Price
12″	900549	1 lb.	$7.25	900457	1 lb.	$9.10	900165	1½ lbs.	$15.05	901278	2 lbs.	$22.45
18″	900552	1 lb.	$8.70	900460	1 lb.	$10.95	900168	1¾ lbs.	$17.60	901295	2 lbs.	$27.15
24″	900553	1½ lbs.	$10.30	900461	1¼ lbs.	$12.75	900169	3 lbs.	$20.15	901296	3 lbs.	$31.55
30″	900554	1½ lbs.	$11.90	900462	1½ lbs.	$14.60	900170	3 lbs.	$22.70	901297	4 lbs.	$35.70
36″	900555	2 lbs.	$13.50	900463	1½ lbs.	$16.45	900171	3 lbs.	$25.25	901298	4 lbs.	$39.90
48″	900844	3 lbs.	$16.70	900464	2 lbs.	$20.10	900172	4 lbs.	$30.30	901299	5 lbs.	$48.65
60″	900556	3 lbs.	$19.90	900465	2 lbs.	$23.75	900173	5 lbs.	$35.40	901300	6 lbs.	$57.10
72″	900557	3 lbs.	$23.10	900466	3 lbs.	$27.40	900174	6 lbs.	$40.45	901301	7 lbs.	$65.55
84″	900558	3 lbs.	$26.25	900467	3 lbs.	$31.10	900175	7 lbs.	$45.50	901302	8 lbs.	$74.10
96″	900559	5 lbs.	$29.50	900468	4 lbs.	$34.75	900176	7 lbs.	$50.60	901303	9 lbs.	$82.50
108″	900548	6 lbs.	$32.65	900456	5 lbs.	$38.40	900164	8 lbs.	$55.05	901304	10 lbs.	$90.90
120″	900550	7 lbs.	$35.85	900458	6 lbs.	$42.05	900166	9 lbs.	$60.70	901305	11 lbs.	$99.65
144″	900551	8 lbs.	$42.25	900459	7 lbs.	$49.35	900167	10 lbs.	$70.90	901306	13 lbs.	$116.35
180″	900980	10 lbs.	$51.85	900986	8 lbs.	$60.35	900989	14 lbs.	$86.10	901307	16 lbs.	$141.85
240″	900981	13 lbs.	$67.85	900987	11 lbs.	$78.65	900990	17 lbs.	$111.45	901308	21 lbs.	$185.60
300″	900982	15 lbs.	$83.80	900988	14 lbs.	$97.05	900991	20 lbs.	$136.85	901309	26 lbs.	$226.55

Hydraulic Hose Clamps ⚠




• Brand new, hydraulic hose mounting clamp. Weld onto equipment to route hoses. Steel top and bottom plates with polypropylene clamp set. Single hose styles (dual style on next page).
See chart below to select clamp for appropriate hose by Hose Size and Single or Two Wire Braid.

ITEM	Type	Clamp Opening	Hose Size	Size	Shpg.	Price
902262	Single	13.5 mm (0.53″)	¼″ Single Wire	1.89″ x 1.18″ x 1.54″	½ lb.	$3.60
902268	Single	14 mm (0.55″)	¼″ Two Wire	1.89″ x 1.18″ x 1.54″	½ lb.	$3.60
902263	Single	17.2 mm (0.67″)	⅜″ Single Wire	1.89″ x 1.18″ x 1.54″	½ lb.	$3.60
902265	Single	18 mm (0.71″)	⅜″ Two Wire	1.89″ x 1.18″ x 1.54″	½ lb.	$3.60
902264	Single	20 mm (0.79″)	½″ Single Wire	2.17″ x 1.18″ x 1.61″	½ lb.	$3.75
902266	Single	21.3 mm (0.84″)	½″ Two Wire	2.17″ x 1.18″ x 1.61″	½ lb.	$3.75
902267	Single	28 mm (1.10″)	¾″ Single Wire	2.44″ x 1.18″ x 1.89″	¾ lb.	$4.35
902269	Single	30 mm (1.18″)	¾″ Two Wire	2.44″ x 1.18″ x 1.89″	¾ lb.	$4.35
902270	Single	38 mm (1.50″)	1″ Two Wire	2.91″ x 1.18″ x 2.52″	¾ lb.	$5.00

JIC Hydraulic Hose Lengths

• Brand new. Top quality, 2 wire braid with JIC female fittings each end.



Two Wire Braid Hose

¼″ ID
• 100R16, working/burst 5800/23,200 PSI

Lgth.	JIC 4F Swivel Fittings ITEM	Shpg.	Price	JIC 6F Swivel Fittings ITEM	Shpg.	Price
12″	901276	1 lb.	$9.30	901293	1 lb.	$9.05
18″	901277	1 lb.	$10.40	901294	1 lb.	$10.65
24″	901279	1 lb.	$11.75	901310	1 lb.	$11.80
30″	901280	1¼ lbs.	$13.00	901312	1¼ lbs.	$13.15
36″	901281	1¼ lbs.	$14.30	901311	1¼ lbs.	$14.60
48″	901282	1½ lbs.	$17.20	901313	1½ lbs.	$17.30
60″	901283	1½ lbs.	$19.70	901314	1½ lbs.	$19.90
72″	901284	1¾ lbs.	$21.65	901315	1¾ lbs.	$22.80
84″	901285	1¾ lbs.	$21.70	901316	1¾ lbs.	$25.35
96″	901286	2 lbs.	$27.65	901317	2 lbs.	$28.05
108″	901287	3 lbs.	$30.10	901322	3 lbs.	$28.35
120″	901288	4 lbs.	$32.90	901323	4 lbs.	$30.60
144″	901289	5 lbs.	$38.15	901324	5 lbs.	$35.35
180″	901290	6 lbs.	$46.05	901325	6 lbs.	$42.70
240″	901291	8 lbs.	$59.15	901326	8 lbs.	$55.00
300″	901292	9 lbs.	$72.65	901328	9 lbs.	$67.30

⅜″ ID
• 100R16, working/burst 4800/19,200 PSI

Lgth.	JIC 6F Swivel Fittings ITEM	Shpg.	Price	JIC 8F Swivel Fittings ITEM	Shpg.	Price
12″	901330	1 lb.	$9.60	901363	1 lb.	$10.70
18″	901348	1 lb.	$11.50	901365	1 lb.	$12.45
24″	901349	1½ lbs.	$12.95	901364	1½ lbs.	$13.90
30″	901350	1½ lbs.	$14.20	901366	1½ lbs.	$15.35
36″	901351	2 lbs.	$16.35	901370	2 lbs.	$16.85
48″	901352	3 lbs.	$17.90	901372	3 lbs.	$18.80
60″	901353	3 lbs.	$21.10	901375	3 lbs.	$22.00
72″	901354	3 lbs.	$24.30	901379	3 lbs.	$25.20
84″	901355	3 lbs.	$27.50	901380	3 lbs.	$28.40
96″	901356	5 lbs.	$30.70	901381	5 lbs.	$31.60
108″	901357	6 lbs.	$33.90	901382	6 lbs.	$34.75
120″	901358	7 lbs.	$37.10	901383	7 lbs.	$37.95
144″	901359	8 lbs.	$43.50	901384	8 lbs.	$44.35
180″	901360	10 lbs.	$53.05	901385	10 lbs.	$53.95
240″	901361	13 lbs.	$69.05	901386	13 lbs.	$69.95
300″	901362	15 lbs.	$85.00	901387	15 lbs.	$85.90

½″ ID
• 100R16, working/burst 4000/16,000 PSI

Lgth.	JIC 8F Swivel Fittings ITEM	Shpg.	Price	JIC 10F Swivel Fittings ITEM	Shpg.	Price
12″	901388	1 lb.	$12.90	901404	1 lb.	$13.95
18″	901389	1 lb.	$14.65	901405	1 lb.	$15.25
24″	901390	1¼ lbs.	$17.00	901406	1¼ lbs.	$17.45
30″	901391	1½ lbs.	$17.90	901407	1½ lbs.	$18.30
36″	901392	1½ lbs.	$18.60	901408	1½ lbs.	$20.10
48″	901393	2 lbs.	$22.25	901409	2 lbs.	$23.80
60″	901394	2 lbs.	$25.90	901410	2 lbs.	$27.45
72″	901395	3 lbs.	$29.55	901411	3 lbs.	$31.10
84″	901396	3 lbs.	$33.25	901412	3 lbs.	$34.75
96″	901397	4 lbs.	$36.90	901413	4 lbs.	$38.45
108″	901398	5 lbs.	$40.55	901414	5 lbs.	$42.10
120″	901399	6 lbs.	$44.20	901415	6 lbs.	$45.75
144″	901400	7 lbs.	$51.55	901416	7 lbs.	$53.10
180″	901401	8 lbs.	$62.50	901417	8 lbs.	$64.05
240″	901402	11 lbs.	$80.85	901418	11 lbs.	$82.35
300″	901403	14 lbs.	$99.15	901419	14 lbs.	$100.65

¾″ ID
• 100R17, working/burst 3000/12,000 PSI

Lgth.	JIC 10F Swivel Fittings ITEM	Shpg.	Price	JIC 12F Swivel Fittings ITEM	Shpg.	Price
12″	901318	2 lbs.	$20.35	901341	2 lbs.	$20.65
18″	901319	2 lbs.	$22.80	901342	2 lbs.	$23.45
24″	901320	3 lbs.	$25.65	901343	3 lbs.	$26.25
30″	901321	3 lbs.	$28.25	901344	3 lbs.	$28.85
36″	901327	3 lbs.	$30.90	901345	3 lbs.	$31.75
48″	901329	4 lbs.	$36.35	901346	4 lbs.	$37.60
60″	901331	5 lbs.	$41.70	901347	5 lbs.	$42.50
72″	901332	6 lbs.	$47.20	901367	6 lbs.	$47.95
84″	901333	7 lbs.	$52.45	901368	7 lbs.	$53.35
96″	901334	8 lbs.	$57.90	901369	8 lbs.	$58.95
108″	901335	9 lbs.	$63.30	901371	9 lbs.	$63.90
120″	901336	10 lbs.	$68.65	901373	10 lbs.	$69.50
144″	901337	11 lbs.	$79.45	901374	11 lbs.	$80.10
180″	901338	15 lbs.	$95.60	901376	15 lbs.	$96.15
240″	901339	19 lbs.	$123.35	901377	19 lbs.	$123.15
300″	901340	22 lbs.	$149.60	901378	22 lbs.	$150.40

Hydraulic Hose Clamps

• Brand new, hydraulic hose mounting clamp. Weld onto equipment to route hoses. Steel top and bottom plates with polypropylene clamp set. Dual hose styles (single style on previous page). See chart below to select clamp for appropriate hose by Hose Size and Single or Two Wire Braid.



ITEM	Type	Clamp Opening	Hose Size	Size	Shpg.	Price
902271	Dual	13.5 mm (0.53″)	¼″ Single Wire	2.17″ x 1.18″ x 1.42″	1 lb.	$4.65
902275	Dual	14 mm (0.55″)	¼″ Two Wire	2.17″ x 1.18″ x 1.42″	1 lb.	$4.65
902272	Dual	17.2 mm (0.67″)	⅜″ Single Wire	2.17″ x 1.18″ x 1.42″	1 lb.	$4.65
902279	Dual	18 mm (0.71″)	⅜″ Two Wire	2.17″ x 1.18″ x 1.42″	1 lb.	$4.65
902273	Dual	20 mm (0.79″)	½″ Single Wire	2.76″ x 1.18″ x 1.85″	1 lb.	$5.10
902278	Dual	21.3 mm (0.84″)	½″ Two Wire	2.76″ x 1.18″ x 1.85″	1 lb.	$5.10
902274	Dual	28 mm (1.10″)	¾″ Single Wire	3.35″ x 1.18″ x 2.05″	1½ lbs.	$5.95
902276	Dual	30 mm (1.18″)	¾″ Two Wire	3.35″ x 1.18″ x 2.05″	1½ lbs.	$5.95
902277	Dual	38 mm (1.50″)	1″ Two Wire	4.33″ x 1.18″ x 2.52″	1½ lbs.	$7.50

California Residents WARNING:Cancer and Reproductive Harm
For more information refer to:www.P65Warnings.ca.gov

Hydraulic Live Swivels

• Brand new SUPER-SWIVELS hydraulic 90° elbow or inline live swivels. Allow hoses to rotate even when fully pressurized. Zinc-plated steel with Vitron seals. One end of the fitting must be connected to a flexible hose. -15°F to 250°F temperature range. NPTF-swivel (NPTF-S) ports will swivel for installation only.

90° Elbow



ITEM	Live Swivel Port	Rigid Port	PSI	Shpg.	Price
901891	¼″ NPTM	¼″ NPTF-S	3500	1 lb.	$53.95
901892	⅜″ NPTM	⅜″ NPTF-S	3500	1½ lbs.	$53.95
901893	½″ NPTM	½″ NPTF-S	3500	2 lbs.	$56.25
901898	¾″ NPTM	¾″ NPTF-S	3500	2 lbs.	$77.10
901895	JIC 4M	¼″ NPTM	3500	1 lb.	$53.95
901896	JIC 6M	⅜″ NPTM	3500	1½ lbs.	$53.95
901897	JIC 8M	½″ NPTM	3500	2 lbs.	$56.25
901894	JIC 12M	¾″ NPTM	3500	2 lbs.	$77.10
901887	¼″ NPTF	¼″ NPTF	5000	1 lb.	$49.90
901888	⅜″ NPTF	⅜″ NPTF	5000	1½ lbs.	$52.00
901889	½″ NPTF	½″ NPTF	5000	2 lbs.	$52.00
901890	¾″ NPTF	¾″ NPTF	4500	2 lbs.	$71.30
901899	SAE 4M	JIC 4M	3500	1 lb.	$53.95
901900	SAE 6M	JIC 6M	3500	1½ lbs.	$53.95
901901	SAE 8M	JIC 8M	3500	2 lbs.	$56.25
901902	SAE 10M	JIC 10M	3500	2 lbs.	$56.25
901903	SAE 12M	JIC 12M	3500	3 lbs.	$77.10
901904	SAE 4M	¼″ NPTF-S	3500	1 lb.	$51.45
901905	SAE 6M	⅜″ NPTF-S	3500	1½ lbs.	$53.95
901906	SAE 8M	½″ NPTF-S	3500	2 lbs.	$56.25
901907	SAE 12M	¾″ NPTF-S	3500	3 lbs.	$77.10

Inline



ITEM	Live Swivel Port	Rigid Port	PSI	Shpg.	Price
901883	¼″ NPTF	¼″ NPTF	5000	1 lb.	$45.05
901884	⅜″ NPTF	⅜″ NPTF	5000	1½ lbs.	$46.65
901885	½″ NPTF	½″ NPTF	5000	2 lbs.	$49.35
901886	¾″ NPTF	¾″ NPTF	4500	2 lbs.	$61.80

JIC F Cap




ITEM	JIC	Shpg.	Price
901242	4	⅛	$ 0.85
901243	6	⅛	$ 1.00
901244	8	⅛	$ 1.65
901245	10	¼	$ 2.20
901246	12	¼	$ 3.20
901247	16	½	$ 3.40

JIC M to JIC M Union



ITEM	JIC A	JIC B	Shpg.	Price
901610	4	4	¼	$ 1.30
901611	6	4	¼	$ 2.55
901612	6	6	¼	$ 1.55
901613	8	6	¼	$ 3.05
901614	8	8	½	$ 2.75
901615	10	8	½	$ 3.65
901616	10	10	½	$ 3.50
901617	12	8	½	$ 4.40
901618	12	10	½	$ 4.15
901619	12	12	¾	$ 3.40
901748	16	12	¾	$ 6.10
901620	16	16	¾	$ 5.55
901621	20	20	¾	$10.15


JIC M to NPT M Connector



ITEM	JIC A	NPT B	Shpg.	Price
900585	4	¼″	¼	$ 1.50
900743	4	⅜″	¼	$ 2.35
903254	6	¼″	¼	$ 1.50
900744	6	⅜″	¼	$ 1.95
900745	6	½″	¼	$ 3.05
903255	8	⅜″	¼	$ 2.45
900746	8	½″	½	$ 2.75
900747	8	¾″	½	$ 3.30
900748	10	½″	½	$ 3.50
900749	10	¾″	¾	$ 3.40
903256	12	½″	¼	$ 3.10
900750	12	¾″	¾	$ 3.85
900751	12	1″	¾	$ 5.25
903257	16	¾″	½	$ 4.90
901747	16	1″	¾	$ 4.90


Thread Identification Guide on page 97

JIC M to NPT F Connector




ITEM	JIC A	NPT B	Shpg.	Price
901936	4	¼″	¼	$ 3.25
903258	6	¼″	¼	$ 3.20
901951	6	⅜″	¼	$ 3.70
903259	8	⅜″	¼	$ 3.45
901954	8	½″	½	$ 3.40
903260	10	½″	¼	$ 3.90
901957	12	¾″	¾	$ 5.70
901956	16	1″	¾	$ 8.70

JIC F to JIC M Reducer/Expander




ITEM	JIC A	JIC B	Shpg.	Price
901622	6	4	¼	$ 2.45
901916	6	8	¼	$ 3.70
901623	8	4	¼	$ 2.95
901624	8	6	¼	$ 3.40
901919	8	10	¼	$ 3.45
901921	8	12	½	$ 3.75
901625	10	6	½	$ 3.85
901626	10	8	½	$ 3.85
901627	10	12	½	$ 4.40
901628	12	6	½	$ 5.45
901629	12	8	½	$ 4.60
901630	12	10	½	$ 4.40
901631	12	16	¾	$ 6.55
901632	16	8	¾	$ 7.30
901633	16	10	¾	$ 8.45
901634	16	12	¾	$ 6.55
901635	20	16	¾	$11.70

Hex Head JIC M Plug




ITEM	JIC	Shpg.	Price
901254	4	⅛	$ 0.85
901255	6	⅛	$ 1.05
901256	8	⅛	$ 1.70
901257	10	⅛	$ 3.00
901258	12	¼	$ 3.75
901259	16	½	$ 4.15
903262	20	½	$ 7.85

JIC M to JIC M 90° Elbow




ITEM	JIC A	JIC B	Shpg.	Price
901636	4	4	¼	$ 3.40
903263	6	4	¼	$ 3.20
901637	6	6	¼	$ 3.55
903264	8	6	¼	$ 3.50
901638	8	8	¼	$ 3.30
903265	10	8	¼	$ 5.20
901639	10	10	¼	$ 5.65
903266	12	8	½	$ 7.30
901640	12	12	¼	$ 7.20
901641	16	16	½	$12.80

JIC M to NPT M 90° Elbow




ITEM	JIC A	NPT B	Shpg.	Price
900908	4	¼″	¼	$ 3.00
903267	4	⅜″	¼	$ 3.65
903268	4	½″	¼	$ 4.35
903269	6	¼″	¼	$ 3.25
900909	6	⅜″	¼	$ 3.65
903270	6	½″	¼	$ 4.05
903271	8	⅜″	¼	$ 3.20
900910	8	½″	½	$ 3.60
903272	8	¾″	½	$ 5.90
900913	10	½″	½	$ 4.05
900914	10	¾″	¾	$ 6.65
903273	12	½″	¼	$ 6.45
900915	12	¾″	¾	$ 5.60
903274	12	1″	½	$10.40
903275	16	¾″	½	$10.15
901746	16	1″	¾	$ 9.55
903276	16	1¼″	¾	$17.10
903739	20	1″	¾	$19.75

JIC M to NPT M 90° Elbow Extra Long




ITEM	JIC A	NPT B	C	Shpg.	Price
903576	4	¼″	2.07″	¼	$ 4.05
903577	6	⅜″	2.42″	¼	$ 6.10
903578	8	½″	2.87″	½	$10.20
903579	10	½″	2.87″	½	$10.80
903580	12	¾″	3.28″	¾	$12.55
903581	16	1″	4.05″	¾	$18.20

JIC M to NPT F 90° Elbow




ITEM	JIC A	NPT B	Shpg.	Price
903277	4	¼″	¼	$ 3.20
903278	6	¼″	¼	$ 3.40
903279	6	⅜″	¼	$ 4.40
903280	6	½″	¼	$ 6.10
903281	8	⅜″	¼	$ 4.90
903282	8	½″	¼	$ 6.00
903283	10	½″	¼	$ 7.60
903284	12	½″	½	$ 8.25
903285	12	¾″	½	$ 0.15
903286	16	¾″	½	$14.30
903287	16	1″	½	$14.05

JIC M to NPT M 45° Elbow




ITEM	JIC A	NPT B	Shpg.	Price
901642	4	¼″	¼	$ 3.60
901643	6	¼″	¼	$ 3.45
901644	6	⅜″	¼	$ 3.40
901645	6	½″	¼	$ 5.00
901646	8	⅜″	¼	$ 4.05
901647	8	½″	¼	$ 4.10
901648	10	½″	¼	$ 4.55
901649	12	½″	¼	$ 6.75
901650	12	¾″	½	$ 6.90
901651	16	1″	½	$10.15

JIC M Union Tee




ITEM	JIC A	JIC B	JIC C	Shpg.	Price
901700	4	4	4	¼	$ 3.75
901701	6	6	6	¼	$ 3.30
901702	8	8	8	¼	$ 4.80
901703	10	10	10	¼	$ 6.65
901704	12	12	12	½	$ 0.55
901705	16	16	16	½	$12.85

JIC M to JIC M Bulkhead Connector




ITEM	JIC A	JIC B	Shpg.	Price
903288	4	4	¼	$ 3.20
903289	6	6	¼	$ 3.00
903290	8	8	¼	$ 3.70
903292	10	10	¼	$ 6.05
903291	12	12	½	$ 7.40
903293	16	16	½	$12.30

JIC M to JIC M Bulkhead 90° Elbow




ITEM	JIC A	JIC B	Shpg.	Price
903294	4	4	¼	$ 3.75
903295	6	6	¼	$ 3.85
903296	8	8	¼	$ 4.75
903297	10	10	¼	$ 7.40
903298	12	12	½	$ 9.95
903299	16	16	½	$12.75

JIC M to JIC M Bulkhead 45° Elbow



ITEM	JIC A	JIC B	Shpg.	Price
903300	4	4	¼	$ 3.65
903301	6	6	¼	$ 3.25
903302	8	8	¼	$ 5.15
903303	10	10	¼	$ 6.75
903304	12	12	½	$ 9.55
903305	16	16	½	$12.80

JIC M to NPT F Bulkhead Connector




ITEM	JIC A	NPT B	Shpg.	Price
903306	4	¼″	¼	$ 4.05
904441	4	⅜″	¼	$ 4.30
903312	6	¼″	¼	$ 4.90
903307	6	⅜″	¼	$ 4.90
903313	8	⅜″	¼	$ 5.70
903308	8	½″	¼	$ 6.55
903309	10	½″	¼	$ 8.70
903310	12	¾″	½	$10.15
903311	16	1″	½	$14.05

JIC F Bulkhead Lock Nut



ITEM	JIC	Shpg.	Price
903314	4	⅛	$ 0.50
903315	6	⅛	$ 0.85
903316	8	⅛	$ 0.90
903318	10	¼	$ 1.50
903317	12	¼	$ 1.70
903319	16	¼	$ 2.90

JIC M to SAE M Connector




ITEM	JIC A	SAE B	Shpg.	Price
902158	4	3	¼	$ 2.45
900726	4	4	¼	$ 2.25
902159	4	5	¼	$ 2.75
900727	4	6	¼	$ 1.80
900728	6	6	¼	$ 1.75
900729	6	8	¼	$ 2.85
903320	6	10	¼	$ 3.40
901795	8	6	½	$ 2.55
900730	8	8	½	$ 2.65
903321	8	10	¼	$ 3.50
900731	8	12	½	$ 3.20
903322	10	8	¼	$ 3.70
900732	10	10	½	$ 3.75
903323	10	12	½	$ 3.65
902058	12	10	¾	$ 3.65
900733	12	12	¾	$ 3.70
900734	12	16	¾	$ 5.25
903324	16	12	½	$ 5.70
900735	16	16	¾	$ 5.45
900758	16	20	¾	$ 9.95
903461	20	12	½	$17.80
903325	20	16	¾	$10.00
903326	20	20	¾	$10.15



You can find weld-in tank flanges on page 83




SAE M to JIC F Connector




ITEM	SAE A	JIC B	Shpg.	Price
900752	4	4	¼	$ 3.65
900753	6	6	¼	$ 3.65
900754	8	8	½	$ 4.05
900755	10	10	½	$ 5.70
900756	12	12	¾	$ 6.90
900757	16	16	¾	$ 10.65

JIC M to JIC F Swivel 90° Elbow




ITEM	JIC A	JIC B	Shpg.	Price
901740	4	4	¼	$ 3.70
901741	6	6	¼	$ 3.75
901742	8	8	¼	$ 4.10
901743	10	10	¼	$ 5.70
901744	12	12	¼	$ 7.60
901745	16	16	½	$12.50

JIC F to NPT M 90° Elbow



ITEM	JIC A	NPT B	Shpg.	Price
903614	4	¼″	¼	$ 3.70
903615	6	⅜″	¼	$ 4.55
903616	6	½″	¼	$ 6.00
903617	8	⅜″	¼	$ 5.90
903618	8	½″	¼	$ 5.90
903619	10	½″	¼	$ 5.10
903620	12	¾″	¼	$ 8.85
903621	16	1″	½	$13.15
903742	24	1½″	½	$32.95

JIC F Swivel to NPT M




ITEM	JIC A	NPT B	Shpg.	Price
901079	4	¼″	¼	$ 3.50
901080	5	¼″	¼	$ 2.50
901081	6	¼″	¼	$ 3.85
901082	6	⅜″	¼	$ 3.20
904459	6	½″	¼	$ 4.75
901083	8	⅜″	¼	$ 5.10
901084	8	½″	¼	$ 3.75
904514	8	¾″	¼	$ 7.85
901099	10	½″	¼	$ 6.55
901086	10	¾″	¼	$15.30
901087	12	½″	¼	$ 7.40
901088	12	¾″	½	$ 6.95
901089	16	¾″	½	$11.75
901090	16	1″	½	$10.60
903741	24	1½″	1¼	$41.35

You can find hydraulic hose on pages 88 - 89




JIC F Swivel to NPT F




ITEM	JIC A	NPT B	Shpg.	Price
901091	4	¼″	¼	$ 3.65
901092	6	¼″	¼	$ 3.60
901093	6	⅜″	¼	$ 3.90
901094	6	½″	¼	$ 5.20
901095	8	⅜″	¼	$ 4.90
901096	8	½″	¼	$ 5.40
901098	10	⅜″	¼	$ 5.15
901099	10	½″	¼	$ 6.55
901100	10	¾″	½	$10.10
901101	12	½″	½	$12.35
901102	12	¾″	½	$ 8.25
901103	14	¾″	¾	$16.30
901104	16	1″	1	$11.70

JIC F to JIC F Union




ITEM	JIC A	JIC B	Shpg.	Price
903328	4	4	¼	$ 5.99
903330	6	6	¼	$ 4.95
903331	8	8	¼	$ 5.90
903332	10	10	¼	$ 9.70
903333	12	12	½	$12.55
903334	16	16	½	$18.35

JIC M / JIC F / JIC M Swivel Tee




ITEM	JIC A	JIC B	JIC C	Shpg.	Price
903335	4	4	4	¼	$ 4.05
903336	6	6	6	¼	$ 4.40
902888	8	8	8	¼	$ 6.35
903337	10	10	10	½	$ 8.70
903338	12	12	12	½	$11.25
903339	16	16	16	½	$16.20
903340	20	20	20	½	$27.05

JIC M to SAE M Swivel Nut 90° Elbow




ITEM	JIC A	SAE B	Shpg.	Price
900736	4	4	¼	$ 3.40
903341	4	6	¼	$ 3.45
900737	6	6	¼	$ 3.70
903342	6	8	¼	$ 4.05
903343	8	6	¼	$ 4.15
900738	8	8	½	$ 4.30
903344	8	10	¼	$ 5.45
900739	8	12	½	$ 8.05
903345	10	8	¼	$ 4.70
900740	10	10	¾	$ 5.60
900741	10	12	¾	$ 7.30
903346	12	8	½	$ 8.25
902059	12	10	¾	$ 7.15
900742	12	12	¾	$ 7.55
903347	12	16	½	$11.50
903348	16	12	½	$11.25
903989	16	16	1	$11.75
903349	16	20	¾	$20.35
903350	20	16	¾	$18.70
903351	20	20	¾	$18.90

JIC M to SAE M Swivel Nut 90° Elbow Long



ITEM	JIC A	SAE B	C	Shpg.	Price
901961	4	4	1.54″	¼	$ 4.15
901962	6	6	1.66″	¼	$ 4.40
903471	6	8	1.97″	¼	$ 7.55
901963	8	8	1.97″	½	$ 6.35
901964	10	10	2.26″	½	$ 9.30
901965	12	12	2.62″	½	$11.85

JIC M to SAE M Swivel Nut 90° Elbow Extra Long




ITEM	JIC A	SAE B	C	Shpg.	Price
903352	4	4	1.73″	¼	$ 4.40
903353	6	6	2.08″	¼	$ 5.05
903354	8	8	2.48″	½	$ 6.45
903355	10	10	2.89″	½	$10.85
903356	12	12	3.34″	½	$12.85
903357	16	16	3.72″	½	$19.45

JIC M to SAE M Swivel Nut 45° Elbow



ITEM	JIC A	SAE B	Shpg.	Price
901966	4	4	¼	$ 3.60
901967	6	6	¼	$ 3.75
901968	8	8	½	$ 4.40
901969	10	10	½	$ 6.45
902765	10	12	½	$ 9.80
902009	12	10	½	$ 9.10
901970	12	12	½	$ 7.80
901971	16	16	¾	$11.90


JIC M / JIC M / SAE M Tee



ITEM	JIC A	JIC B	SAE C	Shpg.	Price
901934	4	4	4	½	$ 3.65
901938	6	6	6	½	$ 4.15
901939	8	8	8	½	$ 5.90
901940	10	10	10	¾	$ 7.45
901941	12	12	12	¾	$11.70
901943	16	16	16	1	$16.40

Thread Identification Guide on page 97

JIC M / JIC M / SAE M Run Tee




ITEM	JIC A	JIC B	SAE C	Shpg.	Price
903603	4	4	4	½	$ 3.65
903604	6	6	6	½	$ 4.15
903605	8	8	8	½	$ 5.90
903606	10	10	10	½	$ 9.15
903607	12	12	12	½	$12.05
903608	16	16	16	¾	$14.75

Hex Head SAE M Plug




ITEM	SAE	Shpg.	Price
900612	4	¼	$ 0.75
900613	5	¼	$ 1.00
900614	6	¼	$ 1.00
900615	8	¼	$ 1.70
900616	10	¼	$ 2.05
900617	12	¼	$ 3.60
901274	14	¼	$ 5.05
900618	16	¼	$ 3.85
900619	20	¼	$ 8.65
900620	24	¼	$ 8.15

SAE M to NPT M Connector




ITEM	SAE A	NPT B	Shpg.	Price
901937	4	¼″	¼	$ 2.35
903358	6	¼″	¼	$ 2.75
901942	6	⅜″	¼	$ 2.65
903359	6	½″	¼	$ 3.85
901958	8	½″	½	$ 3.45
902087	10	½″	½	$ 3.40
901959	12	¾″	½	$ 4.40
901960	16	1″	¾	$ 7.20

SAE M to SAE M Connector




ITEM	SAE A	SAE B	Shpg.	Price
903360	4	4	¼	$ 2.85
903361	6	6	¼	$ 3.60
903362	8	8	¼	$ 3.95
903363	10	10	¼	$ 5.60
903364	12	12	½	$ 8.15
903365	16	16	½	$ 9.40

SAE F to NPT M Connector




ITEM	SAE A	NPT B	Shpg.	Price
901770	4	¼″	¼	$ 3.75
901771	6	⅜″	¼	$ 3.20
901773	6	½″	¼	$ 3.75
901772	8	⅜″	¼	$ 3.75
901774	8	½″	¼	$ 4.05
901775	10	½″	¼	$ 5.45
901776	12	½″	¼	$ 6.75
901778	12	¾″	¼	$ 7.15
901777	16	¾″	¼	$24.20
901779	16	1″	½	$12.30

SAE M to NPT F Connector



ITEM	SAE A	NPT B	Shpg.	Price
900221	4	¼″	¾	$ 3.25
901996	5	¼″	¾	$ 3.45
900761	6	¼″	¾	$ 2.85
900222	6	⅜″	¾	$ 3.75
900337	6	½″	¾	$ 4.60
900762	8	¼″	¾	$ 3.65
900763	8	⅜″	¾	$ 3.55
900223	8	½″	¾	$ 3.30
900224	10	½″	¾	$ 3.65
900338	10	¾″	¾	$ 6.70
900339	12	½″	¾	$ 4.80
900225	12	¾″	¾	$ 5.25
900340	14	¾″	¾	$ 9.10
900341	16	¾″	¾	$ 7.40
900226	16	1″	¾	$ 8.25
900342	20	1″	¾	$10.80
900227	20	1¼″	¾	$11.55
900228	24	1½″	¾	$21.00


SAE M to SAE F Connector



ITEM	SAE A	SAE B	Shpg.	Price
901217	4	6	¼	$ 3.75
901218	6	4	¼	$ 2.95
901219	6	6	¼	$ 3.75
901220	6	8	¼	$ 3.75
901221	8	4	¼	$ 3.70
901222	8	6	¼	$ 3.70
901223	8	10	¼	$ 4.15
901224	8	12	½	$ 6.10
901225	10	4	¼	$ 3.20
901226	10	6	½	$ 2.90
901227	10	8	½	$ 3.45
901228	10	12	½	$ 6.10
901229	12	4	½	$ 6.55
901230	12	6	½	$ 5.65
901231	12	8	½	$ 4.15
901232	12	10	½	$ 5.90
901233	12	12	½	$ 5.90
901234	12	16	½	$12.30
901235	16	8	½	$ 6.55
901236	16	10	½	$ 8.25
901237	16	12	¾	$ 6.70
901238	16	20	1¼	$21.70
901239	20	12	¾	$11.65
901240	20	16	1	$11.90
901241	20	24	1¾	$21.30


Thread Identification Guide on page 97

SAE M to NPT F 90° Elbow




ITEM	SAE A	NPT B	Shpg.	Price
901972	4	¼″	¼	$ 4.40
903366	6	¼″	¼	$ 4.80
901973	6	⅜″	¼	$ 5.50
903367	8	⅜″	¼	$ 6.35
901974	8	½″	½	$ 8.25
903368	10	½″	¼	$ 9.55
903369	12	½″	½	$11.70
901975	12	¾″	½	$12.70
903370	16	¾″	½	$18.00
901976	16	1″	¾	$17.75
903371	20	1¼″	¾	$24.50

SAE M to NPT M 90° Elbow




ITEM	SAE A	NPT B	Shpg.	Price
901917	4	¼″	¼	$ 4.10
903372	6	¼″	¼	$ 3.35
901918	6	⅜″	¼	$ 5.05
901750	8	⅜″	¼	$ 6.25
901920	8	½″	½	$ 7.40
903373	10	½″	¼	$ 8.25
901922	12	¾″	½	$11.00
901923	16	1″	¾	$15.45
903374	20	1¼″	¾	$21.75

SAE M to JIC F Swivel 90° Elbow



ITEM	SAE A	JIC B	Shpg.	Price
901924	4	4	¼	$ 4.40
901925	6	6	¼	$ 5.25
901926	8	8	½	$ 7.15
901927	10	10	½	$ 6.90
901928	12	12	¾	$12.30
901929	16	16	¾	$16.75

SAE M to SAE F 90° Elbow




ITEM	SAE A	SAE B	Shpg.	Price
901949	4	4	¼	$ 4.70
901950	6	6	½	$ 5.90
901952	8	8	½	$ 9.10
901953	12	12	¾	$13.00
901955	16	16	¾	$19.25

SAE Boss Buna O-Ring




ITEM	SAE	Shpg.	Price
903375	#3	1/8	$ 0.05
903376	#4	1/8	$ 0.15
903377	#5	1/8	$ 0.25
903378	#6	1/8	$ 0.15
903379	#8	1/8	$ 0.15
903380	#10	1/8	$ 0.25
903381	#12	1/8	$ 0.25
903382	#14	1/8	$ 0.90
903383	#16	1/8	$ 0.40
903384	#20	1/8	$ 0.65
903385	#24	1/8	$ 0.90
903386	#32	1/8	$ 1.30

NPT F to NPT F Coupler



ITEM	NPT A	NPT B	Shpg.	Price
901734	1/8″	1/8″	1/4	$ 2.55
903387	1/4″	1/8″	1/4	$ 3.00
901735	1/4″	1/4″	1/4	$ 2.60
903388	3/8″	1/4″	1/4	$ 2.35
901736	3/8″	3/8″	1/4	$ 2.80
903389	1/2″	1/4″	1/4	$ 3.65
903390	1/2″	3/8″	1/4	$ 3.45
901737	1/2″	1/2″	1/4	$ 3.30
903391	3/4″	1/2″	1/2	$ 4.65
901738	3/4″	3/4″	1/4	$ 4.60
903392	1″	3/4″	1/2	$ 9.10
901739	1″	1″	1/4	$ 7.85
903393	1 1/4″	1 1/4″	3/4	$12.60

NPT M to NPT M Hex Nipple




ITEM	NPT A	NPT B	Shpg.	Price
903394	1/4″	1/8″	1/4	$ 1.70
900384	1/4″	1/4″	1/4	$ 1.65
903395	3/8″	1/4″	1/4	$ 2.30
900385	3/8″	3/8″	1/4	$ 2.25
903396	1/2″	1/4″	1/4	$ 3.45
903397	1/2″	3/8″	1/4	$ 3.40
900512	1/2″	1/2″	1/4	$ 3.10
903398	3/4″	1/2″	1/2	$ 3.40
900544	3/4″	3/4″	1/4	$ 3.20
903399	1″	3/4″	1/2	$ 5.25
900386	1″	1″	1	$ 5.70
903400	1 1/4″	1″	3/4	$11.70
900387	1 1/4″	1 1/4″	1	$10.80
903463	1 1/2″	1 1/2″	1	$14.25

You can find weld-in tank flanges on page 83




NPT M to NPT F Connector




ITEM	NPT A	NPT B	Shpg.	Price
901184	1/8″	1/8″	1/4	$ 3.20
901185	1/8″	1/4″	1/4	$ 3.05
901186	1/8″	3/8″	1/4	$ 4.10
901187	1/8″	1/2″	1/2	$ 6.35
901188	1/4″	1/4″	1/4	$ 3.25
901189	1/4″	3/8″	1/4	$ 3.55
901190	1/4″	1/2″	1/2	$ 4.90
901191	1/4″	3/4″	3/4	$ 5.90
901192	3/8″	3/8″	1/4	$ 3.60
901193	3/8″	1/2″	1/2	$ 3.65
901194	3/8″	3/4″	3/4	$ 8.00
901195	1/2″	3/8″	1/4	$ 4.25
901196	1/2″	1/2″	1/2	$ 5.00
901197	1/2″	3/4″	1/2	$ 5.70
901198	1/2″	1″	3/4	$10.15
901199	3/4″	1/2″	1/2	$ 6.35
901200	3/4″	3/4″	1/2	$ 5.95
901201	3/4″	1″	3/4	$12.10
901202	3/4″	1 1/4″	1	$16.40
901203	1″	1″	3/4	$ 9.80
901204	1″	1 1/4″	1	$18.00
901205	1″	1 1/2″	1 1/2	$24.70
901206	1 1/4″	1 1/4″	1	$17.65
901207	1 1/4″	1 1/2″	1 1/2	$20.55
901208	1 1/2″	1 1/2″	1 1/2	$21.65
901209	1 1/2″	2″	3	$32.70

NPT M to NPT F Bushing



ITEM	NPT A	NPT B	Shpg.	Price
901878	1/4″	1/8″	1/4	$ 1.35
900547	3/8″	1/8″	1/4	$ 1.90
900388	3/8″	1/4″	1/4	$ 1.70
900389	1/2″	1/4″	1/4	$ 2.75
900185	1/2″	3/8″	1/4	$ 2.40
900390	3/4″	1/4″	1/4	$ 3.10
900282	3/4″	3/8″	1/4	$ 3.20
900184	3/4″	1/2″	1/4	$ 3.75
903401	1″	3/8″	1/4	$ 5.25
903402	1″	1/2″	1/4	$ 4.90
900391	1″	3/4″	1/4	$ 4.75
903403	1 1/4″	1/2″	1/2	$ 8.65
900835	1 1/4″	3/4″	1/2	$ 8.65
901983	1 1/4″	1″	1/2	$ 7.80
901984	1 1/2″	3/4″	1/2	$12.60
901985	1 1/2″	1″	1/2	$12.50
901986	1 1/2″	1 1/4″	1/2	$12.70
901987	2″	1 1/4″	1	$20.50
901988	2″	1 1/2″	1	$20.15

Hex Head NPT M Plug



ITEM	NPT	Shpg.	Price
901053	1/8″	1/8	$ 0.45
901054	1/4″	1/8	$ 0.50
901055	3/8″	1/4	$ 1.00
901056	1/2″	1/4	$ 1.50
901057	3/4″	1/2	$ 3.40
901058	1″	1/2	$ 3.85
901059	1 1/4″	3/4	$ 6.35
901060	1 1/2″	1 1/2	$12.75
901061	2″	1 1/2	$19.80

Hollow Hex Head NPT M Plug




ITEM	NPT	Shpg.	Price
902255	1/8″	1/8	$ 0.35
902256	1/4″	1/8	$ 0.35
902257	3/8″	1/4	$ 0.50
902258	1/2″	1/4	$ 0.70
902237	3/4″	1/4	$ 1.15
902259	1″	1/2	$ 3.05
902260	1 1/4″	1/2	$ 4.80
902261	1 1/2″	3/4	$15.65

NPT F Cap




ITEM	NPT	Shpg.	Price
901248	1/8″	1/8	$ 2.65
901249	1/4″	1/8	$ 2.00
901250	3/8″	1/8	$ 2.85
901251	1/2″	1/4	$ 3.85
901252	3/4″	1/4	$ 3.65
901253	1″	1/4	$ 7.40

NPT M to NPT M 90° Elbow




ITEM	NPT A	NPT B	Shpg.	Price
901723	1/4″	1/4″	1/4	$ 3.60
903404	3/8″	1/4″	1/4	$ 3.55
901724	3/8″	3/8″	1/4	$ 4.40
903405	1/2″	3/8″	1/4	$ 5.05
901725	1/2″	1/2″	1/4	$ 4.50
903406	3/4″	1/2″	1/2	$ 8.00
901726	3/4″	3/4″	1/4	$ 6.95
903407	1″	3/4″	1/2	$12.75
901727	1″	1″	1/2	$10.80

NPT M to NPT F 90° Street Elbow




ITEM	NPT A	NPT B	Shpg.	Price
901706	1/8″	1/8″	1/4	$ 3.50
903408	1/8″	1/4″	1/4	$ 3.65
903409	1/4″	1/8″	1/4	$ 3.75
901708	1/4″	1/4″	1/4	$ 3.00
903410	1/4″	3/8″	1/4	$ 4.70
903411	3/8″	1/4″	1/4	$ 4.05
901707	3/8″	3/8″	1/4	$ 3.85
903412	3/8″	1/2″	1/4	$ 6.10
903413	1/2″	3/8″	1/4	$ 5.15
901709	1/2″	1/2″	1/4	$ 5.45
903414	1/2″	3/4″	1/2	$ 9.60
903415	3/4″	1/2″	1/2	$ 9.55
901710	3/4″	3/4″	1/4	$ 8.45
903416	3/4″	1″	1/2	$17.70
903417	1″	3/4″	1/2	$11.50
901711	1″	1″	1/2	$11.90
903418	1″	1 1/4″	3/4	$18.65
903419	1 1/4″	1″	3/4	$20.80
903420	1 1/4″	1 1/4″	3/4	$17.80

NPT M to NPT F 45° Street Elbow




ITEM	NPT A	NPT B	Shpg.	Price
901712	1/8″	1/8″	1/4	$ 3.60
901713	1/4″	1/4″	1/4	$ 3.05
901714	3/8″	3/8″	1/4	$ 3.90
901715	1/2″	1/2″	1/4	$ 5.70
901716	3/4″	3/4″	1/4	$ 8.65
901717	1″	1″	1/2	$12.60

NPT F to NPT F 90° Elbow




ITEM	NPT A	NPT B	Shpg.	Price
901718	1/4″	1/4″	1/4	$ 3.10
901719	3/8″	3/8″	1/4	$ 3.90
901720	1/2″	1/2″	1/4	$ 5.25
901721	3/4″	3/4″	1/4	$ 8.05
901722	1″	1″	1/2	$16.50

NPT F to NPT F 45° Elbow




ITEM	NPT A	NPT B	Shpg.	Price
903586	1/4″	1/4″	1/4	$ 4.20
903587	3/8″	3/8″	1/4	$ 4.90
903588	1/2″	1/2″	1/4	$ 6.35
903589	3/4″	3/4″	1/4	$ 9.25
903590	1″	1″	1/2	$14.35

NPT M / NPT F / NPT F Tee




ITEM	NPT A	NPT B	NPT C	Shpg.	Price
903421	1/4″	1/4″	1/4″	1/4	$ 4.15
903422	3/8″	3/8″	3/8″	1/4	$ 5.80
903423	1/2″	1/2″	1/2″	1/4	$ 8.85
903424	3/4″	3/4″	3/4″	1/2	$12.50
903425	1″	1″	1″	1/2	$19.00

NPT F / NPT F / NPT F Tee




ITEM	NPT A	NPT B	NPT C	Shpg.	Price
901728	1/8″	1/8″	1/8″	1/4	$ 4.30
901729	1/4″	1/4″	1/4″	1/4	$ 4.40
901730	3/8″	3/8″	3/8″	1/4	$ 6.10
901731	1/2″	1/2″	1/2″	1/4	$ 8.05
901732	3/4″	3/4″	3/4″	1/4	$11.35
901733	1″	1″	1″	1/2	$18.00

NPT F Cross




ITEM	NPT	Shpg.	Price
903597	1/8″	1/4	$ 8.85
903598	1/4″	1/4	$ 8.70
903599	3/8″	1/4	$10.75
903600	1/2″	1/4	$13.50
903601	3/4″	1/4	$19.90
903602	1″	1/2	$26.50

NPT M to NPT F Swivel




ITEM	NPT A	NPT B	Shpg.	Price
900401	1/8″	1/4″F	1/4	$ 3.60
900436	1/4″	1/4″F	1/4	$ 3.10
903426	1/4″	3/8″F	1/4	$ 3.85
903427	3/8″	1/4″F	1/4	$ 3.65
900437	3/8″	3/8″F	1/4	$ 3.75
900250	3/8″	1/2″F	1/4	$ 4.10
900545	1/2″	3/8″F	3/4	$ 3.40
900438	1/2″	1/2″F	3/4	$ 3.30
900546	1/2″	3/4″F	3/4	$ 6.10
900361	3/4″	1/2″F	1	$ 5.45
900439	3/4″	3/4″F	1	$ 5.25
900251	3/4″	1″F	1	$10.15
900362	1″	3/4″F	1	$ 8.90
900252	1″	1″F	1	$ 8.45
900253	1 1/4″	1 1/4″F	1	$13.00

NPT F / NPT F Swivel




ITEM	NPT A	NPT B	Shpg.	Price
900363	1/4″	1/4″	1/2	$ 3.65
900440	3/8″	3/8″	1/2	$ 3.40
900441	1/2″	1/2″	3/4	$ 4.15
900442	3/4″	3/4″	3/4	$ 6.35
900364	1″	1″	1	$10.15
900365	1 1/4″	1 1/4″	1 1/2	$13.20

NPT M to NPT F Swivel 90° Elbow




ITEM	NPT A	NPT B	Shpg.	Price
900400	1/8″	1/4″	1/4	$ 3.30
900374	1/4″	1/4″	1/2	$ 3.70
903428	1/4″	3/8″	1/4	$ 4.55
903429	3/8″	1/4″	1/4	$ 4.55
900180	3/8″	3/8″	1/2	$ 4.15
900375	3/8″	1/2″	1/2	$ 5.65
900376	1/2″	3/8″	3/4	$ 5.25
900181	1/2″	1/2″	3/4	$ 5.05
900254	1/2″	3/4″	1	$ 8.95
900283	3/4″	1/2″	1	$ 9.10
900219	3/4″	3/4″	1	$ 8.45
900255	3/4″	1″	1	$16.25
900260	1″	3/4″	1	$13.35
900256	1″	1″	1	$11.95
900257	1″	1 1/4″	1	$16.60
903430	1 1/4″	1″	3/4	$20.60
900368	1 1/4″	1 1/4″	2	$21.60

NPT M to NPT F Swivel 90° Elbow Long




ITEM	NPT A	NPT B	C	Shpg.	Price
903582	1/4″	1/4″	2.37″	1/2	$ 4.70
903583	3/8″	3/8″	2.81″	1/2	$ 6.10
903584	1/2″	1/2″	3.25″	1/2	$ 7.95
903585	3/4″	3/4″	3.60″	3/4	$11.70

NPT F to NPT F Swivel 90° Elbow




ITEM	NPT A	NPT B	Shpg.	Price
900377	1/4″	1/4″	1/2	$ 4.75
900182	3/8″	3/8″	1/2	$ 5.85
900183	1/2″	1/2″	1/2	$ 7.30
900220	3/4″	3/4″	3/4	$10.40
900258	1″	1″	1	$14.45
900259	1 1/4″	1 1/4″	1 1/4	$27.30

NPT M to NPT F Swivel 45° Elbow



ITEM	NPT A	NPT B	Shpg.	Price
900378	1/4″	1/4″	1/4	$ 4.50
903431	1/4″	3/8″	1/4	$ 5.60
903433	3/8″	1/4″	1/4	$ 4.20
900379	3/8″	3/8″	1/2	$ 4.40
903432	3/8″	1/2″	1/4	$ 6.65
903434	1/2″	3/8″	1/4	$ 5.80
900380	1/2″	1/2″	3/4	$ 5.25
903435	1/2″	3/4″	1/2	$ 9.75
903436	3/4″	1/2″	1/2	$ 9.55
900381	3/4″	3/4″	3/4	$ 9.60
903438	3/4″	1″	1/2	$18.35
903437	1″	3/4″	1/2	$11.90
900382	1″	1″	1	$11.70
900383	1 1/4″	1 1/4″	1 1/4	$21.20


NPT F to NPT F 45° Swivel



ITEM	NPT A	NPT B	Shpg.	Price
903570	1/4″	1/4″	1/4	$ 4.90
903571	3/8″	3/8″	1/4	$ 6.00
903572	1/2″	1/2″	1/4	$ 7.55
903573	3/4″	3/4″	1/4	$ 9.65
903574	1″	1″	1/2	$11.60
903575	1 1/4″	1 1/4″	3/4	$22.15


Thread Identification Guide on page 97

NPT F / NPT F / NPT M Tee Swivel




ITEM	NPT A	NPT B	NPT C	Shpg.	Price
900366	¼″	¼″	¼″	½	$ 7.30
900178	⅜″	⅜″	⅜″	½	$ 8.65
900179	½″	½″	½″	¾	$ 9.70
900192	¾″	¾″	¾″	1	$13.65
900367	1″	1″	1″	1¼	$20.00

NPT F / NPT F / NPT F Tee Swivel




ITEM	NPT A	NPT B	NPT C	Shpg.	Price
900369	¼″	¼″	¼″	¾	$ 6.75
900370	⅜″	⅜″	⅜″	¾	$10.05
900371	½″	½″	½″	1	$10.65
900372	¾″	¾″	¾″	1¼	$11.45
900373	1″	1″	1″	2	$23.85

NPT F / NPT F / NPT F Tee Swivel



ITEM	NPT A	NPT B	NPT C	Shpg.	Price
901605	¼″	¼″	¼″	¾	$ 7.75
901606	⅜″	⅜″	⅜″	¾	$ 8.70
901607	½″	½″	½″	1	$11.85
901608	¾″	¾″	¾″	1¼	$18.00
901609	1″	1″	1″	2	$24.85

SAE M to NPT F Swivel




ITEM	SAE A	NPT B	Shpg.	Price
900717	4	¼″	¼	$ 3.75
901997	5	¼″	¼	$ 2.80
900759	6	¼″	¼	$ 3.70
900718	6	⅜″	¼	$ 3.75
900719	6	½″	¼	$ 4.40
900760	8	⅜″	½	$ 3.30
900720	8	½″	½	$ 3.40
900721	8	¾″	½	$ 6.35
900722	10	½″	½	$ 4.70
900723	10	¾″	½	$ 6.55
900724	12	½″	¾	$ 5.90
900725	12	¾″	¾	$ 6.55
903439	12	1″	½	$11.65
903440	16	¾″	½	$ 9.75
903441	16	1″	½	$ 9.95
903442	20	1″	¾	$14.55
903443	20	1¼″	¾	$12.95

You can find hydraulic hose on pages 88 - 89




SAE M to NPT F Swivel 90° Elbow



ITEM	SAE A	NPT B	Shpg.	Price
903444	4	¼″	¼	$ 4.95
900764	6	¼″	¼	$ 5.90
900392	6	⅜″	¼	$ 4.30
903445	6	½″	¼	$ 8.45
903446	8	¼″	¼	$ 7.40
900393	8	⅜″	¾	$ 5.25
900394	8	½″	¾	$ 5.70
900395	8	¾″	¾	$12.75
900396	10	½″	¾	$ 7.40
900397	10	¾″	¾	$12.50
900398	12	½″	¾	$10.60
900399	12	¾″	¾	$11.30
903447	12	1″	¾	$16.65
903448	16	¾″	1	$15.35
903449	16	1″	1	$15.55
903450	20	1″	1¾	$27.50
903451	20	1¼″	1¾	$21.60


SAE M to NPT F Swivel 45° Elbow



ITEM	SAE A	NPT B	Shpg.	Price
903452	4	¼″	¼	$ 4.80
903453	6	¼″	¼	$ 6.35
901124	6	⅜″	½	$ 6.10
901125	8	⅜″	¾	$ 7.60
901126	8	½″	¾	$ 7.60
901127	8	¾″	1	$14.45
901128	10	½″	1	$ 9.55
901129	10	¾″	1¼	$ 9.85
901130	12	½″	1¼	$15.20
901131	12	¾″	1¼	$12.80

Hosebarb M to NPT M

300 PSI max.




ITEM	Hose ID A	NPT B	Shpg.	Price
901542	¼″	¼″M	¼	$ 3.40
901543	⅜″	⅜″M	¼	$ 3.50
901544	½″	½″M	¼	$ 4.15
901545	¾″	¾″M	¼	$ 5.40
901546	1″	1″M	¼	$ 9.75
901547	1¼″	1¼″M	½	$14.25
901548	1½″	1½″M	½	$20.00

You can find weld-in tank flanges on page 83



Hosebarb M to NPT M 90° Elbow


300 PSI max.



ITEM	Hose ID A	NPT B	Shpg.	Price
900286	½″	⅜″	¼	$ 5.05
900903	½″	½″	¼	$ 5.35
900904	¾″	½″	¼	$ 8.00
900905	¾″	¾″	½	$ 7.20
900906	1″	¾″	½	$11.65
900907	1″	1″	½	$13.25

Hosebarb M to NPT M 45° Elbow

300 PSI max.



ITEM	Hose ID A	NPT B	Shpg.	Price
903591	¼″	¼″	¼	$ 3.85
903592	⅜″	⅜″	¼	$ 8.10
903593	½″	½″	¼	$ 7.20
903594	¾″	¾″	½	$ 7.95
903595	1″	1″	½	$12.20
903596	1¼″	1¼″	½	$21.50


Hosebarb M to SAE M

300 PSI max.



ITEM	Hose ID A	SAE B	Shpg.	Price
901541	¼″	4	¼	$ 3.70
900812	⅜″	6	¼	$ 3.75
900813	½″	8	¼	$ 3.50
900814	⅝″	10	¼	$ 4.75
900822	¾″	8	¼	$ 4.70
900815	¾″	12	¼	$ 5.55
900816	1″	12	¼	$ 8.70
900817	1″	16	¼	$ 9.95
900818	1¼″	16	½	$13.15
900819	1¼″	20	½	$18.55
900820	1½″	20	½	$21.20
900821	1½″	24	½	$20.80

Hosebarb M to SAE M 90° Elbow




ITEM	Hose ID A	SAE B	Shpg.	Price
901930	¼″	4	¼	$ 3.95
901931	⅜″	6	¼	$ 4.05
901932	½″	8	½	$ 9.75
903489	⅝″	10	½	$ 8.20
901933	¾″	12	¾	$ 8.40
901935	1″	16	¾	$13.50
903483	1¼″	16	1½	$26.00

ORFS F Cap



ITEM	ORFS	Shpg.	Price
901652	4	¼	$ 1.70
901653	6	¼	$ 1.95
901654	8	¼	$ 2.85
901655	10	¼	$ 3.30
901656	12	¼	$ 3.85
901657	16	¼	$ 5.60

ORFS M to NPT M Connector




ITEM	ORFS A	NPT B	Shpg.	Price
901664	4	¼″M	¼	$ 2.65
901665	6	⅜″M	¼	$ 3.50
901666	8	½″M	¼	$ 3.45
901667	10	½″M	¼	$ 3.65
901668	12	¾″M	½	$ 5.25
901669	16	1″M	½	$ 8.00

Hex Head ORFS M Plug




ITEM	ORFS	Shpg.	Price
901658	4	¼	$ 1.95
901659	6	¼	$ 2.15
901660	8	¼	$ 2.55
901661	10	¼	$ 3.75
901662	12	¼	$ 3.50
901663	16	¼	$ 4.85

ORFS M to NPT M 90° Elbow




ITEM	ORFS A	NPT B	Shpg.	Price
901670	4	¼″M	¼	$ 3.80
901671	6	⅜″M	¼	$ 4.05
901672	8	½″M	¼	$ 5.15
901673	10	½″M	¼	$ 7.80
901674	12	¾″M	½	$ 9.15
901675	16	1″M	½	$13.30

ORFS M to SAE M Connector




ITEM	ORFS A	SAE B	Shpg.	Price
901676	4	4	¼	$ 2.25
901677	6	4	¼	$ 3.20
901678	6	6	¼	$ 2.80
901679	6	8	¼	$ 3.65
901680	8	6	¼	$ 3.75
901681	8	8	¼	$ 3.30
901682	10	10	¼	$ 3.95
901683	12	12	½	$ 4.85
901684	16	16	½	$ 7.15

ORFS M to ORFS F 90° Swivel Elbow




ITEM	ORFS A	ORFS B	Shpg.	Price
901694	4	4	¼	$ 4.05
901695	6	6	¼	$ 4.90
901696	8	8	¼	$ 6.00
901697	10	10	¼	$ 9.60
901698	12	12	½	$12.40
901699	16	16	½	$17.80

JIC M to ORFS F Swivel Connector




ITEM	JIC A	ORFS B	Shpg.	Price
901765	4	4	¼	$ 4.05
901764	6	6	¼	$ 4.15
901766	8	8	¼	$ 5.05
901767	10	10	¼	$ 6.75
901768	12	12	½	$10.00

ORFS M to SAE M 90° Elbow




ITEM	ORFS A	SAE B	Shpg.	Price
901685	4	4	¼	$ 3.00
901686	6	4	¼	$ 4.15
901687	6	6	¼	$ 3.75
901688	6	8	¼	$ 5.45
901689	8	6	¼	$ 5.45
901690	8	8	¼	$ 5.40
901691	10	10	½	$ 8.85
901692	12	12	½	$11.95
901693	16	16	½	$16.10

JIC M to BSPP M Connector




ITEM	JIC A	BSPP B	Shpg.	Price
903454	4	¼″	¼	$ 3.95
903455	6	⅜″	¼	$ 4.25
903456	8	½″	¼	$ 5.75
903457	10	½″	¼	$ 6.10
903458	12	½″	½	$ 6.70
903459	12	¾″	½	$ 9.15
903460	16	1″	½	$16.45

JIC M to BSPP M 90° Elbow



ITEM	JIC A	BSPP B	Shpg.	Price
903609	4	¼″	¼	$ 4.35
903610	6	⅜″	¼	$ 6.55
903611	8	½″	¼	$ 8.85
903612	12	¾″	½	$11.15
903613	16	1″	½	$16.35


BSPP M to NPT F Connector



ITEM	BSPP A	NPT B	Shpg.	Price
901944	¼″	¼″	¼	$ 3.80
901945	⅜″	⅜″	¼	$ 4.30
901946	½″	½″	½	$ 6.55
901947	¾″	¾″	¾	$10.50
901948	1″	1″	¾	$14.95

Thread Identification Guide

NPT Fittings



• Tapered threads, metal-to-metal seal

Fitting Size	Thread Size	Thread O.D. Male
⅛″ NPT	⅛-27	13/32″
¼″ NPT	¼-18	35/64″
⅜″ NPT	⅜-18	43/64″
½″ NPT	½-14	27/32″
¾″ NPT	¾-14	1 1/16″
1″ NPT	1-11½	1 5/16″
1¼″ NPT	1¼-11½	1 43/64″
1½″ NPT	1½-11½	1 29/32″
2″ NPT	2-11½	2⅜″


SAE Straight Thread O-Ring Boss



• Straight threads, seals on an O-ring

Fitting Size	Nominal Size	Thread Size
SAE 4	¼	7/16-20
SAE 6	⅜	9/16-18
SAE 8	½	¾-16
SAE 10	⅝	⅞-14
SAE 12	¾	1 1/16-12
SAE 14	⅞	1 3/16-12
SAE 16	1	1 5/16-12
SAE 20	1¼	1⅝-12
SAE 24	1½	1⅞-12
SAE 32	2	2½-12


JIC 37° Flare Fittings



• Straight threads, seals on the cone-shaped face

Fitting Size	Nominal Size	Thread Size
JIC 4	¼	7/16-20
JIC 6	⅜	9/16-18
JIC 8	½	¾-16
JIC 10	⅝	⅞-14
JIC 12	¾	1 1/16-12
JIC 14	⅞	1 3/16-12
JIC 16	1	1 5/16-12
JIC 20	1¼	1⅝-12
JIC 24	1½	1⅞-12
JIC 32	2	2½-12

O-Ring Face Seal (ORFS) Fittings



• Straight threads, seals on O-ring in flat face of male fitting

Fitting Size	Nominal Size	Threads Size
ORFS 4	¼	9/16-18
ORFS 6	⅜	11/16-16
ORFS 8	½	13/16-16
ORFS 10	⅝	1-14
ORFS 12	¾	1 3/16-12
ORFS 16	1	1 7/16-12

California Residents ⚠ WARNING:Cancer and Reproductive Harm
For more information refer to:www.P65Warnings.ca.gov

¼″ NPT Back Connection



ITEM	PSI	Dia.	Case	Shpg.	Price
200353	30	2″	Plastic	½ lb.	$3.99
200220	30	2″	Steel	½ lb.	$6.95
200456	60	1½″	Plastic	½ lb.	$3.95
200320	60	2″	Plastic	½ lb.	$4.95
200248	60	2″	Plastic	½ lb.	$3.99
200315	60	2″	Steel	½ lb.	$4.95
200472	1000	2½″	Plastic	½ lb.	$5.95
200298	1000	2½″	Steel	½ lb.	$5.95
200480	1000	2½″	Steel	½ lb.	$5.95
200244	1000	4½″	Stainless	3 lbs.	$19.95
200303	1500	2½″	Stainless	½ lb.	$5.95
200213	1500	2½″	Plastic	½ lb.	$3.99
200214	2000	2½″	Plastic	½ lb.	$3.99
200351	2000	2½″	Stainless	½ lb.	$5.95
200350	2000	2½″	Stainless	½ lb.	$5.95

¼″ NPT Lower Connection



ITEM	PSI	Dia.	Case	Shpg.	Price
200701	400	2″	Steel	¼ lb.	$3.69
200411	500	4½″	Steel	3 lbs.	$18.95
200349	800	4½″	Stainless	3 lbs.	$15.95
200496	1000	2½″	Steel	½ lb.	$5.95
200476	1000	2½″	Plastic	½ lb.	$5.95
200422	1000	4½″	Steel	3 lbs.	$18.95
200243	1000	4½″	Steel	3 lbs.	$21.95
200580	1000	5″	Steel	3 lbs.	$16.95
200356	1015	2½″	Steel	½ lb.	$5.95
200361	1150	2½″	Steel	½ lb.	$5.95
200419	1500	4½″	Steel	2 lbs.	$18.95
200497	1500	2½″	Steel	½ lb.	$5.95
200895	1500	2½″	Plastic	½ lb.	$5.95

⅛″ NPT Lower Connection



ITEM	PSI	Dia.	Case	Shpg.	Price
200504	60	1½″	Steel	½ lb.	$3.99
200481	60	1½″	Steel	½ lb.	$3.95
200327	400	2½″	Plastic	½ lb.	$5.95
200326	400	2½″	Plastic	½ lb.	$5.95
200321	500	2½″	Plastic	½ lb.	$5.95

¼″ NPT Panel Connection



ITEM	PSI	Dia.	Case	Shpg.	Price
200459	30	2″	Plastic	½ lb.	$3.95
200325	30	2½″	Steel	½ lb.	$5.95
200266	30	2½″	Steel	½ lb.	$5.95
200457	600	2″	Plastic	½ lb.	$3.95

¼″ NPT Top Connection



ITEM	PSI	Dia.	Case	Shpg.	Price
200584	1000	5″	Plastic	3 lbs.	$16.95

¼″ NPT Flange Lower Connection



ITEM	PSI	Dia.	Case	Shpg.	Price
200534	400	4″	Steel	1 lb.	$16.95

⅛″ NPT Back Connection



ITEM	PSI	Dia.	Case	Shpg.	Price
200505	60	2″	Plastic	½ lb.	$4.99
200482	1500	1½″	Steel	½ lb.	$3.95

¼″ NPT Flange/ Back Connection



ITEM	PSI	Dia.	Case	Shpg.	Price
200297	600	2.5″	Steel	½ lb.	$5.95
200299	1500	2.5″	Steel	½ lb.	$5.95

Bar Scale Gauges

¼″ NPT Back Connection



ITEM	BAR	Dia.	Case	Shpg.	Price
200474	0 to 6	2″	Plastic	¼ lb.	$3.95
200475	0 to 10	2″	Plastic	¼ lb.	$3.95
200318	0 to 2.5	2″	Plastic	½ lb.	$4.95
200319	0 to 10	2″	Plastic	½ lb.	$4.95

¼″ NPT Lower Connection

ITEM	BAR	Dia.	Case	Shpg.	Price
200477	0 to 6	2½″	Plastic	½ lb.	$5.95
200478	0 to 10	2½″	Plastic	½ lb.	$5.95

½″ NPT Lower Connection

ITEM	BAR	Dia.	Case	Shpg.	Price
200346	0 to 40	4″	Stainless	2¼ lbs.	$12.95
200347	0 to 25	6″	Stainless	3 lbs.	$19.95
200348	0 to 100	6″	Stainless	3 lbs.	$19.95

14 kg/cm² SS 2″ Dry Gauge

ITEM 200130

$3.29



- New top quality pressure gauge.

SPECIFICATIONS

- 14 kg/cm²
- 2″ dia face
- Steel case
- ⅛″ NPT Back Connection
- **Shpg ½ lb.**

0-140 PSI Dry Gauge

ITEM 200819

$3.99



- New. Airtac white faced pressure gauge.

SPECIFICATIONS

- Primary Range
- Graduations 2 PSI
- Face Diameter 1⅜″
- Bezel Diameter 1⅜″
- Mounting Depth 1.479″
- Case Material Steel
- Bezel Color Black
- ⅛″ NPT Back Connection
- **Shpg 0.1 lb.**

15000 PSI 2½″ Dia. Dry Pressure Gauge ⚠

ITEM 903626

$136.10



- Brand new, POWER TEAM model 9040 pressure gauge. Dry. Red background at 10,000 to 15,000 PSI range.

SPECIFICATIONS

- Dry
- Range 0 to 15000 PSI / 0 to 1034 BAR
- Graduations 500 PSI / 20 BAR
- Gauge Type Pressure
- Face Dia. 2½″
- Mount: Lower
- Connection ¼″ NPT
- Case Material Steel
- **Shpg. ½ lb.**

Dry Pressure & Vacuum Gauges



- Brand new. 2″ dial. ¼″ NPT lower connection. **Shpg. ½ lb.**

Pressure Gauges $7.50 each

ITEM 200141	0 to 30 PSI
ITEM 200143	0 to 60 PSI
ITEM 200138	0 to 100 PSI
ITEM 200139	0 to 160 PSI
ITEM 200140	0 to 200 PSI
ITEM 200142	0 to 300 PSI

Vacuum Gauge

ITEM 200144 0 to 30″ VAC **$7.50**



Refrigerant Gauges

- New pressure gauges calibrated to display the temperature and corresponding pressure of compressed refrigerants. All have white faces. **Shpg. ½ lb.**

SPECIFICATIONS FOR ALL

- Gauge Type: Pressure
- Face Diameter: 2½″
- Face:White
- Dry gauge
- Mounting: Lower
- Fitting: ⅛″ NPT
- Housing Material: Plastic

ITEM	PSI	Vac.	Price
200463	500	30″	$5.95
Compatible Refrigerant & Their Range			
R410A: -40 to 90 F, **R12:** 0 to 160 F, **R134a:** 0 to 150 F, **R22:** -30 to 120 F			
ITEM	**PSI**	**Vac.**	
200464	800	—	$5.95
Compatible Refrigerant & Their Range			
R410A: 20 to 150 F, **R12:** 70 to 200 F, **R134a:** 60 to 190 F, **R22:** 30 to 160 F			
ITEM	**PSI**	**Vac.**	
200466	3.4 MPa	-0.1 MPa	$5.95
Compatible Refrigerant & Their Range			
R410A: -40 to 30 C, **R12:** -5 to 70 C, **R134a:** 0 to 65 C, **R22:** -20 to 45 C			

15,000 PSI 2½″ Liquid Filled Pressure Gauge ⚠



ITEM 903464

$132.35

Power Team

• Brand new, POWER TEAM Model 9040 pressure gauge. Liquid filled. Red background at 10,000 to 15,000 PSI range.

SPECIFICATIONS

- Liquid Filled
- Range 0 to 15000 PSI / 0 to 1034 BAR
- Graduations 500 PSI / 20 BAR
- Gauge Type Pressure
- Face Dia. 2½″
- Mount: Lower
- Connection ¼″ NPT
- Case Material Steel
- **Shpg. ½ lb.**

800 PSI Glycerin Filled 2½″ Stainless Steel Pressure Gauge



ITEM 200734

$9.99

• New. MCDANIEL CONTROLS. Glycerin damps vibrations, protects against surge pressure.

SPECIFICATIONS

- Range 0-800 PSI
- Face dia. 2½″
- Case Material: Stainless Steel
- Connection ¼″ NPT back w/panel mount clamp
- Type Glycerin filled
- **Shpg 1 lb.**

¼″ Dry NPT Panel Connection



ITEM	PSI	Dia.	Case	Shpg.	Price
200469	(-30)″-400	2½″	Steel	½ lb.	$5.95

⅛″ Dry NPT Top Connection



ITEM	PSI	Dia.	Case	Shpg.	Price
200557	60	2″	Steel	¼ lb.	$2.49

Liquid Filled Gauges

G¼ BSPP Lower Connection



ITEM	PSI	Dia.	Case	Shpg.	Price
200215	250 kg/cm²	2½″	Plastic	1 lb.	$4.95

¼″ NPT Panel Connection



ITEM	PSI	Dia.	Case	Shpg.	Price
200302	1500	2½″	Plastic	½ lb.	$11.95

Glycerin Filled Pressure Gauges



• Brand new. Glycerin damps vibrations, protects against surge pressure. Stainless steel case & bezel. Combination scale reads in both PSI and BAR. Temperature range -40° F to 180° F. ¼″ NPT brass connection. **Shpg. 1 lb.**

	2½″ Face Lower Connection $16.70	2½″ Face Back Connection $18.05	4″ Face Lower Connection $28.45
PSI	ITEM	ITEM	ITEM
30	200131	200602	200616
60	200132	200603	200617
100	200133	200604	200618
200	200134	200605	200619
300	200135	200606	200620
400	200136	200607	200621
600	200137	200608	200622
1000	200270	200609	200623
1500	200271	200610	200624
2000	200272	200611	200625
3000	200127	200612	200626
5000	200128	200613	200627
6000	200600	200614	200628
10,000	200601	200615	200629

30 PSI 1½″ Dry Gauge



ITEM 200455

$2.99

SPECIFICATIONS

- Range: 0 to 30 PSI / 0 to 210 KPA
- Graduations: 1 PSI / 6 KPA
- 1½″ face dia.
- 1⅝″ bezel dia.
- Clear bezel
- Dry gauge
- Fitting ⅛″ NPT
- Back mount
- Plastic housing
- **Shpg ¼ lb.**

400 PSI 2″ Dry Gauge



ITEM 200295

$2.99

SPECIFICATIONS

- Measures 0-400 PSI in 10 PSI increments
- White face/black markings
- ¼″ NPT lower connection
- 2″ dia. face
- **Shpg ¼ lb.**

30 PSI Panel Mount 2″ Dry Gauge



ITEM 200354

$3.99

SPECIFICATIONS

- Measures 0-30 PSI / 0-2 Bar
- Graduated 0.5 PSI / 0.05 Bar
- Face dia. 2″
- Bezel dia. 2¼″
- Stainless steel bezel
- Dry gauge
- Panel mount
- ¼″ NPT connection
- Steel housing
- **Shpg ½ lb.**

Adjustable Gauge Snubbers



Brand new, DYNAMIC adjustable gauge Zinc plated snubbers. Snubbers allow you to throttle or shut-off flow to protect hydraulic gauges from pressure spikes in your system and reduce pointer vibrations. Zero leakage at shutoff. Locknut prevents accidental adjustments. **1.96″ x 1.47″ x 0.86″**

ITEM	Male Connection	Female Connection	Shpg.	Price
905853	¼″ NPT	¼″ NPT	¼ lb.	$16.65
905854	SAE 4	¼″ NPT	¼ lb.	$16.65
905855	SAE 4	SAE 4	¼ lb.	$16.65

0 to 600 PSI, 2½″ Dry Gauge



ITEM 200460

$2.99

SPECIFICATIONS

- Range: 0 to 600 PSI
- Graduations: 20 PSI
- Gauge Type: Pressure
- Face Diameter: 2½″
- Bezel Diameter: 2⅞″
- Bezel Color: Clear
- Dry gauge
- Mounting: Panel Mount
- Mounting Depth: 1⅛″
- Fitting: ¼″ NPT
- Housing Material: Metal
- **Shpg. ½ lb.**

60 PSI 2″ Dry Gauge



ITEM 200501

$1.99

SPECIFICATIONS

- Range 0-60
- Graduations 1 PSI
- Face diam. 2″
- Bezel diam. 2″
- Dry gauge
- Connection ¼″ NPT back
- Plastic case
- **Shpg ½ lb.**

HYPRO

Diaphragm Pumps

• New, PENTAIR HYPRO medium pressure diaphragm pumps. Pump design offers compatability with many chemicals, smooth mechanical operation, longer operational pump life and consistent performance. The 9915 series diaphragm pumps have additional diaphragms to produce smoother flow with little to no pressure loss, producing more consistent and efficient spray coverage. Hardened black oxide aluminum heads, manifold, and case. Duramax diaphragm, crown-shaped pistons, and double piston rings. 316 Stainless steel spherical profiled valve poppet.

Two Diaphragm

6.3 GPM, 290 PSI



ITEM 200769 **$89.95**

SPECIFICATIONS

- Model Number 9915-DP252
- Number of Diaphragms 2
- Max. Flow 6.3 GPM
- Max. Pressure 290 PSI
- Max. RPM 650
- Required HP 1.4
- Max. Fluid Temperature 140°F/60°C
- Inlet Port 1″/25mm
- Outlet Port ½″/13mm
- Input Shaft ¾″ Solid Shaft
- Size 9.4″ x 9.3″ x 8.6″
- **Shpg 19 lbs.**

ITEM 200770 **$99.95**

• Same as ITEM 200769 Except:

SPECIFICATIONS

- Model Number 9915-DP252GRGI58
- Number of Diaphragms 2
- Max. RPM 3450
- Input Shaft Pump Gearbox ⅝″ Hollow Shaft
- Gearbox Mount Four, 0.347″ holes on 3⅝″ bolt circle
- Size 12″ x 9.4″ x 8.8″
- **Shpg 21 lbs.**

7.1 GPM, 290 PSI



ITEM 200771 **$89.95**

SPECIFICATIONS

- Model Number 9915-DP302
- Number of Diaphragms 2
- Max. Flow 7.1 GPM
- Max. Pressure 290 PSI
- Max. RPM 650
- Required HP 1.6
- Max. Fluid Temperature 140°F/60°C
- Inlet Port 1″/25mm
- Outlet Port ½″/13mm
- Input Shaft Flange
- Size 8.1″ x 9.4″ x 8.6″
- **Shpg 17 lbs.**

ITEM 200772 **$99.95**

• Same as ITEM 200771 Except:

SPECIFICATIONS

- Model Number 9915-DP302AP-A
- Input Shaft ¾″ Solid Shaft
- **Shpg 20 lbs.**

ITEM 200773 **$139.95**

• Same as ITEM 200771 above with a 6:1 gear reducer for attaching to a 5 HP gas engine with ¾″ keyed shaft

SPECIFICATIONS

- Model Number 9915-DP302GRGI
- Max. RPM 3450
- Input Shaft Pump Gearbox ¾″ Hollow Shaft
- Gearbox Mount Four, 0.347″ holes on 3 ⅝″ bolt circle
- Size 15″ x 9.4″ x 10.4″
- **Shpg 22 lbs.**

Performance Charts and Accessories can be found online at www.surpluscenter.com

Three Diaphragm

9.8 GPM, 580 PSI



ITEM 200765 **$129.95**

SPECIFICATIONS

- Model Number 9915-D403
- Number of Diaphragms 3
- Max. Flow 9.8 GPM
- Max. Pressure 580 PSI
- Max. RPM 550
- Required HP 3.9
- Max. Fluid Temperature 140°F/60°C
- Inlet Port 1″/25mm
- Outlet Port ½″ NPT
- Input Shaft Flange
- Size 10″ x 8.8″ x 7.6″
- **Shpg 23 lbs.**

13.5 GPM, 580 PSI



ITEM 200766 **$149.95**

SPECIFICATIONS

- Model Number 9915-D503
- Number of Diaphragms 3
- Max. Flow 13.5 GPM
- Max. Pressure 580 PSI
- Max. RPM 550
- Required HP 5.4
- Max. Fluid Temperature 140°F/60°C
- Inlet Port 1⅜″/40mm
- Outlet Port ¾″ NPT
- Input Shaft Flange
- Size 9.7″ x 12″ x 10.5″
- **Shpg 38 lbs.**

ITEM 200767 **$179.95**

• Same as ITEM 200766 Except:

SPECIFICATIONS

- Model Number 9915-DP503AP-A
- Inlet Port 1⅜″/40mm
- Outlet Port ¾″ NPT
- Input Shaft 1″ Solid Shaft
- Size 9.7″ x 12″ x 10.5″
- **Shpg 40 lbs.**

ITEM 200768 **$299.95**

• Same as ITEM 200766 above with a 6:1 gear reducer for attaching to a 8-13 HP gas engine with 1″ keyed shaft

SPECIFICATIONS

- Model Number 9915-D503GRGI
- Max. RPM 3450
- Required HP 5.4
- Max. Fluid Temperature 140°F/60°C
- Input Shaft Pump Gearbox Controller 1″ Hollow Shaft
- Gearbox Mount Twelve, 0.424″ holes on 6½″ bolt circle
- Size 18.8″ x 13.2″ x 12.7″
- **Shpg 55 lbs.**

8.1 GPM, 580 PSI



ITEM 200762 **$99.95**

SPECIFICATIONS

- Model Number 9915-D303
- Number of Diaphragms 3
- Max. Flow 8.1 GPM
- Max. Pressure 580 PSI
- Max. RPM 650
- Required HP 3.2
- Max. Fluid Temperature 140°F/60°C
- Inlet Port 1″/25mm
- Outlet Port ½″ NPT
- Input Shaft Flange
- Size 7.6″ x 8.8″ x 10″
- **Shpg 24 lbs.**

ITEM 200763 **$139.95**

• Same as ITEM 200762 Except:

SPECIFICATIONS

- Model Number 9915-D303AP-A
- Input Shaft ¾″ Solid Shaft
- Size 10″ x 8.8″ x 7.6″
- **Shpg 23 lbs.**

Three Diaphragm

27.9 GPM, 725 PSI



ITEM 200759 **$499.95**

SPECIFICATIONS

- Model Number 9915-DP1063
- Number of Diaphragms 3
- Max. Flow 27.9 GPM
- Max. Pressure 725 PSI
- Max. RPM 550
- Required HP 13.9
- Max. Fluid Temperature 140°F/60°C
- Inlet Port 1½″/40mm
- Outlet Port ¾″ NPT
- Input Shaft 1⅜″ 6-Spline shaft
- Size 15.2″ x 15.2″ x 14.6″
- **Shpg 118 lbs.**

Truck freight only.

Auto-Demand Diaphragm Pump 1.3 GPM, 45 PSI



ITEM 200838 **$29.95**

• New. Shurflo. Used as industrial and agricultural pumps. With spherically shaped valves and automatic demand switch, these pumps deliver consistent, dependable operation and priming. Pumps can be mounted in any position, and are designed for easy maintenance. Rubber vibration damper mounting feet. Can run dry without damage.

SPECIFICATIONS

- Brand Shurflo
- Model 8090-005-250
- Voltage 230 Volts AC
- Amperage 0.5 Amps
- Shut-Off Pressure 45 psi
- Max Flow 1.3 GPM
- Ports ⅜″ NPT
- Duty Intermittent
- Mount Four bolt on 2¼″ x 3¼″ centers
- Size 7″ x 4″ x 4″
- **Shpg 5.7 lbs.**

ITEM 200841 **$29.95**

• Same as ITEM 200838 Except:

SPECIFICATIONS

- Model 8095-902-890
- Amperage 0.55 Amps
- Shut-Off Pressure 135 psi
- Max Flow 1.4 GPM
- Size 7¼″ x 4″ x 4″
- **Shpg 5.75 lbs.**



10 GPM Double Diaphragm Pump

ITEM 200827 **$49.95**

• New. Shurflo model 477-400-02 air-operated double diaphragm pump. Dual diaphragm design and pneumatic spool valve. Contains specialized elastomers, allowing compatibility with the most caustic or acidic fluids. Rubber vibration damper mounting feet. Can run dry without damage.

SPECIFICATIONS

- Pressure 40-100 PSI
- Max Flow 10 GPM @ 100 PSI
- Liquid Ports ½″ & ¾″ hose barb fittings included
- Air Port ¼″ barb
- Mount Four bolt on 2¼″ x 4⅝″ centers
- Size 7″ x 4⅛″ x 7⅜″
- **Shpg 4.6 lbs.**

HYPRO

Tractor Spray Pumps

MADE IN USA

• Brand new. HYPRO roller pumps give high volume and pressure for all types of agricultural spraying. Rotation can be reversed by disassembly. Super Rollers are compatible with a wide variety of chemicals. Cast iron body for general purpose spraying.

18 GPM, 8 Roller Pump ⚠



ITEM 200148

$265.10

SPECIFICATIONS

- 18 GPM, 8 Roller Pump
- Model 7560-C
- 18.3 GPM
- 300 PSI
- 850 RPM
- 4.5 HP max
- Ports ¾″ NPT
- CCW rotation
- Stainless Steel Shaft 15⁄16″ dia. x 2″
- Ball Bearings
- Replaceable rollers, seals
- 6¾″ x 6½″ x 6½″
- **Shpg 18 lbs.**

PERFORMANCE TABLE

SPEED	0 PSI		100 PSI		300 PSI	
RPM	GPM	HP	GPM	HP	GPM	HP
550	12.0	¼	10.6	1¼	8.0	3
850	18.3	½	16.9	1½	14.2	4½

20 GPM, 6 Roller Pump ⚠



ITEM 200150

$202.90

SPECIFICATIONS

- 19.5 GPM
- 300 PSI
- 400 to 1200 RPM
- Ports ¾″ NPT
- CCW rotation
- Shaft 5⁄8″ dia. x 1½″
- Ball bearings
- Replaceable rollers, seals
- Size 6″ x 5¾″ x 2½″
- **Shpg 12 lbs.**

PERFORMANCE TABLE

SPEED	0 PSI		100 PSI		300 PSI	
RPM	GPM	HP	GPM	HP	GPM	HP
540	9.1	0.21	6.5	0.81	3.3	2.10
1200	19.5	0.69	17.3	1.80	14.1	4.51

22 GPM, 7 Roller Pump ⚠



ITEM 200149

$269.40

SPECIFICATIONS

- 22.4 GPM
- 200 PSI
- 850 RPM
- 1¾ HP max
- Ports ¾″ NPT
- CCW rotation
- Stainless Steel Shaft 15⁄16″ dia. x 2 1⁄16″
- Ball Bearings
- Replaceable rollers, seals
- 6 7⁄8″ x 6 5⁄8″ x 6″
- **Shpg 18 lbs.**

PERFORMANCE TABLE

SPEED	0 PSI		100 PSI		200 PSI	
RPM	GPM	HP	GPM	HP	GPM	HP
550	15	¼	12.8	¾	11.4	1¼
850	22.4	½	20.6	1¼	19.1	1¾

MADE IN USA

Roller Pump Quick Couplers



200157



200158

• Brand new. Use to connect Hypro roller pumps to standard tractor 1 3⁄8″ 6 spline 540 RPM PTO shafts. Die cast construction with quick release collar.

ITEM 200157 **$50.85**

• Fits onto 5⁄8″ pump shafts (6 roller pumps). **Shpg. 4 lbs.**

ITEM 200158 **$55.05**

• Fits onto 15⁄16″ pump shafts (7 & 8 roller pumps). **Shpg. 4 lbs.**

MADE IN USA

Hydraulic Centrifugal Pump ⚠



ITEM 200228

$1080.15

• Brand new HYPRO model 9303-HM1C. Cast iron centrifugal pump with direct drive hydraulic motor. Power from tractor hydraulic circuit leaving PTO free for other uses.

SPECIFICATIONS

- Maximum Pressure 120 PSI
- Maximum Pump Flow: 112 GPM
- Pump inlet 1½″ NPT
- Pump discharge 1¼″ NPT
- 140° F max. fluid temp
- Hydraulic motor ports ½″ NPT
- Hydraulic requirements-13 GPM at 2000 PSI
- 11″ x 7¾″ x 8¼″
- **Shpg. 31 lbs.**

MADE IN USA

140 GPM Centrifugal Pump ⚠



ITEM 200259

$487.15

• Brand new, HYPRO 9203C cast iron centrifugal pedestal mount pump. Ideal for high volume spraying systems. Viton seals.

SPECIFICATIONS

- Model 9203C
- Max. 6000 RPM
- 1½″ NPT inlet port
- 1¼″ NPT outlet port
- Rotation CCW
- Max. temp. 140° F
- 2 bolt pedestal mount on 3″ centers
- Shaft 5⁄8″ outside dia. x 2 1⁄8″ long w/ 3⁄16″ keyway
- Size: 7 3⁄8″ x 7¼″ x 8¼″
- **Shpg. 21 lbs.**

Shurflow Diaphragm Pumps

• Brand new, SHURFLO automatic demand diaphragm pumps. Ideal for spot sprayers. Santoprene diaphragm and Viton valves. Can run dry intermittently. Rubber mounting feet. Intermittent duty. Automatic on/off pressure switch. Use adapters shown below for ½″ MSPT ported items (metal fittings and rigid pipe are not recommended). Wire leads on DC models, 6 ft. power cord on AC model.



200507



200506



200508
200509

ITEM	Model	Volts	Amps	Open Flow	GPM at PSI	Max. PSI	Ports	Switch Settings on/off	Self Priming Lift max.	Size	Shpg.	Price
200507	SLV10-AA41	12 DC	4	1 GPM	0.49 at 30	50	3⁄8″ hosebarb	25/40 PSI	2½ ft.	7″ x 3 5⁄8″ x 2 3⁄8″	**3 lbs.**	**$71.35**
200506	8000-543-236	12 DC	6.4	1.8 GPM	1.4 at 40	50	3⁄8″ NPTF	30/50 PSI	8 ft.	8¼″ x 4″ x 4½″	**6 lbs.**	**$128.40**
200508	2088-343-135	12 DC	7.7	3 GPM	2.05 at 40	40	½″ MSPT	25/45 PSI	12 ft.	8¾″ x 6″ x 4½″	**6 lbs.**	**$158.65**
200509	2088-394-144	115 AC	0.9	3 GPM	1.6 at 40	40	½″ MSPT	25/45 PSI	12 ft.	9″ x 5¼″ x 4 7⁄8″	**6 lbs.**	**$231.25**

Shurflo Hosebarb to Pipe Fittings

MADE IN USA

• Brand new Shurflo polypropylene hosebarb to pipe fittings.



A



B



C

ITEM	Style	Description	Hose ID	NPT Fitting	Shpg.	Price
200512	A	Straight	3⁄8″	½″ NPTF Swivel	**¼ lb.**	**$1.10**
200513	A	Straight	½″	½″ NPTF Swivel	**¼ lb.**	**$1.05**
200510	A	Straight	5⁄8″	½″ NPTF Swivel	**¼ lb.**	**$2.10**
200511	A	Straight	¾″	½″ NPTF Swivel	**¼ lb.**	**$1.25**
200515	B	Elbow	3⁄8″	½″ NPTF Swivel	**¼ lb.**	**$1.05**

ITEM	Style	Description	Hose ID	NPT Fitting	Shpg.	Price
200514	B	Elbow	½″	½″ NPTF Swivel	**¼ lb.**	**$1.05**
200517	B	Elbow	5⁄8″	½″ NPTF Swivel	**¼ lb.**	**$1.80**
200516	B	Elbow	¾″	½″ NPTF Swivel	**¼ lb.**	**$1.25**
200518	C	Straight	3⁄8″	3⁄8″ NPTM	**¼ lb.**	**$0.50**
200519	C	Straight	½″	½″ NPTM	**¼ lb.**	**$2.60**

California Residents WARNING:Cancer and Reproductive Harm
For more information refer to:www.P65Warnings.ca.gov

Water System Automatic Pressure Switches

• Brand new, LEFOO automatic pressure switch for automatic water systems. Automatically turns pump ON or OFF at set values. Adjustable differential. Sturdy plastic housing. Single port.

ITEM 400263
$13.95



SPECIFICATIONS
- Contact ratings
  1½ HP at 120 VAC
  2 HP at 230 VAC
  3 HP at 240 VAC 3Ph
- Factory setting
  ON (cut-in) 40 PS
  OFF (cut-out) 60 PSI
- Min. ON (cut-in) 20 PSI
- Max. OFF (cut-out) 80 PSI
- Differential 15-35 PSI
- Port ¼″ NPT
- Size 3¾″ x 2⅝″ x 3¾″
- **Shpg. 1½ lbs.**

ITEM 400262
$13.95



SPECIFICATIONS
- Contact ratings
  1½ HP, 20 amps at 120 VAC
  2 HP, 12 amps at 240 VAC
  3 HP, 9.6 amps at 240 VAC 3Ph
- Factory setting
  ON (cut-in) 30 PS
  OFF (cut-out) 50 PSI
- Min. ON (cut-in) 30 PSI
- Max. OFF (cut-out) 100 PSI
- Differential 20-35 PSI
- Port ¼″ NPT
- Size 3½″ x 2¼″ x 3⅛″
- **Shpg. 1½ lbs.**

Simer Water Pump



ITEM 200306
$39.95

• New, SIMER. Flexible impeller pump. Use to pump water, brine solutions and light lubricating oils. WARNING: This pump should never be used to pump flammable fluids! Wired with a 4 ft. power cord with on/off switch and alligator clips. Permanent magnet motor. Includes two garden hose to ½″ hosebarb adapters and instructions.

SPECIFICATIONS
- 1,140 liters/hour (301 GPH)
- 24 Volt DC
- Self-priming to 9 feet
- 20 PSI max.
- Max 118ºF
- Male garden hose thread ports
- Base mount
- Overall size 7⅛″ x 4½″ x 4½″
- **Shpg. 7 lbs.**

12 VDC Submersible Pump



ITEM 200678
$13.95

• New. Submersible, brushless impeller pump. Can be mounted in or under tank. Sold with 115 Volt AC to 12 Volt DC adapter with on/off switch (needs alteration to mate with leads from pump). Pump is not self-priming.

SPECIFICATIONS
- Voltage 12 VDC
- Amperage 0.36 Amps @ 12 Volt DC, Dry
- Flow 6 GPM @ 0' head pressure
- Max Head Pressure 6.5'
- Input 17mm (0.669″) O.D. hose
- Output 12mm (0.472″) O.D. hose
- Leads 6″
- Size 3¾″ x 2⅛″ x 1¾″
- **Shpg. 1 lb.**

115 VAC Coolant Recirculating Pump



ITEM 200590
$27.95

• New, BECKETT model BJ5A coolant recirculating pedestal pump. Ideal replacement or use with evaporative coolers, displays, laboratories and other water transfer applications. Features include polystyrene column and cap, ABS base plate and a ½″ OD PVC adapter. ODP motor with fan and cover.

SPECIFICATIONS
- Voltage 115 Volt AC
- Amperage 0.9 Amps
- Power 1/70 HP
- Flow Rates
  340 GPH @ 1 ft. head
  255 GPH @ 4 ft. head
  200 GPH @ 6 ft. head
  130 GPH @ 8 ft. head
  40 GPH @ 10 ft. head
- Speed 3000 RPM
- Shut-off @ 10.1 ft. head
- Duty Continuous
- Power Cord 3 foot 18/3
- Inlet Base
- Discharge ½″ hose barb with adapter
- Size 4½″ diameter x 9″ high
- **Shpg. 5 lbs.**

Tuthill Manual Transfer Pump



ITEM 300167
$19.99

• New, TUTHILL Series 20 hand lever piston pump for pumping fluid into a container. Polypropylene housing, BUNA N seals. Economical manual transfer pump ideal for use on barrels, drums and storage tanks. Anti-drip nozzle, check valve and 360° locking ring. Telescoping suction pipe fits up to 36″ high container. Compatible with water, gear oils, engine oils, paraffin, fertilizers, mild acids, anti-freeze, hydraulic oils, diesel, degreasers, herbicides and pesticides. Not for use with gasoline, ethanol or methanol.

SPECIFICATIONS
- Flow 11 fl. oz. per stroke
- Viscosity SAE 90 max.
- Bung Adapter 2″ NPS
- Inlet 1″ NPT
- Outlet Nozzle with strainer
- Size 9¼″ x 3½″ x 12″
- **Shpg. 5 lbs.**

12 VDC Diaphragm Pump



ITEM 200702
$19.99

• New, DELAVAN automatic demand diaphragm pump. Ideal for spot sprayers or as replacement on existing equipment. Santoprene diaphragm and Viton valves. Automatic shut off switch set to 40 PSI. Pump turns on at 25 PSI. Self priming to 4 foot suction lift. Can run dry intermittently without damage. Wire leads. Rubber vibration damper mounting feet.

SPECIFICATIONS
- Voltage 12 Volt DC
- Amperage 2.6 Amps
- Flow Rates
  1 GPM @ open flow
  0.85 GPM @ 10 PSI
  0.71 GPM @ 20 PSI
  0.61 GPM @ 30 PSI
  0.42 GPM @ 40 PSI
- Shut-Off Pressure 40 PSI
- Ports ⅜″ Hosebarb QA port adapters
- Duty Intermittent
- Temperature 110°F max.
- Mount Four bolt on 3.19″ x 2.25″ pattern
- Size 7″ x 3⅝″ x 2⅜″
- **Shpg. 2 lbs.**

120 VAC Submersible Pump



ITEM 200705
$29.95

• New, DK-5000 submersible water pump. Ideal for fountains, ponds, machine tool coolant. Plastic housing, plastic impeller. Slotted intake cover can be easily removed for cleaning. Four suction cups on base. Includes a brass adapter to ⅜″ ID tubing.

SPECIFICATIONS
- Voltage 120 Volt AC
- Power Consumption 105 Watts
- Flow 20 GPM open flow
- Max Head 15 ft.
- Size 7″ x 4″ x 5″
- Port ¾″ MGHT (Standard Garden Hose Male) w/ ⅜″ ID hose adapter
- Power Cord 15 ft. long, 3-prong plug
- **Shpg. 8 lbs.**

Line Strainers



• Brand new HYPRO. Keeps debris from being drawn thru pump. Provides longer component life and less downtime.

SPECIFICATIONS
- Polypropylene construction
- EPDM gasket
- 80 PSI at 70 degrees F.
- 50 mesh stainless steel screen
- **Shpg. 1 lb.**

ITEM 200124
$15.35

• ½″ NPT, 7.7 sq. in. open area, 3.6″ x 2.95″ x 5.35″

ITEM 200125
$16.55

• ¾″ NPT, 7.7 sq. in. open area, 3.6″ x 2.95″ x 5.35″

ITEM 200126
$22.50

• 1″ NPT, 13.5 sq. in. open area, 5″ x 4.1″ x 6.35″

½″ IPS Brass Gate Valve



ITEM 200594
$4.99

• New, CHAMPION-ARROWHEAD lead-free brass gate valve. Full port. IPS (Iron Pipe Straight) ports.

SPECIFICATIONS
- Ports ½″ IPS
- Pressure Max 200 PSI
- Size 2″ x 1¼″ x 3¼″
- **Shpg ½ lb.**

12 VDC Centrifugal Pump



ITEM 200200
$349.05

• Brand new HYPRO "Aqua-Tiger" bronze centrifugal pump. Use for ag chemical transfer, live well aeration, circulation, etc. Permanent magnet motor.
Not self-priming.

SPECIFICATIONS
- 12 Volt DC
- 5.5 amps
- Max. flow 19 GPM
- Max. 7 PSI
- Max 140ºF
- Ports ¾″ NPT
- 7″ x 4½″ x 4″
- **Shpg. 8 lbs.**

2 Bolt Flange Bearings


• Brand new 200 series normal duty flange bearings. Cast iron construction with self-aligning ball bearing insert and grease zerk.




UCFL Series




HCFT Series



Front View Both Series



Side UCFL



Side HCFT

	UCFL Series Two Set Screws, No Lock Collar									HCFT Series Eccentric Locking Collar w/Set Screws									
			Dimensions (Inches)									Dimensions (Inches)							
Bore	ITEM	Price	A	A1	B	H	J	L	Bolt	ITEM	Price	A	A1	B	H	J	L	Bolt	Shpg.
½″	600299	$11.05	1.004	0.433	1.312	2.362	3.543	4.449	⅜	N/A		–	–	–	–	–	–	–	3
⅝″	600300	$11.05	1.004	0.433	1.312	2.362	3.543	4.449	⅜	N/A		–	–	–	–	–	–	–	3
¾″	600301	$10.60	1.004	0.433	1.312	2.362	3.543	4.449	⅜	600693	$11.80	1.161	0.591	1.791	2.375	3.543	4.429	⅜	3
⅞″	600302	$12.10	1.063	0.512	1.405	2.677	3.898	5.118	7⁄16	600694	$13.40	1.181	0.591	1.807	2.756	3.898	4.843	7⁄16	3
15⁄16″	600303	$12.10	1.063	0.512	1.405	2.677	3.898	5.118	7⁄16	602217	$13.40	1.181	0.591	1.807	2.756	3.898	4.843	7⁄16	3
1″	600304	$12.10	1.063	0.512	1.405	2.677	3.898	5.118	7⁄16	600695	$13.40	1.181	0.591	1.807	2.756	3.898	4.843	7⁄16	3
1⅛″	600999	$15.10	1.221	0.512	1.583	3.150	4.606	5.827	7⁄16	602218	$17.00	1.280	0.630	1.972	3.228	4.587	5.591	7⁄16	4
1 3⁄16″	600713	$15.10	1.221	0.512	1.583	3.150	4.606	5.827	7⁄16	600696	$17.00	1.280	0.630	1.972	3.228	4.587	5.591	7⁄16	4
1¼″	600685	$15.10	1.221	0.512	1.583	3.150	4.606	5.827	7⁄16	602219	$17.00	1.280	0.630	1.972	3.228	4.587	5.591	7⁄16	4
1¼″	600305	$16.55	1.339	0.551	1.748	3.543	5.118	6.339	½	600697	$19.65	1.417	0.669	2.098	3.701	5.118	6.221	½	5
1 5⁄16″	600682	$16.55	1.339	0.551	1.748	3.543	5.118	6.339	½	602220	$19.65	1.417	0.669	2.098	3.701	5.118	6.221	½	5
1⅜″	600306	$16.55	1.339	0.551	1.748	3.543	5.118	6.339	½	602221	$19.65	1.417	0.669	2.098	3.701	5.118	6.221	½	5
1 7⁄16″	600307	$16.55	1.339	0.551	1.748	3.543	5.118	6.339	½	600698	$19.65	1.417	0.669	2.098	3.701	5.118	6.221	½	5
1½″	600308	$19.90	1.417	0.551	2.016	3.937	5.669	6.890	½	602222	$23.15	1.535	0.669	2.319	4.055	5.650	6.772	½	6
1⅝″	600309	$24.25	1.496	0.630	2.055	4.252	5.827	7.402	9⁄16	602223	$27.40	1.575	0.709	2.319	4.252	5.847	7.087	9⁄16	7
1 11⁄16″	600310	$24.25	1.496	0.630	2.055	4.252	5.827	7.402	9⁄16	601450	$27.40	1.575	0.709	2.319	4.252	5.847	7.087	9⁄16	7
1¾″	600311	$24.25	1.496	0.630	2.055	4.252	5.827	7.402	9⁄16	602224	$27.40	1.575	0.709	2.319	4.252	5.847	7.087	9⁄16	7
1⅞″	600710	$30.55	1.575	0.630	2.150	4.528	6.181	7.756	9⁄16	602225	$33.35	1.772	0.787	2.602	4.488	6.181	7.480	9⁄16	8
1 15⁄16″	600731	$30.55	1.575	0.630	2.150	4.528	6.181	7.756	9⁄16	600699	$33.35	1.772	0.787	2.602	4.488	6.181	7.480	9⁄16	8
2″	602212	$30.55	1.575	0.630	2.150	4.528	6.181	7.756	9⁄16	602226	$33.35	1.772	0.787	2.602	4.488	6.181	7.480	9⁄16	8
2″	600312	$36.50	1.693	0.709	2.299	5.118	7.244	8.819	⅝	602227	$41.80	1.890	0.827	2.937	5.039	7.244	8.543	⅝	9
2⅛″	600313	$36.50	1.693	0.709	2.299	5.118	7.244	8.819	⅝	602228	$41.80	1.890	0.827	2.937	5.039	7.244	8.543	⅝	9
2 3⁄16″	600314	$36.50	1.693	0.709	2.299	5.118	7.244	8.819	⅝	600700	$41.80	1.890	0.827	2.937	5.039	7.244	8.543	⅝	9
2¼″	600315	$44.20	1.890	0.709	2.704	5.512	7.953	9.843	⅝	602229	$51.95	2.087	0.827	3.181	5.433	7.953	9.331	⅝	12
2⅜″	600316	$44.20	1.890	0.709	2.704	5.512	7.953	9.843	⅝	602230	$51.95	2.087	0.827	3.181	5.433	7.953	9.331	⅝	12
2 7⁄16″	602213	$44.20	1.890	0.709	2.704	5.512	7.953	9.843	⅝	600701	$51.95	2.087	0.827	3.181	5.433	7.953	9.331	⅝	12
2½″	602214	$58.25	1.969	0.787	2.744	6.102	8.268	10.158	¾	N/A		–	–	–	–	–	–	–	15
2¾″	602215	$67.75	2.126	0.787	2.968	6.299	8.504	10.433	¾	N/A		–	–	–	–	–	–	–	17
2 15⁄16″	600317	$82.85	2.205	0.787	3.093	6.496	8.858	10.827	¾	N/A		–	–	–	–	–	–	–	18
3″	602216	$82.85	2.205	0.787	3.093	6.496	8.858	10.827	¾	N/A		–	–	–	–	–	–	–	18

Flange Bearings



• Brand new. Two bolt stamped steel housing with sealed self aligning ball bearing. Inner race with 2 set screws.

ITEM	Bolt Bore	Uses Centers	Bolts	Shpg.	Price
601872	½″	2½″	¼″	½ lb.	$11.30
600174	⅝″	2½″	¼″	½ lb.	$11.30
601033	¾″	2 13⁄16″	5⁄16″	½ lb.	$11.95
601034	1″	2.992″	5⁄16″	1 lb.	$12.40
601035	1¼″	3 9⁄16″	⅜″	1 lb.	$16.10



600712



603173

Take-Up Bearings


• Brand new, DURA-ROLL take-up bearings. Cast iron housing. Two set screws on inner race. Bearing has grease zerk. Additional specs on our website.

UCT Series Two Set Screws, No Lock Collar

ITEM	Bore	Housing	Bore thru-lgth.	Shpg.	Price
600712	1″	UCT205	1.338″	2 lbs.	$15.10
601446	1.25″	UCT206	1.5″	3 lbs.	$16.75
603174	1.25″	UCT207	1.69″	4 lbs.	$21.00
600714	1 7⁄16″	UCT207	1.69″	4 lbs.	$21.00
603171	1.5″	UCT208	1.937″	6 lbs.	$25.05
603172	1.75″	UCT209	1.937″	6 lbs.	$30.90
601719	1 15⁄16″	UCT210	2.03″	6 lbs.	$33.70
603173	2″	UCT211	2.19″	10 lbs.	$45.30

4 Bolt Flange Bearings


• Brand new 200 series normal duty flange bearings. Cast iron construction with self-aligning ball bearing insert and grease zerk.




UCF Series




HCFS Series



Front View Both Series




Side UCF



Side HCFS

	UCF Series Two Set Screws, No Lock Collar									HCFS Series Eccentric Locking Collar w/Set Screws								
				Dimensions (Inches)									Dimensions (Inches)					
Bore	ITEM	Shpg.	Price	A	A1	B	J	L	Bolt	ITEM	Shpg.	Price	A	A1	B	J	L	Bolt
½″	600279	3	$11.05	1.004	0.433	1.311	2.520	3.386	⅜	602235	3	$11.80	1.161	0.591	1.791	2.500	3.386	⅜
⅝″	600280	3	$11.05	1.004	0.433	1.311	2.520	3.386	⅜	602236	3	$11.80	1.161	0.591	1.791	2.500	3.386	⅜
¾″	600318	3	$10.60	1.004	0.433	1.311	2.520	3.386	⅜	600687	3	$11.80	1.161	0.591	1.791	2.500	3.386	⅜
⅞″	600281	4	$12.10	1.063	0.512	1.406	2.756	3.740	⅜	600688	4	$13.40	1.181	0.591	1.807	2.756	3.661	⅜
15⁄16″	602231	4	$12.10	1.063	0.512	1.406	2.756	3.740	⅜	602237	4	$13.40	1.181	0.591	1.807	2.756	3.661	⅜
1″	600282	4	$12.10	1.063	0.512	1.406	2.756	3.740	7⁄16	601000	4	$13.40	1.181	0.591	1.807	2.756	3.661	⅜
1⅛″	600283	4	$15.10	1.221	0.512	1.583	3.268	4.252	7⁄16	602238	4	$17.00	1.280	0.630	1.972	3.248	4.173	7⁄16
1 3⁄16″	600284	4	$15.10	1.221	0.512	1.583	3.268	4.252	7⁄16	602239	4	$17.00	1.280	0.630	1.972	3.248	4.173	7⁄16
1¼″	600285	4	$15.10	1.221	0.512	1.583	3.268	4.252	7⁄16	601024	4	$17.00	1.280	0.630	1.972	3.248	4.173	7⁄16
1¼″	600286	5	$16.55	1.339	0.591	1.748	3.622	4.606	7⁄16	601001	5	$19.65	1.378	0.669	2.098	3.622	4.567	7⁄16
15⁄16″	602232	5	$16.55	1.339	0.591	1.748	3.622	4.606	7⁄16	602240	5	$19.65	1.378	0.669	2.098	3.622	4.567	7⁄16
1⅜″	600287	5	$16.55	1.339	0.591	1.748	3.622	4.606	7⁄16	601002	5	$19.65	1.378	0.669	2.098	3.622	4.567	7⁄16
1 7⁄16″	600288	5	$16.55	1.339	0.591	1.748	3.622	4.606	7⁄16	600689	5	$19.65	1.378	0.669	2.098	3.622	4.567	7⁄16
1½″	600289	6	$19.90	1.417	0.591	2.016	4.016	5.118	½	601025	6	$23.15	1.535	0.669	2.319	3.996	5.079	½
1⅝″	600290	7	$24.25	1.496	0.630	2.055	4.134	5.394	9⁄16	602241	7	$27.40	1.575	0.709	2.319	4.134	5.315	9⁄16
1 11⁄16″	600291	7	$24.25	1.496	0.630	2.055	4.134	5.394	9⁄16	602242	7	$27.40	1.575	0.709	2.319	4.134	5.315	9⁄16
1¾″	600724	7	$24.25	1.496	0.630	2.055	4.134	5.394	9⁄16	601003	7	$27.40	1.575	0.709	2.319	4.134	5.315	9⁄16
1⅞″	600725	7	$30.55	1.575	0.630	2.150	4.370	5.630	9⁄16	602243	8	$33.35	1.772	0.787	2.602	4.370	5.630	9⁄16
1 15⁄16″	600726	7	$30.55	1.575	0.630	2.150	4.370	5.630	9⁄16	601004	8	$33.35	1.772	0.787	2.602	4.370	5.630	9⁄16
2″	602233	7	$30.55	1.575	0.630	2.150	4.370	5.630	9⁄16	602244	8	$33.35	1.772	0.787	2.602	4.370	5.630	9⁄16
2″	600292	9	$36.50	1.693	0.709	2.299	5.118	6.378	⅝	601005	10	$41.80	1.929	0.827	2.937	5.118	6.378	⅝
2⅛″	600293	9	$36.50	1.693	0.709	2.299	5.118	6.378	⅝	602245	10	$41.80	1.929	0.827	2.937	5.118	6.378	⅝
2 3⁄16″	601006	9	$36.50	1.693	0.709	2.299	5.118	6.378	⅝	600690	10	$41.80	1.929	0.827	2.937	5.118	6.378	⅝
2¼″	600294	11	$44.20	1.890	0.709	2.705	5.630	6.890	⅝	602246	12	$51.95	2.106	0.866	3.181	5.630	6.890	⅝
2⅜″	600295	11	$44.20	1.890	0.709	2.705	5.630	6.890	⅝	602247	12	$51.95	2.106	0.866	3.181	5.630	6.890	⅝
2 7⁄16″	600296	11	$44.20	1.890	0.709	2.705	5.630	6.890	⅝	600691	12	$51.95	2.106	0.866	3.181	5.630	6.890	⅝
2½″	600727	13	$58.25	1.969	0.866	2.744	5.866	7.362	⅝	602248	15	$66.00	2.284	0.866	3.528	5.866	7.244	⅝
2¾″	600297	15	$67.75	2.126	0.866	2.969	5.984	7.598	11⁄16	602249	16	$75.80	2.362	0.906	3.528	5.984	7.402	⅝
2 15⁄16″	600298	17	$82.85	2.205	0.866	3.091	6.260	7.874	11⁄16	600692	18	$90.55	2.441	0.945	3.772	6.000	7.874	⅝
3″	602234	17	$82.85	2.205	0.866	3.091	6.260	7.874	11⁄16	602250	18	$90.55	2.441	0.945	3.772	6.000	7.874	⅝

Stainless Steel Mounted Bearings



• Brand new, better rust and corrosion resistance than regular cast iron models. Use in washdown or chemical fertilizer applications. Refer to the charts on pages 103-105 for dimensional information. Special features include 304 Stainless Steel housing, 440C Stainless Steel Bearing, Stainless Steel grease zerk and flinger seal. Mobil FN222 food grade grease. Available in pillow block, 2 bolt and 4 bolt flange configurations.


Pillow Block Bearings				2 Bolt Flange Bearings				4 Bolt Flange Bearings			
ITEM #	Bore	Shpg	Price	ITEM #	Bore	Shpg	Price	ITEM #	Bore	Shpg	Price
603291	¾″	2	$35.80	603284	¾″	1.5	$34.65	603277	¾″	2	$34.65
603292	1″	2	$62.90	603285	1″	2	$36.75	603278	1″	2	$38.90
603293	1¼″	3	$62.85	603286	1¼″	2	$57.75	603279	1¼″	3	$57.75
603294	1¼″	4	$85.05	603287	1¼″	3	$78.75	603280	1¼″	4	$78.75
603295	1⅜″	4	$85.05	603288	1⅜″	3	$78.75	603281	1⅜″	4	$78.75
603296	1 7⁄16″	4	$85.05	603289	1 7⁄16″	3	$78.75	603282	1 7⁄16″	4	$78.75
603297	1½″	5	$105.40	603290	1½″	4	$105.40	603283	1½″	5	$105.40

Pillow Block Bearings


• Brand new 200 series normal duty pillow block bearings. Cast iron construction with self-aligning ball bearing insert and grease zerk.




UCP Series

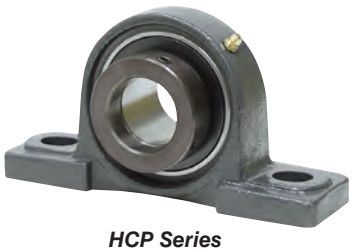


HCP Series

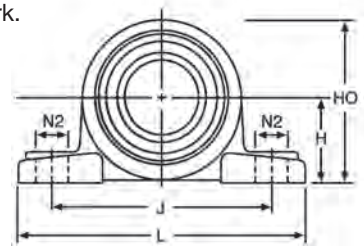

Front View Both Series



Side UCP



Side HCP

	UCP Series Two Set Screws, No Lock Collar		HCP Series Eccentric Locking Collar w/Set Screws			Dimensions (Inches)										
							Set Screw	Lock Collar								
Bore	ITEM	Price	ITEM	Price	Shpg.	A	B	B	H	H1	HO	J	L	Bolt	N1	N2
½″	600259	$11.60	602253	$13.20	3	1.457	1.221	1.713	1.311	0.551	2.512	3.780	5.000	⅜	0.512	0.630
⅝″	600260	$11.60	602254	$13.20	3	1.457	1.221	1.713	1.311	0.551	2.512	3.780	5.000	⅜	0.512	0.630
¾″	600168	$11.45	600989	$13.20	3	1.457	1.221	1.713	1.311	0.551	2.512	3.780	5.000	⅜	0.512	0.630
⅞″	600261	$12.75	600722	$13.70	3	1.496	1.339	1.744	1.437	0.591	2.736	4.134	5.512	⅜	0.512	0.748
15⁄16″	600262	$12.75	602255	$13.70	3	1.496	1.339	1.744	1.437	0.591	2.736	4.134	5.512	⅜	0.512	0.748
1″	600169	$12.75	600708	$13.70	3	1.496	1.339	1.744	1.437	0.591	2.736	4.134	5.512	⅜	0.512	0.748
1⅛″	600263	$16.80	600702	$17.20	4	1.732	1.500	1.902	1.689	0.630	3.228	4.764	6.500	½	0.699	0.826
1 3⁄16″	600264	$16.80	600703	$17.20	4	1.732	1.500	1.902	1.689	0.630	3.228	4.764	6.500	½	0.669	0.826
1¼″	600265	$16.80	602256	$17.20	4	1.732	1.500	1.902	1.689	0.630	3.228	4.764	6.500	½	0.669	0.826
1¼″	600170	$17.85	600990	$20.20	5	1.890	1.689	2.012	1.874	0.669	3.622	4.961	6.575	½	0.669	0.826
15⁄16″	602251	$17.85	602257	$20.20	5	1.890	1.689	2.012	1.874	0.669	3.622	4.961	6.575	½	0.669	0.826
1⅜″	600266	$17.85	600991	$20.20	5	1.890	1.689	2.012	1.874	0.669	3.622	4.961	6.575	½	0.669	0.826
1 7⁄16″	600267	$17.85	600992	$20.20	5	1.890	1.689	2.012	1.874	0.669	3.622	4.961	6.575	½	0.669	0.826
1½″	600171	$21.75	600993	$24.90	6	2.047	1.937	2.217	1.937	0.709	3.858	5.354	7.250	½	0.669	0.827
1⅝″	600268	$25.60	600709	$28.50	7	2.126	1.938	2.217	2.126	0.787	4.154	5.748	7.469	½	0.669	0.827
1 11⁄16″	600711	$25.60	600704	$28.50	7	2.126	1.938	2.217	2.126	0.787	4.154	5.748	7.469	½	0.669	0.827
1¾″	600994	$25.60	600995	$28.50	7	2.126	1.938	2.217	2.126	0.787	4.154	5.748	7.469	½	0.669	0.827
1⅞″	600269	$31.95	602258	$33.75	8	2.244	2.032	2.469	2.252	0.827	4.417	6.260	8.125	⅝	0.781	0.866
1 15⁄16″	600270	$31.95	600996	$33.75	8	2.244	2.032	2.469	2.252	0.827	4.417	6.260	8.125	⅝	0.781	0.866
2″	600271	$31.95	600997	$33.75	8	2.244	2.032	2.469	2.252	0.827	4.417	6.260	8.125	⅝	0.781	0.866
2″	600272	$39.40	602259	$42.25	10	2.362	2.189	2.807	2.500	0.866	4.902	6.772	8.625	⅝	0.781	0.866
2⅛″	600273	$39.40	602260	$42.25	10	2.362	2.189	2.807	2.500	0.866	4.902	6.772	8.625	⅝	0.781	0.866
2 3⁄16″	600274	$39.40	600705	$42.25	10	2.362	2.189	2.807	2.500	0.866	4.902	6.772	8.625	⅝	0.781	0.866
2¼″	600275	$47.45	602261	$52.85	12	2.598	2.563	3.059	2.752	0.945	5.394	7.323	9.500	⅝	0.781	0.984
2⅜″	600276	$47.45	602262	$52.85	12	2.598	2.563	3.059	2.752	0.945	5.394	7.323	9.500	⅝	0.781	0.984
2 7⁄16″	600277	$47.45	600706	$52.85	12	2.598	2.563	3.059	2.752	0.945	5.394	7.323	9.500	⅝	0.781	0.984
2½″	600728	$61.45	602263	$68.80	16	2.756	2.563	3.374	3.000	1.024	5.866	7.992	10.437	¾	1.000	1.188
2¾″	602252	$70.55	602264	$79.30	18	2.835	2.937	3.374	3.126	1.063	6.102	8.268	10.472	¾	1.000	1.188
2 15⁄16″	600278	$85.35	600707	$91.95	19	2.913	3.063	3.626	3.252	1.102	6.362	8.543	10.813	¾	1.000	1.188
3″	600998	$85.35	602265	$91.95	19	2.913	3.063	3.626	3.252	1.102	6.362	8.543	10.813	¾	1.000	1.188

Replacement Insert Bearings

• Brand new, DURA-ROLL replacement bearings. UC bearings have 2 set screws for shaft retention, HC have eccentric locking collar. Order by housing and bore size.



601871



603225

Bore	Item	Price	Item	Price	Bore	Item	Price	Item	Price	Bore	Item	Price	Item	Price
½″	603215	$6.85	603218	$8.10	15⁄16″	603233	$11.40	603236	$14.10	2″	603251	$21.65	603257	$26.60
⅝″	603216	$6.85	603219	$8.10	1⅜″	601468	$11.40	603237	$14.10	2⅛″	603252	$21.65	603258	$26.60
¾″	603217	$6.75	603220	$7.85	1 7⁄16″	603234	$11.40	603238	$14.10	2 3⁄16″	603253	$21.65	603259	$26.60
⅞″	603221	$7.25	603223	$8.50	1½″	601470	$14.10	603242	$16.00	2¼″	603254	$27.15	603260	$32.80
15⁄16″	603222	$7.25	603224	$8.50	1⅝″	603239	$15.10	603271	$15.80	2⅜″	603255	$27.15	603261	$32.80
1″	601871	$7.25	603225	$8.50	1 11⁄16″	603240	$15.10	603246	$15.80	2 7⁄16″	603256	$27.15	603262	$32.80
1⅛″	603226	$9.00	603229	$10.40	1¾″	603241	$15.10	603247	$15.80	2½″	603263	$34.20	603267	$45.85
1 3⁄16″	603227	$9.00	603230	$10.40	1⅞″	603243	$18.25	603248	$20.35	2¾″	603264	$42.10	603268	$53.90
1¼″	603228	$9.00	603231	$10.40	1 15⁄16″	603244	$18.25	603249	$20.35	2 15⁄16″	603265	$50.60	603269	$62.55
1¼″	603232	$11.40	603235	$14.10	2″	603245	$18.25	603250	$20.35	3″	603266	$50.60	603270	$62.55

Vogelsang Tension Bushings

• Brand new, VOGELSANG FASTENER tension bushings used with hydraulic cylinders, grapples, off-road equipment. Installed into slow rotating pivot joints they provide high load capacity and wear resistance. Wavy slot design for consistent alignment during installation. Heat treated 6150 high carbon steel with chamfered ends. Order by Bore, O.D.,Length.


100267


100286


100307


100344

Bore	Outside Dia.	Lgth.	ITEM	Shpg. lbs.	Price
½″	¾″	½″	100256	0.03	$11.60
	¾″	¾″	100257	0.05	$11.95
	¾″	1″	100258	0.07	$12.25
¾″	1″	½″	100259	0.05	$4.20
	1″	⅝″	100260	0.06	$3.75
	1″	¾″	100261	0.07	$3.90
	1″	1″	100262	0.09	$5.48
	1″	1¼″	100263	0.12	$5.60
	1″	1½″	100264	0.14	$6.10
	1″	2″	100265	0.18	$8.75
1″	1¼″	½″	100266	0.06	$4.35
	1¼″	⅝″	100267	0.08	$4.70
	1¼″	¾″	100268	0.09	$4.30
	1¼″	⅞″	100269	0.11	$4.45
	1¼″	1″	100270	0.12	$4.75
	1¼″	1¼″	100271	0.15	$5.50
	1¼″	1½″	100272	0.18	$6.25
	1¼″	2″	100273	0.24	$8.55
	1⅜″	¾″	100274	0.14	$9.80
	1⅜″	1″	100275	0.19	$9.40
	1⅜″	1¼″	100276	0.24	$9.95
	1½″	1″	100280	0.26	$18.70
	1½″	1½″	100281	0.4	$24.00
1⅛″	1⅜″	¾″	100277	0.11	$11.30
	1⅜″	1″	100278	0.14	$11.85
	1⅜″	1½″	100279	0.2	$12.65
1¼″	1½″	½″	100282	0.07	$4.60
	1½″	¾″	100283	0.11	$4.60
	1½″	1″	100284	0.15	$5.50
	1½″	1¼″	100285	0.19	$5.65
	1½″	1½″	100286	0.22	$6.30
1¼″	1½″	2″	100287	0.29	$9.40
	1½″	2½″	100288	0.37	$11.40
	1½″	3″	100289	0.44	$9.80
	1⅝″	¾″	100290	0.17	$10.85
	1⅝″	1″	100291	0.23	$17.10
	1⅝″	1¼″	100292	0.29	$11.60
	1⅝″	2″	100294	0.46	$23.50
1⅜″	1⅝″	1½″	100295	0.25	$22.35
	1¾″	1¼″	100296	0.32	$18.90
	1¾″	1½″	100297	0.38	$20.15
	1¾″	2″	100298	0.5	$25.85
1½″	1¾″	½″	100299	0.09	$4.95
	1¾″	¾″	100300	0.13	$5.50
	1¾″	1″	100301	0.18	$6.75
	1¾″	1¼″	100302	0.22	$8.05
	1¾″	1½″	100303	0.27	$9.20
	1¾″	2″	100304	0.35	$11.45
	1¾″	2½″	100305	0.44	$16.00
	1¾″	2¾″	100307	0.48	$15.05
	1⅞″	¾″	100306	0.21	$21.70
	1⅞″	1″	100308	0.27	$19.85
	1⅞″	1¼″	100309	0.34	$23.80
	1⅞″	1½″	100310	0.42	$25.10
	1⅞″	2″	100311	0.55	$27.15
	2″	1″	100312	0.39	$19.35
	2″	1¼″	100313	0.48	$24.50
	2″	1½″	100314	0.58	$22.65
	2″	2″	100315	0.77	$26.95
	2″	3″	100316	1.5	$35.30
1¾″	2″	¾″	100317	0.15	$7.90
	2″	1″	100345	0.2	$13.55
1¾″	2″	1¼″	100318	0.26	$12.70
	2″	1½″	100319	0.3	$15.35
	2″	2″	100320	0.4	$16.05
	2¼″	1″	100321	0.44	$25.65
	2¼″	2″	100322	0.88	$48.95
	2¼″	2½″	100323	1.5	$49.10
2″	2¼″	1½″	100346	0.35	$17.50
	2¼″	2″	100324	0.46	$19.70
	2⅜″	¾″	100325	0.26	$16.50
	2⅜″	1″	100347	0.35	$18.10
	2⅜″	1¼″	100326	0.44	$20.50
	2⅜″	1½″	100327	0.54	$20.25
	2⅜″	2″	100328	0.72	$24.95
	2⅜″	3″	100329	1.5	$34.50
	2½″	1″	100330	0.49	$26.50
	2½″	1½″	100331	0.74	$27.20
	2½″	2″	100332	0.99	$32.35
	2½″	2½″	100333	1.5	$37.10
	2½″	3″	100334	2	$42.85
2½″	3″	1″	100335	0.61	$34.80
	3″	1½″	100336	0.91	$40.10
	3″	2″	100337	1.5	$40.00
	3″	2½″	100338	2	$51.35
	3″	3″	100339	2.5	$52.90
3″	3½″	1″	100340	0.72	$32.30
	3½″	1½″	100341	1.09	$41.95
	3½″	2″	100342	2	$44.75
	3½″	2½″	100343	2.3	$61.35
	3½″	3″	100344	2.6	$61.50

Tapered Roller Bearing Cup and Cone Sets

• Brand new, tapered roller bearings with cup. Popular sizes.



Item #	Bearing #	Bore	O.D.	Width	Shpg	Price
603298	LM11749/LM11710	0.6875″	1.57″	0.545″	¼ lb.	$6.10
603299	LM11949/LM11910	0.75″	1.781″	0.61″	¼ lb.	$3.95
603300	M12649/M12610	0.8437″	1.9687″	0.69″	¼ lb.	$4.90
603304	LM12749/LM12710	0.8661″	1.781″	0.61″	¼ lb.	$5.00
603307	LM12749/LM12711	0.8661″	1.811″	0.61″	¼ lb.	$5.00
603306	L44643/L44610	1.00″	1.98″	0.56″	¼ lb.	$5.40
603301	L44649/L44610	1.0625″	1.98″	0.56″	¼ lb.	$5.40
603303	LM67048/LM67010	1.25″	2.328″	0.625″	½ lb.	$4.95
603311	15123/15245	1.25″	2.4409″	0.75″	½ lb.	$8.00
603305	L68149/L68110	1.378″	2.328″	0.625″	½ lb.	$5.25
603308	L68149/L68111	1.378″	2.3622″	0.625″	½ lb.	$5.25
603302	LM48548/LM48510	1.375″	2.5625″	0.71″	½ lb.	$6.05
603309	JL69349/JL69310	1.4961″	2.4803″	0.6693″	½ lb.	$7.95
603313	LM29749/LM29710	1.50″	2.5625″	0.71″	½ lb.	$9.35
603310	LM501349/LM501310	1.625″	2.891″	0.77″	½ lb.	$7.40
603312	25580/25520	1.75″	3.265″	0.9375″	½ lb.	$9.20

3 Bolt Offset Flange Bearing



ITEM 603019

$4.95

• New 200 series 3 bolt offset flange bearing. Cast iron construction with self-aligning ball bearing insert and grease zerk. Two set screw on the inner race to lock shaft.

SPECIFICATIONS

- Bore ¾″
- Bore Thru-Length 1.221″
- Bearing # UC204-12
- Housing # FB204
- Mount Triangular 1½″ x ⅞″
- Bolt Size ⅜″
- Size 2.2.5" wide x 4.25″ high
- **Shpg. 2 lbs.**

Pillow Block Bearing



ITEM 603018


$6.95

• New 200 series pillow block bearing. Cast iron construction with self-aligning ball bearing insert and grease zerk. Two set screws on the inner race to lock shaft.

SPECIFICATIONS

- Bore 1″
- Bore Thru-Length 1.339″
- Center-Line Height 1.437″
- Bearing # UC205-16
- Housing # PA205
- Mount 2.20″ bolt center
- Bolt Size ⅜″-16 drilled/ tapped
- Overall Height 2.875″
- **Shpg. 3 lbs.**


Shaft to Shaft Gearboxes ⚠



Right Output

- Brand new, WORLDWIDE ELECTRIC right-angle worm gear reducers.
- Cast iron housing. Four tapped mounting holes on top and bottom of case. Rated for 1750 RPM maximum input speed. Keyed input and output shafts.
- Shipped filled with oil. Mounting bases sold separately, available on our website.

DROP SHIP * *Products drop-shipped from the manufacturer are not returnable.*



Left Output

Ratio	Box Size	ITEM Number Left Output	ITEM Number Right Output	HP	Output RPM	in. lbs. Torque	Overhung Load	Input Shaft	Output Shaft	4 Bolt Mount Centers	Shpg.	Price
5	133	601889	601888	1.15	350	209	190	½″ dia. x 1 5/16″	5/8″ dia. x 2″	3¼″ x 2″	15 lbs.	$153.45
	175	601918	601917	2.83	350	499	228	5/8″ dia. x 1 9/16″	7/8″ dia. x 1 25/32″	4 3/16″ x 2¾″	23 lbs.	$185.25
	206	601934*	601933	3.62	350	925	238	5/8″ dia. x 1 9/16″	1″ dia. x 2 3/32″	5″ x 2⅞″	28 lbs.	$221.80
	237	601961	601960	4.32	350	766	316	¾″ dia. x 2″	1⅛″ dia. x 2⅜″	5″ x 2⅞″	37 lbs.	$254.40
	262	601980	601979*	5.24	350	924	333	¾″ dia. x 2″	1⅛″ dia. x 2⅝″	6⅜″ x 3⅜″	51 lbs.	$312.45
	325	602024*	602023	9.72	350	1724	302	7/8″ dia. x 2 7/16″	1⅜″ dia. x 3¼″	7½″ x 4″	82 lbs.	$425.75
10	133	601894	601893	0.77	175	247	220	½″ dia. x 1 5/16″	5/8″ dia. x 2″	3¼″ x 2″	15 lbs.	$153.45
	175	601920	601919	1.57	175	515	272	5/8″ dia. x 1 9/16″	7/8″ dia. x 1 25/32″	4 3/16″ x 2¾″	23 lbs.	$185.25
	206	601936*	601935	2.77	175	935	283	5/8″ dia. x 1 9/16″	1″ dia. x 2 3/32″	5″ x 2⅞″	28 lbs.	$221.80
	237	601963	601962*	3.47	175	1158	378	¾″ dia. x 2″	1⅛″ dia. x 2⅜″	5″ x 2⅞″	37 lbs.	$254.40
	262	601985	601983	4.17	175	1445	398	¾″ dia. x 2″	1⅛″ dia. x 2⅝″	6⅜″ x 3⅜″	51 lbs.	$312.45
	325	602027	602026*	7.19	175	2419	369	7/8″ dia. x 2 7/16″	1⅜″ dia. x 3¼″	7½″ x 4″	82 lbs.	$425.75
15	133	601896	601895	0.63	120	283	254	½″ dia. x 1 5/16″	5/8″ dia. x 2″	3¼″ x 2″	15 lbs.	$153.45
	175	601922	601921*	1.24	120	554	324	5/8″ dia. x 1 9/16″	7/8″ dia. x 1 25/32″	4 3/16″ x 2¾″	23 lbs.	$185.25
	206	601938*	601937*	2.09	120	1002	337	5/8″ dia. x 1 9/16″	1″ dia. x 2 3/32″	5″ x 2⅞″	28 lbs.	$221.80
	237	601965*	601964*	2.64	120	1249	451	¾″ dia. x 2″	1⅛″ dia. x 2⅜″	5″ x 2⅞″	37 lbs.	$254.40
	262	601993*	601989*	3.22	120	1577	475	¾″ dia. x 2″	1⅛″ dia. x 2⅝″	6⅜″ x 3⅜″	51 lbs.	$312.45
	325	602029*	602028*	5.45	120	2611	450	7/8″ dia. x 2 7/16″	1⅜″ dia. x 3¼″	7½″ x 4″	82 lbs.	$425.75
20	133	601901	601900	0.50	88	276	254	½″ dia. x 1 5/16″	5/8″ dia. x 2″	3¼″ x 2″	15 lbs.	$153.45
	175	601924	601923	1.26	88	737	378	5/8″ dia. x 1 9/16″	7/8″ dia. x 1 25/32″	4 3/16″ x 2¾″	23 lbs.	$185.25
	206	601940	601939	1.57	88	914	394	5/8″ dia. x 1 9/16″	1″ dia. x 2 3/32″	5″ x 2⅞″	28 lbs.	$221.80
	237	601967	601966	2.06	88	1195	530	¾″ dia. x 2″	1⅛″ dia. x 2⅜″	5″ x 2⅞″	37 lbs.	$254.40
	262	601999	601998	2.67	88	1563	558	¾″ dia. x 2″	1⅛″ dia. x 2⅝″	6⅜″ x 3⅜″	51 lbs.	$312.45
	325	602031	602030	4.74	88	2875	526	7/8″ dia. x 2 7/16″	1⅜″ dia. x 3¼″	7½″ x 4″	82 lbs.	$425.75
30	133	601909	601905	0.47	58	336	254	½″ dia. x 1 5/16″	5/8″ dia. x 2″	3¼″ x 2″	15 lbs.	$153.45
	175	601926	601925	0.89	58	666	419	5/8″ dia. x 1 9/16″	7/8″ dia. x 1 25/32″	4 3/16″ x 2¾″	23 lbs.	$185.25
	206	601944	601941	1.65	58	1310	436	5/8″ dia. x 1 9/16″	1″ dia. x 2 3/32″	5″ x 2⅞″	28 lbs.	$221.80
	237	601969*	601968	1.82	58	1507	581	¾″ dia. x 2″	1⅛″ dia. x 2⅜″	5″ x 2⅞″	37 lbs.	$254.40
	262	602001	602000	2.22	58	1827	612	¾″ dia. x 2″	1⅛″ dia. x 2⅝″	6⅜″ x 3⅜″	51 lbs.	$312.45
	325	602033	602032	3.66	58	3045	585	7/8″ dia. x 2 7/16″	1⅜″ dia. x 3¼″	7½″ x 4″	82 lbs.	$425.75
40	133	601911	601910*	0.38	44	356	254	½″ dia. x 1 5/16″	5/8″ dia. x 2″	3¼″ x 2″	15 lbs.	$153.45
	175	601928	601927	0.79	44	714	495	5/8″ dia. x 1 9/16″	7/8″ dia. x 1 25/32″	4 3/16″ x 2¾″	23 lbs.	$185.25
	206	601950	601947	1.09	44	1120	515	5/8″ dia. x 1 9/16″	1″ dia. x 2 3/32″	5″ x 2⅞″	28 lbs.	$221.80
	237	601971*	601970*	1.45	44	1483	684	¾″ dia. x 2″	1⅛″ dia. x 2⅜″	5″ x 2⅞″	37 lbs.	$254.40
	262	602003*	602002	1.85	44	1919	720	¾″ dia. x 2″	1⅛″ dia. x 2⅝″	6⅜″ x 3⅜″	51 lbs.	$312.45
	325	602037	602034	3.35	44	3692	697	7/8″ dia. x 2 7/16″	1⅜″ dia. x 3¼″	7½″ x 4″	82 lbs.	$425.75
50	133	601913	601912*	0.29	35	312	254	½″ dia. x 1 5/16″	5/8″ dia. x 2″	3¼″ x 2″	15 lbs.	$153.45
	175	601930	601929*	0.50	35	538	564	5/8″ dia. x 1 9/16″	7/8″ dia. x 1 25/32″	4 3/16″ x 2¾″	23 lbs.	$185.25
	206	601952	601951*	0.74	35	830	587	5/8″ dia. x 1 9/16″	1″ dia. x 2 3/32″	5″ x 2⅞″	28 lbs.	$221.80
	237	601974	601973*	1.32	35	1527	763	¾″ dia. x 2″	1⅛″ dia. x 2⅜″	5″ x 2⅞″	37 lbs.	$254.40
	262	602009	602006*	1.37	35	1658	803	¾″ dia. x 2″	1⅛″ dia. x 2⅝″	6⅜″ x 3⅜″	51 lbs.	$312.45
	325	602040	602039	2.49	35	3413	803	7/8″ dia. x 2 7/16″	1⅜″ dia. x 3¼″	7½″ x 4″	82 lbs.	$425.75
60	133	601915	601914	0.23	29	158	254	½″ dia. x 1 5/16″	5/8″ dia. x 2″	3¼″ x 2″	15 lbs.	$153.45
	175	601932	601931*	0.38	29	433	613	5/8″ dia. x 1 9/16″	7/8″ dia. x 1 25/32″	4 3/16″ x 2¾″	23 lbs.	$185.25
	206	601956	601953	0.60	29	750	639	5/8″ dia. x 1 9/16″	1″ dia. x 2 3/32″	5″ x 2⅞″	28 lbs.	$221.80
	237	601976	601975	0.86	29	1149	838	¾″ dia. x 2″	1⅛″ dia. x 2⅜″	5″ x 2⅞″	37 lbs.	$254.40
	262	602019	602013	1.16	29	1670	882	¾″ dia. x 2″	1⅛″ dia. x 2⅝″	6⅜″ x 3⅜″	51 lbs.	$312.45
	325	602049	602043	2.03	29	3127	882	7/8″ dia. x 2 7/16″	1⅜″ dia. x 3¼″	7½″ x 4″	82 lbs.	$425.75

Right Angle Motor Mount Gear Reducers

California Residents — WARNING:Cancer and Reproductive Harm. For more information refer to:www.P65Warnings.ca.gov

• Brand new, WORLDWIDE ELECTRIC right-angle worm gear reducers. Standard NEMA-C motor mounting flange. Cast iron housing. Four tapped mounting holes on top and bottom of case. Keyed input and outputs. Shipped filled with oil. Max. input 1750 RPM.

DROP SHIP *Products drop-shipped from the manufacturer are not returnable.

Select gear reducer by output speed, torque, power required, and motor mount then choose between left, right, dual or hollow output shafts.



Left Output



Right Output



Dual Output



Hollow Output

Ratio	Box Size	Motor Frame	Left Output ITEM Number	Right Output ITEM Number	Dual Output ITEM Number	Price
5	133	56C	601891	601890	601892	$178.10
	175	56C	601977	601972	601981	$215.45
	206	56C	602036	602035*	602041*	$273.50
	237	56C	602073	602072	602075	$329.15
	262	182TC	602105*	602104*	602107	$342.80
	325	184TC	602149	602148	602151	$484.20
10	133	56C	601898	601897	601899	$178.10
	175	56C	601984	601982	601987	$215.45
	206	56C	602044	602042	602046	$273.50
	237	56C	602077*	602076*	602079	$329.15
	262	182TC	602109*	602108*	602111	$342.80
	325	184TC	602153*	602152	602155*	$484.20
15	133	56C	601903*	601902*	601904	$178.10
	175	56C	601990	601988	601992	$215.45
	206	56C	602048	602047	602051	$273.50
	237	56C	602081*	602080*	602083*	$329.15
	262	56C	602113*	602112	602115*	$342.80
	262	145TC	602117*	602116	602119*	$342.80
	325	182TC	602157	602156	602159	$484.20
20	133	56C	601907	601906	601908*	$178.10
	175	56C	601995	601994	601997	$215.45
	206	56C	602053	602052	602055	$273.50
	237	56C	602085*	602084*	602087	$329.15
	262	56C	602121*	602120	602123	$342.80
	262	145TC	602125	602124	602127	$342.80
	325	182TC	602161	602160	602163	$484.20
30	133	56C	601942	601916	601943	$178.10
	175	56C	602005	602004	602008	$215.45
	206	56C	602057	602056	602059	$273.50
	237	56C	602089	602088*	602091*	$329.15
	262	56C	602129	602128	602131	$342.80
	262	145TC	602133	602132	602135	$342.80
	325	56C	602165*	602164*	602167*	$484.20
	325	145TC	602169*	602168*	602171	$484.20
40	133	56C	601946	601945	601948*	$178.10
	175	56C	602011	602010	602014	$215.45
	206	56C	602061	602060	602063	$273.50
	237	56C	602093	602092*	602095	$329.15
	262	56C	602137	602136	602139	$342.80
	325	56C	602173	602172	602175*	$484.20
	325	145TC	602177*	602176	602179	$484.20
50	133	56C	601954	601949	601955*	$178.10
	175	56C	602016	602015	602018	$215.45
	206	56C	602065	602064	602067	$273.50
	237	56C	602097	602096	602099	$329.15
	262	56C	602141	602140*	602143*	$342.80
	325	56C	602181	602180	602183	$484.20
	325	145TC	602185*	602184*	602187*	$484.20
60	133	56C	601958	601957	601959	$178.10
	175	56C	602021	602020	602025	$215.45
	206	56C	602069	602068	602071	$273.50
	237	56C	602101	602100	602103	$329.15
	262	56C	602145	602144	602147	$342.80
	325	56C	602189	602188	602191	$484.20
	325	145TC	602193	602192	602195	$484.20

Cast Iron Mounting Bases

• Brand new, cast iron mounting base for use with WORLDWIDE right angle gear reducers. Allows gear reducer to be surface mounted. Bolts included. For use with reducers on pages 107-109.

ITEM	Shpg.	Price
602202	3 lbs.	$20.90
602203	5 lbs.	$26.10
602204	6 lbs.	$31.35
602205	7 lbs.	$36.55
602206	8 lbs.	$41.80
602207	11 lbs.	$47.00



• Brand new, WORLDWIDE ELECTRIC right-angle worm gear reducers. Standard NEMA-C motor mounting flange. Cast iron housing. Four tapped mounting holes on top and bottom of case. Keyed input and outputs. Shipped filled with oil. Max. input 1750 RPM. ⚠

Select gear reducer by output speed, torque and power required, then choose between left, right, dual or hollow output shafts.

Hollow Output ITEM Number	Price	HP	Output RPM	Output Torque	Overhung Load	Input Bore	Output Left, Right, Dual	Output Hollow Bore	4 Bolt Mnt Centers	4 Bolt Mnt Shpg.
N/A		1.15	350	209	190	5/8″	5/8″ dia. x 2″	—	3 1/4″ x 2″	20 lbs.
601978	$284.65	2.83	350	499	228	5/8″	7/8″ dia. x 1 15/16″	1″ dia. x 6 3/16″	4 3/16″ x 2 3/4″	30 lbs.
602038*	$329.70	3.62	350	925	238	5/8″	1″ dia. x 2 3/32″	1 1/8″ dia. x 6 7/16″	5″ x 2 7/8″	35 lbs.
602074	$376.60	4.32	350	766	316	5/8″	1 1/8″ dia. x 2 3/8″	1 1/4″ dia. x 6 7/16″	5″ x 2 7/8″	41 lbs.
602106	$463.45	5.24	350	924	333	1 1/8″	1 1/8″ dia. x 2 5/8″	1 7/16″ dia. x 7″	6 3/8″ x 3 3/8″	56 lbs.
602150	$644.05	9.72	350	1724	302	1 1/8″	1 3/8″ dia. x 3 1/4″	1 15/16″ dia. x 8 3/4″	7 1/2″ x 4″	93 lbs.
N/A		0.77	175	247	220	5/8″	5/8″ dia. x 2″	—	3 1/4″ x 2″	20 lbs.
601986	$284.65	1.57	175	515	272	5/8″	7/8″ dia. x 1 15/16″	1″ dia. x 6 3/16″	4 3/16″ x 2 3/4″	30 lbs.
602045	$329.70	2.77	175	935	283	5/8″	1″ dia. x 2 3/32″	1 1/8″ dia. x 6 7/16″	5″ x 2 7/8″	35 lbs.
602078	$376.60	3.47	175	1158	378	5/8″	1 1/8″ dia. x 2 3/8″	1 1/4″ dia. x 6 7/16″	5″ x 2 7/8″	41 lbs.
602110	$463.45	4.17	175	1445	398	1 1/8″	1 1/8″ dia. x 2 5/8″	1 7/16″ dia. x 7″	6 3/8″ x 3 3/8″	56 lbs.
602154*	$644.05	7.19	175	2419	369	1 1/8″	1 3/8″ dia. x 3 1/4″	1 15/16″ dia. x 8 3/4″	7 1/2″ x 4″	93 lbs.
N/A		0.63	120	283	254	5/8″	5/8″ dia. x 2″	—	3 1/4″ x 2″	20 lbs.
601991	$284.65	1.24	120	554	324	5/8″	7/8″ dia. x 1 15/16″	1″ dia. x 6 3/16″	4 3/16″ x 2 3/4″	30 lbs.
602050	$329.70	2.09	120	1002	337	5/8″	1″ dia. x 2 3/32″	1 1/8″ dia. x 6 7/16″	5″ x 2 7/8″	35 lbs.
602082	$376.60	2.64	120	1249	451	5/8″	1 1/8″ dia. x 2 3/8″	1 1/4″ dia. x 6 7/16″	5″ x 2 7/8″	41 lbs.
602114*	$463.45	3.22	120	1577	475	5/8″	1 1/8″ dia. x 2 5/8″	1 7/16″ dia. x 7″	6 3/8″ x 3 3/8″	56 lbs.
602118	$463.45	3.22	120	1577	475	7/8″	1 1/8″ dia. x 2 5/8″	1 7/16″ dia. x 7″	6 3/8″ x 3 3/8″	56 lbs.
602158*	$644.05	5.45	120	2611	450	1 1/8″	1 3/8″ dia. x 3 1/4″	1 15/16″ dia. x 8 3/4″	7 1/2″ x 4″	93 lbs.
N/A		0.50	88	276	254	5/8″	5/8″ dia. x 2″	—	3 1/4″ x 2″	20 lbs.
601996	$284.65	1.26	88	737	378	5/8″	7/8″ dia. x 1 15/16″	1″ dia. x 6 3/16″	4 3/16″ x 2 3/4″	30 lbs.
602054	$329.70	1.57	88	914	394	5/8″	1″ dia. x 2 3/32″	1 1/8″ dia. x 6 7/16″	5″ x 2 7/8″	35 lbs.
602086	$376.60	2.06	88	1195	530	5/8″	1 1/8″ dia. x 2 3/8″	1 1/4″ dia. x 6 7/16″	5″ x 2 7/8″	41 lbs.
602122	$463.45	2.67	88	1563	558	5/8″	1 1/8″ dia. x 2 5/8″	1 7/16″ dia. x 7″	6 3/8″ x 3 3/8″	56 lbs.
602126*	$463.45	2.67	88	1563	558	7/8″	1 1/8″ dia. x 2 5/8″	1 7/16″ dia. x 7″	6 3/8″ x 3 3/8″	56 lbs.
602162	$644.05	4.74	88	2875	526	1 1/8″	1 3/8″ dia. x 3 1/4″	1 15/16″ dia. x 8 3/4″	7 1/2″ x 4″	93 lbs.
N/A		0.47	58	336	254	5/8″	5/8″ dia. x 2″	—	3 1/4″ x 2″	20 lbs.
602007	$284.65	0.89	58	666	419	5/8″	7/8″ dia. x 1 15/16″	1″ dia. x 6 3/16″	4 3/16″ x 2 3/4″	30 lbs.
602058	$329.70	1.65	58	1310	436	5/8″	1″ dia. x 2 3/32″	1 1/8″ dia. x 6 7/16″	5″ x 2 7/8″	35 lbs.
602090	$376.60	1.82	58	1507	581	5/8″	1 1/8″ dia. x 2 3/8″	1 1/4″ dia. x 6 7/16″	5″ x 2 7/8″	41 lbs.
602130	$463.45	2.22	58	1827	612	5/8″	1 1/8″ dia. x 2 5/8″	1 7/16″ dia. x 7″	6 3/8″ x 3 3/8″	53 lbs.
602134	$463.45	2.22	58	1827	612	7/8″	1 1/8″ dia. x 2 5/8″	1 7/16″ dia. x 7″	6 3/8″ x 3 3/8″	53 lbs.
602166*	$644.05	3.66	58	3045	585	5/8″	1 3/8″ dia. x 3 1/4″	1 15/16″ dia. x 8 3/4″	7 1/2″ x 4″	90 lbs.
602170*	$644.05	3.66	58	3045	585	7/8″	1 3/8″ dia. x 3 1/4″	1 15/16″ dia. x 8 3/4″	7 1/2″ x 4″	90 lbs.
N/A		0.38	44	356	254	5/8″	5/8″ dia. x 2″	—	3 1/4″ x 2″	20 lbs.
602012	$284.65	0.79	44	714	495	5/8″	7/8″ dia. x 1 15/16″	1″ dia. x 6 3/16″	4 3/16″ x 2 3/4″	30 lbs.
602062*	$329.70	1.09	44	1120	515	5/8″	1″ dia. x 2 3/32″	1 1/8″ dia. x 6 7/16″	5″ x 2 7/8″	35 lbs.
602094	$376.60	1.45	44	1483	684	5/8″	1 1/8″ dia. x 2 3/8″	1 1/4″ dia. x 6 7/16″	5″ x 2 7/8″	41 lbs.
602138*	$463.45	1.85	44	1919	720	5/8″	1 1/8″ dia. x 2 5/8″	1 7/16″ dia. x 7″	6 3/8″ x 3 3/8″	53 lbs.
602174*	$644.05	3.35	44	3692	697	5/8″	1 3/8″ dia. x 3 1/4″	1 15/16″ dia. x 8 3/4″	7 1/2″ x 4″	90 lbs.
602178*	$644.05	3.35	44	3692	697	7/8″	1 3/8″ dia. x 3 1/4″	1 15/16″ dia. x 8 3/4″	7 1/2″ x 4″	90 lbs.
N/A		0.29	35	312	254	5/8″	5/8″ dia. x 2″	—	3 1/4″ x 2″	20 lbs.
602017	$284.65	0.50	35	538	564	5/8″	7/8″ dia. x 1 15/16″	1″ dia. x 6 3/16″	4 3/16″ x 2 3/4″	30 lbs.
602066	$329.70	0.74	35	830	587	5/8″	1″ dia. x 2 3/32″	1 1/8″ dia. x 6 7/16″	5″ x 2 7/8″	35 lbs.
602098	$376.60	1.32	35	1527	763	5/8″	1 1/8″ dia. x 2 3/8″	1 1/4″ dia. x 6 7/16″	5″ x 2 7/8″	41 lbs.
602142	$463.45	1.37	35	1658	803	5/8″	1 1/8″ dia. x 2 5/8″	1 7/16″ dia. x 7″	6 3/8″ x 3 3/8″	53 lbs.
602182	$644.05	2.49	35	3413	803	5/8″	1 3/8″ dia. x 3 1/4″	1 15/16″ dia. x 8 3/4″	7 1/2″ x 4″	90 lbs.
602186*	$644.05	2.49	35	3413	803	7/8″	1 3/8″ dia. x 3 1/4″	1 15/16″ dia. x 8 3/4″	7 1/2″ x 4″	90 lbs.
N/A		0.23	29	158	254	5/8″	5/8″ dia. x 2″	—	3 1/4″ x 2″	20 lbs.
602022	$284.65	0.38	29	433	613	5/8″	7/8″ dia. x 1 15/16″	1″ dia. x 6 3/16″	4 3/16″ x 2 3/4″	30 lbs.
602070	$329.70	0.60	29	750	639	5/8″	1″ dia. x 2 3/32″	1 1/8″ dia. x 6 7/16″	5″ x 2 7/8″	35 lbs.
602102	$376.60	0.86	29	1149	838	5/8″	1 1/8″ dia. x 2 3/8″	1 1/4″ dia. x 6 7/16″	5″ x 2 7/8″	41 lbs.
602146	$463.45	1.16	29	1670	882	5/8″	1 1/8″ dia. x 2 5/8″	1 7/16″ dia. x 7″	6 3/8″ x 3 3/8″	53 lbs.
602190	$644.05	2.03	29	3127	882	5/8″	1 3/8″ dia. x 3 1/4″	1 15/16″ dia. x 8 3/4″	7 1/2″ x 4″	90 lbs.
602194	$644.05	2.03	29	3127	882	7/8″	1 3/8″ dia. x 3 1/4″	1 15/16″ dia. x 8 3/4″	7 1/2″ x 4″	90 lbs.

California Residents WARNING:Cancer and Reproductive Harm
For more information refer to:www.P65Warnings.ca.gov

- Brand new, WORLDWIDE ELECTRIC helical inline speed reducers. Cast iron housings. Drop-in replacement for most major inline reducer brands. Gearbox flanges are designed to accept NEMA C-Face electric motors.
- Dimensional drawings and additional information available at **www.surpluscenter.com.**

Pictures Represent Box Size 37



DROP SHIP **These speed reducers are not stocked at Surplus Center; they drop-ship directly from our vendor's warehouse. Products drop-shipped from the manufacturer are not returnable.**

Box Size 37

• Output shaft 1″ dia. x 1.97″ long, ¼″ wide keyway, shaft end tapped ⅜″-16 • Base mount four 0.35″ holes on 5.12″ x 4.33″ ctrs.

ITEM	Motor Frame	Nominal Ratio	Actual Ratio	Output RPM at 1800 RPM Input	Input HP Max.	Output Torque (in.-lbs.)	Over-Hung Load Max. (lbs.)	Stages	Service Class	Shpg.	Price
602906	145TC	10:1	10.02	175	2	680	388	2	III	31 lbs.	$471.30
602976	145TC-3	15:1	14.08	124	2	1016	436	3	II	31 lbs.	$471.30
602907	145TC	15:1	15.75	111	2	1070	451	2	II	31 lbs.	$471.30
602908	56C	20:1	19.95	88	1	680	489	2	III	31 lbs.	$471.30
602909	145TC	20:1	19.95	88	2	1355	489	2	I	31 lbs.	$471.30
602910	56C	30:1	31.02	56	1	1025	565	3	II	31 lbs.	$471.30
602911	56C	40:1	40.08	44	1	1325	615	3	I	31 lbs.	$471.30
602912	56C	50:1	52.24	33	1	1725	670	3	I	31 lbs.	$471.30
602913	56C	60:1	60.84	29	0.89	1770	705	3	I	31 lbs.	$471.30

Box Size 47

• Output shaft 1.25″ dia. x 2.36″ long, ¼″ wide keyway, shaft end tapped ½″-13 • Base mount four 0.55″ holes on 6.5″ x 5.31″ ctrs.

ITEM	Motor Frame	Nominal Ratio	Actual Ratio	Output RPM at 1800 RPM Input	Input HP Max.	Output Torque (in.-lbs.)	Over-Hung Load Max. (lbs.)	Stages	Service Class	Truck Freight Shpg.	Price
602977	182TC	10:1	11.27	155	3	1150	590	2	II	50 lbs.	$542.00
602978	182TC	15:1	15.18	115	3	1555	650	2	II	50 lbs.	$542.00
602979	145TC	20:1	18.37	95	2	1250	690	2	III	50 lbs.	$542.00
602917	182TC	20:1	18.37	95	3	1880	690	2	I	50 lbs.	$542.00
602918	145TC	30:1	31.83	55	2	2105	835	3	I	50 lbs.	$542.00
602914	56C	40:1	41.51	42	1	1370	910	3	III	50 lbs.	$542.00
602915	56C	50:1	52.84	33	1	1740	985	3	II	50 lbs.	$542.00
602916	56C	60:1	63.37	28	1	2095	1050	3	I	50 lbs.	$542.00

Box Size 67

• Output shaft 1.375″ dia. x 2.76″ long, 5⁄16″ wide keyway, shaft end tapped ½″-13 • Base mount four 0.55″ holes on 7.68″ x 5.91″ ctrs.

ITEM	Motor Frame	Nominal Ratio	Actual Ratio	Output RPM at 1800 RPM Input	Input HP Max.	Output Torque (in.-lbs.)	Over-Hung Load Max. (lbs.)	Stages	Service Class	Truck Freight Shpg.	Price
602980	184TC	10:1	9.9	177	5	1685	880	2	III	73 lbs.	$769.80
602922	182TC	20:1	22.9	76	3	2270	1165	3	III	73 lbs.	$769.80
602981	145TC	30:1	32.02	55	2	2115	1305	3	III	73 lbs.	$769.80
602982	145TC	40:1	41.22	42	2	2725	1420	3	II	73 lbs.	$769.80
602923	145TC	50:1	52.21	34	2	3400	1480	3	I	73 lbs.	$769.80
602983	56C	60:1	63.07	28	1	2085	1480	3	III	73 lbs.	$769.80
602919	56C	80:1	78.59	22	1	2590	1480	3	II	73 lbs.	$769.80
602920	56C	100:1	98.69	18	1	3260	1480	3	II	73 lbs.	$769.80
602921	56C	120:1	125.28	14	1	4140	1480	3	I	73 lbs.	$769.80

• Brand new, WORLDWIDE ELECTRIC helical inline speed reducers. Cast iron housings. Drop-in replacement for most major inline reducer brands. Gearbox flanges are designed to accept NEMA C-Face electric motors. ⚠
• Dimensional drawings and additional information available at **www.surpluscenter.com.**

DROP SHIP **These speed reducers are not stocked at Surplus Center; they drop-ship directly from our vendor's warehouse. Products drop-shipped from the manufacturer are not returnable.**

Box Size 77

• Output shaft 1.625″ dia. x 3.15″ long, ⅜″ wide keyway, shaft end tapped ⅝″-11 • Base mount four 0.71″ holes on 8.07″ x 6.69″ ctrs.

ITEM	Motor Frame	Nominal Ratio	Actual Ratio	Output RPM at 1800 RPM Input	Input HP Max.	Output Torque (in.-lbs.)	Over-Hung Load Max. (lbs.)	Stages	Service Class	Truck Freight Shpg.	Price
602927	213TC	10:1	10.91	160	7.5	2795	1035	2	III	83 lbs.	$903.35
602985	182TC	20:1	23.31	75	3	2385	1330	2	III	83 lbs.	$903.35
602986	182TC	30:1	31.97	55	3	3155	1480	3	III	83 lbs.	$903.35
602987	182TC	40:1	39.31	45	3	3855	1555	3	II	83 lbs.	$903.35
602988	145TC	50:1	53.24	33	2	3505	1755	3	II	83 lbs.	$903.35
602924	145TC	60:1	57.73	30	2	3855	1800	3	II	83 lbs.	$903.35
602925	145TC	80:1	84.62	21	2	5510	1935	3	I	83 lbs.	$903.30
602926	145TC 1	00:1	89.8	19	2	6090	1935	3	I	83 lbs.	$903.35
602984	56C	120:1	124.34	14	1	4130	1935	3	II	83 lbs.	$903.35

Box Size 87

• Output shaft 2.125″ dia. x 3.94″ long, ½″ wide keyway, shaft end tapped ¾″-10 • Base mount four 0.71″ holes on 10.24″ x 8.46″ ctrs.

ITEM	Motor Frame	Nominal Ratio	Actual Ratio	Output RPM at 1800 RPM Input	Input HP Max.	Output Torque (in.-lbs.)	Over-Hung Load Max. (lbs.)	Stages	Service Class	Truck Freight Shpg.	Price
602989	213TC	10:1	10.66	164	7.5	2725	2375	2	III	171 lbs.	$1433.55
602990	215TC	10:1	10.66	164	10	3635	2375	2	III	171 lbs.	$1433.55
602991	184TC	20:1	20.06	87	5	3325	2925	3	III	171 lbs.	$1433.55
602992	213TC	20:1	20.06	87	7.5	4985	2925	3	III	171 lbs.	$1433.55
602993	184TC	30:1	31.73	55	5	5260	3010	3	III	171 lbs.	$1433.55
602994	184TC	40:1	38.2	46	5	6290	3010	3	III	171 lbs.	$1433.55
602928	145TC	50:1	49.16	36	2	3215	3010	3	III	171 lbs.	$1433.55
602929	184TC	50:1	49.16	36	5	8035	3010	3	II	171 lbs.	$1433.55
602930	145TC	60:1	61.54	28	2	4130	3010	3	III	171 lbs.	$1433.55
602931	182TC	60:1	61.54	28	3	6200	3010	3	III	171 lbs.	$1433.55
602932	145TC	80:1	87.27	20	2	5785	3010	3	III	171 lbs.	$1433.55
602933	182TC	80:1	87.27	20	3	8680	3010	3	II	171 lbs.	$1433.55
602934	145TC	110:1	112.52	16	2	7230	3010	3	II	171 lbs.	$1433.55
602935	145TC	120:1	122.17	14	2	8265	3010	3	II	171 lbs.	$1433.55

Box Size 97

• Output shaft 2.375″ dia. x 4.72″ long, ⅝″ wide keyway, shaft end tapped ¾″-11 • Base mount four 0.87″ holes on 12.2″ x 9.84″ ctrs.

ITEM	Motor Frame	Nominal Ratio	Actual Ratio	Output RPM at 1800 RPM Input	Input HP Max.	Output Torque (in.-lbs.)	Over-Hung Load Max. (lbs.)	Stages	Service Class	Truck Freight Shpg.	Price
602995	284TC	10:1	10	175	25	8520	2430	2	III	255 lbs.	$2376.15
602996	286TC	10:1	10	175	30	10225	2430	2	II	255 lbs.	$2376.15
602997	254TC	20:1	21.23	82	15	10910	3125	2	III	255 lbs.	$2376.15
602998	256TC	20:1	21.23	82	20	14450	3125	2	II	255 lbs.	$2376.15
602999	213TC	30:1	28.98	60	7.5	7230	3465	3	III	255 lbs.	$2376.15
603000	215TC	30:1	28.98	60	10	9645	3465	3	III	255 lbs.	$2376.15
602936	254TC	30:1	28.98	60	15	14465	3465	3	II	255 lbs.	$2376.15
602937	213TC	40:1	44.57	39	7.5	11125	4000	3	III	255 lbs.	$2376.15
602938	215TC	40:1	44.57	39	10	14835	4000	3	II	255 lbs.	$2376.15
602939	213TC	50:1	51.1	34	7.5	12765	4080	3	III	255 lbs.	$2376.15
602940	215TC	50:1	51.1	34	10	17020	4080	3	II	255 lbs.	$2376.15
602941	213TC	60:1	59.52	29	7.5	14965	4080	3	II	255 lbs.	$2376.15
602942	184TC	80:1	82.59	21	5	13775	4080	3	II	255 lbs.	$2376.15
602943	213TC	80:1	82.59	21	7.5	20665	4080	3	I	255 lbs.	$2376.15
602944	184TC	100:1	97.76	18	5	16070	4080	3	II	255 lbs.	$2376.15
602945	182TC	120:1	127.61	14	3	12400	4080	3	III	255 lbs.	$2376.15

In addition to the 6 sizes of inline reducers shown on these 2 pages there are over 50 additional reducers in 3 larger sizes (107,137 and 147) shown on our website www.surpluscenter.com. These larger models have gear reduction ranges from 10:1 up to 120:1. They are designed for use with NEMA motor flanges from 213TC to 405TC and input as high as 100 HP.

California Residents WARNING:Cancer and Reproductive Harm
For more information refer to:www.P65Warnings.ca.gov



Shaft Mount Gear Reducers ⚠

• Brand new, WORLDWIDE ELECTRIC CORP. shaft mount reducers. Service class III. Cast iron housing, high grade case hardened steel gears and shafts. Double lip seals. Metal reinforced double lips, spring loaded oil seals. Size 2 gear reducers have ball bearings, Size 3-6 gear reducers have tapered roller bearings. Torque arm included. Interchangeable with Dodge, Hub City, Edison and Browning shaft mount reducers.

Find tapered bushings and other accessories in the charts below.

Tapered bushing kit sold separately - see chart below for output bore and appropriate ITEM number.

DROP SHIP **These gear reducers are not stocked at Surplus Center; they drop-ship directly from our vendor's warehouse. Products drop-shipped from the manufacturer are not returnable.**

Performance Specifications

Reducer Size	ITEM	Ratio	Input HP	Output RPM	Torque (in-lbs.)	Min. Drive Pulley Dia.	Input Shaft Dia. x Lgth. x Keyway	Size	Shpg.	Price
2	602599	15:1	5	104-140	2899-2154	3.0″	1⅛″ x 3⁹⁄₁₆″ x ¼″	8⅜″ x 11⁷⁄₁₆″ x 5⅞″	71 lbs.	$ 471.65
	602600	25:1	3	58-85	3119-2128	3.0″	1⅛″ x 3⁹⁄₁₆″ x ¼″	8⅜″ x 11⁷⁄₁₆″ x 5⅞″	71 lbs.	$ 471.65
3	602601	15:1	7.5	94-140	4811-3230	4.0″	1¼″ x 4⁵⁄₁₆″ x ¼″	9¼″ x 12⅞″ x 7⁹⁄₁₆″	94 lbs.	$ 837.80
	602602	25:1	5	57-85	5290-3547	4.0″	1¼″ x 4⁵⁄₁₆″ x ¼″	9¼″ x 12⅞″ x 7⁹⁄₁₆″	93 lbs.	$ 837.80
4	602603	15:1	10	79-141	7633-4277	4.6″	1⁷⁄₁₆″ x 5⁹⁄₁₆″ x ⅜″	10⅜″ x 15⅛″ x 8³⁄₁₆″	175 lbs.	$1133.15
	602604	25:1	7.5	57-85	7934-5321	4.6″	1⁷⁄₁₆″ x 5⁹⁄₁₆″ x ⅜″	10⅜″ x 15⅛″ x 8³⁄₁₆″	170 lbs.	$1133.15
5	602605	15:1	20	115-125	10487-9648	5.4″	1¹⁵⁄₁₆″ x 5¾″ x ½″	13⅛″ x 18⁵⁄₁₆″ x 8¹³⁄₁₆″	221 lbs.	$1786.84
	602606	25:1	10	46-78	13109-7731	5.4″	1¹⁵⁄₁₆″ x 5¾″ x ½″	13⅛″ x 18⁵⁄₁₆″ x 8¹³⁄₁₆″	215 lbs.	$1786.84
6	602607	15:1	30	99-125	18276-14472	6.2″	2³⁄₁₆″ x 6¹⁄₁₆″ x ½″	15⅛″ x 21⁵⁄₁₆″ x 9⅝″	345 lbs.	$2334.78
	602608	25:1	20	58-70	20794-17229	6.2″	2³⁄₁₆″ x 6¹⁄₁₆″ x ½″	15⅛″ x 21⁵⁄₁₆″ x 9⅝″	333 lbs.	$2334.78



Tapered Bushings

• Twin tapered bushing kit for shaft mount reducers. Includes two bushings, bolts and full length shaft key.

Order bushing by gear reducer size and diameter of shaft it will be mounted on.

Size 2		Size 3		Size 4		Size 5		Size 6	
$75.40 each		$92.75 each		$134.24 each		$184.96 each		$240.61 each	
Shpg. 5 lbs.		Shpg. 6 lbs.		Shpg. 8 lbs.		Shpg. 10 lbs.		Shpg. 13 lbs.	
ITEM	Dia.	ITEM	Dia.	ITEM	Dia.	ITEM	Dia.	ITEM	Dia.
602619	1⁵⁄₁₆″	602627	1¹¹⁄₁₆″	602633	1¹⁵⁄₁₆″	602638	2³⁄₁₆″	602643	2½″
602620	1⅜″	602628	1¾″	602634	2″	602639	2⁷⁄₁₆″	602644	2¹¹⁄₁₆″
602621	1⁷⁄₁₆″	602629	1⅞″	602635	2³⁄₁₆″	602640	2½″	602645	2⅞″
602622	1½″	602630	1¹⁵⁄₁₆″	602636	2¼″	602641	2¹¹⁄₁₆″	602646	2¹⁵⁄₁₆″
602623	1⅝″	602631	2″	602637	2⁷⁄₁₆″	602642	2¹⁵⁄₁₆″	602647	3″
602624	1¹¹⁄₁₆″	602632	2³⁄₁₆″					602648	3⁷⁄₁₆″
602625	1¾″								
602626	1¹⁵⁄₁₆″								

Select accessories to match reducer size.

Motor Mount

• Heavy gauge painted steel construction for NEMA frame motors. Adjustable top plate for drive belt tensioning and alignment.



Backstop Assembly



• Ensures smooth forward operation of conveyor with no back slip.

Belt Guard

• Heavy gauge painted all steel construction. Screened face.



Size	ITEM	Motor Frame	Shpg.	Price	ITEM	Shpg.	Price	ITEM	Shpg.	Price
2	602609	56-215T	34 lbs.	$218.05	602614	2 lbs.	$120.35	602651	30 lbs.	$217.90
3	602610	56-215T	36 lbs.	$224.30	602615	2 lbs.	$154.05	602652	38 lbs.	$247.65
4	602611	143-286T	79 lbs.	$337.85	602616	2 lbs.	$154.00	602653	44 lbs.	$284.10
5	602612	143-286T	82 lbs.	$354.74	602617	3 lbs.	$192.10	602654	48 lbs.	$328.97
6	602613	143-286T	107 lbs.	$493.50	602618	4 lbs.	$351.80	602655	61 lbs.	$362.30

Cast Iron High Speed Gearboxes



ITEM 603513 **$417.10**

• Brand new. PEERLESS cast iron gearbox. Shafts rotate in opposite direction.

SPECIFICATIONS
- Model 1050-009A
- Ratio 1:1
- Rotation Opposite
- Input Power 10 HP max continuous
- Input Speed 3600 RPM max.
- Output Torque 360 in-lb
- Input Shaft ¾″ dia. x 1⅝″ w/ 3⁄16″ woodruff keyway
- Output Shaft ¾″ dia. x 1⅝″ w/ 5⁄32″ woodruff keyway
- Mount Two ⅜-16″ bolt holes on 4″ centers and 2.9″ dia. pilot
- Size 7″ x 5¾″ x 4¾″
- **Shpg. 13 lbs.**

ITEM 603514 **$426.05**

• ***SPECIFICATIONS SAME AS ABOVE EXCEPT***
• Model 1015-012 • Ratio 1.2:1 • Rotation Same

Aluminum High Speed Gearboxes



ITEM 603491 **$264.85**

• Brand new. PEERLESS 1000-014-D gearbox. Cast aluminum gearbox and ships with oil. Shafts rotate in same direction when viewed from end.

SPECIFICATIONS FOR ALL
- Ratio 1:1
- Input Power: 10 HP continuous
- Input Speed: 3600 RPM max.
- Output Torque 360 in-lbs.
- Size 5½″ x 4¾″ x 7″
- Input Shaft: ⅞″ dia. x 1½″ w/ 3⁄16″ woodruff keyway
- Output Shaft: ⅞″ dia. x 1¼″ w/ 5⁄32″ woodruff keyway and ⅜″-24 tapped end
- Mount: Two 13⁄32″ bolt holes on 4″ centers, 2.92″ dia. pilot
- **Shpg. 8 lbs.**

ITEM 603492 **$257.50**

• PEERLESS 1000-015 gearbox. Shafts rotate in opposite directions when viewed from end. **Shpg. 8 lbs.**

3 Shaft Gearbox



ITEM 603493

$262.90

• Brand new. PEERLESS 1000-007 gearbox. Solid output shaft extends from both sides of case. **Shpg. 9 lbs.**

Stewart Differential Axles



• New, STEWART MANUFACTURING. Differential assembly with disc brake. Die cast aluminum differential case and 1215 cold drawn steel axle shaft with black oxide coating applied to axle shafts. 1″ Diameter.

SPECIFICATIONS FOR BOTH
- Axle Dia. 1″
- Axle Threads 1″-14 TPI x 1″
- Sprocket 28 tooth 081 Pitch
- Disc Brake Dimensions 8.875″ dia. x 0.179″

ITEM 604134 **$39.95**


35″ Model# 50-000059

SPECIFICATIONS
- Axle Lengths 14¾″, 13¾″
- Size 35″ x 8¾″ x 8¾″
- **Shpg. 26 lbs.**

ITEM 604135 **$49.95**

48″ Model# 50-000121

SPECIFICATIONS
- Axle Lengths 20″, 20¾″
- Size 48″ x 8¾″ x 8¾″
- **Shpg. 20 lbs.**



Right Angle Gearboxes



• Brand new. Right angle gearboxes. One piece cast iron gear case and bearing caps. Roller bearings. Ships without oil, user must add ⅓ quart of 80-90 W oil prior to use.

SPECIFICATIONS FOR ALL
- Ratio 1:1
- Input Power: 40 HP intermittent 32 HP continuous
- Input Speed 1800 RPM max.
- Size 5⅞″ x 6¼″ x 4⅛″
- Output Shaft: 1″ dia. x 2¼″ w/¼″ keyway
- Mount: Four ⅜″-16 tapped holes on 4¼″ square centers
- **Shpg. 23 lbs.**

ITEM	Input Shaft	Output rotation	Price
602823	1″ dia. x 2½″ w/¼″ keyway	Opposite of input	$211.30
602822	1″ dia. x 2½″ w/¼″ keyway	Same as input	$211.30
602824	1″ dia. x 2½″ w/¼″ keyway	Dual Shaft	$251.75
604021	1″ dia. x 2½″ w/5⁄16″ crosshole and ¼″ keyway	Dual Shaft	$251.75

Peerless Differential Axle



ITEM 603503 **$187.85**

¾″ Diameter

• Brand new. PEERLESS differential. Can be used with PEERLESS 700 series transmission, a gas engine, or electric motor (sold separately) for residential or commercial use. Axle is not heat treated. Used with related PEERLESS drive sprockets (sold separately).

SPECIFICATIONS
- Model 100-007B
- Axles ¾″ dia. x 16″ smooth shaft
- Tire Diameter 18″ max
- Output Torque 150 ft-lb max
- Load Rating 400 lb max
- Size 39⅜″ x 3⅝″ x 3⅝″
- **Shpg 11 lbs.**

Peerless Differential Axle




ITEM 603504 **$287.70**

1″ Diameter

• Brand new. PEERLESS 100-224 differential. Can be used with PEERLESS 700 series transmission, a gas engine, or electric motor (sold separately) for residential or commercial use. Axle is not heat treated. Use with related PEERLESS drive sprockets (sold separately).

SPECIFICATIONS
- Brand Peerless
- Model 100-224
- Axles 1″ dia. x 14″ w/ ¼″ x 6″ keyway and ¼″ x 1″ woodruff keyway. Axle end threaded ¾″-16 UNF x 1⅜″
- Output Torque 150 ft-lb max
- Tire Diameter 20″ max
- Load Rating 600 lb max
- Size 38″ x 3⅝″ x 3⅝″
- **Shpg 14.5 lbs.**

Peerless Differential Sprockets



• Brand new. PEERLESS sprocket for differential

SPECIFICATIONS
- Bolt Holes Four 0.35″ dia. for 5⁄16″-18 stud
- Bolt Hole Pattern 0.941″ x 2.81″

ITEM	Pitch	Bore	Teeth	O.D.	Shpg.	Price
603509	35	2⅛″	36	4.51″	½	$54.15
603506	40	2⅛″	45	7.45″	2½	$88.55
603505	41	2⅛″	40	6.81″	2	$48.40
603507	41	2⅛″	48	7.93″	2	$62.50
603508	41	2⅛″	60	9.84″	5	$68.95

Hydrogear Hydrostatic Transaxle



ITEM 602786

$249.95

• New, Hydro-gear ZT-2200 EZT series model ZC-AHBB-4M7B-2FPA zero-turn style hydrostatic transaxle. Includes right transaxle for building ZTR vehicles or for use as replacement on equipment. Integrated 10cc variable displacement axial pump and a 10cc fixed displacement drive motor. Features include a die cast aluminum housing, belt-drive input pulley with fan, single control lever per unit for forward/reverse and speed control, disengagement lever to allow freewheeling, four bolt hub for direct mounting of wheel and parking brake.

SPECIFICATIONS
- Input Speed 3000 RPM max.
- Overall Reduction 19.2:1
- Output Speed 0-150 RPM
- Engine Size 18-22 HP
- Output Torque Continuous 115 ft-lbs. Intermittent 150 ft-lbs.
- Max. Weight per Axle 18″ Diameter Tire 340 lbs. 20″ Diameter Tire 300 lbs.
- Max. Tire Dia. 20″
- Input Rotation CW
- Input 4½″ dia. pulley for ½″ belt
- Axle Length: 4⅛″ housing to face of hub
- Output 4 bolt wheel hub on 4″ B.C.
- Mount 6 hole
- Lubrication 20W-50 motor oil
- Size 14¾″ x 14¼″ x 10¼″
- **Shpg. 44 lbs.**

Peerless Six Speed Transaxles



ITEM 603510

$509.55

• Brand new. PEERLESS MST-206-545C six speed transaxle. Push brake lever to actuate brake. “Axle-Rearward” style transaxle pre-filled with oil from the factory.

SPECIFICATIONS
- Speeds: Six forward, Reverse, and Neutral
- Input Speed 2,000 RPM
- Input Rotation CW
- Output Torque 225 ft-lbs
- Load Rating 525 lbs max
- Input Shaft ⅝″ dia. x 1 3⁄16″ w/ 3⁄16″ keyway
- Axles ¾″ dia. x 4¾″ long w/ 3⁄16″ keyway
- Overall Axle Width 29⅛″
- Tire Diameter 20″ max
- Gear Shift Shaft ⅜″ square, tapped ¼″-28
- Inner Mount Four holes on 13″ x 1¾″ centers
- Outer Mount Four holes on 16¼″ x 2½″ centers
- Size 29⅛″ x 12½″ x 8″
- **Shpg 33 lbs.**

w/Pull Brake Lever

ITEM 603511 **$522.55**

w/Pull Brake Lever/Axle Forward

ITEM 603512 **$525.85**

Rotary Cutter Gearboxes

• Brand new, OMNI GEAR Rotary right angle rotary cutter gearbox. Horizontal input and vertical output downward. Bevel gears. Large deep groove ball bearings to support output. Cast iron housing.

RC 30 Series



$189.00 each

SPECIFICATIONS FOR ALL

- CCW input gives CW output
- Input RPM 540/1000
- Input HP 24-40
- Max torque 2800-4667 in.lbs.
- Output shaft 1 9/16″ dia. 12 tooth tapered spline with threaded end 4½″ total length
- Blade hub 2.95″ dia. x 2.02″ stepped down to 2.5″ dia. x 0.27″ then tapers down to 2.183″ dia. over 0.315″
- Mount 4 holes on 6.8″ dia. B.C.
- Pilot 5¼″ dia.
- Size 10¼″ x 7″ x 7″
- **Shpg. 54 lbs.**

ITEM 602889

SPECIFICATIONS

- Model 250001
- Input shaft 1⅜″ dia. x 3″ long with ½″ dia. pinhole
- Gear ratio 1:1.47 increaser
- Output RPM 790/1460

ITEM 602890

SPECIFICATIONS

- Model 250179
- Input shaft 1⅜″ dia. x 3⅞″ long 6T spline with 5/16″ dia. pinhole

ITEM 602891

SPECIFICATIONS

- Model 250045
- Input shaft 1⅜″ dia. x 3″ long with ½″ dia. pinhole
- Gear ratio 1:1.93 increaser
- Output RPM 1042/1930

RC51 Series



$282.10 each

SPECIFICATIONS FOR ALL

- CCW input gives CW output
- Input RPM 540/1000
- Gear ratio 1:1.93 increaser
- Output RPM 1040/1930
- Input HP 24-40
- Max torque 2800-4667 in.lbs.
- Output shaft 2″ dia., 15 tooth tapered spline with threaded end 4⅝″ total length
- Blade hub 3.94″ dia. x 2.275″ stepped down to 2.5″ dia. x 0.45″ then tapers down to 2.175″ dia. over 0.25″
- Mount 4 holes on 6.8″ dia. B.C.
- Pilot 5¼″ dia.
- Size 10¼″ x 7″ x 7″
- **Shpg. 59 lbs.**

ITEM 602892

SPECIFICATIONS

- Model 250746
- Input shaft 1⅜″ dia. x 3⅞″ long 6T spline with 5/16″ dia. pinhole

ITEM 602893

SPECIFICATIONS

- Model 250618
- Input shaft 1⅜″ dia. x 3″ long with ½″ dia. pinhole

ITEM 602894

SPECIFICATIONS

- Model 251026
- Input shaft 1⅜″ dia. x 3″ long with ½″ dia. pinhole
- Blade hub 3.94″ dia. x 1.75″ stepped down to 2.5″ dia. x 1.12″ then tapers down to 2.175″ dia. over 0.25″

RC71 Series



$419.45 each

SPECIFICATIONS FOR ALL

- Input RPM 540/1000
- Input HP 35-83
- Max torque 4083-9683 in.lbs.
- Input shaft 1⅜″ dia. x 3⅞″ long 6T spline with 5/16″ dia. pinhole
- Output shaft 2″ dia., 15 tooth tapered spline with threaded end 4⅝″ total length
- Blade hub 3.94″ dia. x 2.275″ stepped down to 2.5″ dia. x 0.45″ then tapers down to 2.175″ dia. over 0.25″
- Mount 4 holes on 8″ dia. B.C.
- Pilot 5⅝″ dia.
- Size 12⅜″ x 9¾″ x 9¾″
- **Shpg. 89 lbs.**

ITEM 602896

SPECIFICATIONS

- Model 250598
- CW input gives CW output RPM
- Gear ratio 1:1.21 increaser
- Output RPM 650/1200


ITEM 602897

SPECIFICATIONS

- Model 250492
- CW input gives CCW output RPM
- Gear ratio 1:1.46 increaser
- Output RPM 790/1460

OMNI GEAR

3:1 Right Angle Gear Reducer



ITEM 603207

$588.85

• Brand new. OMNI-GEAR LR-200 series model 254190 right angle gearbox. One piece cast iron gear case and bearing caps. Roller bearings. Spiral bevel gears. Hollow output with full length keyway. Ships without oil, user must add oil prior to use per user's manual.

SPECIFICATIONS

- Ratio 3:1
- Input Power 32 HP continuous
- Input Speed 2000 RPM max.
- Output Torque 950 in.lbs.
- Input Shaft 1″ dia. x 1¾″ w/¼″ crosshole and snap ring groove
- Output Shaft Hollow 1″ dia. x 5¾″ w/ ¼″ keyway
- Mount Four ⅜-16 tapped holes, 4¼″ sq.
- Size 6½″ x 6¼″ x 4⅛″
- **Shpg. 23 lbs.**

Post Hole Digger Gearbox



ITEM 602888

$307.85

• Brand new, OMNI GEAR Model PHD26HD vertical, right angle gearbox. Originally manufactured for PTO driven post hole digger systems. Tapered roller bearings. Spring loaded triple lip seals. Clockwise input rotation gives clockwise output rotation. Cast iron housing. Designed to free hang from a supporting structure or boom that is connected to it with a ⅞″ dia. pin at the top of the gearbox housing. Four ⅜″-16 tapped holes on 3⅜″ dia. B.C. to mount input shaft shield and four ⅜″-16 tapped holes on 4⅛″ dia. B.C. to mount output shaft shield.

SPECIFICATIONS

- Gear ratio 2.92:1
- RPM 540 input max.
- HP input max. 44 HP
- Torque 5133 lb.-in. max.
- 38 oz. oil capacity
- Inner width of mounting ears 4¼″
- Throat depth of pin 1 9/16″
- Input shaft 1¼″ dia. x 2″ smooth with 5/16″ dia. pin hole
- Output shaft 2″ x 4⅜″ smooth shaft with two ½″ dia. pin holes 2¾″ and 3¾″ bearing to center hole
- Size 9½″ x 8¼″ x 7⅝″
- **Shpg. 51 lbs.**

1:1.46 Speed Increaser



ITEM 602895

$404.85

• Brand new, OMNI GEAR 250372 Model RC-61 right angle rotary cutter gearbox. Horizontal input and vertical output downward. Bevel gears. Large deep groove ball bearings to support output. Four 5/16″-18 tapped holes on 4⅛″ dia. B.C. CCW input gives CW output.

SPECIFICATIONS

- Gear ratio 1:1.46 increaser
- Input RPM 540/1000
- Output RPM 790/1460
- Input HP 35-72
- Max torque 4083-8400 in.lbs.
- Input shaft 1⅜″ dia. x 3⅞″ long 6T spline with 5/16″ dia. pinhole
- Output shaft 2″ dia. 15 tooth tapered spline with threaded end. 4⅝″ total length
- Blade hub 3.94″ dia. x 2.275″ stepped down to 2.5″ dia. x 0.45″ then tapers down to 2.175″ dia. over 0.25″
- Mount 4 holes on 8″ dia. B.C.
- Pilot 5⅝″ dia.
- Size 12⅜″ x 9¾″ x 9¾″
- **Shpg. 84 lbs.**

Threaded Rod Ends

• Brand new. Available with left or right hand threads. Steel housing with steel raceway.

Female Threaded Rod Ends With Male Threaded Studs




Left Hand ITEM	Right Hand ITEM	End-To-Center Thread	Length	Shpg.	Price
602708	602715	¼″-28	1.312″	¼ lb.	$ 7.40
602709	602716	5⁄16″-24	1.375″	¼ lb.	$ 7.80
602710	602717	⅜″-24	1.625″	¼ lb.	$ 8.80
602711	602718	7⁄16″-20	1.812″	½ lb.	$12.65
602712	602719	½″-20	2.125″	½ lb.	$16.15
602713	602720	⅝″-18	2.500″	¾ lb.	$17.75
602714	602721	¾″-16	2.875″	1¼ lbs.	$21.95

Male Threaded Rod Ends With Male Threaded Studs




Left Hand ITEM	Right Hand ITEM	End-To-Center Thread	Length	Shpg.	Price
602722	602727	¼″-28	1.562″	¼ lb.	$ 7.10
602723	602728	5⁄16″-24	1.875″	¼ lb.	$ 7.80
602724	602729	⅜″-24	1.938″	¼ lb.	$ 8.80
–	602730	7⁄16″-20	2.125″	½ lb.	$12.65
602725	602731	½″-20	2.438″	½ lb.	$16.15
602726	602732	⅝″-18	2.625″	¾ lb.	$17.90
–	602733	¾″-16	2.875″	1¼ lbs.	$21.95

Female Threaded Rod Ends



Left Hand ITEM	Right Hand ITEM	End-To-Center Bore	Thread	Length	Shpg.	Price
602677	602685	¼″	¼″-28	1.312″	¼ lb.	$ 4.05
602678	602686	5⁄16″	5⁄16″-24	1.375″	¼ lb.	$ 4.70
602679	602687	⅜″	⅜″-24	1.625″	¼ lb.	$ 5.65
602680	602688	7⁄16″	7⁄16″-20	1.812″	¼ lb.	$ 6.90
602681	602689	½″	½″-20	2.125″	½ lb.	$ 8.10
602682	602690	⅝″	⅝″-18	2.500″	½ lb.	$11.15
602683	602691	¾″	¾″-16	2.875″	¾ lb.	$15.20
602684	602692	1″	1″-14	4.125″	2¼ lbs.	$37.80

Male Threaded Rod Ends



Left Hand ITEM	Right Hand ITEM	End-To-Center Bore	Thread	Length	Shpg.	Price
602693	602700	¼″	¼″-28	1.562″	¼ lb.	$ 4.05
602694	602701	5⁄16″	5⁄16″-24	1.875″	¼ lb.	$ 4.70
602695	602702	⅜″	⅜″-24	1.938″	¼ lb.	$ 5.65
602696	602703	7⁄16″	7⁄16″-20	2.125″	¼ lb.	$ 6.90
602697	602704	½″	½″-20	2.438″	¼ lb.	$ 8.10
602698	602705	⅝″	⅝″-18	2.625″	½ lb.	$11.15
602699	602706	¾″	¾″-16	2.875″	¾ lb.	$15.20
–	602707	1″	1″-14	4.125″	2 lbs.	$37.80

¾″-10 Solid Threaded Rod End w/¾″ Eye



ITEM 603144

$4.99

• New, forged, plated solid steel rod end.

SPECIFICATIONS

- Thread Size ¾″-10
- Thread Length 1½″
- Shank Length 2″
- Eye Inside Dia. ¾″
- Eye Outside Dia. 1½″
- Eye Width 13⁄16″
- Size 3⅜″ x 1½″ x 13⁄16″
- **Shpg. ½ lb.**

Special Purchase Rod Ends




Male

Item	Style	Bore	Thread	Shpg.	Price
603162	Male	5⁄16″	5⁄16″-24 LH	¼ lb.	$1.95
603159*	Male	7⁄16″	7⁄16″-20 LH	¼ lb.	$2.95

* Forged Body

¾″ Self Lubricating Stud Rod End



ITEM 604125

$8.95

• New, ALINABAL model PMSL-12-GR rod end with self aligning stud. Self lubricating nylon race.

SPECIFICATIONS

- Body Thread Type Male Left Hand thread
- Body Thread Size ¾″-16
- Misalignment Range 50°
- Self-Aligning Stud ¾″-16 thread
- Misalignment Range 50°
- End To Center 2.875″
- **Shpg. 1½ lbs.**

1″ Swivel Eye Male Rod End



ITEM 603011

$19.95

• New, AURORA BEARING, precision 3 piece swivel eye rod end. High strength alloy steel housing and raceway. PTFE liner. Made in USA.

SPECIFICATIONS

- Model AM16T-56 1-14UNS-3A thread x 2.34″.
- Body thread type male right hand thread
- Housing width 1″
- End to center 4.125″
- Swivel eye 1″ bore x 1.375″ wide
- Static load rating 76,200 lbs.
- Misalignment angle 17° max.
- **Shpg. 3 lbs.**

Jam Nuts

• Brand New. Jam Nuts are often used to lock or "jam" something in place without clamping against another object. Typically low profile compared to a standard nut. Zinc plating, retards the corrosion rate in a normal atmosphere.

* Plain Finish, or bare metal finish which may contain a light coating of oil.



Left Hand Thread ITEM	Price	Right Hand Thread ITEM	Price	Thread
604141	$0.05	604142	$0.05	¼″-28
604143	$0.35	604144	$0.10	5⁄16″-24
604145	$0.45	604146	$0.10	⅜″-24
604147	$0.65	604148	$0.25	7⁄16″-20
604149	$1.20	604150	$0.30	½″-20
604151	$2.25	604152	$0.55	⅝″-18
604153	$3.50	604154	$0.85	¾″-16
604155*	$1.85	604156*	$2.35	1″-14



Roller Chain Sprockets

• Brand new ANSI standard sprockets. Finished, unkeyed bore with two set screws.

Item	Teeth	O.D	Price
25 Pitch ¼″			
	¼″ Finished Bore		
601563	12	1.08″	$5.70
601566	13	1.17″	$6.05
601568	14	1.24″	$6.05
601571	15	1.33″	$6.30
601575	16	1.41″	$6.90
601583	18	1.49″	$7.70
601593	20	1.73″	$9.00
601598	21	1.81″	$8.95
601603	22	1.89″	$10.45
601609	23	1.97″	$11.30
	5⁄16″ Finished Bore		
601562	11	0.99″	$5.40
601564	12	1.08″	$5.70
601569	14	1.24″	$6.05
601572	15	1.33″	$6.30
601576	16	1.41″	$6.90
601579	17	1.49″	$7.20
601604	22	1.89″	$10.45
601610	23	1.97″	$11.30
	⅜″ Finished Bore		
601565	12	1.08″	$5.70
601573	15	1.33″	$6.30
601580	17	1.49″	$7.20
601584	18	1.57″	$7.70
601589	19	1.65″	$8.20
601594	20	1.73″	$9.00
601599	21	1.73″	$10.00
601605	22	1.89″	$10.45
601614	24	2.05″	$11.75
601619	26	2.21″	$13.75
601624	30	2.53″	$18.20
601633	36	3.01″	$23.40
	½″ Finished Bore		
601570	14	1.24″	$6.05
601574	15	1.33″	$6.30
601578	16	1.41″	$6.90
601581	17	1.49″	$7.20
601585	18	1.57″	$7.70
601590	19	1.65″	$8.20
601595	20	1.73″	$9.00
601600	21	1.73″	$10.30
601606	22	1.89″	$10.45
601612	23	1.97″	$7.70
601615	24	2.05″	$11.75
601625	30	2.53″	$18.20
601634	36	3.01″	$23.40
601644	54	4.44″	$37.50
601647	72	5.72″	$43.85
	⅝″ Finished Bore		
601582	17	1.49″	$7.20
601586	18	1.57″	$7.70
601591	19	1.65″	$5.55
601596	20	1.73″	$9.00
601607	22	1.89″	$10.45
601616	24	2.05″	$11.75
601626	30	2.53″	$12.35
601636	40	3.33″	$27.95
601642	48	3.96″	$34.60
601645	54	4.44″	$37.50
	¾″ Finished Bore		
601587	18	1.57″	$7.70
601592	19	1.65″	$5.55
601597	20	1.73″	$9.00
601602	21	1.73″	$7.00
601608	22	1.89″	$10.45
601621	26	2.21″	$13.75
601627	30	2.53″	$18.20
601632	35	2.94″	$23.15
601635	36	3.01″	$23.40
601637	40	3.33″	$19.95
40 Pitch ½″			
	½″ Finished Bore		
600321	10	1.84″	$7.65
600326	12	2.17″	$8.25
600328	13	2.33″	$8.45
600334	14	2.49″	$8.95
600340	15	2.65″	$10.95
	⅝″ Finished Bore		
600563	10	1.84″	$7.65
600324	11	2.00″	$8.00
600734	12	2.17″	$8.25
600330	13	2.33″	$8.45
600336	14	2.49″	$8.95
600342	15	2.65″	$10.95
600626	16	2.81″	$11.45
600351	17	2.98″	$12.35
600360	18	3.14″	$13.45
600369	19	3.30″	$14.05
600375	20	3.46″	$14.95
600382	21	3.62″	$15.50
600390	22	3.78″	$16.30
600399	23	3.94″	$17.15
600408	24	4.10″	$18.65
	¾″ Finished Bore		
600319	10	1.84″	$7.65
600323	11	2.00″	$8.00
600320	12	2.17″	$8.25
600329	13	2.33″	$8.45
600335	14	2.49″	$8.95
600341	15	2.65″	$10.95
600346	16	2.81″	$11.45
600350	17	2.98″	$12.35
600359	18	3.14″	$13.45
600368	19	3.30″	$14.05
600376	20	3.46″	$14.95
600381	21	3.62″	$15.50
600389	22	3.78″	$16.30
600398	23	3.94″	$17.15
600407	24	4.10″	$18.65
600416	25	4.26″	$20.15
600429	28	4.74″	$22.05
601454	29	4.90″	$16.15
600436	30	5.06″	$23.40
	⅞″ Finished Bore		
600325	11	2.00″	$8.00
600327	12	2.17″	$8.25
600331	13	2.33″	$8.45
600337	14	2.49″	$8.95
600343	15	2.65″	$10.95
600624	16	2.81″	$11.45
600578	18	3.14″	$13.45
600370	19	3.30″	$14.05
600374	20	3.46″	$14.95
600391	22	3.78″	$16.30
600400	23	3.94″	$17.15
600409	24	4.10″	$18.65
600430	28	4.74″	$15.40
	1″ Finished Bore		
600625	13	2.33″	$8.45
600332	14	2.49″	$8.95
600736	15	2.65″	$10.95
600683	16	2.81″	$11.45
600347	17	2.98″	$12.35
600579	18	3.14″	$13.45
600362	19	3.30″	$14.05
600580	20	3.46″	$14.95
600377	21	3.62″	$15.50
600383	22	3.78″	$16.30
600393	23	3.94″	$17.15
601032	24	4.10″	$18.65
600411	25	4.26″	$20.15
600418	26	4.42″	$20.70
600424	28	4.74″	$22.05
601455	29	4.90″	$22.60
600432	30	5.06″	$23.40
	1⅛″ Finished Bore		
600339	15	2.65″	$10.95
600345	16	2.81″	$11.45
600355	18	3.14″	$13.45
600364	19	3.30″	$14.05
600372	20	3.46″	$14.95
600565	21	3.62″	$10.85
600385	22	3.78″	$11.40
600404	24	4.10″	$18.65
600413	25	4.26″	$14.10
600420	26	4.42″	$14.50
600426	28	4.74″	$19.70
600434	30	5.06″	$23.40
	1 3⁄16″ Finished Bore		
600735	14	2.49″	$8.95
600349	17	2.98″	$8.65
600356	18	3.14″	$13.45
600365	19	3.30″	$9.85
600737	21	3.62″	$10.85
600386	22	3.78″	$11.40
600395	23	3.94″	$12.00
600414	25	4.26″	$14.10
600421	26	4.42″	$14.50
600738	27	4.58″	$14.80
600427	28	4.74″	$15.40
601457	29	4.90″	$16.15
600435	30	5.06″	$17.20
	1¼″ Finished Bore		
600338	15	2.65″	$10.95
600344	16	2.81″	$11.45
600354	18	3.14″	$13.45
600363	19	3.30″	$14.05
600371	20	3.46″	$14.95
600378	21	3.62″	$15.50
600384	22	3.78″	$16.30
600394	23	3.94″	$15.30
600412	25	4.26″	$14.10
600419	26	4.42″	$14.50
600425	28	4.74″	$22.05
601458	29	4.90″	$16.15
600433	30	5.06″	$23.40
600357	18	3.14″	$13.45
600366	19	3.30″	$9.85
600379	21	3.62″	$10.85
600387	22	3.78″	$11.40
600396	23	3.94″	$12.00
600405	24	4.10″	$18.65
	1 7⁄16″ Finished Bore		
600358	18	3.14″	$9.40
600367	19	3.30″	$9.85
600373	20	3.46″	$10.45
600380	21	3.62″	$10.85
600388	22	3.78″	$11.40
600397	23	3.94″	$12.00
600406	24	4.10″	$13.05
600415	25	4.26″	$14.10
600422	26	4.42″	$14.50
600428	28	4.74″	$15.40
	1½″ Finished Bore		
600353	18	3.14″	$13.45
600361	19	3.30″	$12.55
600564	20	3.46″	$14.95
600392	23	3.94″	$12.00
600401	24	4.10″	$18.65
600410	25	4.26″	$20.15
600417	26	4.42″	$14.50
600739	27	4.58″	$14.80
601459	29	4.90″	$16.15
600431	30	5.06″	$23.40



Roller Chain Sprockets

• Brand new ANSI standard sprockets. Finished, keyed bore with set screw. Carbon steel with heat-treated teeth.

Item	Teeth	O.D	Price
35 Pitch ⅜″			
	⅜″ Finished Bore		
601061	10	1.38″	$5.25
601064	11	1.50″	$5.75
	½″ Finished Bore		
601062	10	1.38″	$5.25
601065	11	1.50″	$5.75
601068	12	1.63″	$6.05
601071	13	1.75″	$6.30
601074	14	1.87″	$6.30
601077	15	1.99″	$6.65
601082	16	2.11″	$7.30
601089	18	2.35″	$8.20
601090	19	2.47″	$8.70
601094	20	2.59″	$9.55
601106	24	3.07″	$12.40
601110	25	3.19″	$13.10
	⅝″ Finished Bore		
601063	10	1.38″	$5.25
601066	11	1.50″	$5.75
601069	12	1.63″	$6.05
601072	13	1.75″	$6.30
601075	14	1.87″	$6.30
601078	15	1.99″	$6.65
601083	16	2.11″	$7.30
601189	18	2.35″	$8.20
601091	19	2.47″	$8.70
601095	20	2.59″	$9.55
601097	21	2.71″	$10.60
601100	22	2.83″	$11.05
601103	23	2.95″	$11.80
601107	24	3.07″	$12.40
601113	26	3.31″	$14.60
601122	28	3.55″	$11.75
601128	29	3.68″	$17.65
601127	30	3.79″	$19.30
601139	32	4.03″	$21.55
601149	36	4.51″	$24.85
601160	42	5.23″	$30.20
601165	45	5.59″	$30.30
601170	48	5.95″	$36.60
	¾″ Finished Bore		
601067	11	1.50″	$5.75
601070	12	1.63″	$6.05
601073	13	1.75″	$6.30
601076	14	1.87″	$6.30
601079	15	1.99″	$6.65
601084	16	2.11″	$7.30
601086	17	2.23″	$7.60
601190	18	2.35″	$8.20
601092	19	2.47″	$8.70
601096	20	2.59″	$9.55
601098	21	2.71″	$10.60
601101	22	2.83″	$11.05
601104	23	2.95″	$11.80
601108	24	3.07″	$12.40
601111	25	3.19″	$13.10
601114	26	3.31″	$14.60
601119	27	3.43″	$15.95
601123	28	3.55″	$17.30
601133	30	3.79″	$19.30
601140	32	4.03″	$21.55
601145	35	4.39″	$24.40
601150	36	4.51″	$24.85
601154	40	4.99″	$29.50
601161	42	5.23″	$30.20
601166	45	5.59″	$33.95
601171	48	5.95″	$36.60
601176	54	6.66″	$39.75
601181	60	7.38″	$36.00
	⅞″ Finished Bore		
601080	15	1.99″	$6.65
601191	18	2.35″	$8.20
601124	28	3.55″	$11.75
601130	29	3.68″	$12.35
601134	30	3.79″	$19.30
601141	32	4.03″	$21.55
601167	45	5.59″	$30.30
601172	48	5.95″	$32.70
601186	72	8.81″	$44.20
	1″ Finished Bore		
601081	15	1.99″	$6.65
601085	16	2.11″	$7.30
601088	17	2.23″	$7.60
601192	18	2.35″	$7.35
601093	19	2.47″	$8.70
601099	21	2.71″	$10.60
601105	23	2.95″	$11.80
601109	24	3.07″	$12.40
601112	25	3.19″	$13.10
601115	26	3.31″	$14.60
601125	28	3.55″	$15.45
601135	30	3.79″	$19.30
601147	35	4.39″	$24.40
601151	36	4.51″	$24.85
601156	40	4.99″	$29.50
601162	42	5.23″	$30.20
601168	45	5.59″	$33.95
601173	48	5.95″	$36.60
601178	54	6.66″	$39.75
601183	60	7.38″	$36.00
	1⅛″ Finished Bore		
601116	26	3.31″	$14.60
601120	27	3.43″	$10.85
601131	29	3.68″	$12.35
601136	30	3.79″	$13.50
601142	32	4.03″	$15.10
601152	36	4.51″	$18.25
601157	40	4.99″	$26.35
601169	45	5.59″	$23.75
601184	60	7.38″	$32.15
	1 3⁄16″ Finished Bore		
601121	27	3.43″	$14.25
601126	28	3.55″	$11.75
601132	29	3.68″	$12.35
601137	30	3.79″	$13.50
601143	32	4.03″	$15.10
601148	35	4.39″	$17.95
601164	42	5.23″	$21.15
601179	54	6.66″	$27.80
	1¼″ Finished Bore		
601138	30	3.79″	$19.30
601144	32	4.03″	$21.55
601174	48	5.95″	$20.90
601180	54	6.66″	$22.70
601188	72	8.81″	$39.45
50 Pitch ⅝″			
	⅝″ Finished Bore		
600438	10	2.30″	$11.10
600440	11	2.50″	$11.75
600447	12	2.71″	$12.25
600471	16	3.52″	$16.15
600835	18	3.92″	$17.85
600842	19	4.12″	$18.70
	¾″ Finished Bore		
600437	10	2.30″	$11.10
600439	11	2.50″	$11.75
600446	12	2.71″	$12.25
600452	13	2.91″	$12.95
600627	14	3.11″	$13.50
600463	15	3.32″	$14.00
600470	16	3.52″	$16.15
600484	18	3.92″	$17.85
600503	21	4.52″	$20.50
600518	23	4.92″	$14.55
600526	24	5.12″	$24.70
600860	25	5.32″	$25.90
600873	27	5.72″	$28.35
600880	28	5.92″	$26.50
600887	30	6.32″	$29.90
600904	40	8.32″	$38.50
	⅞″ Finished Bore		
600751	10	2.30″	$9.90
600448	12	2.71″	$12.25
600453	13	2.91″	$12.95
600456	14	3.11″	$13.50
600465	15	3.32″	$14.00
600472	16	3.52″	$16.15
600480	17	3.72″	$17.05
600485	18	3.92″	$17.85
600495	20	4.32″	$19.65
600888	30	6.32″	$19.55
600896	34	7.12″	$29.30

Item	Teeth	O.D	Price
50 Pitch 5/8″			
600905	40	8.32″	$38.50
1″ Finished Bore			
600752	10	2.30″	$11.10
600753	11	2.50″	$11.75
600442	12	2.71″	$12.25
600449	13	2.91″	$12.95
600782	14	3.11″	$13.50
600458	15	3.32″	$14.00
600568	16	3.52″	$16.15
600474	17	3.72″	$17.05
600837	18	3.92″	$17.85
600486	19	4.12″	$18.70
600491	20	4.32″	$19.65
600497	21	4.52″	$20.50
600505	22	4.72″	$21.05
600512	23	4.92″	$22.00
600520	24	5.12″	$24.70
600862	25	5.32″	$25.90
600868	26	5.52″	$27.10
600882	28	5.92″	$29.70
600889	30	6.32″	$33.50
600897	34	7.12″	$42.95
600906	40	8.32″	$38.50
1⅛″ Finished Bore			
600444	12	2.71″	$12.25
600451	13	2.91″	$12.95
600454	14	3.11″	$13.50
600460	15	3.32″	$14.00
600468	16	3.52″	$16.15
600566	17	3.72″	$17.05
600482	18	3.92″	$17.85
600487	19	4.12″	$18.70
600493	20	4.32″	$19.65
600499	21	4.52″	$20.50
600507	22	4.72″	$14.35
600514	23	4.92″	$14.55
600522	24	5.12″	$24.70
600890	30	6.32″	$33.50
600898	34	7.12″	$42.95
600907	40	8.32″	$38.50
1¾₁₆″ Finished Bore			
600455	14	3.11″	$13.50
600461	15	3.32″	$14.00
600476	17	3.72″	$11.25
600573	18	3.92″	$12.20
600488	19	4.12″	$12.75
600500	21	4.52″	$13.95
600508	22	4.72″	$14.35
600515	23	4.92″	$14.55
600523	24	5.12″	$17.65
600869	26	5.52″	$18.80
600875	27	5.72″	$20.25
600883	28	5.92″	$20.60
600891	30	6.32″	$33.50
600899	34	7.12″	$29.30
600908	40	8.32″	$38.50
1¼″ Finished Bore			
600443	12	2.71″	$12.25
600450	13	2.91″	$12.95
600567	14	3.11″	$13.50
600459	15	3.32″	$14.00
600467	16	3.52″	$16.15
600475	17	3.72″	$17.05
600572	18	3.92″	$17.85
600569	19	4.12″	$18.70
600492	20	4.32″	$19.65
600498	21	4.52″	$20.50
600506	22	4.72″	$21.05
600513	23	4.92″	$22.00
600521	24	5.12″	$24.70
600864	25	5.32″	$25.90
600870	26	5.52″	$27.10
600876	27	5.72″	$28.35
600892	30	6.32″	$33.50
600900	34	7.12″	$42.95
600909	40	8.32″	$38.50
1⅜″ Finished Bore			
600477	17	3.72″	$11.25
600489	19	4.12″	$12.75
600501	21	4.52″	$13.95
600509	22	4.72″	$21.65
600516	23	4.92″	$19.65
600877	27	5.72″	$25.30
600885	28	5.92″	$26.50
600893	30	6.32″	$33.50
600901	34	7.12″	$29.30
1⁷/₁₆″ Finished Bore			
600462	15	3.32″	$14.00
600490	19	4.12″	$12.75
600502	21	4.52″	$13.95
600510	22	4.72″	$14.35
600517	23	4.92″	$14.55
600525	24	5.12″	$24.70
600865	25	5.32″	$18.50
600871	26	5.52″	$24.20
600878	27	5.72″	$20.25
600902	34	7.12″	$29.30

Item	Teeth	O.D	Price
1½″ Finished Bore			
600457	15	3.32″	$14.00
600466	16	3.52″	$16.15
600473	17	3.72″	$17.05
600481	18	3.92″	$17.85
600846	19	4.12″	$18.70
600574	20	4.32″	$19.65
600496	21	4.52″	$20.50
600504	22	4.72″	$21.05
600511	23	4.92″	$19.65
600519	24	5.12″	$24.70
600866	25	5.32″	$25.90
600879	27	5.72″	$20.25
600886	28	5.92″	$20.60
600895	30	6.32″	$33.50
600903	34	7.12″	$42.95
600911	40	8.32″	$38.50
60 Pitch ¾″			
¾″ Finished Bore			
600530	10	2.76″	$13.95
600536	11	3.00″	$14.35
600541	12	3.25″	$14.90
600547	13	3.49″	$16.00
600550	14	3.74″	$17.20
600555	15	3.98″	$19.80
600561	16	4.22″	$22.15
⅞″ Finished Bore			
600531	10	2.76″	$13.95
600537	11	3.00″	$12.80
600556	15	3.98″	$19.80
600598	16	4.22″	$22.15
1″ Finished Bore			
600527	10	2.76″	$13.95
600532	11	3.00″	$14.35
600577	12	3.25″	$14.90
600543	13	3.49″	$16.00
600576	14	3.74″	$17.20
600741	15	3.98″	$19.80
600599	16	4.22″	$22.15
600605	17	4.46″	$23.50
600612	18	4.70″	$26.30
600616	19	4.95″	$27.60
600590	20	5.19″	$31.40
600747	21	5.43″	$33.80
600755	22	5.67″	$35.60
600763	23	5.91″	$37.45
600402	24	6.15″	$39.35
600783	26	6.63″	$43.45
600794	27	6.87″	$31.40
600802	28	7.11″	$36.90
600812	30	7.59″	$40.45
600826	35	8.78″	$51.80
1⅛″ Finished Bore			
600529	10	2.76″	$13.95
600539	12	3.25″	$14.90
600545	13	3.49″	$16.00
600548	14	3.74″	$17.20
600603	15	3.98″	$19.80
600558	16	4.22″	$22.15
600606	17	4.46″	$23.50
600613	18	4.70″	$26.30
600617	19	4.95″	$24.65
600591	20	5.19″	$31.40
600795	27	6.87″	$31.40
600819	32	8.07″	$44.25
600827	35	8.78″	$46.25
1¾₁₆″ Finished Bore			
600535	11	3.00″	$9.85
600583	13	3.49″	$14.30
600551	15	3.98″	$19.80
600600	16	4.22″	$22.15
600607	17	4.46″	$23.50
600614	18	4.70″	$19.00
600618	19	4.95″	$19.90
600593	20	5.19″	$21.60
600748	21	5.43″	$23.25
600757	22	5.67″	$24.45
600765	23	5.91″	$33.45
600774	24	6.15″	$35.15
600797	27	6.87″	$31.40
600814	30	7.59″	$36.10
600820	32	8.07″	$39.50
600828	35	8.78″	$38.70
1¼″ Finished Bore			
600528	10	2.76″	$13.95
600533	11	3.00″	$14.35
600538	12	3.25″	$14.90
600544	13	3.49″	$16.00
600570	14	3.74″	$17.20
600571	15	3.98″	$19.80
600596	16	4.22″	$22.15
600608	17	4.46″	$23.50
600615	18	4.70″	$26.30
600619	19	4.95″	$27.60
600592	20	5.19″	$31.40
600749	21	5.43″	$33.80
600756	22	5.67″	$35.60
600766	23	5.91″	$37.45
600775	24	6.15″	$39.35
600786	26	6.63″	$43.45

Item	Teeth	O.D	Price
600796	27	6.87″	$35.15
600804	28	7.11″	$36.90
600829	35	8.78″	$51.80
1⅜″ Finished Bore			
600546	13	3.49″	$16.00
600552	15	3.98″	$19.80
600559	16	4.22″	$22.15
600609	17	4.46″	$23.50
600586	18	4.70″	$26.30
600620	19	4.95″	$27.60
600767	23	5.91″	$25.00
600776	24	6.15″	$39.35
600787	26	6.63″	$43.45
600798	27	6.87″	$31.40
600805	28	7.11″	$36.90
600815	30	7.59″	$40.45
600821	32	8.07″	$44.25
600830	35	8.78″	$46.25
1⁷/₁₆″ Finished Bore			
600575	14	3.74″	$17.20
600554	15	3.98″	$19.80
600601	16	4.22″	$22.15
600588	18	4.70″	$26.30
600679	19	4.95″	$27.60
600750	21	5.43″	$33.80
600758	22	5.67″	$35.60
600768	23	5.91″	$25.00
600778	24	6.15″	$39.35
600806	28	7.11″	$36.90
600822	32	8.07″	$44.25
1½″ Finished Bore			
600740	13	3.49″	$16.00
600582	14	3.74″	$17.20
600742	15	3.98″	$19.80
600557	16	4.22″	$22.15
600587	18	4.70″	$26.30
600621	19	4.95″	$27.60
600746	20	5.19″	$31.40
600759	22	5.67″	$35.60
600777	24	6.15″	$39.35
600788	26	6.63″	$43.45
600800	27	6.87″	$31.40
600807	28	7.11″	$36.90
600823	32	8.07″	$44.25
600831	35	8.78″	$51.80
1⅝″ Finished Bore			
600553	15	3.98″	$19.80
600560	16	4.22″	$19.80
600610	17	4.46″	$16.95
600589	18	4.70″	$19.00
600594	20	5.19″	$31.40
600760	22	5.67″	$24.45
600769	23	5.91″	$33.45
600816	30	7.59″	$36.10
600832	35	8.78″	$38.70
1¾″ Finished Bore			
600604	15	3.98″	$19.80
600597	16	4.22″	$22.15
600562	18	4.70″	$26.30
600770	23	5.91″	$25.75
600809	28	7.11″	$32.95
600817	30	7.59″	$40.45
600833	35	8.78″	$38.70
1⅞″ Finished Bore			
600744	18	4.70″	$26.30
600761	22	5.67″	$31.80
600771	23	5.91″	$25.75
600779	24	6.15″	$27.10
600791	26	6.63″	$38.80
600801	27	6.87″	$31.40
600810	28	7.11″	$32.95
600818	30	7.59″	$36.10
1¹⁵/₁₆″ Finished Bore			
600602	16	4.22″	$22.15
600611	17	4.46″	$23.50
600628	18	4.70″	$26.30
600595	20	5.19″	$28.05
600762	22	5.67″	$35.60
600772	23	5.91″	$37.45
600780	24	6.15″	$39.35
2″ Finished Bore			
600781	24	6.15″	$39.35
600793	26	6.63″	$43.45
600811	28	7.11″	$36.90
600825	32	8.07″	$44.25
600836	35	8.78″	$51.80
80 Pitch 1″			
1″ Finished Bore			
600644	10	3.68″	$23.05
600648	11	4.01″	$25.65
600671	12	4.33″	$27.65
600715	13	4.66″	$30.50
600636	14	4.98″	$28.75
600657	17	5.95″	$44.75
1⅛″ Finished Bore			
600645	10	3.68″	$23.05
600716	13	4.66″	$20.35
600637	14	4.98″	$16.30
600843	17	5.95″	$29.85
600855	20	5.19″	$33.75

Item	Teeth	O.D	Price
1¾₁₆″ Finished Bore			
600647	10	3.68″	$16.60
600650	11	4.01″	$18.55
600673	12	4.33″	$19.95
600717	13	4.66″	$20.35
600638	14	4.98″	$21.50
600652	15	5.30″	$25.30
600841	16	5.63″	$28.25
600844	17	5.95″	$29.85
600849	18	6.27″	$32.85
600851	19	6.59″	$41.90
600856	20	6.91″	$33.75
1¼″ Finished Bore			
600646	10	3.68″	$23.05
600649	11	4.01″	$25.65
600674	12	4.33″	$27.65
600640	14	4.98″	$32.20
600840	15	5.30″	$37.95
600632	16	5.63″	$42.35
600845	17	5.95″	$44.75
600662	19	6.59″	$41.90
1⅜″ Finished Bore			
600675	12	4.33″	$27.65
600639	14	4.98″	$32.20
600633	16	5.63″	$42.35
600857	20	6.91″	$45.15
1⁷/₁₆″ Finished Bore			
600651	11	4.01″	$25.65
600676	12	4.33″	$19.40
600718	13	4.66″	$20.35
600641	14	4.98″	$28.75
600634	16	5.63″	$28.25
1½″ Finished Bore			
600838	10	3.68″	$23.05
600839	11	4.01″	$25.65
600677	12	4.33″	$27.65
600719	13	4.66″	$30.50
600630	16	5.63″	$42.35
600658	17	5.95″	$44.75
600663	19	6.59″	$41.90
600667	20	6.91″	$45.15
1⅝″ Finished Bore			
600642	14	4.98″	$16.30
600654	15	5.30″	$37.95
600629	16	5.63″	$28.25
600664	19	6.59″	$36.30
1¾″ Finished Bore			
600678	12	4.33″	$27.65
600720	13	4.66″	$27.20
600655	15	5.30″	$37.95
600631	16	5.63″	$42.35
600668	20	6.91″	$45.15
1⅞″ Finished Bore			
600847	17	5.95″	$29.85
600853	19	6.59″	$36.30
600858	20	6.91″	$40.30
1¹⁵/₁₆″ Finished Bore			
600659	17	5.95″	$39.95
600669	20	6.91″	$45.15
2″ Finished Bore			
600721	13	4.66″	$30.50
600643	14	4.98″	$32.20
600681	15	5.30″	$37.95
600635	16	5.63″	$42.35
600660	17	5.95″	$44.75
600661	18	6.27″	$37.85
600666	19	6.59″	$41.90
600670	20	6.91″	$45.15
601466	22	7.58″	$60.65

Idler Sprockets

• Brand new. Cast steel idler sprockets. Sealed ball bearings.

ITEM	Pitch	Bore	Teeth	O.D.	Price
601042	35	½″	18	2.35″	$13.55
601043	35	5/8″	18	2.35″	$13.55
601044	40	½″	17	2.98″	$17.30
601045	40	5/8″	17	2.98″	$17.30
601046	50	½″	13	2.91″	$17.70
601047	50	5/8″	13	2.91″	$17.70
601048	50	½″	15	3.32″	$19.10
601049	50	5/8″	15	3.32″	$19.10
601050	50	½″	17	3.72″	$19.60
601051	50	5/8″	17	3.72″	$19.60
601052	60	½″	11	3.00″	$19.10
601053	60	5/8″	11	3.00″	$19.10
601054	60	½″	13	3.49″	$20.40
601055	60	5/8″	13	3.49″	$20.40
601056	60	½″	15	3.98″	$22.85
601057	60	5/8″	15	3.98″	$22.85
601058	80	¾″	11	4.01″	$31.60
601059	80	¾″	12	4.33″	$32.65
601060	80	1″	12	4.33″	$32.65

Weld-on Roller Chain Sprockets & Hubs



• Brand new. Weld on roller chain sprocket and hub assembly allows multiple combination of bore to sprocket types. Hubs have machined pilot for sprocket to slip over for easy alignment and welding. Keyway slot and set screw furnished with hub.


• ***ORDERING:*** Select sprocket by chain pitch and number of teeth, THEN select hub with matching letter code (V, W, X) and desired bore size.

# Teeth	40 Pitch ITEM	Dia	Hub	Price	50 Pitch ITEM	Dia	Hub	Price	60 Pitch ITEM	Dia	Hub	Price
9	–	–	–	–	600975	2.09	V	$5.75	600978	2.51	V	$7.40
10	–	–	–	–	600976	2.30	V	$5.75	600979	2.76	V	$7.80
11	600912	2.00	V	$4.75	600977	2.50	V	$6.65	600980	3.00	W	$8.25
12	600192	2.17	V	$4.85	600208	2.71	W	$7.20	600224	3.25	W	$9.25
13	600193	2.33	V	$4.60	600209	2.92	W	$7.45	600225	3.49	W	$9.35
14	600194	2.49	V	$5.35	600210	3.12	W	$7.90	600226	3.74	W	$10.30
15	600195	2.65	V	$5.55	600211	3.32	W	$8.45	600227	3.98	X	$11.20
16	600196	2.82	W	$5.85	600212	3.52	W	$8.70	600228	4.22	X	$11.60
17	600197	2.98	W	$6.40	600213	3.72	X	$9.75	600229	4.47	X	$13.20
18	600198	3.14	W	$6.65	600214	3.92	X	$9.90	600230	4.7	X	$14.10
19	600199	3.23	W	$7.00	600215	4.13	X	$10.80	600231	4.95	X	$15.55
20	600200	3.48	X	$7.55	600216	4.33	X	$11.40	600232	5.19	X	$17.20
21	600201	3.62	X	$8.40	600217	4.53	X	$12.25	600233	5.46	X	$18.80
22	600202	3.78	X	$8.95	600218	4.72	X	$13.10	600234	5.67	X	$20.45
23	600981	3.94	X	$9.65	600983	4.92	X	$13.65	600986	5.91	X	$22.15
24	600203	4.1	X	$10.45	600219	5.13	X	$14.50	600235	6.15	X	$22.75
25	600204	4.26	X	$11.10	600220	5.33	X	$15.60	600236	6.4	X	$24.50
26	600205	4.42	X	$11.70	600221	5.53	X	$16.75	600237	6.63	X	$26.30
27	–	–	–	–	600984	5.72	X	$18.00	600987	6.87	X	$28.10
28	600206	4.74	X	$12.85	600222	5.93	X	$19.05	600238	7.15	X	$30.10
29	600982	4.90	X	$13.70	600985	6.12	X	$19.90	600988	7.35	X	$28.65
30	600207	5.06	X	$14.55	600223	6.32	X	$21.55	600239	7.59	X	$33.85
31	600913	5.22	X	$15.40	600934	6.52	X	$22.65	600956	7.83	X	$36.10
32	600914	5.38	X	$16.30	600935	6.72	X	$23.30	600957	8.07	X	$37.60
33	600915	5.54	X	$17.30	600936	6.92	X	$22.00	600958	8.30	X	$40.55
34	600916	5.70	X	$18.20	600937	7.12	X	$25.45	600959	8.54	X	$42.85
35	600917	5.86	X	$19.35	600938	7.32	X	$26.65	600960	8.78	X	$44.80
36	600918	6.02	X	$20.20	600939	7.52	X	$28.95	600961	9.02	X	$37.30
37	600919	6.18	X	$11.25	600940	7.72	X	$31.40	600962	9.26	X	$40.10
38	600920	6.33	X	$22.30	600941	7.92	X	$33.05	600963	9.50	X	$41.70
39	600921	6.49	X	$20.45	600942	8.12	X	$30.00	–	–	–	–
40	600922	6.65	X	$22.65	600943	8.32	X	$33.95	600965	9.98	X	$44.25
41	600923	6.81	X	$23.45	600944	8.52	X	$35.80	600966	10.22	X	$45.05
42	600924	6.97	X	$24.90	600945	8.72	X	$37.80	600967	10.46	X	$46.50
43	600925	7.13	X	$25.80	600946	8.91	X	$25.75	600968	10.70	X	$38.90
44	600926	7.29	X	$27.85	600947	9.11	X	$40.80	600969	10.94	X	$52.35
45	600927	7.45	X	$28.30	600948	9.31	X	$42.40	600970	11.18	X	$53.00
46	600928	7.61	X	$29.00	600949	9.51	X	$40.00	600971	11.42	X	$56.70
48	600929	7.93	X	$32.15	600950	9.91	X	$37.40	600972	11.89	X	$59.85
50	600930	8.25	X	$37.40	600951	10.31	X	$40.85	–	–	–	–
52	–	–	–	–	600952	10.71	X	$41.60	–	–	–	–
54	600931	8.89	X	$39.65	600953	11.11	X	$47.05	600973	13.33	X	$72.65
60	600932	9.84	X	$34.65	600954	12.30	X	$56.80	600974	14.76	X	$95.55
72	600933	11.75	X	$50.70	600955	14.69	X	$90.15	–	–	–	–

80 Pitch

Teeth	ITEM	Dia	Hub	Price	Teeth	ITEM	Dia	Hub	Price	Teeth	ITEM	Dia	Hub	Price
9	603331	3.34	W	$15.35	16	603338	5.63	X	$24.50	24	603346	8.2	X	$39.15
10	603332	3.68	W	$15.75	17	603339	5.95	X	$27.95	25	603347	8.51	X	$40.75
11	603333	4.01	W	$16.15	18	603340	6.27	X	$32.25	26	603348	8.83	X	$38.70
12	603334	4.33	X	$16.90	19	603341	6.59	X	$35.95	27	603349	9.16	X	$47.40
13	603335	4.66	X	$18.25	20	603342	6.91	X	$40.65	28	603350	9.48	X	$49.00
14	603336	4.98	X	$20.90	21	603343	7.23	X	$44.40	29	601023	9.8	X	$53.20
15	603337	5.3	X	$22.95	22	603344	7.55	X	$35.65	30	603351	10.11	X	$56.25

Dimensions of Hubs



All hubs furnished with standard keyway and two setscrews.

V Hub		W Hub		X Hub	
A	1⅛″	A	1⅝″	A	2″
B	1⁷⁄₁₆″	B	1¹³⁄₁₆″	B	2½″
C	⁷⁄₁₆″	C	⁷⁄₁₆″	C	⁷⁄₁₆″
D	¾″	D	1″	D	1″
E	1³⁄₁₆″	E	1⁷⁄₁₆″	E	1⁷⁄₁₆″

Bore	V Hub	W Hub	X Hub
½″	600240	600245	–
⁹⁄₁₆″	600241	600246	–
⅝″	600242	600247	600253
¹¹⁄₁₆″	601007	601014	601021
¾″	600243	600248	600254
¹³⁄₁₆″	601008	601015	601022
⅞″	600244	600249	600255
¹⁵⁄₁₆″	–	601026	601027
1″	–	600250	600256
1¹⁄₁₆″	–	601009	601018
1⅛″	–	600251	600257
1³⁄₁₆″	–	601013	601019
1¼″	–	600252	600258
1⁵⁄₁₆″	–	–	601020
1⅜″	–	–	601028
1⁷⁄₁₆″	–	–	601029
1½″	–	–	601030
¾″ Hex	–	601016	–
⅞″ Hex	–	601017	–
1¼″ Hex	–	601010	–
1⅛″ 6 Spl	–	601012	–
Shpg.	1 lb.	1½ lbs.	2 lbs.
Price	$7.05	$8.65	$10.95

1″ 15 Spline Bore



ITEM 602201

$16.45

• W hub. **Shpg. 1½ lbs.**

1¾″ 20 Spline Bore



ITEM 600166

$28.95

• X hub. **Shpg. 2 lbs.**

QD Roller Chain Sprockets



• Brand new. Quick detachable bushed bore roller chain sprockets. One-piece forged construction, hardened teeth. Black oxide finish. Order correct QD Bushing to match sprocket series and bore size (sold separately).

ITEM	Series	Teeth	O.D.	Shpg	Price
40 Pitch Sprockets					
603502	JA	15	2.65″	0.4	$13.45
603813	JA	17	2.98″	0.5	$15.15
603814	JA	18	3.14″	0.6	$17.60
603815	JA	19	3.23″	0.6	$18.35
603816	SH	20	3.48″	0.8	$20.45
603818	SH	22	3.78″	1	$20.90
603819	SH	23	3.94″	1.5	$20.40
603820	SH	24	4.10″	1.5	$22.50
603821	SH	25	4.26″	1.5	$23.40
603822	SH	26	4.42″	2	$23.95
603823	SH	28	4.74″	2	$28.35
603824	SH	30	5.06″	2	$30.95
603825	SH	32	5.38″	2	$33.15
603826	SH	35	5.86″	3	$36.50
603827	SDS	36	6.02″	3	$37.85
603828	SDS	40	6.65″	3	$42.65
603829	SDS	42	6.97″	3	$36.95
603830	SDS	45	7.45″	4	$40.55
603831	SDS	48	7.93″	4	$42.55
50 Pitch Sprockets					
603833	JA	16	3.52″	0.7	$20.50
603834	SH	17	3.72″	0.9	$22.90
603835	SH	18	3.92″	1.5	$22.85
603836	SH	19	4.13″	1.5	$23.70
603837	SDS	20	4.33″	1.5	$21.70
603838	SDS	21	4.53″	1.5	$25.30
603840	SDS	23	4.92″	2	$30.30
603841	SDS	24	5.13″	2	$31.85
603842	SDS	25	5.33″	2	$33.50
603843	SDS	26	5.53″	2.5	$34.65
603844	SDS	27	5.72″	2.5	$36.50
603845	SDS	28	5.93″	3	$37.85
603846	SDS	30	6.32″	3	$41.45
603847	SDS	32	6.72″	3	$37.00
603848	SDS	35	7.32″	4	$41.55
603849	SDS	36	7.52″	4	$42.95
603850	SDS	40	8.32″	5	$46.25
603851	SDS	42	8.72″	6	$50.00
603852	SDS	45	9.31″	6	$61.95
603853	SDS	48	9.91″	7	$70.85

ITEM	Series	Teeth	O.D.	Shpg	Price
60 Pitch Sprockets					
603854	JA	12	3.25″	0.6	$20.95
603855	SH	14	3.74″	0.9	$22.55
603856	SH	15	3.98″	1.5	$25.85
603857	SH	16	4.22″	1.5	$27.95
603858	SDS	18	4.70″	2	$32.70
603860	SDS	20	5.19″	3	$36.35
603861	SDS	22	5.67″	3	$41.75
603862	SDS	23	5.91″	3	$43.85
603863	SDS	24	6.15″	3	$33.95
603864	SDS	25	6.40″	4	$40.20
603865	SK	26	6.63″	5	$43.60
603866	SK	27	6.87″	5	$45.45
603867	SK	28	7.15″	5	$47.75
603868	SK	30	7.59″	6	$51.80
603869	SK	32	8.07″	7	$58.05
603870	SK	35	8.78″	8	$65.50
603871	SK	40	9.98″	10	$79.75
80 Pitch Sprockets					
603872	SH	11	4.01″	1	$28.25
603873	SH	12	4.33″	1.5	$30.80
603874	SDS	13	4.66″	2	$37.25
603875	SDS	14	4.98″	2	$36.10
603877	SK	17	5.95″	4	$42.00
603878	SK	18	6.27″	4	$44.55
603879	SF	21	7.23″	6	$54.30
603880	SF	22	7.55″	7	$51.35
603881	SF	23	7.87″	7	$62.20
603882	SF	24	8.20″	8	$67.50
603883	SF	25	8.51″	9	$69.00
603885	SF	27	9.16″	10	$76.75
603886	SF	28	9.48″	11	$81.05

QD Keyed Bushings



• Brand new, standard Quick Detachable bushings. Black oxide finish. Includes cap screws. Order by series code and shaft size.

ITEM	Bore	Keyway	Shpg	Price
JA Series Bushings	**Bolt Circle 1.665″ dia.**			
603887	½″	⅛″	1 lb.	$12.75
603888	⅝″	3⁄16″	1 lb.	$12.75
603889	¾″	3⁄16″	1 lb.	$12.75
603890	⅞″	3⁄16″	1 lb.	$12.75
603891	1″	¼″	1 lb.	$12.75
603892	1⅛″	¼″	1 lb.	$12.75
603893	1 3⁄16″	¼″	1 lb.	$12.75
SD Series Bushings	**Bolt Circle 2.688″ dia.**			
603896	¾″	3⁄16″	1.5 lbs.	$25.20
603897	⅞″	3⁄16″	1.5 lbs.	$25.20
603898	1″	3⁄16″	1.5 lbs.	$25.20
603900	1 3⁄16″	¼″	1.5 lbs.	$25.20
603901	1¼″	¼″	1.5 lbs.	$25.20
603902	1⅜″	5⁄16″	1.5 lbs.	$25.20
603903	1 7⁄16″	⅜″	1.5 lbs.	$25.20
603904	1½″	⅜″	1.5 lbs.	$25.20
603905	1⅝″	⅜″	1.5 lbs.	$25.20
603906	1¾″	⅜″	1.5 lbs.	$25.20
603895	1 11⁄16″	⅜″	1.5 lbs.	$25.20
603907	1 15⁄16″	½″	1.5 lbs.	$25.20
603908	2″	None	1.5 lbs.	$22.50
SDS Series Bushings	**Bolt Circle 2.688″ dia.**			
603910	¾″	3⁄16″	1 lb.	$21.80
603911	⅞″	3⁄16″	1 lb.	$21.80
603912	1″	¼″	1 lb.	$21.80
603913	1 3⁄16″	¼″	1 lb.	$21.80
603914	1¼″	¼″	1 lb.	$21.80
603915	1⅜″	5⁄16″	1 lb.	$21.80
603916	1 7⁄16″	⅜″	1 lb.	$17.90
603917	1½″	⅜″	1 lb.	$21.80
603918	1⅝″	⅜″	1 lb.	$21.80

ITEM	Bore	Keyway	Shpg	Price
603919	1¾″	⅜″	1 lb.	$21.80
603909	1 11⁄16″	⅜″	1 lb.	$21.80
603920	1⅞″	½″	1 lb.	$19.45
603921	1 15⁄16″	½″	1 lb.	$21.80
603922	2″	None	1 lb.	$21.80
SF Series Bushings	**Bolt Circle 3.875″ dia.**			
603933	1″	¼″	3 lbs.	$38.35
603934	1⅛″	¼″	3 lbs.	$38.35
603935	1 3⁄16″	¼″	3 lbs.	$38.35
603936	1¼″	¼″	3 lbs.	$38.35
603937	1⅜″	5⁄16″	3 lbs.	$38.35
603938	1 7⁄16″	⅜″	3 lbs.	$38.35
603939	1½″	⅜″	3 lbs.	$38.35
603940	1⅝″	⅜″	3 lbs.	$38.35
603941	1¾″	⅜″	3 lbs.	$38.35
603923	1 11⁄16″	⅜″	3 lbs.	$38.35
603942	1⅞″	½″	3 lbs.	$38.35
603943	1 15⁄16″	½″	3 lbs.	$40.90
603944	2″	½″	3 lbs.	$38.35
603925	2⅛″	½″	3 lbs.	$38.35
603927	2 3⁄16″	½″	3 lbs.	$38.35
603931	2 5⁄16″	⅝″	3 lbs.	$38.35
603945	2¼″	½″	3 lbs.	$38.35
603946	2⅜″	⅝″	3 lbs.	$38.35
603947	2 7⁄16″	⅝″	3 lbs.	$38.35
603924	2½″	⅝″	3 lbs.	$38.35
603948	2⅝″	⅝″	3 lbs.	$38.35
603926	2 11⁄16″	⅝″	3 lbs.	$38.35
603930	2¾″	⅝″	3 lbs.	$38.35
603929	2 13⁄16″	¾″	3 lbs.	$38.35
603932	2⅞″	¾″	3 lbs.	$38.35
603928	2 15⁄16″	¾″	3 lbs.	$38.35

ITEM	Bore	Keyway	Shpg	Price
SH Series Bushings	**Bolt Circle 2.25″ dia.**			
603950	⅝″	3⁄16″	1 lb.	$18.20
603951	¾″	3⁄16″	1 lb.	$16.25
603952	⅞″	3⁄16″	1 lb.	$18.20
603953	1″	¼″	1 lb.	$18.20
603954	1⅛″	¼″	1 lb.	$18.20
603955	1 3⁄16″	¼″	1 lb.	$18.20
603956	1¼″	¼″	1 lb.	$18.20
603957	1 7⁄16″	⅜″	1 lb.	$18.20
603959	1⅝″	⅜″	1 lb.	$16.25
603949	1 11⁄16″	None	1 lb.	$18.20
SK Series Bushings	**Bolt Circle 3.13″ dia.**			
603964	1″	¼″	2 lbs.	$36.95
603965	1⅛″	¼″	2 lbs.	$36.95
603966	1 3⁄16″	¼″	2 lbs.	$36.95
603967	1¼″	¼″	2 lbs.	$36.95
603968	1⅜″	5⁄16″	2 lbs.	$36.95
603969	1½″	⅜″	2 lbs.	$36.95
603970	1⅝″	⅜″	2 lbs.	$36.95
603960	1 11⁄16″	⅜″	2 lbs.	$36.95
603971	1¾″	⅜″	2 lbs.	$36.95
603972	1⅞″	½″	2 lbs.	$36.95
603973	1 15⁄16″	½″	2 lbs.	$36.95
603974	2″	½″	2 lbs.	$36.95
603975	2⅛″	½″	2 lbs.	$36.95
603962	2 3⁄16″	½″	2 lbs.	$36.95
603976	2¼″	½″	2 lbs.	$36.95
603963	2 5⁄16″	⅝″	2 lbs.	$36.95
603977	2⅜″	⅝″	2 lbs.	$36.95
603978	2 7⁄16″	⅝″	2 lbs.	$36.95
603961	2½″	⅝″	2 lbs.	$36.95
603979	2⅝″	None	2 lbs.	$36.95

Roller Chain & Links



• Brand new, roller chain. Meets all ANSI standards. Available in 10 ft boxes in standard, heavy (thicker side plates) and double strand styles. One connecting link included in each box to make into a continuous loop.
• Connecting links are spring clip style except for 100 and 120 chain that use cotter pins to retain side plate.

Single Roller Chain & Links

Pitch	(Size)	Ultimate Strength	10 Ft. Box ITEM	10 Ft. Box Shpg.	10 Ft. Box Price	Connecting Link ITEM	Connecting Link Shpg.	Connecting Link Price	Offset (half) Link ITEM	Offset (half) Link Shpg.	Offset (half) Link Price
25	(¼″)	925 lbs.	601530	2 lbs.	$19.80	601649	0.1 lb.	$0.75	601650	0.1 lb.	$1.30
35	(⅜″)	2100 lbs.	600123	3 lbs.	$19.80	600164	0.1 lb.	$0.45	600163	0.1 lb.	$0.90
40	(½″)	3700 lbs.	600124	5 lbs.	$23.40	600104	0.1 lb.	$0.45	600101	0.1 lb.	$0.90
41	(½″)	2400 lbs.	603812	5 lbs.	$26.35	600732	0.1 lb.	$0.50	601760	0.1 lb.	$0.95
50	(⅝″)	6100 lbs.	600125	7 lbs.	$30.75	600105	0.1 lb.	$0.60	600102	0.1 lb.	$1.15
60	(¾″)	8500 lbs.	600126	10 lbs.	$44.70	600106	0.1 lb.	$0.80	600103	0.1 lb.	$1.45
80	(1″)	14,500 lbs.	600167	18 lbs.	$71.65	600179	0.1 lb.	$1.90	600178	0.1 lb.	$3.05
100	(1¼″)	24,000 lbs.	601724	31 lbs.	$137.50	601510	0.3 lb.	$3.20	601511	0.3 lb.	$4.25
120	(1½″)	34,000 lbs.	601535	42 lbs.	$174.85	601516	0.3 lb.	$4.00	601517	0.3 lb.	$7.70

Stainless Steel Chain & Links


Pitch	(Size)	Ultimate Strength	10 Ft. Box ITEM	10 Ft. Box Shpg.	10 Ft. Box Price	Connecting Link ITEM	Connecting Link Shpg.	Connecting Link Price	Offset (half) Link ITEM	Offset (half) Link Shpg.	Offset (half) Link Price
35	(⅜″)	1600 lbs.	601531	3 lbs.	$133.25	601448	1 oz.	$1.90	601449	1 oz.	$3.00
40	(½″)	2560 lbs.	601532	5 lbs.	$118.50	601478	0.25 lb.	$2.20	601479	0.25 lb.	$3.45
50	(⅝″)	4250 lbs.	601533	7 lbs.	$144.80	601485	0.25 lb.	$2.65	601486	0.25 lb.	$4.65
60	(¾″)	6120 lbs.	601534	12 lbs.	$223.10	601494	0.25 lb.	$3.65	601495	0.25 lb.	$5.05
80	(1″)	10,700 lbs.	602818	18 lbs.	$372.95	601503	0.25 lb.	$4.15	601504	0.25 lb.	$8.30

Heavy Single Roller Chain & Links

Pitch	(Size)	Ultimate Strength	10 Ft. Box ITEM	10 Ft. Box Shpg.	10 Ft. Box Price	Connecting Link ITEM	Connecting Link Shpg.	Connecting Link Price	Offset (half) Link ITEM	Offset (half) Link Shpg.	Offset (half) Link Price
50H	(⅝″)	6100 lbs.	602789	12 lbs.	$37.35	602790	0.1 lb.	$0.75	602791	0.1 lb.	$1.45
60H	(¾″)	8500 lbs.	601536	16 lbs.	$54.15	601526	0.1 lb.	$0.85	601527	0.1 lb.	$1.75
80H	(1″)	14,500 lbs.	601537	25 lbs.	$85.60	601528	0.1 lb.	$2.20	601529	0.1 lb.	$3.65







Double Roller Chain & Links

Pitch	(Size)	Ultimate Strength	10 Ft. Box ITEM	10 Ft. Box Shpg.	10 Ft. Box Price	Connecting Link ITEM	Connecting Link Shpg.	Connecting Link Price	Offset (half) Link ITEM	Offset (half) Link Shpg.	Offset (half) Link Price
40-2	(½″)	8400 lbs.	601538	12 lbs.	$38.05	601480	0.25 lb.	$1.00	601481	0.25 lb.	$1.75
50-2	(⅝″)	14,000 lbs.	601539	18 lbs.	$57.85	601487	0.25 lb.	$1.30	601488	0.25 lb.	$2.35
60-2	(¾″)	19,400 lbs.	601540	25 lbs.	$86.30	601496	0.25 lb.	$1.60	601498	0.25 lb.	$2.50
80-2	(1″)	29,000 lbs.	601541	39 lbs.	$128.05	601505	0.25 lb.	$3.20	601506	0.25 lb.	$4.90







Agricultural Chain

Pitch	(Size)	Ultimate Strength	10 Ft. Box ITEM	10 Ft. Box Shpg.	10 Ft. Box Price	Connecting Link ITEM	Connecting Link Shpg.	Connecting Link Price	Offset (half) Link ITEM	Offset (half) Link Shpg.	Offset (half) Link Price
A2040	(1″)	3700 lbs.	602785	4 lbs.	$19.80	603176	0.1 lb.	$0.75	603177	0.1 lb.	$1.30
A2050	(1¼″)	6100 lbs.	601548	6 lbs.	$27.80	603178	0.1 lb.	$1.00	603179	0.1 lb.	$1.90
A2060	(1½″)	8500 lbs.	601549	8 lbs.	$37.35	602806	0.1 lb.	$5.70	602808	0.1 lb.	$2.20







Conveyor Chain

Pitch	(Size)	Ultimate Strength	10 Ft. Box ITEM	10 Ft. Box Shpg.	10 Ft. Box Price	Connecting Link ITEM	Connecting Link Shpg.	Connecting Link Price	Offset (half) Link ITEM	Offset (half) Link Shpg.	Offset (half) Link Price
C2040	(1″)	3700 lbs.	602656	5 lbs.	$15.80	601550	0.2 lb.	$0.60	603180	0.1 lb.	$1.00
C2050	(1¼″)	6100 lbs.	601878	7 lbs.	$22.75	601551	0.2 lb.	$0.85	603186	0.1 lb.	$1.30
C2060H	(1½″)	8500 lbs.	601545	12 lbs.	$53.45	601552	0.25 lb.	$1.75	603181	0.1 lb.	$2.95
C2062H	(1½″)	8500 lbs.	601546	17 lbs.	$51.15	601554	0.25 lb.	$1.00	603182	0.1 lb.	$2.20
C2080H	(2″)	1,4500 lbs.	603175	19 lbs.	$87.75	601553	0.3 lb.	$3.05	603183	0.2 lb.	$4.30
C2082H	(2″)	1,4500 lbs.	601547	26 lbs.	$108.75	603184	0.3 lb.	$3.05	603185	0.2 lb.	$5.90

Steel Shaft Collars

• Brand new. Solid collars include a set screw, split collars include clamping screws.

Choose from three collar styles.

Solid Shaft Collars

Zinc Plated



Single Split Shaft Collars

Black Oxide Finish



Double Split Shaft Collars

Black Oxide Finish



ITEM	Bore	O.D.	Width	Price
601651	3/16″	7/16″	1/4″	$1.10
601652	1/4″	1/2″	5/16″	$1.30
601653	5/16″	5/8″	5/16″	$1.55
601654	3/8″	3/4″	3/8″	$1.80
601655	7/16″	7/8″	7/16″	$1.95
601656	1/2″	1″	7/16″	$2.30
601657	5/8″	1 1/8″	1/2″	$2.45
601658	3/4″	1 1/4″	9/16″	$2.95
601659	7/8″	1 1/2″	9/16″	$2.85
601660	15/16″	1 1/2″	9/16″	$2.85
601661	1″	1 5/8″	5/8″	$3.65
601662	1 1/8″	1 3/4″	5/8″	$4.20
601663	1 3/16″	2″	11/16″	$5.30
601664	1 1/4″	2″	11/16″	$5.30
601665	1 3/8″	2 1/8″	3/4″	$4.60
601666	1 7/16″	2 1/4″	3/4″	$5.15
601667	1 1/2″	2 1/4″	3/4″	$5.15
601668	1 5/8″	2 1/2″	13/16″	$6.50
601669	1 11/16″	2 1/2″	13/16″	$6.50
601670	1 3/4″	2 3/4″	7/8″	$8.40
601671	1 7/8″	2 3/4″	7/8″	$8.40
601672	1 15/16″	3″	7/8″	$9.25
601673	2″	3″	7/8″	$9.25
602650	2 3/16″	3 1/4″	15/16″	$6.60

ITEM	Bore	O.D.	Width	Price
601674	3/16″	5/8″	5/16″	$3.80
601675	1/4″	1 1/16″	5/16″	$4.65
601676	5/16″	1 1/16″	5/16″	$5.20
601677	3/8″	7/8″	11/32″	$5.45
601678	7/16″	15/16″	3/8″	$5.45
601679	1/2″	1 1/8″	13/32″	$4.90
601680	5/8″	1 5/16″	7/16″	$5.50
601681	3/4″	1 1/2″	1/2″	$5.90
601682	7/8″	1 5/8″	1/2″	$6.50
601683	15/16″	1 3/4″	1/2″	$7.40
601684	1″	1 3/4″	1/2″	$7.40
601685	1 1/8″	1 7/8″	1/2″	$6.60
601686	1 1/4″	2 1/16″	1/2″	$7.75
601687	1 3/8″	2 1/4″	9/16″	$8.65
601689	1 1/2″	2 3/8″	9/16″	$9.25
601691	1 3/4″	2 3/4″	11/16″	$12.25
601692	1 7/8″	2 7/8″	11/16″	$8.65
601693	1 15/16″	3″	11/16″	$13.30
601694	2″	3″	11/16″	$13.30

ITEM	Bore	O.D.	Width	Price	Shpg.
601695	3/16″	5/8″	5/16″	$7.00	0.1 lb.
601696	1/4″	1 1/16″	5/16″	$7.00	0.1 lb.
601697	3/8″	7/8″	11/32″	$7.30	0.1 lb.
601698	7/16″	15/16″	3/8″	$5.35	0.1 lb.
601699	1/2″	1 1/8″	13/32″	$7.60	0.1 lb.
601716	5/8″	1 5/16″	7/16″	$8.25	0.1 lb.
601700	3/4″	1 1/2″	1/2″	$8.65	0.1 lb.
601715	7/8″	1 5/8″	1/2″	$9.20	0.2 lb.
601701	15/16″	1 3/4″	1/2″	$10.05	0.2 lb.
601702	1″	1 3/4″	1/2″	$10.05	0.3 lb.
601703	1 1/8″	1 7/8″	1/2″	$10.05	0.4 lb.
601704	1 3/16″	2 1/16″	1/2″	$10.60	0.4 lb.
601705	1 1/4″	2 1/16″	1/2″	$10.60	0.5 lb.
601706	1 3/8″	2 1/4″	9/16″	$11.50	0.6 lb.
601707	1 7/16″	2 1/4″	9/16″	$11.50	0.6 lb.
601708	1 1/2″	2 3/8″	9/16″	$12.05	0.6 lb.
601709	1 5/8″	2 5/8″	11/16″	$13.85	0.7 lb.
601710	1 11/16″	2 3/4″	11/16″	$15.00	0.7 lb.
601711	1 3/4″	2 3/4″	11/16″	$15.00	0.8 lb.
601712	1 7/8″	2 7/8″	11/16″	$15.00	0.8 lb.
601713	1 15/16″	3″	11/16″	$16.20	0.9 lb.
601714	2″	3″	11/16″	$16.20	0.9 lb.

10′ Box Of #41 Roller Chain



ITEM 601723

$12.99

• New, ANSI standard riveted roller chain. Comes with one connecting link.

SPECIFICATIONS

• Pitch: 41
• Length: 10′
• **Shpg. 5 lbs.**

30 Tooth 1 7/8″ Bore 40 Pitch Roller Chain Plate Sprocket



ITEM 603166

$3.95

• New, steel sprocket.

SPECIFICATIONS

• Pitch 40
• Teeth 30
• Bore 1.875″ unfinished
• Hubless
• O.D. 5.06″
• **Shpg 1.25 lbs.**

1 Strand Roller Chain Lengths



• New, ANSI standard riveted roller chain in various lengths. More sizes online!

ITEM	Pitch	Lgth.	Type	Shpg.	Price
602903	35	21 1/4″	R	3/4 lb.	$ 1.85
602902	35	27″	R	3/4 lb.	$ 1.99
600177	65 (43)	33″	R	1 lb.	$ 1.95
600176	65 (43)	71″	R	2 lbs.	$ 4.95
600188	65 (43)	246″	R	6 lbs.	$17.95


Steel Square Key Stock

• Brand new, steel key stock. Use with motors, engines, gear reducers, shafting. One foot length can be cut to get the exact size needed.



ITEM	Size	Length	Shpg.	Price
100223	1/8″	12″	1/4 lb.	$2.15
100195	3/16″	1 1/4″	1/10 lb.	$0.95
100196	3/16″	12″	1/4 lb.	$2.80
100254	3/16″	1 1/2″	1/10 lb.	$0.95
100197	1/4″	1 1/2″	1/10 lb.	$1.30
100198	1/4″	12″	1/4 lb.	$2.80
100199	5/16″	1 1/2″	1/10 lb.	$1.25
100200	5/16″	12″	1/2 lb.	$4.20
100201	3/8″	1 5/8″	1/10 lb.	$1.60
100202	3/8″	12″	3/4 lb.	$5.40
100203	1/2″	1 7/8″	1/5 lb.	$2.20
100204	1/2″	12″	1 lb.	$8.15

Roller Chain Breakers

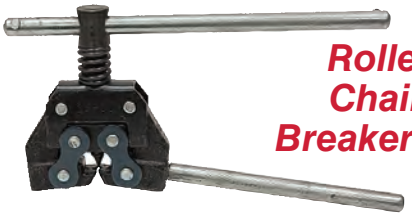

• Easily dismantle roller chain without using hammer or punch. Replaceable tip.

ITEM 100115 **$17.20**

• For 25 to 60 pitch chain. **Shpg. 1 lb.**

ITEM 100120 **$41.55**

• For 60 to 100 pitch chain. **Shpg. 3 lbs.**


Keyed Shafting



• Brand new. 36″ or 72″ lengths of C1018 cold-drawn steel, full length keyway.

O.D.	Keyway	3 ft. Lengths ITEM	Shpg.	Price	6 ft. Lengths ITEM	Shpg.	Price
½″	⅛″ x 1⁄16″	601853	3 lbs.	$25.10	601880	6 lbs.	$40.85
⅝″	3⁄16″ x 3⁄32″	601854	4 lbs.	$29.30	601881	8 lbs.	$43.90
¾″	3⁄16″ x 3⁄32″	601855	6 lbs.	$34.90	601882	12 lbs.	$52.30
⅞″	3⁄16″ x 3⁄32″	601856	7 lbs.	$43.95			
1″	¼″ x ⅛″	601857	9 lbs.	$43.70	601883	18 lbs.	$65.50
1⅛″	¼″ x ⅛″	601873	12 lbs.	$42.50	601887	24 lbs.	$78.30
1¼″	¼″ x ⅛″	601870	14 lbs.	$46.65	601884	28 lbs.	$93.25
1¼″	5⁄16″ x ⅛″	601858	14 lbs.	$53.05	601885	28 lbs.	$106.10
1⅜″	5⁄16″ x 5⁄32″	601859	16 lbs.	$54.85			
1½″	⅜″ x 3⁄16″	601860	19 lbs.	$64.25	601886	38 lbs.	$128.50

6 Foot Hexagon Shafting



• Brand new, hex shafting. USA made. 1045 Cold Drawn steel. (due to length these have a surcharge on shipping cost).

ITEM	Hex Size	Lgth.	Actual Weight.	Price
604013	⅝″	72″	7 lbs.	$73.55
604014	¾″	72″	10 lbs.	$88.15
604015	⅞″	72″	14 lbs.	$98.50
604016	1″	72″	16 lbs.	$127.45
602196	1⅛″	72″	23 lbs.	$168.55
604017	1.25″	72″	28 lbs.	$197.40
604018	1.5″	72″	40 lbs.	$235.05
604019	1.75″	72″	55 lbs.	$320.85

Splined Shafts





• Brand new, G & G Mfg. Black oxide finished steel.

ITEM	Model	Spline	Spline Location	Spline Lgth.	Overall Lgth.	Overall O.D.	Retention Groove Inset	Shpg.	Price
602199	106A1615	1″ 15T	One end	3″	6″	1″	1″	3 lbs.	$32.90
602200	112A1615	1″ 15T	One end	2¾″	12″	1″	1″	4 lbs.	$33.35
602198	112B1615	1″ 15T	Both ends	2¾″	12″	1″	1″	4 lbs.	$43.70
602197	112F1615	1″ 15T	Full	12″	12″	1″	–	4 lbs.	$72.00
602676	106A2014	1¼″ 14T	One end	2⅝″	6″	1¼″	–	4 lbs.	$15.80
601844	106A2206	1⅜″ 6T	One end	3″	6″	1⅜″	⅞″	4 lbs.	$23.95
601845	112A2206	1⅜″ 6T	One end	2¾″	12″	1⅜″	⅞″	7 lbs.	$42.55
601848	112B2206	1⅜″ 6T	Both ends	2¾″	12″	1⅜″	⅞″	7 lbs.	$63.35
601850	112F2206	1⅜″ 6T	Full	12″	12″	1⅜″	–	7 lbs.	$82.15
602739	112A2820	1¾″ 20T	One end	3″	12″	1¾″	1″	8 lbs.	$67.80
602821	112B2820	1¾″ 20T	Both ends	3″	12″	1¾″	1″	8 lbs.	$87.60
602820	112F2820	1¾″ 20T	Full	12″	12″	1¾″	–	8 lbs.	$94.80
601846	106A2221	1⅜″ 21T	One end	2¾″	6″	1⅜″	⅞″	4 lbs.	$27.25
601847	112A2221	1⅜″ 21T	One end	2¾″	12″	1⅜″	⅞″	7 lbs.	$49.50
601849	112B2221	1⅜″ 21T	Both ends	2¾″	12″	1⅜″	⅞″	7 lbs.	$56.35
601851	112F2221	1⅜″ 21T	Full	12″	12″	1⅜″	–	7 lbs.	$105.35

ACME Lead Screws & Nuts



• Brand new, G & G MFG. ACME lead screws and nuts (sold separately). 36″ or 72″ lengths of 1010/1018 class 2G rolled threads. Plain finish. Right-hand thread. Hex nuts for ACME lead screws. 12L14 screw stock. Plain finish.

Size & Pitch	3 ft. Screws ITEM	Shpg.	Price	6 ft. Screws ITEM	Shpg.	Price	Nuts ITEM	Shpg.	Price
½″-10	601861	3 lbs.	$ 16.85	601875	5 lbs.	$ 26.80	601865	¼ lb.	$ 4.40
¾″-6	601862	5 lbs.	$ 23.60	601874	10 lbs.	$ 38.50	601866	¼ lb.	$ 5.70
⅞″-6	603328	6 lbs.	$ 33.05	603023	12 lbs.	$ 66.10	603329	¼ lb.	$ 8.80
1″-4	601863	7 lbs.	$ 41.45				601867	½ lb.	$ 8.95
1¼″-5	601864	12 lbs.	$ 72.25	601877	24 lbs.	$144.50	601868	1 lb.	$12.45
1½″-4	602825	16 lbs.	$101.80	602826	32 lbs.	$203.55	600190	1½ lbs.	$23.35

Universal Joints



• Brand new. Cold-formed, carbon steel yokes.

ITEM	Bore	Series	Bearings	Cross Dia	HP at 540 RPM	HP at 1000 RPM	Yoke Width Inside	Yoke Width Outside	Size	Shpg	Price
601556	1″	4P	Journal	⅞″	5	9	1 23⁄64″	1⅞″	4⅞″ x 2″ x 2″	4 lbs.	$53.35
601557	¾″	6N	Needle	31⁄32″	12	22	1 7⁄16″	2¼″	5″ x 2¼″ x 2¼″	4 lbs.	$50.30
601558	1″	6N	Needle	31⁄32″	12	22	1 7⁄16″	2¼″	5″ x 2¼″ x 2¼″	5 lbs.	$50.30
601559	1″	12N	Needle	1 1⁄16″	28	52	1 13⁄16″	2½″	7″ x 2⅞″ x 2⅞″	6 lbs.	$77.30
601560	1¼″	12N	Needle	1 1⁄16″	28	52	1 13⁄16″	2½″	7″ x 2⅞″ x 2⅞″	6 lbs.	$69.55

3 Piece Flexible & Spline Couplings

• Brand new, 3-piece flexible couplings. Use to connect engines or electric motors to pumps, gear reducers, drive shafts. Purchase two halves and one flexible insert to make a complete coupling. Inserts are available in either rubber or urethane construction. Urethane gives longer life and 50% greater torque handling capability. Splined halves are available for use with hydraulic pumps.

• Interchangeable with L Series jaw couplings from Lovejoy, Browning and others.

• Some series can be interchanged to reduce overall length. Series Interchangeablity:
L-090 with L-095 coupled length will be 2 5/16″ L-099 with L-100 coupled length will be 3 3/16″

Example: A complete coupling for 10 HP at 3600 RPM coupling a ½″ dia. shaft and a ⅝″ 9 tooth splined shaft.
Order one each of
600108 (L-095 Series ½″ bore keyed coupling half)
602778 (L-095 Series ⅝″ 9 tooth splined coupling half)
600115 (L-095 Series rubber insert)


L-050 Series


L-075 thru L-110 Series


Complete Coupler

Inserts for 3 Piece Couplings

Coupling Series	Rubber Inserts ITEM	Shpg.	Price	Urethane Inserts ITEM	Shpg.	Price
L-050	600132	1/10	$3.25			
L-070	602750	1/10	$3.45			
L-075	602663	1/10	$5.05	602754	1/10	$21.00
L-090	602753	1/10	$5.40			
L-095	600115	1/10	$5.40	602755	1/10	$24.75
L-099	602763	1/10	$11.00	602803	1/10	$20.95
L-100	600122	1/10	$11.00	602756	1/10	$36.05
L-110	602673	1/4	$18.25			

Performance Ratings with Rubber Insert

Coupling Series	Rated Torque (in-lbs.)	HP Rating Based on Speed (RPM) 100	300	1200	1800	3600	Coupling O.D.	Coupled Length
L-050	28	0.04	0.12	0.48	0.72	1.44	1 5/64″	1 23/32″
L-070	37	0.06	0.18	0.72	1.08	2.16	1 3/8″	2″
L-075	73	0.12	0.36	1.44	2.16	4.32	1 3/4″	2 1/8″
L-090	126	0.20	0.60	2.40	3.60	7.20	2 1/8″	2 11/32″
L-095	169	0.28	0.84	3.36	5.04	10.08	2 7/64″	2 1/2″
L-099	260	0.42	1.26	5.04	7.56	15.10	2 17/32″	2 7/8″
L-100	370	0.60	1.80	7.20	10.80	21.60	2 17/32″	3 1/2″
L-110	680	1.10	3.30	13.20	19.80	39.60	3 5/16″	4 7/32″

Flexible Coupling Halves



Item	Series	Shpg	Price Per Half
1/4″ Bore			
600127	L-050	1/2	$5.60
5/16″ Bore			
600128	L-050	1/2	$5.60
3/8″ Bore			
600129	L-050	1/2	$5.60
7/16″ Bore			
602658	L-075	3/4	$9.50
600107	L-095	1	$14.75
1/2″ Bore			
600130	L-050	1/2	$5.60
602747	L-070	3/4	$8.50
602659	L-075	3/4	$9.50
602751	L-090	1	$11.65
600108	L-095	1	$13.25
602757	L-099	2	$21.50
601722	L-100	2	$23.25
9/16″ Bore			
600109	L-095	1	$14.75
600116	L-100	2	$23.25

Item	Series	Shpg	Price Per Half
5/8″ Bore			
600131	L-050	1/2	$5.60
602748	L-070	3/4	$8.50
602660	L-075	3/4	$9.50
602876*	L-075	3/4	$9.50
602752	L-090	1	$11.65
600110	L-095	1	$14.75
602878*	L-095	1	$14.75
602758	L-099	2	$21.50
602879*	L-099	2	$21.50
600117	L-100	2	$23.25
602880*	L-100	2	$23.25
602664	L-110	5	$39.70
3/4″ Bore			
602749	L-070	3/4	$8.50
602661	L-075	3/4	$9.50
600111	L-095	1	$14.75
602759	L-099	2	$21.50
600118	L-100	2	$23.25
602665	L-110	5	$39.70
7/8″ Bore			
602662	L-075	3/4	$9.50
600112	L-095	1	$14.75
602764	L-099	2	$21.50
600119	L-100	2	$23.25
602666	L-110	5	$39.70

Item	Series	Shpg	Price Per Half
15/16″ Bore			
602674	L-095	1	$14.75
602675	L-100	2	$23.25
1″ Bore			
600113	L-095	1	$14.75
602760	L-099	2	$21.50
600120	L-100	2	$23.25
602667	L-110	5	$39.70
1 1/8″ Bore			
600114	L-095	1	$14.75
602761	L-099	2	$21.50
600121	L-100	2	$23.25
602668	L-110	5	$39.70
1 1/4″ Bore			
602762	L-099	2	$21.50
601718	L-100	2	$23.25
602669	L-110	5	$39.70
1 3/8″ Bore			
600100	L-100	3.32″	$23.25
602670	L-110	5	$39.70
1 7/16″ Bore			
602900	L-110	5	$51.00
1 1/2″ Bore			
602671	L-110	5	$39.70
1 5/8″ Bore			
602672	L-110	5	$39.70

*Has special 5/32″ keyway

Splined Coupling Halves



Item	Series	Teeth	Shpg	Price Per Half
5/8″ Bore				
602781	L-090	9	1	$72.00
602778	L-095	9	1	$72.00
602769	L-099	9	2	$47.25
602772	L-100	9	2	$47.25
602777	L-110	9	5	$74.25
3/4″ Bore				
602782	L-090	11	1	$36.00
602779	L-095	11	1	$72.00
602770	L-099	11	2	$47.25
602773	L-100	11	2	$47.25
602776	L-110	11	5	$74.25
7/8″ Bore				
602783	L-090	9	1	$72.00
602780	L-095	9	1	$72.00
602771	L-099	9	2	$47.25
602774	L-100	9	2	$47.25
602775	L-110	9	5	$74.25

Solid Steel Couplers

• Brand new. Rigid steel couplers for connecting shafts together. Made from cold rolled steel. Machinable and weldable, black oxide finish. Keyed couplers have keyway slot and 2 set screws.


Solid Hex Couplers


Keyed Shaft Couplers


Spline Shaft Couplers

ITEM	Bore	O.D.	Lgth.	Shpg.	Price
600148	1/2″ w/ 1/8″ wide keyed	1 1/4″	2″	1 lb.	$8.20
600149	5/8″ w/ 3/16″ wide keyed	1 1/2″	2 1/2″	1 lb.	$10.55
600150	3/4″ w/ 3/16″ wide keyed	1 5/8″	3″	2 lbs.	$12.75
600151	7/8″ w/ 3/16″ wide keyed	1 3/4″	3 1/2″	2 lbs.	$12.95
600152	1″ w/ 1/4″ wide keyed	1 3/4″	4″	2 lbs.	$17.25
600153	1 1/8″ w/ 1/4″ wide keyed	2″	4 1/2″	3 lbs.	$22.50
600154	1 1/4″ w/ 1/4″ wide keyed	2 1/8″	4 1/2″	3 lbs.	$23.10
600585	1 1/4″ w/ 5/16″ wide keyed	2 1/8″	4 1/2″	3 lbs.	$23.10
600155	1 3/8″ w/ 5/16″ wide keyed	2 5/16″	4 1/2″	4 lbs.	$24.95
600156	1 1/2″ w/ 3/8″ wide keyed	2 1/2″	4 1/2″	4 lbs.	$30.85
600139	5/8″ 9 T spline	1 1/4″	1 1/4″	1 lb.	$12.20
601869	3/4″ 11 T spline	1 1/2″	2 1/4″	2 lbs.	$21.85
600133	7/8″ 13 T spline	1 1/2″	2 1/4″	2 lbs.	$9.75
600145	1″ 6 T spline	1 1/2″	2 1/4″	1 lb.	$10.10

ITEM	Bore	O.D.	Lgth.	Shpg.	Price
600146	1″ 15 T spline	1 1/2″	2 1/4″	1 lb.	$10.10
600134	1 1/4″ 14 T spline	2″	2 1/4″	2 lbs.	$14.40
600147	1 3/8″ 6 T spline	2″	5″	3 lbs.	$29.35
602736	1 3/8″ 21 T spline	2″	2 1/4″	2 lbs.	$15.10
600141	1 1/2″ 17 T spline	2 1/8″	2″	2 lbs.	$15.40
603494	3/4″ hex	1.625″	3″	1 lb.	$16.05
603496	7/8″ hex	1.75″	3″	1 1/2 lbs.	$17.05
603495	1″ hex	1.75″	3″	1 1/2 lbs.	$17.05
603497	1 1/8″ hex	2″	4 1/2″	2 3/4 lbs.	$24.95
603498	1 1/4″ hex	2.125″	4 1/2″	3 lbs.	$25.50
603499	1 1/2″ hex	2.75″	4 1/2″	5 lbs.	$40.00
603500	1 3/4″ hex	3″	4 1/2″	6 lbs.	$42.35

Double Roller Chain Couplers



• Brand new. Three piece chain coupler consist of two sprockets connected together with double roller chain. Sold as individual halves and chain. Purchase two halves and one coupler chain to make a complete coupling.

Pitch & Tooth Count	Max. RPM	Max. Torque Ft.-Lbs.	Max HP at RPM	Coupling O.D.	Coupled Length
40 Pitch 16 Tooth	5000	80.5	73.6 at 4800 RPM	3.03″	3.44″
50 Pitch 16 Tooth	4000	159.6	109.4 at 3600 RPM	3.78″	3.92″
60 Pitch 18 Tooth	3000	407.5	194.5 at 2500 RPM	5″	4.86″

Keyed Half



• Furnished with standard keyway and setscrews.

Item	Pitch	Tooth	Shpg	Price
5/8″ Bore				
602832	40	16	2lbs.	$18.05
3/4″ Bore				
602833	40	16	2lbs.	$18.05
602841	50	16	3lbs.	$22.40
7/8″ Bore				
602834	40	16	2lbs.	$18.05
602842	50	16	3lbs.	$22.40
1″ Bore				
602835	40	16	2lbs.	$18.05
602843	50	16	3lbs.	$22.40
602854	60	18	7lbs.	$38.85
1 1/8″ Bore				
602836	40	16	2lbs.	$18.05
602844	50	16	3lbs.	$22.40
602855	60	18	7lbs.	$38.85
1 1/4″ Bore				
602845	50	16	3lbs.	$22.40
602856	60	18	7lbs.	$38.85
1 3/8″ Bore				
602846	50	16	3lbs.	$22.40
602857	60	18	7lbs.	$38.85

Item	Pitch	Tooth	Shpg	Price
1 7/16″ Bore				
602847	50	16	3lbs.	$22.40
1 1/2″ Bore				
602848	50	16	3lbs.	$22.40
602858	60	18	7lbs.	$38.85
1 5/8″ Bore				
602859	60	18	7lbs.	$38.85
1 15/16″ Bore				
602860	60	18	7lbs.	$38.85
2″ Bore				
602861	60	18	7lbs.	$38.85
2 1/8″ Bore				
602862	60	18	7lbs.	$38.85
2 3/8″ Bore				
602863	60	18	7lbs.	$38.85
2 7/16″ Bore				
602864	60	18	7lbs.	$38.85

Smooth Bore Half



• Plain bore, no keyway or setscrews.

Machinable Bore Range	50 Pitch 16 Tooth ITEM	Shpg.	Price
5/8″ - 1 5/8″	602839	3 lbs.	$19.45

Double Roller Chain with Connecting Link



	40 Pitch 16 Tooth	50 Pitch 16 Tooth	60 Pitch 18 Tooth
ITEM	602837	602850	602865
Shpg.	1/2 lb.	1 1/2 lbs.	3 lbs.
Price	$5.70	$10.15	$18.05

Coupling Covers



• Brand new. Shock coupling covers recommended to obtain maximum coupling life. Aluminum covers are made as halves for easy installation.

	40 Pitch 16 Tooth	50 Pitch 16 Tooth	60 Pitch 18 Tooth
ITEM	602838	602851	602866
Shpg.	1 lb.	1 1/2 lbs.	3 lbs.
Price	$29.60	$40.10	$53.10

Splined PTO Adapters



• Brand new, G & G Mfg. Co. Adapts keyed shaft to 1 3/8″ 6 tooth spline. **Shpg 4 lbs.**

ITEM	Female Bore	Size	Price
600729	1″	2″ dia. x 5 3/4″	$37.60
600730	1 1/4″	2″ dia. x 5 7/8″	$37.60
601852	1 1/2″	2 1/4″ dia. x 5 7/8″	$42.85

Tractor PTO Adapter



ITEM 600165 **$53.35**

• New. Use to connect hydraulic or water pumps direct to tractor PTO.

SPECIFICATIONS

- Splined end 1 3/8″ 6 tooth spline, 2 1/2″ deep
- Overall size 1 3/4″ dia. x 5″
- Keyed end 7/8″ dia. x 2 1/2″ deep, 3/16″ keyway
- **Shpg. 3 lbs.**

Snap Hitch Pump Adapters



• Brand new G & G. Snap hitch adapters. Slides onto standard 1 3/8″ splined PTO shaft and spring-loaded retention pin holds adapter onto PTO shaft retention groove. Painted steel construction. Size 4 1/8″ x 2 1/2″ x 2 1/8″. **Shpg. 4 lbs.**

ITEM # 6T	ITEM # 21T	Round Bore	Keyway	Price
601433	601440	5/8″	3/16″	$68.95
601434	601441	3/4″	3/16″	$59.65
601435	—	7/8″	3/16″ & 1/4″	$68.95
601436	601443	15/16″	1/4″	$68.95
601437	601444	1″	1/4″	$68.95

U-Joint Assembly



ITEM 601561 **$4.99**

• New, universal joint assembly originally made for use in automotive steering applications. Ideal for low torque, low speed projects. Gray rubber boot. Rubber boot end accepts a round shaft 0.645″ in diameter x 15/16″ long with two flats, 0.58″ across the flats. Other end accepts a 7/8″ diameter shaft with two flats (0.667″ across). 14″ overall length, tip-to-tip. Tube outside diameter 7/8″. **Shpg. 3 lb.**

12 VDC Electric Clutch/Brake



ITEM 603981

$78.99

• New. OGURA model GT1-CH03L(D) 12 volt DC clutch/brake. Ideal replacement for mowers. Triangular back plate. Note: Crankshaft does not extend fully thru clutch.

SPECIFICATIONS

- Voltage 12 DC
- Pulley 5 1/4″ dia. 1 groove
- Belt Width 5/8″
- Mount 2 slots
- Back Plate 6″ x 6 1/4″
- Hub 25mm bore
- Size 6 1/2″ x 3″ x 5 3/4″
- **Shpg. 10 lbs.**

Finished Bore Single, Double & Triple Groove Pulleys

- Brand new cast iron pulleys. For use with type “A” and “B” belts. Fully balanced.
- Pulleys have keyed bores in sizes greater than ½″ (½″ bore pulleys have no keyway).
- All pulleys furnished with one set screw.



Single

Single Groove Pulleys

Item	Datum Dia. O.D	A Belt	B Belt	Shpg	Price
½″ Finished Bore					
601193	2.40	1.80″	2.20″	1 lb	$10.55
601197	2.50	1.90″	2.30″	1 lb	$12.55
601200	2.60	2.00″	2.40″	1 lb	$13.60
601204	2.70	2.10″	2.50″	1 lb	$14.60
601214	3.15	2.40″	2.80″	2 lbs	$15.90
601220	3.35	2.60″	3.00″	2 lbs	$17.00
601225	3.55	2.80″	3.20″	2 lbs	$18.95
601231	3.75	3.00″	3.40″	2 lbs	$21.00
601236	3.95	3.20″	3.60″	2 lbs	$23.20
601242	4.25	3.50″	3.90″	3 lbs	$21.40
601247	4.45	3.70″	4.10″	3 lbs	$24.45
601252	4.75	4.00″	4.40″	3 lbs	$25.30
601257	4.95	4.20″	4.60″	3 lbs	$25.70
601263	5.25	4.50″	4.90″	4 lbs	$27.40
601273	5.75	5.00″	5.40″	4 lbs	$29.45
601278	5.95	5.20″	5.90″	4 lbs	$31.25
⅝″ Finished Bore					
601194	2.40	1.80″	2.20″	1 lb	$10.55
601349	2.50	1.90″	2.30″	1 lb	$12.55
601201	2.60	2.00″	2.40″	1 lb	$13.60
601205	2.70	2.10″	2.50″	1 lb	$14.60
601209	2.95	2.20″	2.60″	2 lbs	$15.70
601215	3.15	2.40″	2.80″	2 lbs	$15.90
601221	3.35	2.60″	3.00″	2 lbs	$17.00
601226	3.55	2.80″	3.20″	2 lbs	$18.95
601237	3.95	3.20″	3.60″	2 lbs	$23.20
601243	4.25	3.50″	3.90″	3 lbs	$24.00
601248	4.45	3.70″	4.10″	3 lbs	$24.45
601258	4.95	4.20″	4.60″	3 lbs	$25.70
601264	5.25	4.50″	4.90″	4 lbs	$27.40
601274	5.75	5.00″	5.40″	4 lbs	$29.45
601279	5.95	5.20″	5.90″	4 lbs	$31.25
601283	6.25	5.50″	5.90″	4 lbs	$33.30
601286	6.45	5.70″	6.10″	4 lbs	$35.20
601290	6.75	6.00″	6.40″	5 lbs	$35.60
¾″ Finished Bore					
601195	2.40	1.80″	2.20″	1 lb	$10.55
601198	2.50	1.90″	2.30″	1 lb	$12.55
601202	2.60	2.00″	2.40″	1 lb	$13.60
601206	2.70	2.10″	2.50″	1 lb	$14.60
601210	2.95	2.20″	2.60″	2 lbs	$15.70
601216	3.15	2.40″	2.80″	2 lbs	$15.90
601222	3.35	2.60″	3.00″	2 lbs	$17.00
601227	3.55	2.80″	3.20″	2 lbs	$18.95
601232	3.75	3.00″	3.40″	2 lbs	$21.00
601238	3.95	3.20″	3.60″	2 lbs	$23.20
601244	4.25	3.50″	3.90″	3 lbs	$24.00
601249	4.45	3.70″	4.10″	3 lbs	$24.45
601253	4.75	4.00″	4.40″	3 lbs	$25.30
601259	4.95	4.20″	4.60″	3 lbs	$25.70
601265	5.25	4.50″	4.90″	4 lbs	$27.40
601269	5.45	4.70″	5.10″	4 lbs	$27.55
601284	6.25	5.50″	5.90″	4 lbs	$33.30
601287	6.45	5.70″	6.10″	4 lbs	$35.20
601291	6.75	6.00″	6.40″	5 lbs	$35.60
601295	6.95	6.20″	6.60″	5 lbs	$33.40
601300	7.25	6.50″	6.90″	5 lbs	$41.30
601301	7.45	6.70″	7.10″	5 lbs	$43.35
601319	9.75	9.00″	9.40″	7 lbs	$45.45
601328	10.75	10.00″	10.40″	8 lbs	$53.25
601334	11.75	11.00″	11.40″	9 lbs	$60.80
⅞″ Finished Bore					
601196	2.40	1.80″	2.20″	1 lb	$10.55
601199	2.50	1.90″	2.30″	1 lb	$12.55
601203	2.60	2.00″	2.40″	1 lb	$13.60
601207	2.70	2.10″	2.50″	1 lb	$14.60
601211	2.95	2.20″	2.60″	2 lbs	$15.70
601217	3.15	2.40″	2.80″	2 lbs	$15.90
601223	3.35	2.60″	3.00″	2 lbs	$17.00
601228	3.55	2.80″	3.20″	2 lbs	$18.95
601233	3.75	3.00″	3.40″	2 lbs	$21.00
601239	3.95	3.20″	3.60″	2 lbs	$23.20
601250	4.45	3.70″	4.10″	3 lbs	$24.45
601254	4.75	4.00″	4.40″	3 lbs	$25.30
601260	4.95	4.20″	4.60″	3 lbs	$25.70
601270	5.45	4.70″	5.10″	4 lbs	$27.55
601275	5.75	5.00″	5.40″	4 lbs	$29.45
601306	7.75	7.00″	7.40″	6 lbs	$35.70
601320	9.75	9.00″	9.40″	7 lbs	$45.75



Double

Item	Datum Dia. O.D	A Belt	B Belt	Shpg	Price
1″ Finished Bore					
601212	2.95	2.20″	2.60″	2 lbs	$15.70
601218	3.15	2.40″	2.80″	2 lbs	$15.90
601229	3.55	2.80″	3.20″	2 lbs	$18.95
601234	3.75	3.00″	3.40″	2 lbs	$21.00
601240	3.95	3.20″	3.60″	2 lbs	$23.20
601245	4.25	3.50″	3.90″	3 lbs	$24.00
601251	4.45	3.70″	4.10″	3 lbs	$24.45
601255	4.75	4.00″	4.40″	3 lbs	$25.30
601261	4.95	4.20″	4.60″	3 lbs	$25.70
601266	5.25	4.50″	4.90″	4 lbs	$27.40
601271	5.45	4.70″	5.10″	4 lbs	$27.55
601276	5.75	5.00″	5.40″	4 lbs	$29.45
601280	5.95	5.20″	5.90″	4 lbs	$74.05
601285	6.25	5.50″	5.90″	4 lbs	$33.30
601288	6.45	5.70″	6.10″	4 lbs	$35.20
601292	6.75	6.00″	6.40″	5 lbs	$35.60
601296	6.95	6.20″	6.60″	5 lbs	$37.40
601302	7.45	6.70″	7.10″	5 lbs	$43.35
601311	8.25	7.50″	7.90″	6 lbs	$38.05
601329	10.75	10.00″	10.40″	8 lbs	$53.25
601331	11.25	10.50″	10.90″	8 lbs	$57.60
601335	12.75	12.00″	12.40″	10 lbs	$68.00
601338	13.75	13.00″	13.40″	12 lbs	$75.45
601341	15.75	15.00″	15.40″	14 lbs	$83.35
601346	18.75	18.00″	18.40″	16 lbs	$90.65
1⅛″ Finished Bore					
601213	2.95	2.20″	2.60″	2 lbs	$15.70
601219	3.15	2.40″	2.80″	2 lbs	$15.90
601230	3.55	2.80″	3.20″	2 lbs	$18.95
601235	3.75	3.00″	3.40″	2 lbs	$21.00
601241	3.95	3.20″	3.60″	2 lbs	$23.20
601246	4.25	3.50″	3.90″	3 lbs	$24.00
601256	4.75	4.00″	4.40″	3 lbs	$25.30
601262	4.95	4.20″	4.60″	3 lbs	$25.70
601267	5.25	4.50″	4.90″	4 lbs	$27.00
601272	5.45	4.70″	5.10″	4 lbs	$27.55
601277	5.75	5.00″	5.40″	4 lbs	$29.45
601281	5.95	5.20″	5.90″	4 lbs	$31.25
601289	6.45	5.70″	6.10″	4 lbs	$35.20
601293	6.75	6.00″	6.40″	5 lbs	$35.60
601297	6.95	6.20″	6.60″	5 lbs	$37.40
601303	7.45	6.70″	7.10″	5 lbs	$43.35
601312	8.25	7.50″	7.90″	6 lbs	$38.05
601317	9.25	8.50″	8.90″	7 lbs	$42.05
601321	9.75	9.00″	9.40″	7 lbs	$45.45
1 3⁄16″ Finished Bore					
601268	5.25	4.50″	4.90″	4 lbs	$27.40
601282	5.95	5.20″	5.90″	4 lbs	$23.45
601294	6.75	6.00″	6.40″	5 lbs	$35.60
601307	7.75	7.00″	7.40″	6 lbs	$31.20
601339	13.75	13.00″	13.40″	12 lbs	$75.45
601343	15.75	15.00″	15.40″	14 lbs	$83.35
1¼″ Finished Bore					
601308	7.75	7.00″	7.40″	6 lbs	$34.95
601323	9.75	9.00″	9.40″	7 lbs	$45.45
601344	15.75	15.00″	15.40″	14 lbs	$83.35
601347	18.75	18.00″	18.40″	16 lbs	$90.65
1⅜″ Finished Bore					
601298	6.95	6.20″	6.60″	5 lbs	$37.40
601313	8.25	7.50″	7.90″	6 lbs	$51.05
601324	9.75	9.00″	9.40″	7 lbs	$40.55
1 7⁄16″ Finished Bore					
601299	6.95	6.20″	6.60″	5 lbs	$33.40
601305	7.45	6.70″	7.10″	5 lbs	$29.80
601325	9.75	9.00″	9.40″	7 lbs	$45.45
601333	11.25	10.50″	10.90″	8 lbs	$51.45
601336	12.75	12.00″	12.40″	10 lbs	$68.00
601340	13.75	13.00″	13.40″	12 lbs	$75.45
601345	15.75	15.00″	15.40″	14 lbs	$83.35
601348	18.75	18.00″	18.40″	16 lbs	$90.65

Std. Keyseat Dimensions

Shaft Dia.	Width	Depth
½″	No keyseat	
⅝″ - ⅞″	3⁄16″	3⁄32″
15⁄16″ - 1¼″	¼″	⅛″
1 5⁄16″ - 1⅜″	5⁄16″	5⁄32″
1 7⁄16″	⅜″	3⁄16″



Triple

Double Groove Pulleys

Item	Datum Dia. O.D	A Belt	B Belt	Shpg	Price
½″ Finished Bore					
601350	2.50	1.90″	2.30″	2 lbs	$20.20
601356	2.95	2.20″	2.60″	3 lbs	$17.30
601362	3.15	2.40″	2.80″	4 lbs	$24.30
⅝″ Finished Bore					
601351	2.50	1.90″	2.30″	2 lbs	$20.20
601355	2.75	2.10″	2.50″	2 lbs	$24.00
601357	2.95	2.20″	2.60″	3 lbs	$23.70
601363	3.15	2.40″	2.80″	4 lbs	$24.30
601367	3.35	2.60″	3.00″	4 lbs	$25.70
601370	3.55	2.80″	3.20″	4 lbs	$28.55
601377	3.95	3.20″	3.60″	4 lbs	$34.60
¾″ Finished Bore					
601352	2.50	1.90″	2.30″	2 lbs	$20.20
601358	2.95	2.20″	2.60″	2 lbs	$24.00
601364	3.15	2.40″	2.80″	4 lbs	$24.30
601371	3.55	2.80″	3.20″	5 lbs	$25.50
601378	3.95	3.20″	3.60″	5 lbs	$34.60
601386	4.75	4.00″	4.40″	5 lbs	$40.65
601398	5.75	5.00″	5.40″	6 lbs	$36.25
601406	7.75	7.00″	7.40″	9 lbs	$48.45
601409	8.75	8.00″	8.40″	10 lbs	$54.55
601415	9.75	9.00″	9.40″	11 lbs	$70.90
⅞″ Finished Bore					
601359	2.95	2.20″	2.60″	4 lbs	$24.00
601365	3.15	2.40″	2.80″	4 lbs	$24.30
601372	3.55	2.80″	3.20″	4 lbs	$28.55
601374	3.55	2.80″	3.20″	5 lbs	$31.70
601379	3.95	3.20″	3.60″	5 lbs	$34.60
601383	4.45	3.70″	4.10″	5 lbs	$37.85
601390	4.95	4.20″	4.60″	6 lbs	$41.00
1″ Finished Bore					
601360	2.95	2.20″	2.60″	4 lbs	$24.00
601380	4.25	3.50″	3.90″	5 lbs	$37.75
601385	4.45	3.70″	4.10″	5 lbs	$37.85
601387	4.75	4.00″	4.40″	5 lbs	$40.65
601391	4.95	4.20″	4.60″	6 lbs	$41.00
601395	5.45	4.70″	5.10″	6 lbs	$44.50
601404	6.75	6.00″	6.40″	8 lbs	$44.30
601407	7.75	7.00″	7.40″	9 lbs	$54.25
601423	13.75	13.00″	13.40″	19 lbs	$118.15
1⅛″ Finished Bore					
601361	2.95	2.20″	2.60″	4 lbs	$24.00
601366	3.15	2.40″	2.80″	4 lbs	$24.30
601369	3.35	2.60″	3.00″	4 lbs	$25.70
601373	3.55	2.80″	3.20″	4 lbs	$28.55
601375	3.55	2.80″	3.20″	5 lbs	$31.70
601381	4.25	3.50″	3.90″	5 lbs	$37.75
601384	4.45	3.70″	4.10″	5 lbs	$37.85
601388	4.75	4.00″	4.40″	5 lbs	$40.65
601392	4.95	4.20″	4.60″	6 lbs	$36.60
601396	5.45	4.70″	5.10″	6 lbs	$44.50
601399	5.95	5.20″	5.90″	6 lbs	$38.45
601408	7.75	7.00″	7.40″	9 lbs	$54.25
601413	8.75	8.00″	8.40″	10 lbs	$61.10
1 3⁄16″ Finished Bore					
601418	10.75	10.00″	10.40″	12 lbs	$73.70
601420	11.75	11.00″	11.40″	14 lbs	$94.40
601426	15.75	15.00″	15.40″	20 lbs	$116.50
1⅜″ Finished Bore					
601376	3.55	2.80″	3.20″	5 lbs	$31.70
601382	4.25	3.50″	3.90″	5 lbs	$37.75
601389	4.75	4.00″	4.40″	5 lbs	$40.65
601393	4.95	4.20″	4.60″	6 lbs	$41.00
601394	5.25	4.50″	4.90″	6 lbs	$43.80
601397	5.45	4.70″	5.10″	6 lbs	$44.50
601400	5.95	5.20″	5.90″	6 lbs	$38.45
601401	6.25	5.50″	5.90″	6 lbs	$36.90
601403	6.45	5.70″	6.10″	6 lbs	$39.05
601405	6.75	6.00″	6.40″	8 lbs	$44.30
601411	7.75	7.00″	7.40″	9 lbs	$54.25
601414	8.75	8.00″	8.40″	10 lbs	$61.10
601416	9.75	9.00″	9.40″	11 lbs	$70.90
1 7⁄16″ Finished Bore					
601430	8.75	8.00″	8.40″	10 lbs	$61.10
601417	9.75	9.00″	9.40″	11 lbs	$63.30
601421	11.75	11.00″	11.40″	14 lbs	$84.30
601425	13.75	13.00″	13.40″	19 lbs	$118.65
601427	15.75	15.00″	15.40″	20 lbs	$130.50
601429	18.75	18.00″	18.40″	35 lbs	$148.45

Triple Groove Pulleys

1⅛″ Finished Bore					
602886	3.35	2.60″	3.00″	4 lbs	$38.95
1⅜″ Finished Bore					
603012	3.55	2.80″	3.20″	4 lbs	$42.55
1⅝″ Finished Bore					
603013	3.55	2.80″	3.20″	4 lbs	$42.55

H Bushed Bore Single, Double & Triple Groove Pulleys

• Brand new, cast iron, FHP pulleys. Use with a H-type split taper bushing (sold separately see third column). For use with Type A or Type B belts.

Choose appropriate bore H bushing (at right) for pulleys.







Single Groove Pulleys

Double Groove Pulleys

Triple Groove Pulleys

O.D.	Datum Dia. A Belt	Datum Dia. B Belt	ITEM	Hub Width	Shpg.	Price	ITEM	Hub Width	Shpg.	Price
3.15	2.40	2.80	601761	1 15/16″	2 lbs.	$15.40		–		
3.35	2.60	3.00	601762	1 15/16″	2 lbs.	$16.45	601793	2 13/16″	3 lbs.	$25.70
3.55	2.80	3.20	601763	1 15/16″	2 lbs.	$18.50	601794	2 13/16″	3 lbs.	$28.45
3.75	3.00	3.40	601764	1½″	2 lbs.	$20.65	601795	2⅜″	3 lbs.	$31.70
3.95	3.20	3.60	601765	1½″	2 lbs.	$22.65	601796	2⅜″	3 lbs.	$34.60
4.25	3.50	3.90	601766	1½″	2 lbs.	$22.75	601797	2⅜″	4 lbs.	$37.80
4.45	3.70	4.10	601767	1½″	3 lbs.	$23.45	601798	1¾″	4 lbs.	$37.95
4.75	4.00	4.40	601768	1½″	3 lbs.	$25.30	601799	1¾″	4 lbs.	$40.65
4.95	4.20	4.60	601769	1½″	3 lbs.	$25.40	601800	1¾″	5 lbs.	$41.00
5.25	4.50	4.90	601770	1½″	3 lbs.	$27.30	601801	1¾″	5 lbs.	$43.85
5.75	5.00	5.40	601771	1½″	3 lbs.	$29.90	601802	1¾″	5 lbs.	$36.20
5.95	5.20	5.60	601772	1½″	4 lbs.	$31.35	601803	1¾″	6 lbs.	$38.55
6.25	5.50	5.90	601773	1½″	4 lbs.	$33.40	601804	1¾″	6 lbs.	$41.45
6.45	5.70	6.10	601774	1½″	4 lbs.	$35.20		–		
6.75	6.00	6.40	601775	1 9/16″	4 lbs.	$35.50	601805	1¾″	6 lbs.	$44.40
6.95	6.20	6.60	601776	1 9/16″	4 lbs.	$37.50		–		
7.25	6.50	6.90		–				–		
7.45	6.70	7.10	601778	1 9/16″	5 lbs.	$43.45		–		
7.75	7.00	7.40	601779	1 9/16″	5 lbs.	$34.95	601806	1¾″	8 lbs.	$54.35
8.75	8.00	8.40	601781	1 9/16″	6 lbs.	$40.25	601807	1¾″	9 lbs.	$61.35
9.25	8.50	8.90	601782	1 9/16″	6 lbs.	$42.00		–		
9.75	9.00	9.40	601783	1 9/16″	6 lbs.	$45.30	601808	1¾″	10 lbs.	$71.00
10.25	9.50	9.90	601784	1 9/16″	6 lbs.	$48.65		–		
10.75	10.00	10.40	601785	1 9/16″	7 lbs.	$53.25	601809	1¾″	11 lbs.	$82.70
11.25	10.50	10.90	601786	1 9/16″	8 lbs.	$57.60		–		
11.75	11.00	11.40	601792	1 9/16″	8 lbs.	$60.75	601810	1¾″	13 lbs.	$94.55
12.75	12.00	12.40	601787	1 9/16″	8 lbs.	$69.90	601811	1¾″	15 lbs.	$106.35
13.75	13.00	13.40	601788	1 9/16″	10 lbs.	$75.50	601812	1¾″	16 lbs.	$118.35
14.75	14.00	14.40	601789	1 9/16″	11 lbs.	$81.90		–		
15.75	15.00	15.40	601790	1 9/16″	12 lbs.	$83.40	601813	1¾″	19 lbs.	$130.60
18.75	18.00	18.40	601791	1 9/16″	15 lbs.	$93.35	601814	1¾″	23 lbs.	$148.60

O.D.	Datum Dia. A Belt	Datum Dia. B Belt	ITEM	Hub Width	Shpg.	Price
8.75	8.00	8.40	603015	2½″	11 lbs.	$91.60
9.75	9.00	9.40	603016	2½″	12 lbs.	$108.15
10.75	10.00	10.40	603017	2½″	13 lbs.	$113.50

H Series Keyed Bushings

• Brand new, type H split taper bushings. For use with all of the pulleys at left. **Shpg. 2 lbs.**

Metric ITEM	Metric Bore	Metric Price	Standard ITEM	Standard Bore	Standard Price
–	–		601815	3/8″	$11.70
–	–		601816	7/16″	$11.70
–	–		–	–	
–	–		601818	9/16″	$11.70
601832	14 mm	$11.70	601819	5/8″	$11.70
601833	15 mm	$11.70	601820	11/16″	$11.70
601834	16 mm	$11.70	601821	3/4″	$11.70
601835	18 mm	$11.70	–	–	
–	–		601822	7/8″	$11.70
601836	20 mm	$11.70	–	–	
601837	22 mm	$11.70	601823	1″	$11.70
601838	24 mm	$11.70	601824	1 1/16″	$11.70
601839	25 mm	$11.70	601825	1 1/8″	$11.70
601840	28 mm	$11.70	601826	1 3/16″	$11.70
601841	30 mm	$11.70	601827	1 1/4″	$11.70
601842	32 mm	$11.70	–	–	
601843	35 mm	$11.70	601828	1 3/8″	$11.70
–	–		601829	1 7/16″	$11.70
–	–		601830	1 1/2″	$11.70

Single Groove Pulley



ITEM 603275

$4.95

• New, single groove, steel pulley with keyway (not drilled for setscrew). Ideal for mounting on small engine crankshaft.

SPECIFICATIONS

- Outside Diameter 5 1/8″
- Belt Type A (½″)
- Hub offset 3/16″
- Bore 1 1/8″ dia. w/1/4″ keyway
- Length thru bore 1 5/16″
- **Shpg. 2 lbs.**

5½″ Dia. Single Groove Pulley



ITEM 602887

$4.95

• New, single groove, steel pulley with keyway (not drilled for setscrew). Ideal for mounting on small engine crankshaft.

SPECIFICATIONS

- Outside dia. 5½″
- Belt type A (½″)
- Bore 1 1/8″ dia. w/1/4″ keyway
- Length thru bore 1 7/8″
- Hub offset ½″
- **Shpg. 2 lbs.**

Idler Pulleys



Flat Belt Pressed



V-Belt Pressed V-Belt Solid

• Use to provide tension on belts. All 3 styles have extended inner race precision ball bearing hubs.

Flat Belt Pressed Steel Style

SPECIFICATIONS

- Outside dia. 3¼″
- Groove width 1 3/16″
- Hub width 1 1/16″
- Groove dia. 2¾″
- **Shpg. 1 lb.**

ITEM 602792 ½″ bore hub **$18.20**

ITEM 602793 5/8″ bore hub **$18.20**

SPECIFICATIONS

- Outside dia. 4¼″
- Groove width 1 3/16″
- Hub width 1 1/16″
- Groove dia. 4″
- **Shpg. 1 lb.**

ITEM 602796 ½″ bore hub **$19.70**

ITEM 602797 5/8″ bore hub **$19.70**

V-Belt Pressed Steel Style

SPECIFICATIONS

- Outside dia. 5″
- Belt size A (½″) or B (5/8″)
- Hub width 1 1/16″
- **Shpg. 2 lbs.**

ITEM 602794 ½″ bore hub **$19.70**

ITEM 602795 5/8″ bore hub **$19.70**

V-Belt Solid Steel Style

SPECIFICATIONS


- Outside dia. 4″
- Hub bore ½″
- **Shpg. 3 lbs.**

ITEM 602798 **$31.90**

• For A (½″) belts, 1 1/16″ hub width

ITEM 602799 **$36.25**

• For B (5/8″) belts, 1 3/16″ hub width



A (½˝) V-Belts ⚠

• Brand new, BESTORQ classic profile V-belts. Highly oil and heat resistant. Wrapped construction. Outside length is the outer circumference of the belt. These belts exceed RMA published ratings.

ITEM	Model	Outside Lgth.	Shpg.	Price
602280	A15 or 4L170	17	½ lb.	$3.05
602281	A16 or 4L180	18	½ lb.	$3.15
602282	A17 or 4L190	19	½ lb.	$3.30
602283	A18 or 4L200	20	½ lb.	$3.40
602284	A19 or 4L210	21	½ lb.	$3.55
602285	A20 or 4L220	22	½ lb.	$3.65
602286	A21 or 4L230	23	½ lb.	$3.80
602287	A22 or 4L240	24	½ lb.	$3.95
602288	A23 or 4L250	25	½ lb.	$4.05
602289	A24 or 4L260	26	½ lb.	$4.20
602290	A25 or 4L270	27	½ lb.	$4.35
602291	A26 or 4L280	28	½ lb.	$4.45
602292	A27 or 4L290	29	½ lb.	$4.65
602293	A28 or 4L300	30	½ lb.	$4.75
602294	A29 or 4L310	31	½ lb.	$4.90
602295	A30 or 4L320	32	½ lb.	$5.05
602296	A31 or 4L330	33	½ lb.	$5.15
602297	A32 or 4L340	34	½ lb.	$5.30
602298	A33 or 4L350	35	½ lb.	$5.45
602299	A34 or 4L360	36	½ lb.	$5.65
602300	A35 or 4L370	37	½ lb.	$5.75
602301	A36 or 4L380	38	½ lb.	$5.90
602302	A37 or 4L390	39	½ lb.	$6.05
602303	A38 or 4L400	40	½ lb.	$6.20
602304	A39 or 4L410	41	½ lb.	$6.30
602491	A40 or 4L420	42	½ lb.	$6.45
602305	A41 or 4L430	43	½ lb.	$6.65

ITEM	Model	Outside Lgth.	Shpg.	Price
602306	A42 or 4L440	44	½ lb.	$6.80
602307	A43 or 4L450	45	½ lb.	$6.90
602309	A44 or 4L460	46	½ lb.	$7.05
602310	A45 or 4L470	47	¾ lb.	$7.20
602311	A46 or 4L480	48	¾ lb.	$7.35
602313	A47 or 4L490	49	¾ lb.	$7.50
602314	A48 or 4L500	50	¾ lb.	$7.65
602315	A49 or 4L510	51	¾ lb.	$7.75
602317	A50 or 4L520	52	¾ lb.	$7.95
602324	A51 or 4L530	53	¾ lb.	$8.05
602327	A52 or 4L540	54	¾ lb.	$8.20
602328	A53 or 4L550	55	¾ lb.	$8.35
602330	A54 or 4L560	56	¾ lb.	$8.50
602331	A55 or 4L570	57	¾ lb.	$8.65
602336	A56 or 4L580	58	¾ lb.	$8.80
602343	A57 or 4L590	59	¾ lb.	$8.95
602345	A58 or 4L600	60	¾ lb.	$9.05
602348	A59 or 4L610	61	¾ lb.	$9.20
602351	A60 or 4L620	62	¾ lb.	$9.40
602353	A61 or 4L630	63	¾ lb.	$9.55
602356	A62 or 4L640	64	¾ lb.	$9.70
602358	A63 or 4L650	65	¾ lb.	$9.25
602362	A64 or 4L660	66	¾ lb.	$9.95
602365	A65 or 4L670	67	¾ lb.	$10.10
602368	A66 or 4L680	68	¾ lb.	$10.25
602370	A67 or 4L690	69	¾ lb.	$10.40
602378	A70 or 4L720	72	¾ lb.	$10.25

ITEM	Model	Outside Lgth.	Shpg.	Price
602383	A71 or 4L730	73	¾ lb.	$10.95
602385	A72 or 4L740	74	¾ lb.	$11.15
602386	A73 or 4L750	75	¾ lb.	$11.25
602390	A74 or 4L760	76	¾ lb.	$11.45
602392	A76 or 4L780	78	¾ lb.	$11.70
602398	A78 or 4L800	80	¾ lb.	$12.00
602408	A80 or 4L820	82	¾ lb.	$12.30
602409	A81 or 4L830	83	¾ lb.	$11.75
602410	A82 or 4L840	84	¾ lb.	$11.55
602411	A83 or 4L850	85	¾ lb.	$12.00
602412	A84 or 4L860	86	¾ lb.	$12.90
602413	A85 or 4L870	87	¾ lb.	$11.95
602414	A86 or 4L880	88	¾ lb.	$13.15
602418	A88 or 4L900	90	¾ lb.	$13.45
602421	A90 or 4L920	92	¾ lb.	$13.00
602423	A91 or 4L930	93	1 lb.	$13.10
602425	A92 or 4L940	94	1 lb.	$14.05
602427	A93 or 4L950	95	1 lb.	$14.20
602428	A94 or 4L960	96	1 lb.	$14.35
602430	A95 or 4L970	97	1 lb.	$14.50
602432	A96 or 4L980	98	1 lb.	$14.65
602434	A98 or 4L1000	100	1 lb.	$14.90
602436	A99	101	1 lb.	$15.10
602273	A103	105	1 lb.	$15.65
602276	A120	122	1 lb.	$18.15
602278	A128	130	2 lbs.	$19.30
602279	A136	138	2 lbs.	$20.45

AX (½˝) Notched V-Belts ⚠

• Brand new, BESTORQ notched, classic profile V-belts. Highly oil and heat resistant. Cut edge molded notch construction. Notches give belt superior flexibility around pulleys and longer working life compared to standard V-belts. Outside length is the outer circumference of the belt. These belts exceed RMA published ratings.

ITEM	Model	Outside Lgth.	Shpg.	Price
602438	AX21	23	½ lb.	$7.30
602440	AX22	24	½ lb.	$7.90
602442	AX23	25	½ lb.	$8.05
602446	AX24	26	½ lb.	$8.25
602449	AX26	28	½ lb.	$8.65
602451	AX27	29	½ lb.	$8.80
602452	AX28	30	½ lb.	$9.00
602453	AX29	31	½ lb.	$9.20
602455	AX30	32	½ lb.	$8.85
602457	AX32	34	½ lb.	$9.75
602459	AX33	35	½ lb.	$9.95
602461	AX34	36	½ lb.	$10.15
602462	AX35	37	½ lb.	$10.30
602464	AX36	38	½ lb.	$10.50
602466	AX37	39	½ lb.	$10.65
602468	AX38	40	½ lb.	$10.90
602470	AX39	41	½ lb.	$11.05
602472	AX40	42	½ lb.	$10.65
602416	AX41	43	½ lb.	$11.45
602417	AX42	44	½ lb.	$11.65
602419	AX43	45	½ lb.	$11.85
602420	AX44	46	½ lb.	$12.00
602422	AX45	47	¾ lb.	$12.20
602424	AX46	48	¾ lb.	$12.40

ITEM	Model	Outside Lgth.	Shpg.	Price
602426	AX47	49	¾ lb.	$12.60
602429	AX48	50	¾ lb.	$12.80
602431	AX49	51	¾ lb.	$13.00
602435	AX50	52	¾ lb.	$13.15
602437	AX51	53	¾ lb.	$13.35
602439*	AX52	54	¾ lb.	$13.55
602441	AX53	55	¾ lb.	$13.75
602444*	AX55	57	¾ lb.	$14.10
602445	AX56	58	¾ lb.	$14.30
602447	AX57	59	¾ lb.	$14.50
602448	AX58	60	¾ lb.	$14.70
602450	AX59	61	¾ lb.	$14.90
602454	AX60	62	¾ lb.	$15.05
602456*	AX61	63	¾ lb.	$15.25
602458	AX62	64	¾ lb.	$14.60
602463	AX64	66	¾ lb.	$15.80
602465	AX65	67	¾ lb.	$16.00
602467	AX66	68	¾ lb.	$15.30
602469	AX67	69	¾ lb.	$16.40
602471	AX68	70	¾ lb.	$16.60
602475	AX71	73	¾ lb.	$15.75
602476*	AX72	74	¾ lb.	$17.35
602477*	AX73	75	¾ lb.	$17.55
602478	AX74	76	¾ lb.	$16.25

ITEM	Model	Outside Lgth.	Shpg.	Price
602479	AX75	77	¾ lb.	$17.95
602480	AX76	78	¾ lb.	$18.15
602481	AX77	79	¾ lb.	$17.30
602482*	AX78	80	¾ lb.	$18.50
602483	AX79	81	¾ lb.	$17.15
602484	AX80	82	¾ lb.	$17.30
602485*	AX81	83	¾ lb.	$19.05
602486	AX82	84	¾ lb.	$18.20
602487	AX83	85	¾ lb.	$18.35
602488	AX84	86	¾ lb.	$19.65
602489	AX85	87	¾ lb.	$18.20
602492	AX87	89	¾ lb.	$19.10
602494	AX89	91	¾ lb.	$20.60

DROP SHIP *Products drop-shipped from the manufacturer are not returnable.*

5½˝ Dia. Single Groove Pulley

ITEM 604048


$16.95



• New. Fractional HP, single groove, cast iron pulley with keyway and one set-screw. For use with type "A" and "B" belts. Fully balanced.

SPECIFICATIONS

- Bore ⅝˝
- Outside Diameter 3.75˝
- **Shpg. 3 lbs.**
- Belt Type A (½˝) Datum Diameter 3.00˝
- Belt Type B (⅝˝) Datum Diameter 3.40˝



B (5/8″) V-Belts ⚠

• Brand new, BESTORQ classic profile V-belts. Highly oil and heat resistant. Wrapped construction. Outside length is the outer circumference of the belt. These belts exceed RMA published ratings.

ITEM	Model	Outside Lgth.	Shpg.	Price
602363	B25 or 5L280	28	½ lb.	$5.90
602364	B26 or 5L290	29	¾ lb.	$6.10
602367	B27 or 5L300	30	¾ lb.	$6.25
602369	B28 or 5L310	31	¾ lb.	$6.45
602371	B29 or 5L320	32	¾ lb.	$6.65
602372	B30 or 5L330	33	¾ lb.	$6.85
602373	B31 or 5L340	34	¾ lb.	$7.05
602374	B32 or 5L350	35	¾ lb.	$7.20
602376	B33 or 5L360	36	¾ lb.	$7.40
602379	B34 or 5L370	37	¾ lb.	$7.55
602380	B35 or 5L380	38	¾ lb.	$7.75
602381	B36 or 5L390	39	¾ lb.	$7.95
602506	B37 or 5L400	40	¾ lb.	$8.15
602507	B38 or 5L410	41	¾ lb.	$8.35
602509	B39 or 5L420	42	¾ lb.	$8.55
602510	B40 or 5L430	43	¾ lb.	$8.75
602512	B41 or 5L440	44	¾ lb.	$8.90
602514	B42 or 5L450	45	¾ lb.	$9.10
602516	B43 or 5L460	46	¾ lb.	$9.30
602517	B44 or 5L470	47	¾ lb.	$9.45
602518	B45 or 5L480	48	¾ lb.	$9.70
602520	B46 or 5L490	49	¾ lb.	$9.85
602521	B47 or 5L500	50	¾ lb.	$10.05
602522	B48 or 5L510	51	¾ lb.	$10.25
602524	B49 or 5L520	52	¾ lb.	$10.45
602525	B50 or 5L530	53	¾ lb.	$10.65
602526	B51 or 5L540	54	¾ lb.	$10.80
602527	B52 or 5L550	55	¾ lb.	$11.00
602529	B53 or 5L560	56	¾ lb.	$11.20
602530	B54 or 5L570	57	¾ lb.	$11.40
602531	B55 or 5L580	58	1 lb.	$11.55
602532	B56 or 5L590	59	1 lb.	$11.80
602533	B57 or 5L600	60	1 lb.	$11.95
602534	B58 or 5L610	61	1 lb.	$12.15
602535	B59 or 5L620	62	1 lb.	$12.35
602536	B60 or 5L630	63	1 lb.	$12.55
602543	B61 or 5L640	64	1 lb.	$12.70
602545	B62 or 5L650	65	1 lb.	$12.95
602546	B63 or 5L660	66	1 lb.	$13.15
602547	B64 or 5L670	67	1 lb.	$13.30
602550	B65 or 5L680	68	1 lb.	$13.50
602551	B66 or 5L690	69	1 lb.	$13.70
602553	B67 or 5L700	70	1 lb.	$13.90
602554	B68 or 5L710	71	1 lb.	$14.05
602508	B69 or 5L720	72	1 lb.	$14.30
602511	B70 or 5L730	73	1 lb.	$14.45
602513	B71 or 5L740	74	1 lb.	$14.65
602515	B72 or 5L750	75	1 lb.	$14.85
602519	B73 or 5L760	76	1 lb.	$15.00
602523	B74 or 5L770	77	1 lb.	$15.25
602528	B75 or 5L780	78	1 lb.	$15.45
602537	B76 or 5L790	79	1 lb.	$15.60
602538	B77 or 5L800	80	1 lb.	$15.80
602539	B78 or 5L810	81	1 lb.	$16.00
602540	B79 or 5L820	82	1 lb.	$16.20
602541	B80 or 5L830	83	1¼ lb.	$16.40
602542	B81 or 5L840	84	1¼ lb.	$16.55
602544	B82 or 5L850	85	1¼ lb.	$16.75
602548	B83 or 5L860	86	1¼ lb.	$16.95
602549	B84 or 5L870	87	1¼ lb.	$17.15
602552	B85 or 5L880	88	1¼ lb.	$17.35
602555	B86 or 5L890	89	1¼ lb.	$16.55
602556	B87 or 5L900	90	1¼ lb.	$17.75
602557	B88 or 5L910	91	1¼ lb.	$17.95
602558	B89 or 5L920	92	1¼ lb.	$18.10
602559	B90 or 5L930	93	1¼ lb.	$18.30
602561	B92 or 5L950	95	1¼ lb.	$18.70
602562	B93 or 5L960	96	1½ lb.	$18.90
602563	B94 or 5L970	97	1½ lb.	$19.05
602564	B95 or 5L980	98	1½ lb.	$19.25
602565	B96 or 5L990	99	1½ lb.	$19.45
602566	B97 or 5L1000	100	1½ lb.	$19.65
602567	B99	102	1½ lb.	$18.90
602495	B100	103	1½ lb.	$20.25
602496	B101	104	1½ lb.	$20.45
602497	B102	105	1½ lb.	$19.45
602498	B103	106	1½ lb.	$20.80
602499	B105	108	1½ lb.	$21.20
602500	B106	109	1½ lb.	$21.40
602501	B108	111	1½ lb.	$21.80
602502	B111	114	2 lbs.	$22.35
602503	B112	115	2 lbs.	$22.50
602504	B113	116	2 lbs.	$21.45
602505	B115	118	2 lbs.	$23.15
602321	B117	120	2 lbs.	$23.50
602323	B118	121	2 lbs.	$22.35
602326	B120	123	2 lbs.	$24.10
602332	B124	127	2 lbs.	$24.85
602334	B128	131	2 lbs.	$25.65
602337	B133	136	2 lbs.	$26.60
602338	B136	139	2 lbs.	$27.15
602340	B140	143	2 lbs.	$27.95
602342	B144	147	2 lbs.	$28.70

BX (5/8″) Notched V-Belts ⚠

• Brand new, BESTORQ notched, classic profile V-belts. Highly oil and heat resistant. Cut edge, molded notch construction. Notches give belt superior flexibility around pulleys and longer working life compared to standard V-belts. Outside length is the outer circumference of the belt. These belts exceed RMA published ratings.

ITEM	Model	Outside Lgth.	Shpg.	Price
602575	BX30	33	¾ lb.	$14.60
602577	BX32	35	¾ lb.	$14.30
602578	BX33	36	¾ lb.	$15.45
602579	BX34	37	¾ lb.	$15.65
602580	BX35	38	¾ lb.	$15.95
602581	BX36	39	¾ lb.	$16.25
602582	BX37	40	¾ lb.	$16.50
602583	BX38	41	¾ lb.	$16.75
602584	BX39	42	¾ lb.	$17.05
602585	BX40	43	¾ lb.	$17.30
602586	BX41	44	¾ lb.	$17.60
602587	BX42	45	¾ lb.	$17.90
602588	BX43	46	¾ lb.	$18.15
602589	BX44	47	¾ lb.	$18.45
602590	BX45	48	¾ lb.	$18.70
602592	BX47	50	¾ lb.	$19.25
602593	BX48	51	¾ lb.	$19.50
602595	BX50	53	¾ lb.	$20.05
602596	BX51	54	¾ lb.	$19.20
602597	BX52	55	¾ lb.	$20.65
602598	BX53	56	¾ lb.	$19.75
602308*	BX54	57	1 lb.	$21.20
602312	BX55	58	1 lb.	$21.45
602316	BX56	59	1 lb.	$21.70
602318	BX57	60	1 lb.	$22.00
602319	BX58	61	1 lb.	$22.25
602322	BX59	62	1 lb.	$22.55
602325	BX60	63	1 lb.	$22.85
602335	BX62	65	1 lb.	$23.40
602339	BX63	66	1 lb.	$23.70
602344	BX65	68	1 lb.	$24.20
602346	BX66	69	1 lb.	$24.50
602349	BX67	70	1 lb.	$24.75
602352	BX68	71	1 lb.	$25.05
602355	BX69	72	1 lb.	$25.35
602357	BX70	73	1 lb.	$25.60
602361	BX72	75	1 lb.	$26.15
602366	BX73	76	1 lb.	$26.45
602384	BX75	78	1 lb.	$26.95
602387	BX76	79	1 lb.	$27.25
602388	BX77	80	1 lb.	$27.50
602389	BX78	81	1 lb.	$27.80
602393	BX79	82	1¼ lb.	$28.10
602399*	BX84	87	1¼ lb.	$29.45
602400	BX85	88	1¼ lb.	$29.75
602401	BX86	89	1¼ lb.	$30.00
602402	BX87	90	1¼ lb.	$30.30
602403*	BX88	91	1¼ lb.	$30.60
602405	BX90	93	1¼ lb.	$31.15
602407	BX95	98	1½ lb.	$32.50
602568	BX105	108	1½ lb.	$33.95
602569*	BX112	115	2 lbs.	$37.90
602570	BX115	118	2 lbs.	$38.75
602571	BX116	119	2 lbs.	$39.05
602573*	BX124	127	2 lbs.	$41.30

DROP SHIP *Products drop-shipped from the manufacturer are not returnable.*

Lawn & Garden Belts

• Brand new, BESTORQ lawn and garden V-belts. Resistant to severe and repeated shock loads and belt turnover or roll. Use where misalignment, clutching and backside idlers are present in lawn and garden, ag equipment and all types of industrial drives. Created with a lowered coefficient outer rubber-impregnated fabric cover that is extremely tough, wear and crack resistant. Kevlar cord.
Available in ⅜″ (3L), ½″(A) and ⅝″ (B) widths.
Many other sizes online at **www.surpluscenter.com.**

Also our website has cross-reference material from many mowers to their specific replacement belts.

ITEM	EDP	Effective Length	Shpg.	Price
⅜″ width				
603523	3L310LG	31	0.1	$9.95
603524	3L320LG	32	0.1	$10.25
603536	3L440LG	44	0.2	$13.75
½″ width				
603590	A22LG	24.2	0.1	$8.40
603593	A26LG	28.2	0.2	$9.60
603594	A27LG	29.2	0.2	$9.90
603597	A29LG	31.2	0.2	$10.50
603599	A31LG	33.2	0.2	$11.10
603600	A33LG	35.2	0.2	$11.70
603601	A35.5LG	37.7	0.2	$12.45
603603	A36.5LG	38.7	0.2	$12.80
603605	A37LG	39.2	0.2	$12.95
603606	A38LG	40.2	0.2	$13.25
603612	A46LG	48.2	0.3	$15.70
603613	A47LG	49.2	0.3	$16.00
603619	A53LG	55	0.3	$17.90
603620	A54LG	56	0.3	$18.20
603621	A55LG	57	0.3	$18.50
603622	A56LG	58	0.4	$18.80
603625	A59LG	61	0.4	$19.75
603628	A62LG	64	0.4	$20.70
603630	A64LG	66	0.4	$21.30
603631	A65LG	67	0.4	$21.60
603636	A70LG	72	0.4	$23.15
603637	A71LG	73	0.5	$23.50
603639	A73LG	75	0.5	$24.10
603640	A74LG	76	0.5	$24.40
603642	A76LG	78	0.5	$25.05
603643	A77LG	79	0.5	$25.35
603644	A78LG	80	0.5	$25.65
603645	A79LG	81	0.5	$25.95
603647	A81LG	83	0.5	$26.60
603649	A83LG	85	0.5	$27.20
603650	A84LG	86	0.5	$27.55
603651	A85LG	87	0.5	$27.85
603652	A86LG	88	0.5	$28.15
603654	A88LG	90	0.6	$28.80
603655	A89LG	91	0.6	$29.10
603656	A90LG	92	0.6	$29.40
603657	A91LG	93	0.6	$29.70
603660	A94LG	96	0.6	$30.65
603661	A95LG	97	0.6	$30.95
603663	A97LG	99	0.6	$31.60
⅝″ width				
603741	B26LG	28.9	0.3	$13.00
603744	B29LG	31.9	0.3	$14.20
603747	B32LG	34.9	0.3	$15.40
603750	B35LG	37.9	0.4	$16.60
603754	B39LG	41.9	0.4	$18.25
603755	B40LG	42.9	0.4	$18.65
603757	B42LG	44.9	0.4	$19.45
603759	B44LG	46.9	0.5	$20.30
603760	B45LG	47.9	0.5	$20.70
603762	B47LG	49.9	0.5	$21.50
603763	B48LG	50.9	0.5	$21.90
603765	B50LG	52.9	0.5	$22.70
603768	B53LG	55.9	0.5	$23.95
603770	B55LG	57.9	0.6	$24.75
603772	B57LG	59.9	0.6	$25.60
603774	B59LG	61.9	0.6	$26.40
603777	B63LG	65.9	0.7	$28.05
603778	B64LG	66.9	0.7	$28.45
603779	B65LG	67.9	0.7	$28.85
603780	B66LG	68.9	0.7	$29.30
603782	B68LG	70.9	0.7	$30.10
603785	B71LG	73.9	0.7	$31.35
603792	B79LG	81.9	0.8	$34.60
603793	B80LG	82.9	0.8	$35.05
603794	B81LG	83.9	0.8	$35.45
603795	B82LG	84.9	0.8	$35.85
603798	B86LG	88.9	0.9	$37.50
603799	B87LG	89.9	0.9	$37.90
603800	B88LG	90.9	0.9	$38.30
603807	B95LG	97.9	1.0	$41.20
603668	B102LG	104.9	1.1	$44.05
603674	B109LG	111.9	1.1	$46.95
603675	B110LG	112.9	1.1	$47.35
603676	B111LG	113.9	1.1	$47.75
603677	B112LG	114.9	1.2	$48.20
603679	B114LG	116.9	1.2	$49.00
603681	B116LG	118.9	1.2	$49.85
603682	B117LG	119.9	1.2	$50.25
603689	B124LG	126.9	1.3	$53.10
603699	B135LG	137.9	1.4	$57.65
603702	B139LG	141.9	1.4	$59.30
603703	B140LG	142.9	1.4	$59.70
603704	B141LG	143.9	1.5	$60.10
603706	B143LG	145.9	1.5	$60.95
603707	B144LG	146.9	1.5	$61.35
603711	B147LG	149.9	1.5	$62.60
603712	B149LG	151.9	1.5	$63.40
603713	B150LG	152.9	1.6	$63.85
603714	B151LG	153.9	1.6	$64.25
603716	B154LG	156.9	1.6	$65.50
603718	B156LG	158.9	1.6	$66.30
603719	B157LG	159.9	1.6	$66.70
603720	B160LG	162.9	1.7	$67.95
603721	B162LG	164.9	1.7	$68.75
603723	B165LG	167.9	1.7	$70.00
603728	B173LG	175.9	1.8	$73.30

Single Groove Variable Pitch Pulley



ITEM 604038
$34.95

• New, single groove, cast iron pulley with keyway and one set-screw. For use with type ″A″ and ″B″ belts. Fully balanced.

SPECIFICATIONS
- Bore 1⅛″
- Outside Diameter 6″
- Belt Type A (½″) Minimum Datum Diameter 4.2″ Maximum Datum Diameter 5.2″
- Belt Type B (⅝″) Datum Diameter Minimum Datum Diameter 4.4″ Maximum Datum Diameter 5.6″
- Bore Thru Length 2.218″
- Outside Groove Width Minimum Width 0.88″ Maximum Width 1.25″
- Inside Groove Width Minimum Width 0.66″ Maximum Width 1.031″
- **Shpg. 7 lbs.**

Single Groove Pulley



ITEM 601304
$29.80

• New. Fractional HP, single groove, cast iron pulley with keyway and one set-screw. For use with type ″A″ and ″B″ belts. Fully balanced.

SPECIFICATIONS
- Bore 1⅜″
- Outside Diameter 7.45″
- Belt Type A (½″) Datum Diameter 6.70″
- Belt Type B (⅝″) Datum Diameter 7.10″
- **Shpg. 5 lbs.**

Double Groove Pulley




ITEM 601422
$73.00

• New. Fractional HP, double groove, cast iron pulley with keyway and one set-screw. For use with type ″A″ and ″B″ belts. Fully balanced.

SPECIFICATIONS
- Bore 1⅜₁₆″
- Outside Diameter 12.75″
- Belt Type A (½″) Datum Diameter 12.00″
- Belt Type B (⅝″) Datum Diameter 12.40″
- **Shpg. 17 lbs.**

Single Groove Pulleys



ITEM 604121
$10.95

• New. Fractional HP, single groove, cast iron pulley with keyway and one set-screw. For use with type ″A″ belts. Fully balanced.

SPECIFICATIONS
- Bore ⅞″
- Outside Diameter 2.5″
- Belt Type A (½″) Datum Diameter 2.3″
- **Shpg. 0.65 lbs.**

ITEM 604122
$10.95

SPECIFICATIONS
- Bore ⅝″
- Outside Diameter 2.8″
- Belt Type A (½″) Datum Diameter 2.6″
- **Shpg. 0.7 lbs.**

Die Cast Pulley



ITEM 600135
$3.95

• New. Smooth bore. No keyway.

SPECIFICATIONS
- 1 ¾″ O.D.
- Bore: ½″
- Grooves: One
- Belt Width: ⅜″
- Belt Type: 3L
- Material: Die cast
- **Shpg wt: ½ lb.**



¾ HP 3460 RPM Motor

ITEM 501400

$79.95

• New, WEG electric motor and inverter duty.

SPECIFICATIONS

- Model# TEOC040J0000101862
- Power ¾ HP
- Voltage 208-230/460 AC
- Phase 3
- Frequency 60 Hz
- Amperage 2.5-2.3/1.15 Amps
- Speed 3460 RPM
- Rotation CCW
- Service Factor 1.15
- Enclosure TEFC
- Duty Continuous
- Frame B56J
- Face Mount: Four ⅜″-16 tapped holes on 5⅞″ diameter bolt circle
- Rigid Base Mount: Four 0.34″ dia. holes on 4⅞″ x 3″
- Shaft ⅝″ dia. x 1¾″ smooth w/ 7⁄16″-20 thread 1 1⁄16″ long
- Size 12½″ x 8⅝″ x 7″
- **Shpg. 27 lbs.**



1½ HP 3520 RPM Motor

ITEM 501405

$164.95

• New, WEG three phase electric motor.

SPECIFICATIONS

- Power 1½ HP
- Voltage 230/460 AC
- Phase 3
- Frequency 60 Hz
- Amperage 3.74/1.87 Amps
- Speed 3520 RPM
- Rotation CCW
- Service Factor 1.15
- Enclosure TEFC
- Duty Continuous
- Frame 56J
- Face Mount: Four ⅜″-16 tapped holes on 5⅞″ diameter bolt circle
- Rigid Base Mount: Four 0.34″ dia. holes on 4⅞″ x 3″ centers
- Shaft ⅝″ dia. x 1⅞″ w/ 7⁄16-20 thread 1 1⁄16″ long
- Size 12½″ x 9″ x 7¼″
- **Shpg. 36 lbs.**



1½ HP 1800 RPM Motor

ITEM 501469

$599.95

• Brand new, general purpose three phase, electric motor. Inverter-rated, speed range 10:1. Steel frame. No thermal overload protection.

SPECIFICATIONS

- Model 145TTFR16033
- Power 1½ HP
- Voltage 230/460 AC
- Amperage 4.8/2.4 Amps
- Speed 1750 RPM
- Rotation Reversible
- Phase 3
- Service Factor 1.15
- Bearings Ball
- Enclosure TEFC
- Duty Continuous
- Frame 145T
- Rigid Base Mount: Six 0.34″ dia. holes on 5″ x 4″ to 5½″ centers
- Shaft ⅞″ dia. x 2¼″ w/ 3⁄16″ keyway
- Size 11.37″ x 9″ x 7″
- **Shpg. 50 lbs.**



1½ HP 1800 RPM Motor

ITEM 500798

$699.95

• Brand new, LINCOLN premium efficiency three phase, electric motor. Inverter-rated, speed range 10:1. Steel frame. No thermal overload protection.

SPECIFICATIONS

- Model SSF2B2TC61
- Power 1½ HP
- Voltage 208-230/460 AC
- Amperage 4.7-4.6/2.3 Amps
- Speed 1800 RPM
- Rotation Reversible
- Phase 3
- Service Factor 1.15
- Bearings Ball
- Enclosure TEFC
- Duty Continuous
- Frame 145TC
- Face Mount: Four ⅜″-16 tapped holes on 5⅞″ dia. bolt circle
- Rigid Base Mount: Six 0.34″ dia. holes on 4⅞″ x 4″ to 5″ centers
- Shaft ⅞″ dia. x 2⅛″ w/ 3⁄16″ keyway
- Size 12.25″ x 9.24″ x 7.34″
- **Shpg. 46 lbs.**



3 HP 3600 RPM Motor

ITEM 500824

$891.05

• Brand new, LEESON model P145K34FK4 E general purpose electric motor. Capacitor start and run. Steel housing. Manual reset thermal overload protection.

SPECIFICATIONS

- Power 3 HP
- Voltage 230 AC
- Amperage 13 Amps
- Speed 3600 RPM
- Rotation Reversible
- Phase 1
- Service Factor 1.0
- Bearings Ball
- Enclosure TEFC
- Duty Continuous
- Frame 145TC
- Face Mount: Four ⅜″-16 tapped holes on 5⅞″ diameter bolt circle
- Rigid Base Mount: Six 0.34″ dia. holes on 5½″ x 4″ to 5″ centers
- Shaft ⅞″ dia. x 2⅛″ w/ 3⁄16″ keyway
- Size 10⅞″ x 8⅞″ x 8⅝″
- **Shpg. 51 lbs.**



10/7.5 HP 3490 RPM Motor

ITEM 501407

$758.95

• New, BALDOR three phase electric motor model# 37M031R210H2.

SPECIFICATIONS

- Power 10/7.5 HP
- Voltage 230/460//190/380 AC
- Phase 3
- Frequency 60//50 Hz
- Amperage 24/12//22/11 Amps
- Speed 3490//2900 RPM
- Rotation Reversible
- Service Factor 1.15
- Enclosure TEFC
- Duty Continuous
- Frame 215JM
- Face Mount: Four ½″-13 tapped holes on 7-¼″ diameter bolt circle
- Rigid Base Mount: Six 0.41″ dia. holes on 8½″ x 5½″ to 7″ centers
- Shaft 1″ dia. x 2¼″ stepped down to ⅞″ dia. x 1⅜″ w/ 3⁄16″ keyway
- Size 19¾″ x 12¾″ x 12½″
- **Shpg. 123 lbs.**

Truck freight only.



50 HP 1785 RPM Motor

ITEM 500966

$995.95

• New, GENERAL ELECTRIC, model 5K5405SL229.

SPECIFICATIONS

- Power 50 HP
- Voltage 460 AC
- Amperage 56 Amps
- Speed 1785
- Rotation Reversible
- Phase 3
- Service Factor 1.15
- Bearings Ball
- Enclosure TENV
- Duty Continuous
- Frame 405TZ
- Mount Rigid Base
- Shaft 2⅛″ dia. x 5⅞″ w/½″ keyway
- Size 31″ x 26″ x 20″
- **Shpg. 1040 lbs.**

Truck freight only.



75 HP 2940 RPM Motor

ITEM 501388

$799.95

• New, BALDOR model# M15913DB.

SPECIFICATIONS

- Power 75 HP
- Voltage 220/380 AC
- Phase 3
- Frequency 50 Hz
- Amperage 171/99 Amps
- Speed 2940 RPM
- Rotation Reversible
- Service Factor 1.15
- Bearing Ball
- Enclosure ODP
- Duty Continuous
- Frame 364JP
- Face Mount Four ⅝″-11 tapped holes on 11″ diameter bolt circle
- Rigid Base Mount Four 0.66″ dia. holes on 11″ x 11¼″ centers
- Shaft 1¾″ dia. x 3½″ stepped down to 1-⅝″ dia. x 2¼″ w/ ⅜″ keyway and tapped for ½″-13 x 2″
- Size 31¼″ x 21″ x 16½″
- **Shpg. 596 lbs.**

Truck freight only.

Variable Frequency Motor Controls



501348



501349

• New TECO. Variable frequency drive for controlling speed of a three phase motor. Keypad switches for Start/Stop and Speed control. Programmable acceleration and deceleration time, upper and lower frequency. Also has terminals for external controls to reverse motor or use external potentiometer (not included) for speed control. Internal cooling fan. Use with standard 3 phase induction motors.

SPECIFICATIONS FOR ALL

- Display 3 digit
- Enclosure IP20
- Terminals screw clamp
- INPUT 200-240 VAC 50/60 Hz
- OUTPUT 0-240 VAC, 3 ph. 0-200 Hz

		INPUT		OUTPUT				
				Amps	HP			
ITEM	Model	Phase	Amps	Cont.	Max.	Size	Shpg.	Price
501348	L510-201-H1-U	1	11	4.3	1	5½″ x 2⅞″ x 5⅜″	3 lbs.	$192.00
501349	L510-202-H1-U	1	15.5	7.5	2	5⅝″ x 4⅝″ x 5¾″	3 lbs.	$259.50

Phase Converters



• Brand new PHASE-A-MATIC. Allows 3 phase electric motors to be operated on 1 phase power. Converter is wired in between motor and power line. 3 phase motors have advantages of lower current draw, simple reversing, lighter weight. These heavy duty converters are suitable for long starting, frequent starting and reversing.

• *3 phase motor will produce approx. ⅔ of its rated HP.*

• *Order converters by size of motor being used with it. All models are for 220 VAC power.*

	Mfg Model		Full Load			
ITEM	Number	HP	Amps	Size	Shpg.	Price
501473	UL-200-HD	¾ to 1½	6.0	10½″ x 6″ x 3½″	3 lbs.	$292.50
501471	UL-300-HD	1 to 3	9.6	10½″ x 6″ x 3½″	3 lbs.	$311.65
501474	UL-600-HD	3 to 5	15.2	10½″ x 6″ x 3½″	4 lbs.	$396.00
501475	UL-900-HD	4 to 8	22	9½″ x 5⅛″ x 3″	4 lbs.	$432.00
501476	UL-1200-HD	8 to 10	28	14¼″ x 6″ x 3″	5 lbs.	$564.75

General Purpose Motors

• Brand new WORLDWIDE ELECTRIC general purpose motors. Ideal for use in blowers, pumps, conveyors, and many other diverse applications.

SPECIFICATIONS
- 208-230/460 Volt
- Reversible Rotation
- Enclosure TEFC
- 56 Frame
- 3-Phase
- IP43 Protection
- ⅝″ Diameter keyed shaft
- Service Factor 1.15
- Continuous Duty


501513

Rigid Base					
ITEM	Model	HP	Amps	Shpg	Price
501513	NAT12-18-56	½	1.9/0.95	24 lbs.	$198.00
501520	NAT34-18-56	¾	2.6/1.3	27 lbs.	$211.90
501529	NATE1-18-56	1	3.22/1.61	41 lbs.	$262.50
501524	NATE1.5-18-56	1½	4.52/2.26	48 lbs.	$309.90
501534	NATE2-18-56	2	5.92/2.96	53 lbs.	$369.25


501517


501519


501539

C-Face Removable Base 1800 RPM					
ITEM	Model	HP	Amps	Shpg	Price
501517	NAT13-18-56CB	⅓	1.4/0.72	22 lbs.	$191.55
501514	NAT12-18-56CB	½	1.9/0.95	24 lbs.	$203.40
501521	NAT34-18-56CB	¾	2.6/1.3	27 lbs.	$220.60
501530	NATE1-18-56CB	1	3.22/1.61	41 lbs.	$289.55
501525	NATE1.5-18-56CB	1½	4.52/2.26	48 lbs.	$367.00
501535	NATE2-18-56CB	2	5.92/2.96	54 lbs.	$409.05
C-Face Removable Base 3600 RPM					
ITEM	Model	HP	Amps	Shpg.	Price
501519	NAT13-36-56CB	⅓	1.3/0.65	24 lbs.	$175.95
501516	NAT12-36-56CB	½	1.7/0.85	23 lbs.	$183.65
501523	NAT34-36-56CB	¾	2.4/1.2	27 lbs.	$191.25
501532	NATE1-36-56CB	1	3.0/1.5	29 lbs.	$267.25
501527	NATE1.5-36-56CB	1½	3.96/1.98	36 lbs.	$302.60
501537	NATE2-36-56CB	2	5.22/2.61	39 lbs.	$334.40
501539	NATE3-36-56CB	3	7.38/3.69	45 lbs.	$386.85


501518


501536


501533

C-Face Round Body 1800 RPM					
ITEM	Model	HP	Amps	Shpg	Price
501518	NAT13-18-56CRD	⅓	1.4/0.72	22 lbs.	$191.55
501515	NAT12-18-56CRD	½	1.9/0.95	23 lbs.	$203.40
501522	NAT34-18-56CRD	¾	2.6/1.3	26 lbs.	$220.60
501531	NATE1-18-56CRD	1	3.22/1.61	40 lbs.	$289.55
501526	NATE1.5-18-56CRD	1½	4.52/2.26	47 lbs.	$367.00
501536	NATE2-18-56CRD	2	5.92/2.96	52 lbs.	$409.05
C-Face Round Body 3600 RPM					
ITEM	Model	HP	Amps	Shpg.	Price
501533	NATE1-36-56CRD	1	3.0/1.5	27 lbs.	$267.25
501528	NATE1.5-36-56CRD	1½	3.96/1.98	33 lbs.	$302.60
501538	NATE2-36-56CRD	2	5.22/2.61	38 lbs.	$334.40
501540	NATE3-36-56CRD	3	7.38/3.69	44 lbs.	$386.85

1 HP 1760 RPM 3PH Motor

ITEM 501459

$499.95



• Brand new, LEESON model# 121179.00 3-Phase general purpose motor. Rolled steel frame.

SPECIFICATIONS
- Power 1 HP
- Voltage 230/460 Volt AC
- Phase 3
- Frequency 60 Hz
- Amperage 3.2/1.6 Amps
- Speed 1760 RPM
- Rotation Reversible
- Service Factor 1.15
- Bearings Ball
- Thermal Overload Protection None
- Enclosure TEFC
- Duty Continuous
- Frame 143TC
- Base Mount Six 0.88″ x 0.34″ elliptical slots on 5.50″ x 3″ and 5″ centers
- Face Mount Four ⅜″-16 threaded holes in motor face on 5⅞″ B.C., 4½″ pilot
- Shaft ⅞″ dia. x 2.13″ overall length w/ 3⁄16″ wide x 1⅜″ long keyway
- Size 10.16″ x 8.64″ x 7.32″
- **Shpg. 35 lbs.**

3 HP 3600 RPM 3PH Motor

ITEM 501456

$179.95



• New, WEG 00336ES3ESA80SL saw arbor motor. Compact motor with cast iron frame that ensures high outputs with smaller frame. It was especially designed for application on circular saws, miter saws, metal cutoff saws, routers, disc sanders, and wood milling machines.

SPECIFICATIONS
- Power 3 HP
- Voltage 208-230/460 VAC
- Phase 3 Ph
- Frequency 60 Hz
- Amperage 9.49-8.58/4.29 Amps
- Speed 3500 RPM
- Rotation CW
- Service Factor 1.00
- Bearings Ball
- Enclosure TEFC
- Thermal Overload Protection None
- Duty S6
- Frame 80S
- Base Mount Four 0.58″ holes on 10½″ x 7½″ centers
- Shaft M30 x 3.5 (left)
- Arbor Dimensions 120mm dia. x 32.5mm
- Size 18½″ x 10½″ x 6½″
- **Shpg. 132 lbs.**

3 HP 3490 RPM Motor

ITEM 501608

$249.95



• New, WEG capacitor-start, capacitor-run motor. Stainless steel shaft. Thermal overload protection.

SPECIFICATIONS
- Brand WEG
- Model Number 24366-SHU
- Power 3 HP
- Voltage 208-230 Volt AC
- Phase 1
- Frequency 60 Hz
- Amperage 14.00-12.70 Speed 3490 RPM
- Rotation CCW
- Service Factor 1.15
- Bearings Ball
- Thermal Overload Protection Automatic
- Enclosure TEFC
- Duty Continuous
- Frame 56HJ
- Base Mount Six 1⅛″ x 5⁄16″ elliptical slots on 4⅞″ x 2″ x 5″ centers
- Face Mount Four ⅜″-16 threaded holes in motor face on 5⅞″ B.C., 4½″ pilot
- Shaft ⅝″ dia. x 2½″ overall length w/ 7⁄16″-20 x ⅝″ threaded end
- Size 16″ x 10¼″ x 8¼″
- **Shpg. 51 lbs.**

Three Phase Motors



• Brand new fractional horsepower three phase motors with steel motor frame and base.



SPECIFICATIONS
- Voltage 208-230/460
- Service factor 1.15
- Shaft ⅝″ with keyway
- RPM 1725
- Enclosure TEFC
- Electrically reversible rotation
- Enclosure TEFC
- No overload protection
- Ball bearings
- Continuous duty

* MADE IN USA

ITEM	Brand	Model	HP	Amps	Frame	Shpg	Price
501462	MARATHON	5K49FN4136	⅓	1.5-1.6/0.8	56	22 lbs.	$340.75
501461	MARATHON	5K42FN4035	⅓	1.5-1.6/0.8	56C	20 lbs.	$384.60
501454	MARATHON	5K35MNB117	½	2.2/1.1	56	22 lbs.	$381.85
501018*	LEESON	116747	2	5.8/2.9	56C	48 lbs.	$949.60

½ HP 3475 RPM Motor
ITEM 501401
$129.95



• New, WEG three phase electric motor model# TO0C040J0000100734.

SPECIFICATIONS
- Power ½ HP
- Voltage 208-230/460 AC
- Phase 3
- Frequency 60 Hz
- Amperage 1.85/0.93 Amps
- Speed 3475 RPM
- Rotation Reversible
- Service Factor 1.6
- Enclosure ODP
- Duty Continuous
- Frame E56J
- Face Mount:: Four ⅜″-16 tapped holes on 5⅞″ diameter bolt circle
- Rigid Base Mount: Four 0.34″ diam. holes on 4⅞″ x 3″ centers
- Shaft ⅝″ dia. x 1¾″ 7⁄16-20 thread 11⁄16″ long
- Size 11⅜″ x 6½″ x 6¾″
- **Shpg. 23 lbs.**

¾ HP 3455 RPM Motor
ITEM 501495
$99.95



• New, WEG model# W01.TO01C0X0X motor.

SPECIFICATIONS
- Power ¾ HP
- Voltage 208-230/460 AC
- Phase 3
- Frequency 60 Hz
- Amperage 2.98-2.70/1.36 Amps
- Speed 3455 RPM
- Rotation CCW
- Service Factor 1.5
- Bearings Unknown
- Thermal Overload Protection None
- Enclosure ODP
- Duty Continuous
- Frame W56J
- Base Mount: Four 1³⁄16″ x 5⁄16″ elliptical slots on 3″ x 4″ to 6⅞″ centers
- Face Mount: Four ⅜″-16 threaded holes in motor face on 5⅞″ B.C., 4½″ pilot
- Shaft ⅝″ dia. x 2⅜″ overall length w/ 7⁄16-20 thread ½″ long
- Size 7¾″ x 6½″ x 6⅝″
- **Shpg. 19 lbs.**

1 HP 3510 RPM Motor
ITEM 501404
$229.95



• New, WEG three phase motor.

SPECIFICATIONS
- Model W01-TE01C0X0X
- Power 1 HP
- Voltage 230/460 AC
- Phase 3
- Frequency 60 Hz
- Amperage 2.88/1.44 Amps
- Speed 3510 RPM
- Rotation Reversible
- Service Factor 1.15
- Enclosure TEFC
- Duty Continuous
- Frame 56J
- Face Mount: Four ⅜″-16 tapped holes on 5⅞″ diameter bolt circle
- Rigid Base Mount: Four 0.34″ diam. holes on 4⅞″ x 3″
- Shaft ⅝″ dia. x 1⅞″ smooth w/ 7⁄16″-20 thread and 11⁄16″ long
- Size 12½″ x 9½″ x 7¼″
- **Shpg. 27 lbs.**

1½ HP 3400 RPM Motor
ITEM 501496
$129.95



• New, WEG model# TO0C040J0000100646 motor.

SPECIFICATIONS
- Power 1½ HP
- Voltage 208-230/460 AC
- Phase 3
- Frequency 60 Hz
- Amperage 4.50-4.18/2.09 Amps
- Speed 3400 RPM
- Rotation CCW
- Service Factor 1.30
- Bearings Unknown
- Thermal Overload Protection None
- Enclosure ODP
- Duty Continuous
- Frame E56J
- Base Mount: Four 1³⁄16″ x 5⁄16″ elliptical slots on 3″ x 3⅞″ to 6⅞″ centers
- Face Mount: Four ⅜″-16 threaded holes in motor face on 5⅞″ B.C., 4½″ pilot
- Shaft ⅝″ dia. x 2½″ overall length w/ 7⁄16″-20 thread ½″ long
- Size 9⅜″ x 6½″ x 6½″
- **Shpg. 28 lbs.**

3 HP 3400 RPM Motor
ITEM 501497
$159.95



• New, WEG model# W01.TO01C0X0X.

SPECIFICATIONS
- Power 3 HP
- Voltage 230/460 AC
- Phase 3
- Frequency 60 Hz
- Amperage 7.78/3.89
- Speed 3400 RPM
- Rotation CCW
- Service Factor 1.15
- Bearings Ball
- Thermal Overload Protection None
- Enclosure ODP
- Duty Continuous
- Frame 56HJ
- Base Mount: Six 1³⁄16″ x 5⁄16″ elliptical slots on 2″ to 5″ x 3⅞″ to 6⅞″ centers
- Face Mount: Four ⅜″-16 threaded holes in motor face on 5⅞″ B.C., 4½″ pilot
- Shaft ⅝″ dia. x 2½″ overall length w/ 7⁄16″-20 thread ½″ long
- Size 10⅝″ x 6½″ x 6½″
- **Shpg. 36 lbs.**

½ HP 3450 RPM Motor
ITEM 501430
$99.95



• New, TECHTOP three phase, electric motor. Model BL3-AL-TF-56C-2-B-D-.5

SPECIFICATIONS
- Power ½ HP
- Voltage 208-230/460 AC
- Amperage 1.88/0.94 Amps
- Speed 3450 RPM
- Rotation Reversible
- Phase 3
- Service Factor 1.15
- Bearings Ball
- Enclosure TEFC
- Duty Continuous
- Frame 56C
- Face Mount Four ⅜″-16 holes on 5⅞″ Bolt Circle
- Rigid Base Mount Four 0.34″ diam. holes on 4⅞″ x 3″ centers
- Shaft ⅝″ diam. x 1⅞″ w/ 3⁄16″ keyway
- Size 11¾″ x 8½″ x 6½″
- **Shpg. 20 lbs.**

2 HP 1745 RPM Motor
ITEM 501480
$499.95



• New, LEESON motor.

SPECIFICATIONS
- Model Number C145T17FK27E
- Vendor Number 121181.00
- Power 2 HP
- Voltage 230/460 & 190/380 VAC
- Phase 3
- Frequency 60 & 50 Hz
- Amperage 5.8/2.9 & 6.8/3.4 Amps
- Speed 1745 & 1435 RPM
- Rotation Reversible
- Service Factor 1.25
- Bearings Ball
- Thermal Overload Protection None
- Enclosure TEFC
- Duty Continuous
- Frame 145TC
- Base Mount: Six, 0.334″ x 1″ slotted holes on 3″ to 5″ x 5-6″ centers
- Face Mount: Four ⅜″-16 threaded holes in motor face on 5⅞″ B.C., 4½″ pilot
- Shaft ⅞″ dia. x 2¼″ overall length w/ 3⁄16″ wide x 1½″ long keyway
- Size 13¾″ x 9″ x 7¼″
- **Shpg. 53 lbs.**

3 HP 3505 RPM Motor
ITEM 501609
$179.95



• New, WEG model# 25314-SHU general purpose 3-phase motor. Totally Enclosed Fan Cooled (TEFC) enclosures.

SPECIFICATIONS
- Power 3 HP
- Voltage 230/460 AC
- Phase 3
- Frequency 60 Hz
- Amperage 7.34/3.67 Amps
- Speed 3505 RPM
- Rotation Reversible
- Service Factor 1.15
- Bearings Ball
- Enclosure TEFC
- Duty Continuous
- Frame 56HJ
- Base Mount Six 1⅛″ x 5⁄16″ elliptical slots on 4⅞″ x 2″ x 5″ centers
- Face Mount Four ⅜″-16 threaded holes in motor face on 5⅞″ B.C., 4½″ pilot
- Shaft ⅝″ dia. x 2½″ overall length w/ 7⁄16″-20 x ⅝″ threaded end and ¼″-28 tapped
- Size 15½″ x 10″ x 7½″
- **Shpg. 54 lbs.**

3 HP 3532 RPM Motor
ITEM 501431
$179.95



• New, MARATHON three phase, motor. Inverter-rated, speed range 10:1.

SPECIFICATIONS
- Model 182TTFB6004
- Power 3 HP
- Voltage 208-230/460 AC
- Amperage 7.9-7.6/3.8
- Speed 3532 RPM
- Rotation Reversible
- Phase 3
- No Thermal Overload
- Service Factor 1.15
- Bearings Ball
- Enclosure TEFC
- Duty Continuous
- Frame 184TC
- Size 15½″ x 12″ x 10½″
- **Shpg. 90 lbs.**

Truck freight only.

7.5 HP 3450 RPM Motor
ITEM 501003
$199.95



• New, CENTURY inverter duty rated motor. 1″ I.D. lifting tab included.

SPECIFICATIONS
- Model# TCP71006
- Power 7½ HP
- Voltage 230/460 VAC
- Amperage 19/9 Amps
- Speed 3500 RPM
- Rotation Reversible
- Phase 3
- Service Factor 1.15
- Bearings Ball
- Enclosure TEFC
- Duty Continuous
- Frame 213JM
- Face Mount Four ½″-13 tapped holes on 7¼″ B.C., 8⅜″ pilot
- Base Mount Eight 7⁄16″ holes on 8½″ x 1½″ x 5½″ x 7″ centers
- Shaft 1¼″ dia. x 4¼″ long, Stepped down to 1″ dia., Stepped down to ⅞″ dia. w/ 3⁄16″ wide keyway
- Size 16⅞″ x 15″ x 10⅞″
- **Shpg. 240 lbs.**

Truck freight only.


500108

Farm Duty Single Phase Motors

• Brand new LEESON heavy duty motors. High starting torque. Totally enclosed fan cooled with double shielded ball bearings for outdoor use. Capacitor start. Manual reset thermal overload protection. Cont. duty, reversible rotation, rigid mount. Single phase.

ITEM	HP	Voltage	Amps	RPM	Frame	Shaft	Shpg.	Price
500106	½	115/230	8.8/4.4	1725	56	⅝″	25 lbs.	$328.90
500107	¾	115/230	10.8/5.4	1725	56	⅝″	28 lbs.	$396.35
500108	1	115/230	14/7	1725	56	⅝″	32 lbs.	$445.95
500109	1½	115/230	17.2/8.6	1725	56	⅝″	41 lbs.	$522.80
500110	2	230	9.2	1725	56Hz	⅞″	48 lbs.	$599.25

Worldwide Farm Duty Motors

• Brand new WORLDWIDE ELECTRIC fractional farm duty motor. Heavy duty motor for agricultural and other industrial use. Available as base mount or as face and base mount. Motors have ⅝″ diameter keyed shaft.


501507

- **SPECIFICATIONS**
- 1800 RPM
- 115/230 Volt
- Enclosure TEFC
- Reversible Rotation
- Continuous Duty
- Manual thermal overload protection
- Service factor 1.15
- IP54 Protection

Base Mount

ITEM	Model	HP	Amps	Frame	Shpg	Price
501507	FM13-18-56	⅓	5.2/2.6	56	29 lbs.	$231.90
501505	FM12-18-56	½	7.2/3.6	56	32 lbs.	$238.75
501511	FM34-18-56	¾	10.0/5.0	56	36 lbs.	$279.40
501503	FM1-18-56	1	13.0/6.5	56	41 lbs.	$291.75
501501	FM1.5-18-56H	1½	14.5/7.3	56H	42 lbs.	$346.15
501509*	FM2-18-56HZ	2	19.6/9.8	56HZ	50 lbs.	$417.85

* ⅞″ diameter shaft

Face & Base Mount

ITEM	Model	HP	Amps	Frame	Shpg	Price
501508	FM13-18-56C	⅓	5.2/2.6	56C	29 lbs.	$266.05
501506	FM12-18-56C	½	7.2/3.6	56C	32 lbs.	$273.30
501512	FM34-18-56C	¾	10.0/5.0	56C	36 lbs.	$319.65
501504	FM1-18-56C	1	13.0/6.5	56C	41 lbs.	$333.35
501502	FM1.5-18-56HC	1½	14.5/7.3	56C	43 lbs.	$394.65
501510*	FM2-18-56HZC	2	19.6/9.8	56HZC	51 lbs.	$475.45

* ⅞″ diameter shaft

Worldwide Farm Duty Motors

• Brand new WORLDWIDE ELECTRIC Integral farm duty motor. Heavy duty motor for agricultural and other industrial use. Available as base mount or as face and base mount.


501553

- **SPECIFICATIONS**
- 1800 RPM
- 208/230 Volt
- Enclosure TEFC
- Reversible Rotation
- Continuous Duty
- Manual thermal overload protection
- Service factor 1.15
- IP55 Protection

Base Mount *Truck freight only.*

ITEM	Model	HP	Amps	RPM	Frame	Shaft	Shpg	Price
501553	FD2-18-145T	2	7.8	1758	145T	⅞″	54 lbs.	$392.65
501557	FD2-18-182T	2	8.5	1764	182T	1⅛″	83 lbs	$435.50
501559	FD3-18-184T	3	12.5	1769	184T	1⅛″	91 lbs	$518.20
501561	FD5-18-184T	5	22.2/20.2	1769	184T	1⅛″	155 lbs.	$611.00
501563	FD7.5-18-215T	7.5	28.7	1767	215T	1⅜″	190 lbs.	$940.60
501565	FD7.5-18-215TZ	7.5	31.5/28.7	1767	215TZ	1⅛″	183 lbs.	$940.60
501566	FD10-18-215T	10	38.8	1765	215T	1⅜″	210 lbs.	$1096.35

Face & Base Mount *Truck freight only.*

ITEM	Model	HP	Amps	RPM	Frame	Shaft	Shpg	Price
501558	FD2-18-182TC	2	8.5	1764	182TC	1⅛″	124 lbs.	$492.65
501560	FD3-18-184TC	3	12.5	1769	184TC	1⅛″	126 lbs.	$539.75
501562	FD5-18-184TC	5	20.2	1769	184TC	1⅛″	155 lbs.	$636.45
501564	FD7.5-18-215TC	7.5	31.5/28.7	1767	215TC	1⅜″	200 lbs.	$979.80
501567	FD10-18-215TC	10	42.5/38.8	1765	215TC	1⅜″	212 lbs.	$1142.00



¾ HP 1725 RPM Motor

ITEM 500816

$424.14

• Brand new, LEESON model M4C17FZ18H electric motor. Replacement poultry feed auger motor. Fully gasketed to keep dust out. Capacitor start motor. Mechanical centrifugal starting switch with overspeed protection. Steel construction. Manual overload protection.

SPECIFICATIONS

- Power ¾ HP
- Voltage 115/208-230 AC
- Amperage 10.8/5.3-5.4 Amps
- Speed 1800 RPM
- Rotation Reversible
- Phase 1
- Service Factor 1.0
- Bearings Ball
- Enclosure TEFC
- Duty Continuous
- Frame 48Y
- Face Mount Two 0.343 dia. holes on 7¼″ B.C.
- Shaft ½″ dia. x 1½″ w/ Flat
- Size 9.5″ x 8.75 x 8.31″
- **Shpg. 31 lbs.**



5 HP 208-230 VAC Compressor Duty Motor

ITEM 500656

$389.85

• Brand new, LEESON ELECTRIC Model 116523 motor. Special duty motor designed to replace motors on compressors. Motor is rated for a breakdown torque of 5 HP and a continuous compressor duty at 3 HP. Overload protection with manual reset. Steel frame and base. Welded base. Capacitor start/capacitor run.

• *Confirm your motor name plate data tag including voltage, amperage, speed, frame and shaft diameter to match this motor specifications for proper operation.*

SPECIFICATIONS

- 5 HP Definite Purpose Special Compressor Duty
- Voltage 208-230 VAC
- Amperage 15 Amps
- Speed 3450 RPM
- Phase 1
- Rotation Reversible
- Service factor 1.0
- Bearings Ball
- Enclosure ODP
- Cont. compressor duty
- Frame 56H
- Mount base
- Shaft ⅝″ dia. x 1⅞″ w/ 3⁄16″ keyway
- Size 9¼″ x 7″ x 8″
- **Shpg. 38 lbs.**



5 HP 3600 RPM Motor

ITEM 500865

$1249.70

• Brand new, LEESON model P184K34FK2D general purpose electric motor. Capacitor start and run. Steel housing. Manual reset thermal overload protection.

SPECIFICATIONS

- Power 5 HP
- Voltage 230 AC
- Amperage 19.8 Amps
- Speed 3600 RPM
- Rotation Reversible
- Phase 1
- Service Factor 1.15
- Bearings Ball
- Enclosure TEFC
- Duty Continuous
- Frame 184TC
- Face Mount: Four ½″-13 tapped holes on 7¼″ diameter bolt circle
- Rigid Base Mount: Six 0.4″ diam. holes on 7½″ x 4½″ to 5½″ centers
- Shaft 1⅛″ dia. x 2⅝″ w/ ¼″ keyway
- Size 11 1⁄16″ x 11″ x 11 5⁄16″
- **Shpg. 103 lbs.**

Truck freight only.



Single Phase TEFC Motors

• Brand new LEESON or MARATHON. Totally enclosed fan cooled motors for a wide range of applications. Ideal workshop motor for dirty environments. Capacitor start. Ball bearings. High starting torque. All position mounting.

* MADE IN USA

** MARATHON brand

SPECIFICATIONS

- Service factor 1.15
- Voltage 115/208-230 AC
- Duty continuous
- Phase single
- Rotation reversible

LEESON

1800 RPM

• 56C frame have ⅝″ dia. shaft with keyway • 145TC frame have ⅞″ dia. shaft with keyway

ITEM	Model	HP	Amps	Frame	Overload Protection	Shpg.	Price
500792	102916	¼	5.4/2.4-2.7	56C	None	22 lbs.	$247.05
501460**	5KC42GN0066	½	8.6./4.3	56C	None	24 lbs.	$445.30
501455**	5KCR46MN0055Y	½	5.8-5.6/2.9-2.8	56C	Manual	33 lbs.	$692.60
501452**	056C17F5913	¾	11.0/5.4-5.5	56C	Manual	33 lbs.	$367.70
500793*	110908	1	12.8/6.4	56C	None	30 lbs.	$398.75
501448**	056C17F5914	1	13.4/6.8-6.7	56C	Manual	35 lbs.	$444.05
500794*	110910	1½	17.2/8.8-8.6	56C	None	39 lbs.	$427.95
501450**	056B17F5584	1½	15.2/8.2-7.6	56HC	Manual	42 lbs.	$509.10
500795*	120274	2	18.4/9.2	145TC	None	49 lbs.	$493.05
500796*	121465	2	18.4/9.2	145TC	Manual	44 lbs.	$508.40

3600 RPM

ITEM	Model	HP	Amps	Frame	Overload Protection	Shpg.	Price
500799*	112135	¾	10/5.2-5	56C	None	26 lbs.	$340.70
500800*	110180	1	12/6.2-6	56C	None	28 lbs.	$394.85

2 HP Compressor Duty Motor



ITEM 501432

$363.85

• Brand New, CENTURY electric air compressor motor. High torque Special duty compressor duty motor. Capacitor start/capacitor run.

SPECIFICATIONS

- Brand Century
- Model B381
- Power 2 HP Definite Purpose Special Compressor Duty
- Voltage 115/230 AC
- Amperage 15.0/7.5 Amps
- Speed 3450 RPM
- Rotation CCW
- Phase 1
- Service Factor 1.00
- Bearings Ball
- Overload Protection Manual
- Enclosure ODP
- Duty Continuous
- Frame M56
- Mount 4 bolt 4⅞″ x 3″
- Shaft ⅝″ dia. x 1¾″ w/ 3⁄16″ keyway
- Size 9½″ x 6½″ x 8″
- **Shpg. 29 lbs.**

3 HP Compressor Duty Motor



ITEM 501433

$249.60

• Brand New, electric air compressor motor. Special Duty motor designed to replace motors on compressors. High torque design for compressor duty applications. Steel frame and base.

SPECIFICATIONS

- Brand Century
- Model B383
- Power 3 HP Definite Purpose Special Compressor Duty
- Voltage 115/230 AC
- Amperage 15.0/7.5 Amps
- Speed 3450 RPM
- Rotation CCW
- Phase 1
- Service Factor 1.00
- Bearings Ball
- Enclosure ODP
- Duty Continuous
- Frame U56
- Thermal Overload Protection Manual
- Mount 4 bolt base 4⅞″ x 3″ centers
- Shaft ⅝″ dia. x 1¾″ w/ 3⁄16″ keyway
- Size 9½″ x 6½″ x 8″
- **Shpg. 32 lbs.**

3 HP Compressor Duty Motor



ITEM 500745

$249.95

• Brand new, WEG model# Z00336OS1C022416 capacitor-start, capacitor-run electric motor. Special Duty motor designed to replace motors on compressors. High torque design for compressor duty applications. Thermal overload protection with manual reset. Steel frame and base.

SPECIFICATIONS

- Power 3 HP Definite Purpose Special Compressor Duty
- Voltage 208 - 230 VAC
- Amperage 13.00/12.70 Amps
- Speed 3480 RPM
- Phase 1
- Rotation CCW
- Service Factor 1.2
- Bearings Ball
- Enclosure ODP
- Duty Continuous
- Frame 56H
- Base Mount Six 1⁷⁄₃₂″ x 5⁄16″ slots on 4¹⁵⁄₁₆″ x 3″ to 5″ centers
- Shaft ⅝″ dia. x 1⅞″ w/ 3⁄16″ keyway
- Size 10″ x 8¼″ x 6½″
- **Shpg. 38 lbs.**

5 HP Compressor Duty Motor



ITEM 501434

$256.45

• Brand new, Special duty motor designed to replace motors on compressors. Steel frame and base. Welded base. Capacitor start/capacitor run.

SPECIFICATIONS

- Brand Century
- Model B385
- Power 5 HP Definite Purpose Special Compressor Duty
- Voltage 208-230 VAC
- Amperage 15 Amps
- Speed 3450 RPM
- Phase 1
- Rotation CCW
- Service Factor 1.0
- Bearings Ball
- Overload Protection Manual
- Enclosure ODP
- Duty Continuous Compressor Duty
- Frame 56
- Mount Base
- Shaft ⅝″ dia. x 1⅞″ w/ 3⁄16″ keyway
- Size 10½″ x 7″ x 8½″
- **Shpg. 38 lbs.**

5 HP Compressor Duty Motor



ITEM 501580

$399.95

• New, WEG capacitor-start, capacitor-run motor. Special Duty motor designed to replace motors on compressors. High torque compressor duty motor.

SPECIFICATIONS

- Model Number 00536OS-1DCD56HZ-S
- Part Number EM0.5.0-36-10
- Power 5 HP Definite Purpose Special Compressor Duty
- Voltage 230 Volts AC
- Phase 1
- Frequency 60 Hz
- Amperage 20.3 Amps
- Speed 3440 RPM
- Rotation Reversible
- Service Factor 1.00
- Bearings Ball
- Thermal Overload Protection Manual
- Enclosure ODP
- Duty Continuous
- Frame 56HZ
- Base Mount Six 1⅛″ x 5⁄16″ elliptical slots on 2″, 5″ x 5″ centers
- Shaft ⅞″ dia. x 2⅞″ w/ 3⁄16″ keyway
- Size 15½″ x 7½″ x 9⅝″
- **Shpg. 53 lbs.**

5 HP Compressor Duty Motor



ITEM 501435

$528.95

• Brand New, capacitor-start, capacitor-run motor. Special duty motor designed to replace motors on compressors. High torque design for compressor duty applications.

SPECIFICATIONS

- Brand Century
- Model B386
- Power 5 HP Definite Purpose Special Compressor Duty
- Voltage 208-230 AC
- Phase 1
- Frequency 60 Hz
- Amperage 22 Amps
- Speed 3450 RPM
- Rotation CCW
- Service Factor 1.15
- Bearings Ball
- Thermal Overload Protection Manual
- Enclosure ODP
- Duty Continuous
- Frame R56HZ
- Base Mount Six 1⅛″ x 5⁄16″ elliptical slots on 5″ x 4¾″ to 3″ x 4″ centers
- Shaft ⅞″ dia. x 2¼″ w/ 3⁄16″ keyway
- Size 12⅜″ x 9″ x 10″
- **Shpg. 50 lbs.**

5 HP Compressor Duty Motor



ITEM 501440

$564.35

• Brand new, air compressor motor. Special duty motor designed to replace motors on compressors. High starting torque on start-up to achieve a higher starting load required in air compressor applications. Capacitor-start/capacitor-run. Heavy-duty construction ensures motor durability.

SPECIFICATIONS

- Brand Century
- Model B813
- Power 5 HP Definite Purpose Special Compressor Duty
- Voltage 230 AC
- Phase 1
- Frequency 60 Hz
- Amperage 22.0 Amps
- Speed 3450 RPM
- Rotation CCW
- Service Factor 1
- Bearings Ball
- Thermal Overload Protection Manual Reset
- Enclosure ODP
- Duty Continuous
- Frame Y56HZ
- Base Mount Six 1¼″ x 5⁄16″ elliptical slots on 3″ x 4.88″ to 5″ x 4.88″ centers
- Shaft ⅞″ dia. x 2.31″ w/ 3⁄16″ keyway
- Size 14.06″ x 9.07″ x 9″
- **Shpg. 45 lbs.**

General Purpose Motors



• Brand new WORLDWIDE ELECTRIC general purpose motors. Ideal for use in blowers, pumps, conveyors, and many other diverse applications.

SPECIFICATIONS
- 115/208-230 Volt
- 56C Frame
- P43 Protection
- Enclosure TEFC
- Continuous Duty
- Single-Phase
- Reversible Rotation
- Service Factor 1.15
- ⅝″ Diameter keyed shaft
- C-Face with Removable Base

1800 RPM					
ITEM	Model	HP	Amps	Shpg	Price
501546	NT13-18-56CB	⅓	5.2/2.6	29 lbs.	$209.95
501544	NT12-18-56CB	½	7.2/3.6	32 lbs.	$221.20
501551	NT34-18-56CB	¾	10.0/5.0	36 lbs.	$240.75
501543	NT1-18-56CB	1	13.0/6.5	41 lbs.	$268.60
501541	NT1.5-18-56CB	1½	14.5/7.3	42 lbs.	$339.25
501549	NT2-18-56CB	2	19.6/9.8	50 lbs.	$412.75
3600 RPM					
ITEM	Model	HP	Amps	Shpg.	Price
501547	NT13-36-56CB	⅓	5.4/2.7	29 lbs.	$204.30
501545	NT12-36-56CB	½	6.5/3.3	31 lbs.	$215.65
501552	NT34-36-56CB	¾	9.2/4.6	34 lbs.	$221.75
501548	NT1-36-56CB	1	11.5/5.8	37 lbs.	$242.60
501542	NT1.5-36-56CB	1½	13.0/6.5	37 lbs.	$303.25
501550	NT2-36-56CB	2	17.0/8.5	44 lbs.	$334.25

Electric Motor Slide Mounts ⚠



• Brand new, WORLDWIDE ELECTRIC T-frame motor slide base. Use to mount NEMA standard electric motor. Simplifies alignment and positioning, ideal for tensioning belts. Steel construction with baked-on primer. Washers included.

Find dimensional specifications and drawings for these items online.

ITEM	Compatible Motor Frame Size	Slide Length	Adjusting Screw	Base Mount Centers	Foot Print	Shpg.	Price
500610	56	3″	1	7⅝″ x 5¾″	10⅝″ x 6½″	5 lbs.	$16.75
500611	143	3″	1	7½″ x 6¾″	10½″ x 7½″	8 lbs.	$32.25
500612	145	3″	1	7½″ x 7¾″	10½″ x 8½″	9 lbs.	$32.25
500613	182	3″	2	9″ x 8½″	12¾″ x 9½″	13 lbs.	$43.85
500614	184	3″	2	9″ x 9½″	12¾″ x 10½″	13 lbs.	$43.85
500615	213	3½″	2	10½″ x 9½″	15″ x 11″	18 lbs.	$65.20
500616	215	3½″	2	10½″ x 11″	15″ x 12½″	20 lbs.	$65.20
500617	254	4″	2	12½″ x 13¼″	17¾″ x 15⅛″	22 lbs.	$88.85
500618	256	4″	2	12½″ x 15″	17¾″ x 16⅞″	23 lbs.	$88.85
500619	284	4½″	2	14″ x 15″	19¾″ x 16⅞″	27 lbs.	$99.90
500620	286	4½″	2	14″ x 16½″	19¾″ x 18⅜″	28 lbs.	$99.90
500621	324	5¼″	2	16″ x 17″	22¾″ x 19¼″	38 lbs.	$145.40
500622	326	5¼″	2	16″ x 18½″	22¾″ x 20¾″	39 lbs.	$145.40

¼ HP 1725 RPM Motor



ITEM 501427

$48.95

• New, BALDOR electric 3PH motor. Ideal replacement motor for pool, jet, and other industrial pump applications.

SPECIFICATIONS
- Model JM145
- Power ¼ HP
- Voltage 230/460 AC
- Phase 3
- Frequency 60 Hz
- Amperage 1.1/0.55 Amps
- Speed 1725 RPM
- Rotation CCW
- Service Factor 1.35
- Enclosure ODP
- Duty Continuous
- Frame 56J
- Face Mount: Four ⅜″-16 tapped holes on 5⅞″ diameter bolt circle
- Shaft ⅝″ dia. x 1¾″ w/ 7⁄16-20 thread ¾″ long
- Size 11¾″ x 6½″ x 6½″
- **Shpg. 17 lbs.**

½ HP 1150 RPM Motor



ITEM 501429

$79.95

• New. RELIANCE marine duty three phase electric motor.

SPECIFICATIONS
- Model P14G7701
- Power ½ HP
- Voltage 460 VAC
- Amperage 1 Amps
- Speed 1150 RPM
- Rotation Reversible
- Phase 3
- Enclosure TENV
- Duty Continuous
- Frame 143T
- Base Mount Eight ⅜″ bolt holes on 5½″ x 3″ to 5″ centers
- Shaft ⅞″ dia. x 2¼″ long w/ 3⁄16″ keyway
- Size 9″ x 11″ x 9½″
- **Shpg. 55 lbs.**

½ HP 3450 RPM Motor



ITEM 501428

$36.95

• New, BALDOR pool pump motor Ideal replacement motor for pool pumps.

SPECIFICATIONS
- Model# JSM225.
- Power ⅓ HP
- Voltage 208-230/460 AC
- Amps 1.6/0.8
- RPM 3450
- Rotation CCW
- Phase 3
- Service Factor 1.75
- Enclosure Open
- Duty continuous
- Frame 56YZ
- Shaft ⅝″ diameter with ½″-20 UNF-2A threaded end
- Size 10½″ x 6½″ x 6½″
- **Shpg 17 lbs.**

½ HP 3450 RPM Motor



ITEM 500361

$49.95

• New, RELIANCE Duty Master series. Originally built for powering hydraulic pumps. Thermally protected, auto reset.

SPECIFICATIONS
- HP ½
- Voltage 115 VAC
- Amps 10.5
- RPM 3,450
- Rotation reversible
- Phase 1
- Service Factor 1.0
- Enclosure TENV
- Duty 15 minutes
- Frame FA56
- Foot mount 4 bolts on 3″ x 5″ centers
- Shaft ¼″ wide female tang
- Overall Size 8⅝″ x 7½″ x 7⅝″
- **Shpg. 28 lb.**

½ HP 3460 RPM Motor



ITEM 501398

$146.95

• New, WEG three phase electric motor model# TE01C040J00001007.

SPECIFICATIONS
- Power ½ HP
- Voltage 208-230/460 AC
- Phase 3
- Frequency 60 Hz
- Amperage 1.87-1.7/0.85 Amps
- Speed 3460 RPM
- Rotation CCW
- Service Factor 1.15
- Enclosure TEFC
- Duty Continuous
- Frame B56J
- Face Mount: Four ⅜″-16 tapped holes on 5⅞″ diameter bolt circle
- Rigid Base Mount: Four 0.34″ diam. holes on 4⅞″ x 3″ centers
- Shaft ⅝″ dia. x 1¾″ w/ 7⁄16-20 thread 11-16″ long
- Size 11¾″ x 8⅝″ x 7⅛″
- **Shpg. 26 lbs.**

1 HP 3465 RPM Motor



ITEM 501397

$127.95

• New, WEG three phase electric motor.

SPECIFICATIONS
- Model# T00C040J0000101334
- Power 1 HP
- Voltage 208-230/460 AC
- Phase 3
- Frequency 60 Hz
- Amperage 3.17-3.11/1.56 Amps
- Speed 3465 RPM
- Rotation Reversible
- Service Factor 1.4
- Enclosure ODP
- Duty Continuous
- Frame E56J
- Face Mount: Four ⅜″-16 tapped holes on 5⅞″ diameter bolt circle
- Rigid Base Mount Four 0.34″ diam. holes on 4⅞″ x 3″ centers
- Shaft ⅝″ dia. x 1¾″ w/ 7⁄16-20 thread 11⁄16″ long
- Size 11¾″ x 6½″ x 6¾″
- **Shpg. 26 lbs.**

1/0.33 HP 1450 RPM Motor

ITEM 500320

$149.95



Old unused inventory, General Electric 5KC184AL929 base mount motor.

SPECIFICATIONS

- Power 1 & ⅓ HP
- Voltage 230 AC
- Phase 1
- Frequency 50 Hz
- Amperage 7/4.5 Amps
- Speed 1450/970 RPM
- Rotation Reversible
- Service Factor 1
- Bearings Ball
- Enclosure TEFC
- Duty Continuous
- Frame 184TY
- Base Mount Six 0.39″ dia. x 1¼″ slotted holes on 1″, 5½″ x 7½″ centers
- Shaft 1-⅛″ dia. x 2½″ overall length w/ ¼″ x 2″ long keyway
- Size 16½″ x 12″ x 9½″
- **Shpg. 84 lbs.**

½ HP 1725 RPM Motor

ITEM 501607

$119.95



New, Century carbonator pump motor. Automatic overload protection.

SPECIFICATIONS

- Model Number S48A64C28
- Power 1/2 HP
- Voltage 115/230 Volt AC
- Phase 1
- Frequency 60/50 Hz
- Amperage 6.8/3.4 Amps
- Speed 1725/1425 RPM
- Rotation Reversible
- Service Factor 1.0
- Bearings Ball
- Thermal Overload Protection Automatic
- Enclosure ODP
- Duty Continuous
- Frame 48
- Base Mount Four 1″ x 5⁄16″ elliptical slots on 4¼″ x 2¾″ centers
- Shaft 0.197″ wide Tang drive
- Size 9″ x 5½″ x 6″
- **Shpg. 20 lbs.**

½ HP 3450 RPM Motor

ITEM 501379

$79.95



• New, pool pump motor. Ideal replacement motor for pool pumps. Square flange 4 bolt pump mount on 7⅛″ bolt circle. Stainless steel shaft ⅝″ diameter with ½″-20 UNF-2A RH threaded end. Thermally protected.

SPECIFICATIONS

- Power ½ HP
- Voltage 208-230/460 AC
- Amps 3/1.5
- RPM 3450
- Rotation CCW
- Phase 3
- Service Factor 1.9
- Enclosure TEFC
- Duty continuous
- Frame 56Z
- Shaft ⅝″ diameter with ½″-20 UNF-2A threaded end
- Size 10½″ x 6½″ x 8½″
- **Shpg 18 lbs.**

¾ HP 3450 RPM Motor

ITEM 501285

$59.95



• New, BLUFFTON MOTOR WORKS model B1244 pool pump motor. Smooth portion of shaft measures 1⁹⁄₁₆″ from the bearing overall length 2¹⁄₁₆″. Automatic thermal overload protection.

SPECIFICATIONS

- Power ¾ HP
- Voltage 115/230 AC
- Amperage 12.8/6.4 Amps
- Speed 3450 RPM
- Rotation CCW
- Phase 1
- Service Factor 1.27
- Bearings Ball
- Enclosure ODP
- Duty Continuous
- Frame 56Y
- Mount Square flange 4 bolt on 7⅛″ dia. B.C.
- Shaft ⅝″ dia. x 2¹⁄₁₆″ w/ ½″-20 RH threaded end
- Size 10⅞″ x 6⅝″ x 6⅝″
- **Shpg. 24 lbs.**

¾ HP 3480 RPM Motor

ITEM 501606

$149.95



New, WEG model# 1409-SHU general purpose electric motor. Capacitor start. Steel housing. Automatic overload protection.

SPECIFICATIONS

- Power ¾ HP
- Voltage 115/208-230 Volt AC
- Phase 1
- Frequency 60 Hz
- Amperage 10.8/5.40-4.90 Amps
- Speed 3480 RPM
- Rotation CCW
- Service Factor 1.15
- Bearings Ball
- Thermal Overload Protection Automatic
- Enclosure TEFC
- Duty Continuous
- Frame E56J
- Base Mount Four 1¼″ x 5⁄16″ elliptical slots on 4⅞″ x 3″ centers
- Face Mount Four ⅜″-16 threaded holes in motor face on 5⅞″ B.C., 4½″ pilot
- Shaft ⅝″ dia. x 1⅞″ overall length w/ 7⁄16″-20 x ⅝″ threaded end
- Size 12½″ x 9½″ x 8¼″
- **Shpg. 31 lbs.**

¾ HP 3600 RPM Motor

ITEM 501329

$39.95



• New, AO Smith model# J218-1006.

SPECIFICATIONS

- Power ¾ HP
- Voltage 115/230 VAC
- Phase 1
- Frequency 60 Hz
- Amperage 12.5/3 Amps
- Speed 3600 RPM
- Rotation CCW
- Bearings Ball
- Enclosure ODP
- Thermal Overload Protection Automatic
- Duty Continuous
- Face Mount Four ⅜″ threaded holes in motor face on 7⅛″ B.C.
- Shaft 12mm dia. tapered x ¾″ long with M10-1.0 threaded end
- Size 12″ x 8″ x 8″
- **Shpg. 23 lbs.**

¾ HP 3600 RPM Motor

ITEM 501331

$49.99



• New, AO SMITH model# J218-590B.

SPECIFICATIONS

- Power ¾ HP
- Voltage 115/230 VAC
- Phase 1
- Frequency 60 Hz
- Amperage 11.5/5.75 Amps
- Speed 3600 RPM
- Rotation CCW
- Service Factor 1.25
- Bearings Ball
- Thermal Overload Protection Automatic
- Enclosure ODP
- Duty Continuous
- Face Mount Four ⅜″ threaded holes in motor face on 7⅛″ B.C.
- Shaft ⅝″ dia. x 1½″ long with ½″-20 threaded end
- Size 10½″ x 6½″ x 6½″
- **Shpg. 22 lbs.**

¾ HP 1725 RPM Motor

ITEM 501498

$139.95



• New, CENTURY electric motor. Manual thermal overload protection

SPECIFICATIONS

- Model 7-196325-21
- Power ¾ HP
- Voltage 115/208-230 AC
- Phase 1
- Frequency 60/50 Hz
- Amperage 10.6/5.2-5.3 Amps
- Speed 1725/1425 RPM
- Rotation Reversible
- Service Factor 1.25
- Bearings Ball
- Enclosure ODP
- Thermal Overload Protection Manual
- Duty Continuous
- Frame K56C
- Base Mount Four slots on 4″ to 5¾″ x 3″ centers
- Face Mount Four ⅜″-16 threaded holes on 5⅞″ B.C. w/ 4½″ pilot
- Shaft ⅝″ dia. x 1⅞″ overall length w/ 3⁄16″ wide x 1½″ long keyway
- Size 11½″ x 6½″ x 9″
- **Shpg. 31 lbs.**

¾ HP 1725 RPM Motor

ITEM 501575

$69.95



New, Century motor. Thermal overload protection with manual reset.


SPECIFICATIONS

- Model Number S56AA23C8
- Power ¾ HP
- Voltage 115/230 AC
- Phase 1
- Frequency 60 Hz
- Amperage 10.4/5.2 Amps
- Speed 1725/1425 RPM
- Rotation Reversible
- Service Factor 1.00
- Bearings Ball
- Enclosure ODP
- Thermal Overload Protection Manual
- Duty Continuous
- Frame 56
- Base Mount Eight 1¼″ x 5⁄16″ elliptical slots on 1⅞″, 3″, 4⅞″ x 5″ centers
- Face Mount Four ⅜″-16 threaded holes in motor face on 5⅞″ B.C., 4½″ pilot
- Shaft ⅝″ dia. x 2⅜″ overall length w/ flat
- Size 12⅛″ x 6½″ x 6¾″
- **Shpg. 30 lbs.**

1 HP 1725 RPM Motor

ITEM 501499

$149.95



• New, CENTURY capacitor-start motor. Thermal overload protection with manual reset. Rigid Base and C-face mount.

SPECIFICATIONS

- Model C56AA79C28-03
- Power 1.0 HP
- Voltage 208-230/115 AC
- Phase 1
- Frequency 60/50 Hz
- Amperage 6.5-6.3/12.6 Amps
- Speed 1725/1425 RPM
- Rotation Reversible
- Service Factor 1.25
- Thermal Overload Protection Manual
- Enclosure ODP
- Duty Continuous
- Frame L56C
- Shaft ⅝″ dia. x 2¾″ w/ flat
- Size 10⅛″ x 7½″ x 8¾″
- **Shpg. 37 lbs.**

1 HP 1800 RPM Motor

ITEM 501472

$159.95



• New, CENTURY model #C530 electric motor. Rigid base mount. ⅝″ dia. shaft.

SPECIFICATIONS

- Power 1 HP
- Voltage 208-230/115 AC
- Phase 1
- Frequency 60 Hz
- Amperage 7.2-6.5/13.6 Amps
- Speed 1725 RPM
- Rotation Reversible
- Service Factor 1.25
- Bearings Ball
- Thermal Overload None
- Enclosure ODP
- Duty Continuous
- Frame L56C
- Size 10¼″ x 6½″ x 8⅝″
- **Shpg. 35 lbs.**

2 HP 1725 RPM Motor

ITEM 501581

$249.95



• New, BALDOR RELIANCE model# 36F283-379 capacitor-start, capacitor-run motor. Thermal overload protection with manual reset. ON/OFF switch mounted on the electrical box.

SPECIFICATIONS

- Power 2 HP
- Voltage 115/230 Volts AC
- Phase 1
- Frequency 60 Hz
- Amperage 24/12 Amps
- Speed 1725 RPM
- Rotation CW
- Service Factor 1.15
- Bearings Ball
- Thermal Overload Protection Manual
- Enclosure Open
- Duty Continuous
- Frame 184
- Base Mount:
- Shaft ⅞″ dia. x 2¼″ w/ 3⁄16″ keyway
- Size 14″ x 10½″ x 11″
- **Shpg. 72 lbs.**


500146


500987


500742


500743

Motor Start Capacitors

• New, round motor start capacitors. Molded phenolic resin housing. Spade terminals. All have capacitance range of +20%/-0%.

ITEM	MFD	MFD Range	Voltage	Size	Shpg.	Price
500986	36	36-43	220	1 7/16″ dia. x 2¾″	½ lb.	$1.49
500146	43	43-53	125	1 7/16″ dia. x 2¾″	½ lb.	$1.49
500987	53	53-64	220	1 7/16″ dia. x 2¾″	½ lb.	$1.49
500742	59	59-70	250	1 13/16″ dia. x 3⅜″	½ lb.	$2.99
500743	86	86-103	250	1 13/16″ dia. x 3⅜″	½ lb.	$2.99

Dual Rating Capacitors

• New. Size does not include terminals. **Shpg. 1 lb.**

ITEM	Voltage	MFD	Shape	Size	Price
500522	370	20/5	Round	2″ dia. x 2⅞″	$4.79
500525	370	25/3	Oval	1¾″ x 2¾″ x 3″	$4.99
500523	370	25/5	Oval	1¾″ x 2¾″ x 3″	$4.99
500524	370	25/5	Oval	1¾″ x 2¾″ x 4″	$4.99
500543	370	25/5	Oval	2 15/16″ x 1 15/16″ x 2⅝″	$4.99
500526	440	30/7.5	Oval	1¾″ x 2¾″ x 4″	$5.29
500545	440	40/7.5	Oval	3 21/32″ x 1 31/32″ x 4¾″	$5.49
500546	370	45/5	Oval	2 15/16″ x 1 15/16″ x 3¾″	$5.69
500527	370	45/10	Oval	1¾″ x 2¾″ x 4″	$5.69


500518


500541


500988


500995

Motor Run Capacitors

• New. Size does not include terminals. **Shpg. 1 lb.**

ITEM	Voltage	MFD	Shape	Size	Price
500518**	330	9	Oval	1¼″ x 2″ x 3⅞″	$3.69
500541	330	12.5	Round	1¾″ dia. x 3″	$4.29
500519	370	12.5	Round	1¾″ dia. x 2⅞″	$4.29
500991	370	15	Round	1¾″ dia. x 2⅞″	$3.99
500989	370	15	Oval	2⅛″ x 1¼″ 3¾″	$3.99
500542	370	25	Oval	2 15/16″ x 1 15/16″ x 2⅝″	$4.99
500520	370	25	Oval	1¾″ x 2¾″ x 3″	$4.99
500990	370	25	Oval	2⅛″ x 1¼″ 4¾″	$4.99
500992	370	25	Round	1¾″ dia. x 2⅞″	$3.99
500988	370	25	Round	1¾″ dia. x 2¾″	$3.99
500521*	330	30	Round	1¾″ dia. x 2⅞″	$5.29
500994	370	30	Round	1¾″ dia. x 3⅞″	$3.99
500997	370	30	Round	1¾″ dia. x 3⅞″	$3.99
500993	370	40	Round	1¾″ dia. x 3⅞″	$4.99
500996	370	40	Round	2″ dia. x 3⅞″	$4.99
500995	330	40	Round	1¾″ dia. x 3 3/16″	$4.99

** Resistor between terminals * Ground lug



⅓ HP 3470 RPM Motor

ITEM 501399

$99.95

• New, WEG electric motor model# MO0C0C0J0000100742 capacitor-start. Thermal overload protection with automatic reset.

SPECIFICATIONS

- Power ⅓ HP
- Voltage 115/230 AC
- Phase 1
- Frequency 60 Hz
- Amps 7.2/4-3.6
- Speed 3470 RPM
- Rotation CCW
- Service Factor 1.75
- Enclosure ODP
- Duty Continuous
- Frame W56J
- Mount Face 4 tapped holes on 5⅞″ dia. B.C.
- Rigid Base Mount
- Shaft ⅝″ dia. w/ 7/16- 20 threaded end
- Size 11″ x 5¾″ x 7¾″
- **Shpg. 22 lbs.**



½ HP 3470 RPM Motor

ITEM 501403

$129.95

• New, WEG electric motor model# ME01C0C0J0000100734 capacitor-start. Thermal overload protection with manual reset.

SPECIFICATIONS

- Power ½ HP
- Voltage 115/230 AC
- Phase 1
- Amps 7/3.8-3.5
- Speed 3470 RPM
- Rotation CCW
- Service Factor 1.15
- Enclosure TEFC
- Duty Continuous
- Frame E56J
- Mount Face 4 tapped holes on 5⅞″ dia. B.C.
- Rigid Base Mount:
- Shaft ⅝″ dia. w/ 7/16- 20 threaded end
- Size 12″ x 8½″ x 8⅛″
- **Shpg. 29 lbs.**



½ HP 3500 RPM Motor

ITEM 501494

$99.95

• New, WEG model# W01.1GMO01C0X0X capacitor-start motor.

SPECIFICATIONS

- Power ½ HP
- Voltage 208-230/115 AC
- Phase 1
- Frequency 60 Hz
- Amperage 6.60/3.65-3.30 Amps
- Speed 3500 RPM
- Rotation CCW
- Service Factor 1.60
- Bearings Unknown
- Thermal Overload Protection None
- Enclosure ODP
- Duty Continuous
- Frame W56J
- Base Mount Four 13/16″ x 5/16″ elliptical slots on 4″ x 4″ to 6⅞″ centers
- Face Mount Four ⅜″-16 threaded holes in motor face on 5⅞″ B.C., 4½″ pilot
- Shaft ⅝″ dia. x 2½″ overall length w/ 7/16-20 thread ½″ long
- Size 8⅛″ x 6½″ x 7½″
- **Shpg. 23 lbs.**



5HP 1740 RPM Motor

ITEM 500111

$1030.00

• Brand new LEESON heavy duty motor. High starting torque. Totally enclosed fan cooled with double shielded ball bearings for outdoor use. Capacitor start. Manual reset thermal overload protection.

SPECIFICATIONS

- 5 HP
- 230 Volt
- 23 amps
- 1740 RPM
- Reversible
- Single phase
- TEFC enclosure
- Frame 184T
- Cont. duty
- Rigid Mount
- Shaft 1⅛″ dia
- **Shpg 106 lbs.**

Truck freight only.

Westinghouse Circuit Breakers

• New, WESTINGHOUSE QUICKLAG, plug-in, single pole circuit breakers.

SPECIFICATIONS FOR ALL

- Thermal magnetic
- Plug on clip line terminal
- Box lug load terminal
- Suitable for 60° C wire
- Size 2 9/16″ x 1″ x 2 15/16″
- **Shpg. ½ lb.**

New Low Price! 99¢ Each



ITEM	Model	VAC	Amps	Interrupting Rating	Price
500460	HQP1030	120/240	30	10,000 amp at 120/240 VAC	$ .99
500478	HQP1040	120/240	40	10,000 amp at 120/240 VAC	$ .99
500459	QPHW1030	120/240	30	22,000 amp at 120/240 VAC	$ .99
500467	QPHW1030	120/240	30	22,000 amp at 120/240 VAC	$ .99
500476	QPHW1040	120/240	40	22,000 amp at 120/240 VAC	$ .99
500468	QPHW1050	240	50	22,000 amp at 240 VAC	$ .99
500477	QPHW1060	120/240	60	22,000 amp at 120/240 VAC	$ .99
500458	QPHW1060	120/240	60	10,000 amp at 120/240 VAC	$ .99

1.8 RPM 115 VAC Inline Gearmotor



ITEM 500719

$18.95

• New, inline gearmotors. Ideal replacement corn pellet stove, auger motor. Originally built for Bixby stoves. Aluminum gear housing. Four 8-32 UNC tapped bolt hole face mount on 2⅜″ x 2⅜″ centers.

SPECIFICATIONS

- SPG Co. Model ISG-3220BXA(P/N 2051788)
- Speed 1.8 RPM
- Voltage 115 AC
- Torque 110 in - lbs.
- Rotation CW
- Duty intermittent (5 min)
- Enclosure open
- Mount face
- Shaft ½″ dia. x 1¾″, ½-13 UNC RH threaded
- Size 3⅜″ x 2¾″ x 4¾″
- **Shpg. 5 lbs.**

3.5 RPM 115 VAC Inline Gearmotor



ITEM 500999

$11.95

• New, SPG Co. model ISG-31315FKA (P/N 40384rG). Inline gearmotor. Originally built for timer controls on water softeners. Aluminum gear housing. Four 10-32 UNF tapped bolt hole face mount on 1½″ x 1½″ centers.

SPECIFICATIONS

- Speed 3.5 RPM
- Voltage 115 AC
- Amperage ½ Amp
- Rotation CW
- Duty Intermittent (30 seconds on/30 seconds off)
- Enclosure Open
- Mount Face
- Shafts Front-5⁄16″ dia. x 0.7″, Rear-¼″ dia. x ¾″ both have cross holes
- Size 2¼″ x 3″ x 5″
- **Shpg. 3 lbs.**

15 RPM, 115 VAC Shaded Pole Gearmotor



ITEM 500600

$9.95

• New, MERKLE-KORFF Model 3715UP-250. Thermally protected, shaded pole motor. Metal gear housing.

SPECIFICATIONS

- Speed 15 RPM
- Voltage 115 AC
- Amperage 2.7 Amps
- Power 97 Watts at idle
- Rotation CW
- Duty intermittent
- Face mt 3 untapped bosses
- Shaft: Threaded end 5⁄16″-18 LH Base end ⅜″ dia. x ⅜″ long Overall lgth. 15⁄16″
- Size 3⅜″ x 2½″ x 4″
- **Shpg. 3 lbs.**

20 RPM 115 Vac Gearmotor



ITEM 500548

$8.95

• Unused old inventory. BRISTOL MOTOR COMPANY model# 425 2B, 115 Volt AC gearmotor with two animation arms that have some superficial rust.

SPECIFICATIONS

- Speed 20 RPM
- Voltage 115 AC
- Cycle 60
- Watt. 4
- Mounting Tabs 2 tabs 0.495″ x 0.421″ x 0.121″
- Arm length 1.47″
- Arm diameter 0.092″
- **Shpg. 0.7 lb.**

115 VAC Inline Gearmotors



500825



500826
500827

$748.95 each

• Brand new LEESON inline split capacitor gearmotors. Features steel gears and needle bearing supported output shaft. No thermal overload. Capacitor furnished.

SPECIFICATIONS

- Voltage 115 AC
- Torque 100 in - lbs.
- Rotation reversible
- Duty continuous
- Enclosure TENV
- Mount four 10-32 holes on face, 2.645″ x 2.645″
- Shaft ½″ dia. x 1″ w/⅛″ keyway

ITEM	Model	RPM	Amps	HP	Gear Ratio	Size	Shpg.
500825	M1125050	1.9	0.4	1⁄50	900:1	7.25″ x 3.63″ x 3.63″	9 lbs.
500826	M1125127	9	0.9	1⁄15	180:1	8.86″ x 3.75″ x 3.97″	11 lbs.
500827	M1125128	19	0.9	1⁄15	180:1	8.86″ x 3.75″ x 3.97″	12 lbs.

18 RPM, 115 VAC Shaded Pole Gearmotor



ITEM 501416

$9.95

• New, OH SUNG model ORG-4003Y1-2 compact shaded pole gearmotor. Thermally protected, originally built for refrigerator ice maker.

SPECIFICATIONS FOR BOTH

- Speed 18 RPM
- Voltage 115 AC
- Amperage 2.5 Amps
- Power 97 Watts @ idle
- Rotation CW
- Size 2⅞″ x 3½″ x 4″
- Duty Intermittent (1 minute max on time)
- Face Mount 3 tapped bosses
- Shaft: ⅜″ dia. x 2⅛″ long, threaded end 5⁄16″-18 LH Overall length 2⅝″
- **Shpg. 4 lbs.**

ITEM 501418

$9.95

• New, SPG model ISF-3240SSJ. Amperage 2.8 Amps

310 RPM 220 VAC Gearmotor



ITEM 500573

$199.95

• New, BISON, model 015-790-0011. In-line permanent magnet gearmotor. Requires 270-324 MFD start capacitor and 189605-13 solid state switch not included.

SPECIFICATIONS

- Brand Bison
- Speed 131 RPM
- Voltage 208-230 AC
- Amperage 5
- Power ⅝ HP
- Torque 280 in.lbs.
- Gear Ratio 10.8:1
- Rotation Reversible
- Duty Continuous
- Enclosure TE
- Size 12½″ x 6¼″ x 7¼″
- Gearbox Face Mount 4 holes 0.410″ x 0.375″ depth 2¾″ x 4¾″ centers
- Motor Mount 4 tapped holes ¼″-20 TPI, two on each side of motor on 4″ centers
- Shaft 1″ dia. x 3 1⁄16″ w/ tang 0.887″ x 0.371″ x 0.493″ on end of shaft and 0.108″ wide groove 2.443″ from end of shaft to center of groove
- **Shpg. 40 lbs.**

62 RPM 115 VAC Inline Gearmotor



ITEM 500717

$8.99

• New, BREVEL 782 inline gearmotor. T.P.I. Model 8T-115-7AM209A10. Aluminum gear housing. Shaded pole motor. Mounting holes tapped 8-32.

SPECIFICATIONS

- Speed 62 RPM
- Voltage 115 AC
- Amperage 4 Amps
- Rotation CW
- Duty Intermittent
- Enclosure Open
- Mnt. 4 holes on back face
- Shaft ½″ dia. x 1½″ hollow threaded 7⁄16-20 LH
- Size 2½″ x 2″ x 5¾″
- **Shpg. 3 lbs.**

65 RPM 120 VAC



ITEM 501338

$8.95

• New, MOLON inline shaded pole gearmotor. Diecast gear housing. Four thru hole face mount on 2⅜″ x 2⅜″ centers.

SPECIFICATIONS

- Speed 65 RPM
- Voltage 115 AC
- Amperage 2 Amps
- Rotation CW
- Duty Intermittent(1 min)
- Enclosure Open
- Mount Face
- Shaft ⅜″ diam. x 1″ w/flat
- Size 5″ x 2¾″ x 4¾″
- **Shpg. 5 lbs.**

75 RPM 115 Volt AC Gearmotor



ITEM 500631

$6.99

• New, ECM model 34 3406 000 shaded pole gearmotor. Tapped mounting holes #8-32. Shaft extends from opposite side of mounting holes.

SPECIFICATIONS

- Speed 75 RPM
- Voltage 115 AC
- Amperage 1.8 Amps
- Rotation CW
- Duty Intermittent
- Enclosure Open
- Mount Four bolt on 1⅝″ x 1 9⁄16″
- Shaft ¼″ diam. x 17⁄32″ w/ 3⁄32″ diam. pin hole
- Size 2¾″ x 2¾″ x 5½″
- **Shpg. 4 lbs.**

100 RPM 115 AC



ITEM 500171

$4.95

• New MERKLE-KORFF.

SPECIFICATIONS

- RPM 100
- Voltage 115
- Amps 1.25
- Torque 4 in. lbs.
- Rotation CCW
- Duty Intermittent
- Shaft 5⁄16″ diam. x ½″ w/crosshole
- Mount front
- Size 2¾″ x 2½″ x 5¼″
- **Shpg. 3 lbs.**

743 RPM 115 VAC Inline Gearmotor



ITEM 501479

$29.99

• Used, BODINE ELECTRIC 48C8B-VDYY2, inline gearmotor. Requires run and start capacitors (not included). Requires relay (not included) for start capacitor.

SPECIFICATIONS

- Speed 743 RPM
- Voltage 115 AC
- Amperage 9.9 Amps
- Power 440 watts
- Torque 44 in - lbs.
- Gear ratio 2.42:1
- Rotation CW
- Duty continuous
- Enclosure open
- Mount face 3⅝″ x 3⅝″
- Shaft 16mm x 3½″ w/keyway
- Size 5½″ x 10½″ x 5½″
- **Shpg. 36 lbs.**

3600 RPM 12 VDC Fan Motor



ITEM 500198

$17.99

• New . Permanent magnet fan motor

SPECIFICATIONS

- Voltage 12 DC
- Amps 1.65 no load
- 70 ohms resistance
- RPM 3600
- Rotation reversible
- Mount 7″ B.C.
- Shaft 5⁄16″ x 1¼″ w/flat
- Size 8″ diam. x 5¼″
- **Shpg. 6 lbs.**

½ HP 2500 RPM 180 Volt DC Electric Motor



ITEM 501339

$49.95

• New, TURDAN model# A1K05J.

SPECIFICATIONS

- Power ½ HP
- Voltage 180 Volt DC
- Amperage 2.75 Amps
- Speed 2500 RPM
- Rotation Reversible
- Service Factor 1
- Bearings Ball
- Enclosure TENV
- Duty Continuous
- Frame C71
- Face Mount
- Shaft 5⁄8″ dia. x 2″ overall length keyed
- Size 8¾″ x 6½″ x 6½″
- **Shpg. 23 lbs.**

4000 RPM 12 Volt DC Fan Motor



ITEM 500338

$12.99

• Replacement motor for automotive fan. Model 1632F.

SPECIFICATIONS

- Voltage 12 VDC
- Speed 4000 RPM
- Amperage 2.2 Amps @ no load
- Housing Vented
- Rotation CW
- Shaft 5⁄16″ dia. x 1⅛″ w/flat
- Mount 3 holes on 6″ B.C.
- Overall size 6¼″ dia. x 4¼″
- **Shpg. 5 lbs.**

12 Volt DC Permanent Magnet Motor



ITEM 500677

$14.99

• New, MAMCO Model CP-12-132 permanent magnet motor. Designed to fit into a 4.3″ dia. opening with O-ring groove in edge of front mounting flange. Shaft is partially recessed in flange, extends 5⁄8″ from face.

SPECIFICATIONS

- Voltage 12 DC
- Amperage 2.5 (no load)
- Speed 4400 RPM (no load) Torque 45 in.oz. at 3600 RPM 15 amps
- Rotation reversible
- Bearings bronze sleeve
- Enclosure TENV
- Duty continuous
- Shaft 5⁄16″ dia. x 1″ w/threaded end
- Size 4.33″ dia. x 4¾″
- **Shpg. 5 lbs.**

12 VDC Blower Motor



ITEM 501578

$24.95

• New. RED DOT CORP RD-5-5121-0 73R4252 single speed dual shaft permanent magnet motor.

SPECIFICATIONS

- Brand Red Dot Corp
- Model Number RD-5-5121-0 73R4252
- RPM 2000 at no load
- Voltage 12 Volts DC
- Rotation Reversible
- Dual Shafts 5⁄16″ dia. x 3⅝″ w/ Flat
- Size 12″ x 3″ x 3″
- **Shpg 4.6 lbs.**

14000 RPM 6 Volt DC PM Motor



ITEM 501051


$3.99

• New, permanent magnet motor. Shaft has 0.38″ dia. 12 tooth gear on it.

SPECIFICATIONS

- Voltage 6 DC
- Amperage 0.3 amps (no load)
- Speed 14000 RPM
- Rotation Reversible
- Enclosure Open
- Duty Intermittant
- Mount Two tapped holes on face
- Shaft 0.09 dia. x 0.425
- Size 1⅛″ dia. x 2″
- **Shpg. ½ lb.**

6000 RPM, 12 VDC



ITEM 500757

$7.99

• New, permanent magnet motor. Built for use in battery powered weed trimmers. Could also be used as small DC generator.

SPECIFICATIONS

- Voltage 12 DC
- Amperage 1 Amp (no load)
- Speed 6000 RPM
- Rotation reversible
- Bearings bronze bushings
- Enclosure TENV
- Duty intermittent
- Mnt. 2 studs rear 2¼″ c/c
- Shaft ¼″ dia. x 1″ w/flat
- Size 3.15″ dia. x 1¾″
- **Shpg. 3 lbs.**

3200 RPM, 12 VDC Motor



ITEM 500699


$2.99

• New, DAEWOO permanent magnet motor. Originally for automotive power seat drive. Accepts 3mm square flex drive cable into each end. Packard 12064750 terminal (3⁄16″ push-on spades).

SPECIFICATIONS

- Voltage 12 DC
- Amperage 1.1 Amps
- Speed 3200 RPM
- Rotation reversible
- Enclosure TENV
- Duty intermittent
- Mount 2 screws each end
- Shaft female 3mm socket at each end
- Size 2″ dia. x 4⅝″
- **Shpg. 2 lbs.**

12 Volt DC Fan Motor



ITEM 501596

$34.95

• New, BERGSTROM 2809-550-094R blower motor. Used in Kenworth and Peterbilt cab blowers.

SPECIFICATIONS

- Brand Bergstrom
- Model 2809-550-094R
- Part Number 203364
- Voltage 12 VOLT DC
- Rotation CW
- Wire Type 2 wire harness
- Mount Three 0.297″ holes
- Shaft 5⁄16″ dia. x 1¾″ length w/ flat
- Size 6¼″ x 6¼″ x 6¼″
- **Shpg. 5 lbs.**

DC Motor Grab Bag



ITEM 500334 **$24.95**

• 5 assorted new wound field direct current motors made for automotive fans. Most operate on 12 VDC, some were made to operate on 24 VDC but can run on 12 VDC. Photo shows five motors pulled at random and is intended to give a general representation only. **Shpg. 20 lbs.**

SPECIFICATIONS

- Voltage 12 DC
- Amps: 1.73, no load
- 90 ohm resistance
- 3600 RPM
- Rotation reversible
- Mount: 6⅞″ B.C.
- Shaft: 5⁄16″ x 1⅛″ w/flat
- Motor Size 3″ diam.x 5″
- Size w/mnt.: 7¾″dia.x 5″

3400 RPM 12 Volt DC Motor



ITEM 500270

$12.95

• New, direct current Siemens fan motor. Originally made for automotive industry

SPECIFICATIONS

- Siemens Part #: PM3727X
- Voltage: 12VDC
- 3400 RPM @ no load
- 1 Amp @ no load
- Motor Type: flange mount, vented
- Rotation: CCW
- Shaft dia. x length: 6.8mm x 2 1⁄16″
- Mount: 3 bolt flange
- Overall size dia. 3″ x 3 13⁄16″
- **Shpg. 3 lbs.**

¼ HP 1500 RPM 24 VDC Motor



ITEM 501500


$129.95

• New, 24 VDC 1500 RPM motor, model number 730203.

SPECIFICATIONS

- Power ¼ HP
- Voltage 24 DC
- Amperage 13.5 Amps
- Speed 1500 RPM
- Rotation Reversible
- Thermal Overload Protection none
- Duty S2 60 minutes
- Face Mount Four M6-1.0 threaded holes in motor face on 3⅜″ B.C., 2¾″ pilot
- Shaft 14mm dia. x ⅞″ overall length w/ 5mm wide x ¾″ long keyway
- Size 7½″ x 5″ x 4½″
- **Shpg. 14 lbs.**

1⁄10 HP 4150 RPM 12 Volt DC Motor



ITEM 501477

$24.95

• New, PROTECH model 1-030-015 permanent magnet motor. Heavy duty leads with connectors.

SPECIFICATIONS

- Voltage 12 DC
- Amperage 12 Amps
- Power 0.13 HP
- Torque 13 oz.in.
- Speed 4150 RPM
- Rotation Reversible
- Enclosure TENV
- Duty Intermittent
- Face Mount 3 tapped #10-32 holes on 2 5⁄16″ dia. B.C. w/ 1.146″ dia. pilot
- Shaft ⅜″ dia. x 3″ w/flat
- Size 4⅝″ x 3″ x 3″
- **Shpg. 5 lbs.**

California Residents WARNING:Cancer and Reproductive Harm
For more information refer to:www.P65Warnings.ca.gov

Variable Speed DC Motor Control



ITEM 500678
$368.10

• Brand new, WORLDWIDE ELECTRIC Model WDCCONT variable speed DC motor controller. Designed for DC permanent magnet, shunt wound and some universal (AC/DC) motors. Enclosed and gasketed cover rated NEMA 4/12. Integral potentiometers for setting minimum and maximum speed, acceleration and deceleration, torque and IR compensation. ON/OFF switch and speed control potentiometer on cover face. Heatsink integrated into housing.

SPECIFICATIONS
- Input voltage 120/240 VAC
- Output: 90 VDC at 120 VAC, 180 VDC at 240 VAC
- Amperage F.L.A. 10.8 amps DC
- Size 7″ x 5 9/16″ x 3 1/4″
- Speed regulation/range 1% regulation over 50:1 speed range
- HP range: 1/8 HP to 1 HP at 90 VDC, 1/4 HP to 2 HP at 180 VDC
- Mount 4 bolt on 5 1/8″ x 5 1/2″ centers
- **Shpg. 4 lbs.**

ITEM 500679
$558.70

• Same as ITEM 500678 above except Model WDCCONTREV variable speed DC motor controller with reverse. Integral potentiometers for setting minimum and maximum speed, acceleration and deceleration, torque and IR compensation. FWD/OFF/REV switch and speed control potentiometer on cover face.

SCR Motor Speed Control for DC Motors



ITEM 500204
$140.15

• Brand new MINARIK Model MM23001C. Adjustable SCR speed controller for permanent magnet or shunt wound, brush type motors. Ideal for motors in the range of 1/8 HP to 2 HP. Compact design in industry standard MM footprint. Optional heatsink (sold separately) can be added to boost output current capacity. Integral potentiometers for setting minimum and maximum speed, acceleration and deceleration, torque and IR compensation. Speed control potentiometer included.

SPECIFICATIONS
- Input 115 or 230 VAC, 50/60 Hz
- Armature voltage (115 VAC IN): 90 VDC (230 VAC IN): 180 VDC
- Size 4 5/16″ x 3 19/32″ x 1 19/32″
- 5 amps output, 10 amps w/heatsink
- 1/8 HP to 1 HP at 90 VDC
- 1/4 HP to 2 HP at 180 VDC
- 1% regulation over 60:1 speed range
- **Shpg. 2 lbs**.



Heatsink

ITEM 500242
$54.95

• Heatsink drilled and tapped for use with ITEM 500204 DC motor controller. Size 6 7/8″ x 4 3/8″ x 1″. **Shpg. 2 lbs.**

1800 RPM Motors



• Brand new, WORLDWIDE ELECTRIC permanent magnet motors. Bolt on/off steel base. Class F insulation. 20:1 speed range at constant torque.

SPECIFICATIONS FOR ALL
- Voltage 12 DC
- Speed 1800 RPM
- Rotation reversible
- Service factor 1.0
- Bearings ball
- Duty continuous
- Frame 56C
- Mount face & base
- Shaft 5/8″ x 1 7/8″ w/3/16″ keyway

12 VDC

ITEM	HP	Amps	Torque	Enclosure	Size	Shpg.	Price
500680	1/3	26.4	0.97 lb.ft.	TENV	8.1″ x 5.87″ x 7.63″	20 lbs.	$294.40
500682	1/2	40	1.46 lb.ft.	TENV	10″ x 5.87″ x 7.63″	23 lbs.	$418.60
500683	3/4	61.2	2.19 lb.ft.	TEFC	11.4″ x 5.87″ x 7.63″	30 lbs.	$394.20
500684	1	82.2	2.92 lb.ft.	TEFC	12.2″ x 5.87″ x 7.63″	35 lbs.	$438.85

90 VDC

ITEM	HP	Amps	Torque	Enclosure	Size	Shpg.	Price
500685	1/3	3.5	0.97 lb.ft.	TENV	8.1″ x 5.87″ x 7.63″	21 lbs.	$255.60
500686	1/2	5.2	1.46 lb.ft.	TENV	10″ x 5.87″ x 7.63″	23 lbs.	$359.65
500687	3/4	7.8	2.19 lb.ft.	TEFC	11.4″ x 5.87″ x 7.63″	30 lbs.	$408.70
500688	1	10.4	2.92 lb.ft.	TEFC	12.2″ x 5.87″ x 7.63″	33 lbs.	$429.75
500689	1 1/2	15.4	4.38 lb.ft	TEFC	14.38″ x 5.87″ x 7.63″	40 lbs.	$464.40



Winch Motor

ITEM 500226
$178.60

• Brand new. Built as replacement motor for commercial winches. Series wound.

SPECIFICATIONS
- Voltage 12 DC
- Amps 50 no load
- RPM 8000
- Rotation reversible
- Duty intermittent
- Frame 3″ pilot ring
- Mount 4 tapped holes 4″ BC
- Shaft 3/4″ diam. x 1 3/4
- w/keyway
- Size 4″ x 4″ x 7 3/4″
- **Shpg. 22 lbs.**

2550 RPM 12 VDC Motor



ITEM 500976
$249.45

• Brand new, BUYERS PRODUCTS model# 1306007 snow plow motor. Replacement motor for many hydraulic power packs.

SPECIFICATIONS
- Voltage 12 VDC
- Amperage 200 Amps, Max.
- Speed 2550 RPM
- Rotation Clockwise
- Enclosure TENV
- Duty Intermittent
- Face Mount Two thru-holes on 3 9/16″ centers for 1/4″ O.D. bolts
- Shaft 5/8″ O.D. shaft w/ 1/4″ wide female tang
- Size 6 3/4″ L x 4 1/2″ housing dia.
- **Shpg. 16 lbs.**



1/4 HP 12 VDC Motor

ITEM 500868
$29.95

• New, permanent magnet motor. Built to drive agricultural spray pumps. 5 mounting bosses on front cover for attaching pump.

SPECIFICATIONS
- Power 1/4 HP
- Voltage 12 DC
- Speed/Amps: 2600 RPM, 2.2 amps no load 2300 RPM, 25 amps 7 in.lbs. torque
- Rotation reversible
- Enclosure TENV
- Duty continuous
- Mount 4 1/8″ x 2 1/2″
- Shaft 5/16″ dia. x 11/16″ w/flat
- Size 4 1/4″ dia. x 4 1/2
- **Shpg. 8 lbs.**

1050 RPM 12 Volt DC Motor



ITEM 501056
$301.50

• New, ARROWHEAD model SAB0191 permanent magnet motor. Ideal replacement for salt spreaders or other applications. Heavy duty leads with connectors.

SPECIFICATIONS
- Voltage 12 DC
- Amperage 1.5 Amps (no load)
- Speed 1050 RPM (no load)
- Rotation Reversible
- Enclosure TENV
- Duty Continuous
- Mount 4 tapped holes on face, 4 3/8″ x 4 3/8″
- Shaft 3/4″ dia. x 3 1/2″ w/5/16″ crosshole
- Size 6 1/2″ x 7″ x 5″
- **Shpg. 18 lbs.**

1900 RPM 12 Volt DC Motor



ITEM 501054
$147.00

• New, ARROWHEAD model SAB0121 permanent magnet motor. Ideal replacement for salt spreaders or other applications. External brush access.

SPECIFICATIONS
- Power 1/4 HP
- Voltage 12 DC
- Amperage 2.3 Amps
- Speed 1900 RPM
- Rotation Reversible
- Phase 1 Nm
- Bearings
- Enclosure TENV
- Duty Continuous
- Mount 4 tapped holes on face, 2 5/8″ x 2 5/8″
- Shaft 1/2″ dia. x 1 3/4″ w/flat
- Size 3 1/4″ x 8″ x 3 1/4″
- **Shpg. 11 lbs.**

925 RPM 12 Volt DC Motor

ITEM 501055
$97.65

SPECIFICATIONS
- Power 1/8 HP
- Voltage 12 DC
- Amperage 0.75 Amps (no load)
- Speed 925 RPM
- Rotation Reversible
- Enclosure TENV
- Model SAB0189
- Duty Continuous
- Mount 2 studs on face, 2 3/8″ c/c
- Shaft 5/16″ dia. x 1 3/8″ w/flat
- Size 3″ dia. x 4″
- **Shpg. 5 lbs**

12 VDC Powerpack Motors



ITEM 500623 **$190.70**

Model KMD1 (1787-AC)

SPECIFICATIONS
- Voltage 12 DC
- Amperage 270 amps (max.)
- Rotation CW
- Enclosure TENV
- Mount 2 studs, 3½″ c/c
- Duty Intermittent 8% duty (24 seconds on/276 seconds off in 5 minutes at full load).
- Shaft 0.48″ dia 9 tooth spline
- Size 4½″ dia. x 3.94″
- **Shpg. 17 lbs.**

ITEM 500637 **$223.70**

Model KMD3 (1789-AC) Heavy Duty

• Same as ITEM 500623 above except 300 Amps, 13% Intermittent Duty (39 seconds on/ 261 seconds off in 5 min. at full load), Size 4.5″ dia. x 7.52″. **Shpg. 18 lbs.**

42 RPM 12 VDC Gearmotor



ITEM 501465
$129.95

• New, BODINE, model 24A4BEPM-Z3. Inline permanent magnet gearmotor. Aluminum housing with permanent grease and steel gears. Externally accessible brushes. Ball bearings.

SPECIFICATIONS
- Speed 42 RPM
- Voltage 12 DC
- Amperage 5.9
- Power 1/17 HP
- Torque 65 in.lbs.
- Gear Ratio 60:1
- Rotation Reversible
- Duty Continuous
- Enclosure TENV
- Mount 4 holes on face (2.652″ sq.)
- Shaft ½″ dia. x 1½″ w/⅛″ keyway and flat
- Size 7.77″ x 3.6″ x 3.4″
- **Shpg. 7 lbs.**

5 RPM, 24 VDC Inline Gearmotor



ITEM 500920 **$129.95**

• New take-off, SOLFOCUS P/N 350-000062-000 permanent magnet inline gearmotor. Rated for 24 volts but will operate on 12 volts at reduced speed and output.

SPECIFICATIONS
- Speed 5 RPM
- Voltage 24 VDC
- Amperage 4.2 Amps
- Power 1/10 HP
- Torque 109 Nm (964.8 in.lbs.)
- Gear Ratio 266.3:1
- Rotation Reversible
- Duty Continuous
- Enclosure TENV
- Face Mount 2 bolt, 106mm (4.173″) bolt circle
- Mount Pilot 68mm (2.677″)
- Shaft 25mm (0.984″) dia. x 1½″ long 18T spline DIN 5480
- Size 18⅝″ x 5³⁄₁₆″ x 6¼″
- **Shpg. 40 lbs.**

109 RPM 24 VDC GearMotor



ITEM 500608
$14.95

• New, MABUCHI inline parallel shaft gearmotor. Die-cast gear housing. Mounting holes are drilled and tapped with 10-32 thread.

SPECIFICATIONS
- Speed 109 RPM
- Voltage 24 DC
- Amperage 78 mA (no load)
- Rotation Reversible
- Duty Intermittent
- Enclosure Open
- Mount 4 bolt face on 2⅜″ x 2½″ centers
- Shaft 5⁄16″ dia. x ⅜″ w/ flat
- Size 2⅞″ x 2¾″ x 3³⁄₁₆″
- **Shpg. 2 lbs.**

40 RPM, 12 VDC Right-Angle Gearmotors



• Brand new, BUYERS PRODUCTS. High torque, right-angle gearmotor built to fit common truck and trailer tarp systems. Forged drive gear, aluminum gearbox housing and motor end-cap, steel motor housing. Gearbox is sealed to prevent contamination. Includes a chromed plastic bolt-on cover and mounting hardware. Shaft has two 5⁄16″ cross-holes spaced ¾″ apart. Five mounting holes in face of gearbox tapped 5⁄16″-18.

ITEM 500632 **$215.20**

SPECIFICATIONS
- P/N 5541095
- Speed 40 RPM
- Voltage 12 DC
- Amperage 33-50 Amps
- Power .53 HP
- Torque 836 in-lbs.
- Gear ratio 90:1
- Rotation reversible
- Duty intermittent
- Totally enclosed
- Mount five tapped holes
- Shaft ¾″ x 3⅛″ w/ two cross-holes
- Size 10″ x 6″ x 3⅜″
- **Shpg. 14 lbs**

ITEM 500633 **$227.10**

SPECIFICATIONS
- P/N 5541895
- Speed 40 RPM
- Voltage 12 DC
- Amperage 33-75 Amps
- Power 1.2 HP
- Torque 1890 in-lbs.
- Gear ratio 90:1
- Rotation reversible
- Duty intermittent
- Totally enclosed
- Mount five tapped holes
- Shaft ¾″ x 3⅛″ w/ two cross-holes
- Size 11⅛″ x 6″ x 3⅜″
- **Shpg. 16 lbs**

100 RPM, 12 VDC Gearmotor



ITEM 500567
$157.90

• Brand new, STATURE ELECTRIC Model RA-AFSL-30AN-35 right-angle gearmotor. Ball bearings and bronze bushings, steel worm gear, brass output gear and die cast aluminum gearbox. Two pole, permanent magnet motor with internal brushes. Three mounting holes tapped for M6 machine screws. Rated to withstand 300 in-lbs. max back-drive torque.

SPECIFICATIONS
- Speed 100 RPM
- Voltage 12 DC
- Amperage 3.0 no load, 6.0 cont., 62 peak
- HP 1/30 cont.
- Torque 20 in-lbs. cont.
- Gear ratio 35:1
- Rotation reversible
- Duty intermittent
- Fully enclosed, IP54
- Face mount, tapped holes
- Shaft 7⁄16″ dia. x 2⁷⁄16″ w/flat
- Size 7⅜″ x 3⅛″ x 4⅜″
- **Shpg. 7 lbs.**

37 RPM, 90 VDC Gearmotor



ITEM 501493
$79.95

• New, BISON model# 011-190-4249 inline permanent magnet gearmotor. Externally accessible brushes. Cosmetic damage due to warehouse storage.

SPECIFICATIONS
- Brand Bison
- Power 1/20 HP
- Voltage 90 DC
- Amperage 0.62 Amps
- Speed 37 RPM
- Rotation Reversible
- Gear Ratio 49:1
- Torque 74 in. lbs.
- Duty Continuous
- Enclosure TENV
- Face Mount Four 10-32 threaded holes in motor face on 2⅝″ x 2⅝″ centers
- Shaft 5⁄16″ dia. x ¾″ overall length w/ ¼″ flat
- Size 8½″ x 3¾″ x 3¾″
- **Shpg. 7 lbs.**

12 VDC Seven Channel Wireless Remote Control



ITEM 500681 **$175.50**

• Brand new. Wireless remote control receiver/transmitter combination. Each circuit is controlled separately from transmitter.

• Code learning feature on receiver for easy programming. Select activation as long as transmitter button is depressed or momentary pulse for channels 1, 2, 6 and 7.

• Ignition lockout option disables channels 1-4. Channels 1 and 2 allow for manual switch (not included) to activate in addition to remote transmitter.

• Operate from 12 Volt DC power supply or battery. Only draws 0.15 amps.

• 100 ft. range with clear line of sight. Includes 2 keychain 4-pushbutton transmitters and full instructions.

SPECIFICATIONS
- Voltage 12 VDC
- Channel 1-2 Output Relay
- Relay Contacts Rating 30 Amp max
- Relays SPDT (common N.O. connection)
- Channels 3-7 Output 500 mA
- Connections: Channel 1-2, spade terminals Channel 3-7 and power, 10 Pin Connector
- Mount Two hole, 3⅞″ c/c
- Size 4⅛″ x 4″ x 1¼″
- **Shpg. 2 lbs.**

12 Volt DC Reversing Wireless Remote Control



ITEM 500806
$153.00

• Brand new. Wireless remote control to reverse polarity to equipment. Ideal for linear actuators or other permanent magnet motors. Waterproof receiver. Remotes have 2 buttons to control output. Code learning button on receiver with LED indicator. Very low current draw in standby. Heavy duty leads. High power radio gives over 150 foot range with a clear line of sight. Includes two keychain remote transmitters.

SPECIFICATIONS
- Input Voltage 12 VDC
- Output 12 VDC polarity reversing
- Momentary Contacts
- Output current 30 Amp max
- Mount 2 tabs
- Size 3″ x 3″ x 1″
- **Shpg. 3 lbs.**

140 RPM, 12 VDC Gearmotor



ITEM 500705
$9.95

• New, compact inline permanent magnet gearmotor.

SPECIFICATIONS
- Speed 140 RPM
- Voltage 12 DC
- Amperage 0.13 Amps (no load)
- Rotation reversible
- Duty intermittent
- Mount 3 M3 tapped holes on face
- Shaft 5mm dia. x 10mm w/flat
- Size 1¼″ dia. x 2⁷⁄16″
- **Shpg. ½ lb.**

500 RPM, 12 VDC Gearmotor



ITEM 500831
$15.95

• New, permanent magnet, right angle, worm gear reduction gearmotor. Built for seat back adjustment in vehicles. Cast aluminum gear housing with steel motor frame. Hollow square thru-drive output shaft. Two bolt rubber isolation mount. Two pin male integral Packard Power Connection.

SPECIFICATIONS

- Speed 500 RPM no load
- Speed 220 RPM at rated torque
- Voltage 12 DC
- Amperage 22 Amps at rated torque
- Torque 16 in-lbs
- Rotation reversible
- Duty intermittent
- Enclosure TENV
- Mount ⅜″ dia. two bolt on 2.2″ centers
- Hollow thru-shaft 5⁄32″ (4 mm)
- Size 5½″ x 3⅛″ x 2½″
- **Shpg. 3 lbs.**

500 RPM, 12 VDC Gearmotor



ITEM 500658
$9.99

• New, permanent magnet, right angle gearmotor. Cast aluminum gear housing with steel motor frame. Hollow square thru-drive output shaft. Two bolt rubber isolation mount.

SPECIFICATIONS

- Speed: 500 RPM no load 250 RPM at rated torque
- Voltage 12 DC
- Amperage 16 Amps
- Torque 8.5 in-lbs
- Rotation reversible
- Duty intermittent
- Enclosure TENV
- Mount ⅜″ dia. two bolt on on 2.2″ centers
- Hollow thru-shaft 5⁄32″ (4 mm)
- Size 5½″ x 3⅛″ x 2½″
- **Shpg. 3 lbs.**

8″ Stroke 12 VDC 150 LB. Linear Actuator w/ Limit Switches



ITEM 501457 **$59.95**

• New, PROGRESSIVE AUTOMOTIONS model PA-18 linear actuator. Linear track sliding block motion design for applications with fixed mounting points. ACME screw drive. Limit switches at each end of travel.

SPECIFICATIONS

- Stroke 8″
- Voltage 12 DC
- Push/Pull Rating Dynamic 150 lbs. max
- Extension Speed: No Load 1.50 in/sec Max Load 0.98 in/sec
- Amps: No Load 2.5 Full Load 8.0
- Duty 20%
- Base End Clevis Pin Hole 0.400″
- Enclosure IP20
- Rod End Bracket Mount Four 0.260″ holes
- Sliding Block Mount 1 tapped hole M10-1.5 and 2 tapped holes M6-1.0 on each side
- Sliding Block Dimensions 2.60″ x 1.780″
- Retracted Length Base to Mounting Block Center 5.875″
- Mounting Holes Length 15.68″
- Size 17⅛″ x 7¼″ x 3⅜″
- **Shpg. 7 lbs.**

44 RPM, 6 VDC Gearmotor



ITEM 500740
$8.95

• New, BUEHLER Model 1.61.065.305 inline permanent magnet design. Very compact and powerful.

SPECIFICATIONS

- Voltage 6 DC
- Amperage 280 mA (no load)
- Speed 44 RPM (no load)
- Performance 34 RPM w/1.3 in.lb. torque 0.28 amps
- Rotation Reversible
- Enclosure TENV
- Duty Continuous
- Mount 3 tapped holes on face
- Shaft 2.5mm dia. x 10mm w/flat
- Size 29mm x 40mm x 28mm
- **Shpg. 1 lb.**

Toy Car Drive Gearmotors

• New Take-Offs, gearmotor made for use in kid's vehicles. High output torque. Output is 2½″ diameter 6 lug wheel drive hub that rotates around a fixed center spindle with an inside hole for axle. Comes in white, black, red, blue and pink.



ITEM 501110 white
ITEM 501111 black
ITEM 501109 red
ITEM 501113 blue
ITEM 501112 pink
$9.99

SPECIFICATIONS

- Speed 70 RPM
- Voltage 12 VDC
- Amperage 0.7 Amps no load
- Rotation Reversible
- Duty Intermittent
- Shaft 2½″ diameter 6 lug hub
- Spindle Bore ⅜″
- Size 6½″ x 3⅝″ x 3″
- **Shpg. 2 lbs**

ITEM 501107
ITEM 501108
$12.99

SPECIFICATIONS

- Speed 75 RPM no load
- Voltage 12 VDC
- Amperage 1.2 Amps no load
- Rotation Reversible
- Duty Intermittent
- Shaft 2½″ diameter 6 lug hub
- Spindle Bore ½″
- Size 7⅜″ x 4¼″ x 3⅝″
- **Shpg. 3 lbs**

37 RPM 90 VDC Gear Motor



ITEM 501490
$89.95

• New, BISON, model EP-16535-1. Inline permanent magnet gearmotor. Externally accessible brushes.

SPECIFICATIONS

- Speed 37 RPM
- Voltage 90 DC
- Amperage 0.62
- Power 1⁄20 HP
- Torque 74 in.lbs.
- Gear Ratio 49:1
- Rotation Reversible
- Duty Continuous
- Enclosure TENV
- Mount 4 holes #10-24 TPI on face (2⅝″ sq.)
- Shaft 5⁄16″ dia. x ¾″ w/ flat
- Size 8¾″ x 3⅝″ x 3⅝″
- **Shpg. 8.2 lbs.**

1080 RPM 12 VDC Gearmotor



ITEM 501290
$8.95

• New, GLOBE MOTORS model 415A431 compact inline gearmotor. Operates on 12-24 VDC.

SPECIFICATIONS

- Speed 1080 RPM (no load)
- Voltage 24 DC
- Amperage 0.07 A (no load)
- Torque 8 in.oz.
- Gear Ratio 6.3:1
- Rotation Reversible
- Duty Continuous
- Mount 3 holes on face M3
- Shaft 0.186″ dia. x 0.69″ w/flat
- Size 1.375″ dia. x 2.75″
- **Shpg. ½ lb.**

140 RPM 4.5 VDC Gearmotor




ITEM 500763
$9.95

• New, SOURCE ENGINEERING inline permanent magnet gearmotor. Low voltage and compact size.

SPECIFICATIONS

- Speed 140 RPM
- Voltage 4.5 DC
- Amperage 0.21 Amps
- Torque 12 in. oz.
- Rotation reversible
- Duty continuous
- Mount four M3 holes face
- Shaft 6mm dia. x 15mm w/flat
- Size 2¼″ dia. x 1½″
- **Shpg. 1 lb.**

1.5 VDC Animation Motor



ITEM 500607
$3.99

• New, HANKSCRAFT MOTORS, battery operated motor with gear reduction driving a pivoting arm. Holes to mount hanging lightweight objects at each end of arm. Great for animation. Low torque output. Should be mounted flat. Operates on 1 D cell battery. Geartrain and battery exposed, no power switch (runs when battery is in place).

SPECIFICATIONS

- Voltage 1.5 VDC
- Cycles/minute 33
- Arm length. 7⅝″
- Rotation reversible
- Arm rotation 45°
- Arm travel 3⅜″ side 1 1⅝″ side 2
- Size 4¾″ x 4⅝″ x 1⅞″
- **Shpg. ½ lb.**

120 RPM 22 Volt DC Inline Gearmotor



ITEM 500808 **$9.99**

• New, IGARASHI permanent magnet inline gearmotor. Spur geartrain.

SPECIFICATIONS

- Speed 120 RPM-no load
- Voltage 22 DC
- Amperage 90 mA no-load
- Performance 70 RPM w/50 oz.in. torque, 500 mA
- Gear Ratio 50
- Rotation Reversible
- Duty Continuous
- Mount 3 holes on face, M3 thread.
- Shaft 5mm dia. x 7mm w/flat
- Size 1.3″ dia. x 2.5″
- **Shpg. 1 lb.**

175 RPM 12 Volt DC Gearmotor



ITEM 501413 **$8.95**

• New, right angle drive gearmotor originally made for use in electric automotive seats. No clutch or limit switches. Permanent magnet type motor. Output to right when viewed from motor end with output shaft above motor centerline.

SPECIFICATIONS

- Voltage 12 VDC
- Amps 1.5 no load
- RPM 175
- Output Orientation RH
- Rotation reversible
- Enclosure Fully enclosed
- Duty Intermittent
- Mount ¼″ clevis, ⅜″ between ears
- Shaft Thread 7/16″-8 ACME thread w/M6x1 LH at end
- Shaft Length 3½″
- Overall size 6″ x 2½″ x 5½″
- **Shpg. 3 lbs.**

13 RPM 24 VDC Right Angle Gearmotor



ITEM 501114 **$12.99**

• New, right angle permanent magnet gearmotor. High torque in a compact size for many applications.

SPECIFICATIONS

- Speed 13 RPM no load
- Voltage 24 DC
- Amperage 40 mA no load
- Torque 4 in-lbs.
- Rotation Reversible
- Duty Continuous
- Mount M3 tapped 4 bolt on 18mm x 33mm centers
- Shaft 6mm dia. x 9/16″ long w/flat tapped M3
- Size 3⅛″ x 1¼″ x 1⅛″
- **Shpg. ½ lb.**

188 RPM 24 VDC Gearmotor



ITEM 501060

$19.95

• New, AMETEK PITTMAN model# GM9234E992-R1 parallel-shaft gear motor. Intended for use with nylon travelling nut to move along shaft. No limit switches. (Nylon travelling nut not included.)

SPECIFICATIONS

- Travel 7″
- Full Stroke Time 4 seconds
- Shaft Speed 188 RPM
- Voltage 24 VDC
- Amperage 0.15 Amps @ No Load
- Gear Ration 5.9:1
- Rotation Reversible
- Duty Intermittent
- Enclosure TENV
- Face Mount Two 10-32 tapped holes on 1½″ centers
- Rear Mount Four 6-32 tapped holes on 11/16″ square centers
- Shaft ⅜″-8 round thread lead screw
- Size 3 13/16″ x 2″ dia.
- **Shpg. 3 lbs.**

142 RPM 24 Volt DC Inline Gearmotor ⚠



ITEM 501356 **$8.95**

• New, HENKWELL, very compact permanent magnet precision inline gearmotor. Will operate on 6-24 VDC. Planetary gear reduction, dual ball bearings.

SPECIFICATIONS

- Speed 142 RPM no load, 113 RPM rated load
- Voltage 24 DC rated
- Gear Ratio 84:1
- Torque 1.3 in.lb. rated, 4.9 in.lb. stall
- Amps 0.1 no load, 0.2 rated load
- Rotation Reversible
- Duty Continuous
- Mount 4 M2 tapped holes, 18mm B.C.
- Shaft 6mm dia. x 14mm w/crosshole
- Size 11mm dia. x 50mm
- **Shpg. ½ lb.**

90 RPM 12 Volt DC Inline Gearmotor



ITEM 501357 **$8.95**

• New, KINDLY MOTOR model KC55-37G50-3162 compact permanent magnet inline gearmotor. Operates on 12-24 VDC.

SPECIFICATIONS

- Speed 90 RPM (no load)
- Voltage 12 DC
- Amps 160 mA (no load)
- Torque 8 in.lbs.
- Gear Ratio 50:1
- Rotation Reversible
- Duty Continuous
- Mount 6 holes on face tapped M3
- Shaft 5.5mm x 15″ w/flat
- Size 35mm dia. x 83mm
- **Shpg. 1 lb.**

30 RPM, 24 VDC Gearmotor

ITEM 500220

$24.95



• New MULTI-PRODUCTS CO. INC. #2738. Offset gearbox.

SPECIFICATIONS

- RPM 30
- Duty continuous
- Voltage 24 DC
- Shaft 11 mm dia. x 12 mm w/dual flats
- Amps 0.68 no load
- HP 1/45
- Mnt. 4 bolt 2½″ x 2″ pattern
- Torque 47 in. lbs.
- Size 4½″ x 3″ x 4¾″
- Rotation reversible
- **Shpg. 5 lbs.**

45 RPM, 24 VDC Inline Gearmotor

ITEM 500568

$9.95



• New, MOLON Model CHM-2435-1. High torque output. 4⅞″ wheel with o-ring on edge to friction drive equipment. Use for drive wheel on robots. Operates at ½ speed on 12 VDC. Permanent magnet motor.


SPECIFICATIONS

- Speed 45 RPM
- Voltage 24 DC
- Amperage 0.28
- Torque 7.5 in-lbs.
- Rotation Reversible
- Duty Continuous
- Mount 4 tapped holes 2⅜″ x 2½″
- Shaft 5/16″ dia.
- Size 2¾″ x 2¼″ x 3″
- **Shpg. 1½ lbs.**

180 RPM, 24 VDC

ITEM 500809

$8.95



• New, inline gearmotor. Die cast zinc gear housing. Will operate on 12 volts at reduced output speed.

SPECIFICATIONS

- Speed 180 RPM
- Voltage 24 DC
- Amperage 0.6 Amps
- Torque 2.5 in-lbs.
- Rotation Reversible
- Duty Continuous
- Shaft ¼″ dia. x ⅝″ w/dual flats and crosshole
- Shaft crosshole ⅛″
- Mount 4 bolt 1.25″ x 1.56″ centers
- Size 2¾″ x 2½″ x 2¾″
- **Shpg. 1 lb.**

12 VDC, 5.9″ Stroke Linear Actuator



ITEM 500184

$9.95

• New MOLON take-offs. Inline parallel shaft gear motor. Rated 24 volt DC, will run on 12 volt DC at lower speed and torque

SPECIFICATIONS

- RPM 45
- Voltage 24 DC
- Draws 175 mA @ no load
- Torque 38 in. lbs. full load 7.5 in. lbs. cont.
- Rotation reversible
- Duty continuous
- Shaft 5/16″ x ¾″ long w/flat
- Mount face 2⅜″ x 2½″ drilled/tapped
- Size 2¾″ x 3″ x 2 3/16″
- **Shpg. 2 lbs.**

120 RPM, 22 VDC Inline Gearmotor



ITEM 500807 **$9.99**

• New, IGARASHI permanent magnet inline gearmotor. Spur geartrain. Includes rubber boot over brushholders.

SPECIFICATIONS

- Speed 120 RPM-no load
- Voltage 22 DC
- Amperage 90 mA no-load
- Performance 70 RPM w/50 oz.in. torque, 500 mA
- Gear ratio 50
- Rotation reversible
- Duty continuous
- Mount 3 holes on face, M3 thread
- Shaft 5mm dia. x 7mm w/flat
- Size 1.3″ dia. x 2.5″
- **Shpg. 1 lb.**

15 RPM, 24 VDC

ITEM 500235

$4.95



• New CKD Model J209-056. DC synchronous motor attached to removable mtg. bracket.

SPECIFICATIONS

- RPM 15
- Voltage 24 DC
- Amps 0.2 no load
- Rotation CW
- Duty intermittent
- Shaft 3/16″ diam. x ½″ long w/flat
- Mount 2 bolt on 3 13/32″ BC
- Size 4″ x 1¾″ x 2″
- **Shpg. 1 lb.**

152 RPM, 36 VDC Gearmotor



ITEM 500780

$7.99

• New, MAXON A-max, very compact permanent magnet precision gearmotor. Will operate on 12-36 VDC.

SPECIFICATIONS

- Speed 152 RPM
- Voltage 36 DC
- Gear ratio 64.4:1
- Power consumption 5 watts
- Rotation reversible
- Duty continuous
- Mount three M2x1.5 holes, 17mm B.C.
- Shaft 2.7mm dia. x 4mm w/flat
- Size 15/16″ dia. x 2″
- **Shpg. ½ lb.**

30 RPM, 50 VDC Gearmotor



ITEM 500605

$89.95

• Used PARVALUX permanent magnet right angle gearmotor. Heavy duty construction.

SPECIFICATIONS

- Speed 30 RPM
- Voltage 50 DC
- Amperage 1.3 Amps
- Torque 62 in - lbs.
- Gear ratio 96:1
- Rotation reversible
- Duty continuous
- Mount base
- Shaft 15 mm x 2″ w/keyway
- Size 9″ x 5″ x 5½″
- **Shpg. 16 lbs.**

12 VDC, 500 lb. & 1000 lb. Linear Actuators ⚠

• Brand new heavy duty linear actuators. 500 lb. actuators have ACME screw drive, 1000 lb. actuators have ball screw. Metal housing is water resistant and sealed against dust. Permanent magnet motor. No limit switches or potentiometer.

concentric INTERNATIONAL

500 lb. Linear Actuators

		Retracted.				
ITEM	Model	Stroke	Lgth.	Size	Shpg.	Price
500585	LACT4A-500A	4.01″ (102mm)	10.24″	11.24″ x 3.04″ x 5.97″	9 lbs.	$310.90
500586	LACT6A-500A	6.02″ (153mm)	12.24″	13.24″ x 3.04″ x 5.97″	11 lbs.	$314.40
500587	LACT8A-500A	8.03″ (204mm)	14.25″	15.25″ x 3.04″ x 5.97	13 lbs.	$317.95
500588	LACT12A-500A	12.04″ (306mm)	18.26″	19.26″ x 3.04″ x 5.97	17 lbs.	$325.05
500727	LACT18A-500A	18.07″ (460mm)	28.96″	29.96″ x 3.04″ x 5.97″	16 lbs.	$351.55
500728	LACT24A-500A	24.1″ (630mm)	34.97″	35.97″ x 3.04″ x 5.97″	18 lbs.	$358.65




SPECIFICATIONS FOR 500 lb.

- Push/Pull: Dynamic 500 lbs. max.
- Extension speed: No load 0.71 in/sec; Max. 0.51 in/sec
- Duty 25%
- Amps no load 2, full load 24
- Enclosure IP54
- Shaft dia. 1⅛″
- Pin holes ½″

1000 lb. Linear Actuators

		Retracted.				
ITEM	Model	Stroke	Lgth.	Size	Shpg.	Price
500589	LACT4-1000B	3.31″ (84mm)	12.03″	13.03″ x 3.04″ x 5.97″	9 lbs.	$474.05
500590	LACT6-1000B	5.31″ (135mm)	14.17″	15.17″ x 3.04″ x 5.97″	11 lbs.	$417.00
500591	LACT8-1000B	7.32″ (186mm)	16.03″	17.03″ x 3.04″ x 5.97″	13 lbs.	$420.50
500592	LACT12-1000B	11.34″ (288mm)	20.04″	21.04″ x 3.04″ x 5.97″	17 lbs.	$431.15
500593	LACT18-1000B	18.07″ (459mm)	28.96″	29.96″ x 3.04″ x 5.97″	18 lbs.	$466.50
500596	LACT24-1000B	24.10″ (612mm)	34.97″	35.97″ x 3.04″ x 5.97″	20 lbs.	$484.20



SPECIFICATIONS FOR 1000 lb.

- Push/Pull: Dynamic 1000 lbs. max.
- Extension speed: No load 0.98 in/sec; Max. 0.55 in/sec
- Duty 25%
- Pin holes ½″
- Enclosure IP65
- Shaft dia. 1⅛″

Mounting Adapters for 500 & 1000 lb. Actuators

All brackets are sold individually. Can be used at either end of actuator




500597 501070 5501071

ITEM 500597 $47.65
• Billet aluminum. **Shpg. 2 lbs.**

ITEM 501070 $42.60
• Steel bracket. **Shpg. 2 lbs.**

ITEM 501071 $60.50
• Converts the end mountings on actuator to clevis style. **Shpg. 1 lb.**

30 Amp, 12 VDC Polarity Reversing Switches



$23.15 each


• DPDT-CO With Permanant Jumper Connections.

ITEM 500725 Maintained action

ITEM 500726 Momentary action

12 VDC, 110 lb. Linear Actuators ⚠

• Brand new. Metal housing is water resistant and sealed against dust. Non-adjustable limit switches at end of stroke both directions.



SPECIFICATIONS

- 12 VDC
- Amps no load 1.2, full load 3.2
- 0.48″ in/sec. at max load
- Permanent magnet motor
- 110 lb. max load capacity
- Pin holes ¼″
- **Shpg. 5 lbs.**

Without Potentiometer

ITEM	Model	Stroke	Retracted Lgth.	Size	Price
500636	LACT2	50mm (1.96″)	6¼″	6⅞″ x 1 1⁄16″ x 3¼″	$127.40
500914	LACT4	100mm (3.93″)	8¼″	8⅞″ x 1 1⁄16″ x 3¼″	$128.20
500921	LACT6	150mm (5.90″)	10¼″	10⅞″ x 1 1⁄16″ x 3¼″	$129.00
500922	LACT8	200mm (7.87″)	12¼″	12⅞″ x 1 1⁄16″ x 3¼″	$129.80
500923	LACT10	250mm (9.84″)	14¼″	14⅞″ x 1 1⁄16″ x 3¼″	$130.60
500924	LACT12	300mm (11.81″)	16¼″	16⅞″ x 1 1⁄16″ x 3¼″	$131.40

With Potentiometer *For use with controller kits*

Built-in potentiometer allows for use with position-sensing circuits.

ITEM	Model	Stroke	Retracted Lgth.	Size	Price
500529	LACT2P	50mm (1.96″)	7 1 1⁄16″	8 5⁄16″ x 1 1⁄16″ x 3¼″	$153.90
500530	LACT4P	100mm (3.93″)	9 1 1⁄16″	10 5⁄16″ x 1 1⁄16″ x 3¼″	$154.65
500531	LACT6P	150mm (5.90″)	11 1 1⁄16″	12 5⁄16″ x 1 1⁄16″ x 3¼″	$155.45
500532	LACT8P	200mm (7.87″)	13 1 1⁄16″	14 5⁄16″ x 1 1⁄16″ x 3¼″	$156.25
500533	LACT10P	250mm (9.84″)	15 1 1⁄16″	16 5⁄16″ x 1 1⁄16″ x 3¼″	$157.10
500534	LACT12P	300mm (11.81″)	17 1 1⁄16″	18 5⁄16″ x 1 1⁄16″ x 3¼″	$157.90

500529





501069

Mounting Bracket Kits for 110 lb. Actuators

ITEM 500535 $25.75

• Billet aluminum. Sold individually.
Shpg. ¼ lb.

Steel (2pk)

ITEM 501069 $35.95



Controller Kit ⚠

ITEM 500536 $110.80

• Brand new controller kit for use with our LACTP series linear actuators. Pushbuttons give manual control of travel and can be programmed to move actuator to any of three operator determined preset positions. **Shpg. 1 lb.**

Dual Linear Actuator Controller Kit ⚠

ITEM 500598 $173.80

• Brand new controller kit for use with two of our LACTP series linear actuators. **Shpg. 1 lb.**

12 Volt DC Heavy Duty Linear Actuators with Limit Switches ⚠

• Brand new GLIDEFORCE actuators with fixed limit switches at both ends to stop the motor at the end of travel. Permanent magnet motor with overload clutch. IP65 rated for water and dust protection. 25% duty cycle. ½″ dia. pin holes at each end.

Acme Drive w/Limit Switches — 500 lb. Capacity

ITEM	Model	Stroke	Retracted. Lgth.	Size	Shpg.	Price
501362	10A122004.1	4″	14.1″	15.13″ x 3.04″ x 5.97″	10 lbs.	$356.80
501363	10A122006.1	6″	16.1″	17.14″ x3 .04″ x 5.97″	12 lbs.	$360.25
501364	10A122008.1	8″	18.1″	19.11″ x 3.04″ x 5.97″	14 lbs.	$363.70
501365	10A122012.1	12″	24.1″	25.13″ x 3.04″ x 5.97″	17 lbs.	$370.60
501366	10A122018.1	18″	30.1″	31.12″ x 3.04″ x 5.97″	18 lbs.	$396.50
501367	10A122024.1	24″	36.1″	37.14″ x 3.04″ x 5.97″	20 lbs.	$403.40

Ball Screw Drive w/Limit Switches IP65 — 1000 lb. Capacity

ITEM	Model	Stroke	Retracted. Lgth.	Size	Shpg.	Price
501368	10B122004.1	4″	15.7″	16.71″ x 3.04″ x 5.97″	10 lbs.	$470.65
501369	10B122006.1	6″	17.7″	18.72″ x 3.04″ x 5.97″	12 lbs.	$474.05
501370	10B122012.1	12″	26.8″	27.77″ x 3.04″ x 5.97″	17 lbs.	$487.85
501371	10B122018.1	18″	32.8″	33.75″ x 3.04″ x 5.97″	20 lbs.	$522.40
501372	10B122024.1	24″	38.8″	39.78″ x 3.04″ x 5.97″	22 lbs.	$539.65

High Performance Faster Speed Ball Screw w/Limit Switches IP65 — 1000 lb. Capacity

ITEM	Model	Stroke	Retracted. Lgth.	Size	Shpg.	Price
501373	GF17-121004-1-65	4″	15.7″	16.71″ x 3.04″ x 5.97″	10 lbs.	$479.25
501374	GF17-121006-1-65	6″	17.7″	18.72″ x 3.04″ x 5.97″	12 lbs.	$482.75
501375	GF17-121008-1-65	8″	19.7″	20.72″ x 3.04″ x 5.97″	14 lbs.	$486.15
501376	GF17-121012-1-65	12″	26.8″	27.77″ x 3.04″ x 5.97″	17 lbs.	$496.55
501377	GF17-121018-1-65	18″	32.8″	33.75″ x 3.04″ x 5.97″	20 lbs.	$531.05
501378	GF17-121024-1-65	24″	38.8″	39.78″ x 3.04″ x 5.97″	22 lbs.	$548.30

12 VDC 225 lb. Linear Actuators ⚠

• Brand new, CONCENTRIC INTERNATIONAL model MD12 medium-duty linear actuators. Simple two wire hookup. Metal housing is water resistant and sealed against dust. Permanent magnet motor. Preset limit switches at both ends of stroke.

SPECIFICATIONS

- Voltage 12 VDC
- Push/Pull Rating: Dynamic 225 lbs. max
- Extension Speed: No Load 0.58 in/sec Max Load 0.41 in/sec
- Amps: No Load 0.5 Full Load 4.25
- Operational Temperature Range -13° F to +149° F
- Duty 25%
- Enclosure IP65
- Pin Holes 10mm (0.394″)
- Shaft Dia. 20mm (0.787″)



ITEM	Model	Stroke	Retracted lgth.	Size	Shpg.	Price
501062	MD122004	100mm (3.93″)	8.07″	224mm x 87mm x 45mm	5 lbs.	$206.20
501063	MD122006	155mm (5.91″)	10.04″	274mm x 87mm x 45mm	5 lbs.	$211.95
501064	MC122008	200mm (7.87″)	12.01″	324mm x 87mm x 45mm	5 lbs.	$215.85
501065	MD122010	250mm (9.84″)	13.98″	374mm x 87mm x 45mm	5 lbs.	$219.75
501066	MC122012	300mm (11.81″)	15.94″	424mm x 87mm x 45mm	5 lbs.	$222.05

Linear Actuator Mounting Bracket



ITEM 501067

$36.40

• Brand new, GLIDEFORCE steel mounting bracket kit for use with 50106 series linear actuators. Includes mounting hardware. Sold individually, order 2 kits per actuator.

SPECIFICATIONS

- Inside Clevis Width 13/16″
- Outside Clevis Width 1 5/16″
- Throat Depth 1¼″
- Size 2″ x 1 15/16″ x 1 5/16″
- Actuator Mount Pin Size 10mm (0.394″)
- Base Mount Bolt Spacing 1⅛″
- **Shpg. 1 lb.**

Linear Actuator Mounting Bracket Kit



ITEM 501068 **$50.55**

• New, GLIDEFORCE Aluminum mounting bracket kit for use with 50106 series linear actuators. Includes mounting hardware. Sold individually, order 2 kits per actuator.

SPECIFICATIONS

- Inside Clevis Width 13/16″
- Outside Clevis Width 2″
- Throat Depth 7/16″
- Size 2″ x 2″ x 2″
- Actuator Mount Pin Size 10mm (0.394″)
- Base Mount Bolt Spacing 1⅛″
- **Shpg. ¼ lb.**

GLIDEFORCE



SPECIFICATIONS FOR 500 lb.

- ACME screw drive
- Gear Ration 20:1
- Extension rate Unloaded 0.66″/sec. Loaded 0.56″/sec
- Push/Pull 500 lb. dynamic load
- Current draw Unloaded 2.6 amps Loaded 13.2 amps



SPECIFICATIONS FOR 1000 lb.

- Ball screw drive
- Gear Ration 20:1
- Extension rate Unloaded 0.66″/sec. Loaded 0.56″/sec.
- Push/Pull 1000 lb. dynamic load
- Current draw Unloaded 2.6 amps Loaded 13.2 amps



SPECIFICATIONS FOR 1000 lb. High Speed

- Ball screw drive
- Push/Pull 1000 lb. dynamic load
- Gear Ration 10:1
- Extension rate Unloaded 1.5″/sec. Loaded 1.1″/sec.
- Current draw Unloaded 3.6 amps Loaded 26.6 amps

12 VDC Linear Actuators



ITEM 500695 **ITEM 500696**

$14.95 each

• New, linear actuator originally made for use in electric automotive seats. No clutch or limit switches. Permanent magnet type motor. Traveling nut has ⅞″ wrench flats. Output is when viewed from motor end with output shaft above motor centerline.

SPECIFICATIONS

- Voltage 12 VDC
- Amps 1.5 no load
- Travel 2¼″
- Extension time 6 seconds full travel
- Rotation reversible
- Fully enclosed
- Duty intermittent
- Mount ¼″ clevis, ⅜″ between ears
- Shaft 7/16″-8 ACME thread w/M6x1 LH at end
- Overall size 6″ x 2½″ x 5½″
- **Shpg. 3 lbs.**

ITEM 500695 Right hand output
ITEM 500694 Left hand output


ITEM 500697 Right hand output
ITEM 500696 Left hand output

• Same as ITEM 500695 with auxiliary socket for ⅛″ cable drive out rear of motor.

120 and 240 Volt AC Linear Actuators

• New, linear actuators built for exercise equipment, lift chairs or other applications. Power extend and power retract. Operation in direction opposite of the rating is to be non-loaded. Various configurations. Other models available online at **www.surpluscenter.com.**

ITEM	Mfg	Voltage	Load	Style	Stroke	Amps	Retracted lgth	Shpg	Callout	Price
500957	Gentech	120	900	Pull	3.56″	1.7	6.75″	**7 lbs.**	A	*$29.95*
500985	Icon	120	900	Push	6.875″	1.55	9.5″	**7 lbs.**	A	*$29.95*
500952	Icon	120			1.5″	1.2	8.625″	**6 lbs.**	C	*$24.95*
500980	Gentech	120	900	Push	3.56″	1.55	8.125″	**7 lbs.**	A	*$24.95*
500956	Gentech	240	900	Pull	3.56″	0.7	6.75″	**6 lbs.**	A	*$29.95*
500954	Icon	240	900	Push		0.7	10″	**7 lbs.**	A	*$24.95*
500979	Icon	240	900	Push	6.125″	0.7	10.25″	**7 lbs.**	A	*$29.95*
500975	FBS	120			3.75″	1.4	9″	**6 lbs.**	D	*$24.95*
500978	Icon	120	900	Push	5″	1.55	8.43″	**6 lbs.**	A	*$24.95*
500960	Gentech	120	900	Push	3.02″	1.55	7.625″	**6 lbs.**	A	*$29.95*
500959	Icon	120	900	Pull	4.5″	1.55	7.5″	**6 lbs.**	A	*$29.95*
500974	FBS	120			1.75″	1.2	8.43	**6 lbs.**	C	*$24.95*
500970	FBS	120			4.4375″	1.8	9.625	**6 lbs.**	D	*$29.95*
500972	Icon	120	900	Push	5″	1.55	8.125	**6 lbs.**	A	*$29.95*
500953	Icon	120	900	Pull	3.5″	1.55	7.5	**6 lbs.**	A	*$29.95*
500958	Icon	120	900	Pull	3.5″	1.55	7.5	**6 lbs.**	A	*$29.95*
500982	Icon	120	900	Push	4.9375″	1.55	8.5	**6 lbs.**	A	*$29.95*
500955	Gentech	120	900	Pull	4.36″	1.55	7.875″	**6 lbs.**	A	*$29.95*
500981	Gentech	120	900	Push	6.125″	1.55	10.125″	**7 lbs.**	A	*$29.95*
500961	Icon	120	900	Pull	3.75″	1.55	6.875″	**6 lbs.**	A	*$29.95*

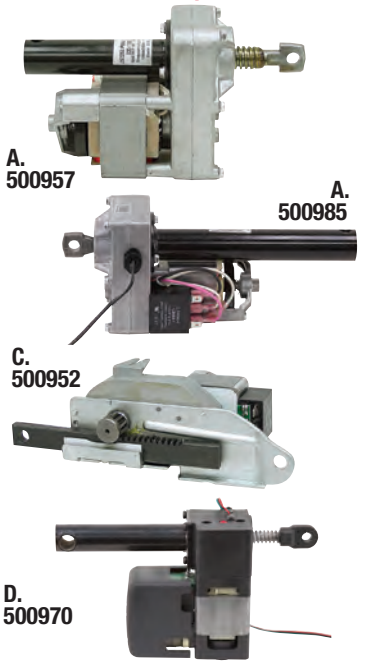

450 Lbs. 115 Volt AC Linear Actuator



ITEM 501582 *$11.95*

• New, GIGA linear actuator. Limit switches at the end of extension and retraction..

SPECIFICATIONS

- Brand Giga
- Model Number CS1-9309
- Stroke 1⅞″
- Voltage 115 Volt AC
- Amperage 1.5 Amps
- Push/Pull Rating 450 lbs
- RPM Unknown
- Direction Reversible
- Duty Intermittent (1 min ON, 5 Min Off)
- Retracted Length 9″
- Rod end pin hole ½″ dia.
- Base pin hole ⅜″ dia.
- Size 10″ x 5⅞″ x 3½″
- **Shpg. 8 lbs.**

450 Lbs. 120 Vac Linear Actuator



ITEM 501618 *$11.95*

• New, Giga linear actuator. Limit switches at the end of extension and retraction.

SPECIFICATIONS

- Brand Giga
- Model Number CS1-9301
- Stroke 2¾″
- Voltage 115 Volt AC
- Amperage 1.5 Amps
- Push/Pull Rating 450 lbs
- RPM Unknown
- Direction Reversible
- Duty Intermittent (1 min ON, 5 Min Off)
- Retracted Length 9¾″
- Rod end pin hole ½″ dia.
- Base pin hole ⅜″ dia.
- Size 10″ x 5⅞″ x 3½″
- **Shpg. 8 lbs.**

188 RPM 24 Volt DC Gearmotor



ITEM 501000 *$24.95*

• New, AMETEK PITTMAN parallel-shaft gearmotor. Nylon travelling nut moves along shaft. No limit switches. Nut is ⅝ dia. x 1″ with 1⅛″ dia. flange that has 3 holes.

SPECIFICATIONS

- Travel 7″
- Full Stroke Time 4 seconds
- Shaft Speed 188 RPM
- Voltage 24 VDC
- Amperage 0.15 Amps @ No Load
- Gear Ration 5.9:1
- Rotation Reversible
- Duty Intermittent
- Enclosure TENV
- Face Mount Two 10-32 tapped holes on 1½″ centers
- Rear Mount Four 6-32 tapped holes on 1 1/16″ square centers
- Shaft ⅜″-8 round thread lead screw
- Size 3 13/16″ x 2″ dia.
- **Shpg. 3 lbs.**

24 VDC, Linear Actuator



ITEM 501190 *$119.95*

• Old unused inventory, SKF linear actuator.

SPECIFICATIONS

- Brand SKF
- Model Number TLG10-CXXX0-043
- Stroke Nominal 28.7″(730mm)
- Push Rating 337 lbs. max
- Voltage 24 Volt DC
- Avg. Extension Speed 0.9″/sec.
- Pin Hole 0.48″
- Retracted Length 53″
- Size 57½″ x 4¾″ x 3¾″
- **Shpg 11 lbs.**

Screwjack



ITEM 100142 *$9.95*

• New, ball screw type screwjack. Designed to convert rotary motion to linear motion. Two grease zerks in both swivel eye housings. Retracted length measured from swivel eyes center to center.

SPECIFICATIONS

- Travel 5½″
- Retracted Length 10.5″
- Input Gear Type Helical
- Input Gear Outside Diam. 3⅛″
- Input Gear Tooth angle 40°
- Bearing O.D. 2.165″
- Pin Hole ⅜″ diam.
- 4 Revolutions per 1″ travel
- Swivel-ball End Mounts
- Size 12″ x 4″ x 4″
- **Shpg. 6 lbs.**

Robotic Arm Assembly



ITEM 501458 *$119.95*

• New, robotic arm assembly that was used in a self serve yogurt machine. Assembly includes an 8″ stroke linear track actuator, stepper motor drives, circuit board and position sensors. Stainless and aluminum construction. Vertical and horizontal motion. Ideal for building robotic arms and other automation systems. No wiring diagram or operating instructions available.

SPECIFICATIONS

- Linear Actuator Track Stroke 8″
- Linear Actuator Voltage 12 DC
- Linear Actuator Push/Pull 150 lbs.
- Shoulder Vertical Stroke 8″
- Upper Arm Length 12¾″
- Upper Arm Horizontal Rotation 180 degrees
- Lower Arm Length 14¼″
- Lower Arm Horizontal Rotation 300 degrees
- Size 22¼″ x 12½″ x 19¾″
- **Shpg. 53 lbs. Oversize**

Clamping Toggle Pliers

• New, AMERICAN DRILL BUSHING clamping toggle pliers for gluing, welding, other work-holding applications. Plated steel construction. Copper plated adjustment bolt. Models C&E have self aligning ⅝″ dia. spindle ends. Vinyl covered handles.



ITEM	Model	Max Material Thickness	Jaw Depth	Shpg.	Price
100135	61470	2.25″	2.5″	**1.5 lbs.**	*$4.95*
100133	61410	0.75″	1.75″	**1.5 lbs.**	*$4.95*
100134	61430	0.75″	1.75″	**1.5 lbs.**	*$4.95*


500962


500963

12 VDC Fans

• New, axial fans. Provide airflow at very low sound levels. Low power consumption. Easy to mount with holes in each corner.


501393

ITEM	CFM	Mfg.	Watts	RPM	# Blades	db	Bearing	Size	Shpg.	Price
500962	11.9	Protechnic	2.3	5800	9	34.6	Rifle	50mm x 50mm x 10mm	¼ lb.	$2.99
500963	50	Delta	10.44	9000	7	55	Ball	60mm x 60mm x 25mm	¼ lb.	$3.49
501393	285	TKFAN	30		7	72	Ball	120mm x 120mm x 38mm	½ lb.	$4.95

10 CFM 12 VDC Blower



ITEM 501192

$6.95

• New, NICEC Gamma28 model A33475-68 centrifugal blower. Brushless design with lubricated ball bearing. Flat mounting on back side. 2 thru holes for mounting.

SPECIFICATIONS

- Flow 10 CFM max.
- Voltage 12 DC
- Amperage 0.29 Amps
- Inlet 1⅞″ dia.
- Outlet 15⁄16″ x 1⅜″
- Size 3″ x 3″ x 1⅛″
- **Shpg. ¼ lb.**

9 VDC Muffin Fan



ITEM 500154

$5.99

• New ROTRON. Supplied with housing to direct airflow through fan and turn 90° through 1½″ x 4½″ outlet. Ideal for moving air through cabinets with restricted access. Operates on 9 VDC, 0.6 amps. Approx. 90 CFM airflow. 5 blades, 4¼″ diam. Size 5″ x 3⅛″ x 5″. **Shpg. 2 lbs.**

5″ Grill 61 CFM 24 VDC Filter Fan



ITEM 501201

$29.95

• New, PENTAIR fresh air enclosure filter fan model SF0524514. High airflow and low noise for cooling electrical equipment or general air circulation. Grey plastic grill. Air is pulled through the plastic grill and filter. Metal housing with plastic blades. Click-fit design installs into enclosure wall. Snap over grill with foam filter. 42db rating. Terminal block electrical connection.

SPECIFICATIONS

- Pull Type Fan
- Flow 61 CFM max.
- Voltage 24 DC
- Amperage 0.17 Amps
- Power 4.1 Watts
- Operating Temperature Range Min. -4° F to Max. 149° F
- Speed 3050 RPM
- IP Rating 55
- Mount 4 holes on 5¼″ x 5¼″
- Cutout Dimensions 4.92″ x 4.92″
- Blade Dia. 4½″
- Number of Blades 5
- Size 5⅞″ x 5⅞″ x 2¾″
- **Shpg. 3 lbs.**

26 CFM, 48 VDC



ITEM 500744

$8.95

• New, ROTRON Biscuit centrifugal blower. Operating voltage range 24-56 DC. Plastic body.

SPECIFICATIONS

- Model BD48B3
- Airflow 26 CFM
- Voltage 48 DC
- Pressure 0.87″ H20
- Inlet 2¾″ dia.
- Outlet 1″ x 2 3⁄16″
- Blower wheel 3¼″ dia. x 5⁄8″
- Mount 4 holes thru body
- Size 4.8″ x 4.8″ x 1.6″
- **Shpg. 2 lbs.**

12-28 VDC Axial Fan



ITEM 501304

$9.95

• New, PAPST type 6224N/17HT axial fan. Ball bearings. Metal housing with plastic impellor. 12″ cord with 5 pin connector plug. Air discharges on motor support side.

SPECIFICATIONS

- Air Flow 282.5 CFM max
- Voltage (rated) 24 VDC, useable on 12-28 VDC
- Amperage 1.1 Amps
- Power 26 Watts
- Sound Level 61 dB
- Mount 4 thru-holes
- Blade 5⅝″ dia.
- Number of blades 7
- Size 6¾″ dia. x 2″
- **Shpg. 3 lbs.**

70 CFM 9″ 48 Volt DC Filter Fan



ITEM 501207

$29.95

• New, Pentair fresh air enclosure filter fan model SF0948514. High airflow and low noise for cooling electrical equipment or general air circulation. Grey plastic grill. Air is pulled through the plastic grill and filter. Metal housing with plastic blades. Click-fit design installs into enclosure wall. Snap over grill with paper filter. 51db rating. Terminal block electrical connection.

SPECIFICATIONS

- Pull Type Fan
- Flow 70 CFM max.
- Voltage 48 DC
- Amperage 0.075 Amps
- Power 3.5 Watts
- Speed 3050 RPM
- Operating Temperature Range Min. -4° F to Max. 149° F
- IP Rating 55
- Mount 8 holes on 3⅝″ to 7¼″ x 3⅝″ to 7¼″ centers
- Cutout Dimensions 6.97″ x 6.97″
- Blade Dia. 4 5⁄16″
- Number of Blades 5
- Size 8 1⁄16″ x 8 1⁄16″ x 3 9⁄16″
- **Shpg. 4 lbs.**

12 VDC Heavy Duty Cab Fan

Two Speed

Metal Blades



ITEM 500766

$76.40

• Brand new, SERVICEMATE two speed cab fans. Metal mounting base with swivel ball joint to position air flow. Toggle switch for low/off/high. Aluminum fan blades with chromed steel shroud. Single wire installation (ground thru base).

SPECIFICATIONS

- Airflow 285 CFM (high speed)
- Voltage 12 DC
- Amperage 1.6/2.6 Amps
- Blade Dia. 6¼″
- Number of Blades 4
- Mount 4 hole pattern 1¾″ x 1″
- Size 7¼″ x 5″ x 8¾″
- **Shpg. 5 lbs.**

12 VDC Cab Fan



ITEM 500871

$39.95

• Brand new, two speed cab fan. Metal mounting base with swivel ball joint to position air flow. Toggle switch for low/off/high. Aluminum fan blades with chromed steel shroud. Two wire installation.

SPECIFICATIONS

- Voltage 12 DC
- Amperage 0.6/0.9 Amps
- Blade Dia. 6¼″
- Number of Blades 4
- Mount 3 hole pattern 2 3⁄16″ B.C.
- Size 7¼″ x 4¼″ x 8¾″
- **Shpg. 3 lbs.**

24 VDC Motorized Impellor



ITEM 500853

$7.99

• New MCCLEAN COOLING Model DB400-2420S6. Backward curved motorized impellor. Use for cabinet cooling, air filtration systems. Air is discharged in 360° pattern around impellor. Narrow profile and vertical or horizontal mount to save space. Plastic construction. Quiet operation with high airflow.

SPECIFICATIONS

- Flow 115 CFM
- Voltage 24 VDC
- Amps 1.4
- Speed 5900 RPM (max).
- Mounting Flange Triangular with hole in each corner
- Speed 5900 RPM (max).
- Inlet 2¾″ dia.
- Outlet 360 degrees around perimeter
- Size 4″ dia. x 2″
- **Shpg. 2 lbs.**

California Residents WARNING:Cancer and Reproductive Harm
For more information refer to:www.P65Warnings.ca.gov

Motorized Impellers

• New. Backward curved motorized impeller. Use for cabinet cooling, air filtration systems. Air is discharged in 360° pattern around impellor. Narrow profile and vertical or horizontal mount to save space. Quiet operation with high airflow. Mounting flange four tapped holes on motor. Requires run capacitor, not included.



500849
Plastic



500851
Steel



500852
Steel

ITEM	Mfg.	Model	CFM	Voltage	Amps	RPM	Inlet	Capacitor Construction	Required	Size	Shpg.	Price
500849	Fans-Tech	FH133	115	230 VAC	0.14	3100	3¾″	Plastic	1 MFD 450 VAC	5¼″ dia.x 3¾″	4 lbs.	$9.99
501189	Fans-Tech	FH133L0000	120	230 VAC	0.14	3100	3 11/16″	Plastic	1 MFD 450 VAC	5¼″ dia.x 3 13/16″	4 lbs.	$9.99
500850	Fans-Tech	FH175	235	230 VAC	0.21	2800	5″	Plastic	1.5 MFD 450 VAC	7″ dia. x 2½″	4 lbs.	$14.99
500848	Fans-Tech	FH175	235	115 VAC	0.4	2800	5″	Plastic	4MFD 250 VAC	7″ dia. x 2½″	4 lbs.	$14.99
500851	EBM-Papst	R2E175	280	230 VAC	0.35	2300	5″	Steel	1.5 MFD 400 VAC	6¾″ dia. x 2¼″	5 lbs.	$14.99
500852	Fans-Tech	FH320	1175	230 VAC	0.75	1580	8½″	Steel	4 MFD 450 VAC	12½″ dia. x 6″	14 lbs.	$24.99

115 Volt AC Draft Inducer Blower



ITEM 501422

$89.95

• New, JAKEL 119278-00 part# J238-15240 draft inducer blower. Shaded pole motor with cooling fan. Metal housing and blower wheel. Attaches to side of furnace. Hose barb for 3/16 ID pressure sense tube.

SPECIFICATIONS

- Voltage 115 AC
- Amperage 2.1
- Speed 3000 RPM
- Duty Continuous
- Size 8½″ x 6¼″ x 8″
- Mount 5 hole flange w/ spun fiberglass gasket
- Inlet 6½″ dia.
- Outlet 1⅝″ x 2⅝″
- **Shpg. 6 lbs.**

160 CFM 115 Volt AC Dual Blower



ITEM 501284

$18.95

• New, AIR-DEC model 60992656 centrifugal double blower. Ideal for use on corn or wood stoves and other general purpose air movement. Metal housing and plastic blower wheels. Mounting tabs on bottom and front. Shaded pole motor.

SPECIFICATIONS

- Flow 215 CFM max.
- Voltage 115 AC
- Amperage 1.2
- Speed 3000 RPM
- Duty Continuous
- Blower Wheels 3″ dia. x 3¾″
- Mount 6 hole base
- Inlets 3¼″ dia.
- Outlets 4¾″ x 1″
- Mounts Front 13½″ c/c, Base 2″ x 3⅝″
- Size 4½″ x 14″ x 4″
- **Shpg. 7 lbs.**

13″ 473 CFM 115 Volt AC Filter Fan



ITEM 501230

$79.95

• New, PENTAIR fresh air enclosure filter fan. High airflow and low noise for cooling electrical equipment or general air circulation. Gray plastic grill. Air is pulled through the plastic grill and filter. Plastic housing with metal blades. Click-fit design installs into enclosure wall. Snap over grill with foam filter. 70db rating. Terminal block electrical connection.

SPECIFICATIONS

- Pull Type Fan
- Model Number ST1316424
- Flow 473 CFM max.
- Voltage 115 AC
- Amperage 1.47 Amps
- Power 175 Watts
- Speed 2650 RPM
- IP Rating 54
- Size 12¾″ x 12¾″ x 6¾″
- Operating Temperature Range Min. 14° F to Max. 131° F
- Mount 8 holes on 5 15/16″ to 11 7/8″ x 5 15/16″ to 11 7/8″ centers
- Cutout Dimensions 11.5″ x 11.5″
- Blade Dia. 9⅞″
- Number of Blades 7
- **Shpg. 11 lbs.**



500723



500724



500627



500625



500626

• 120 Volt AC Axial Fans • ⚠

• Brand new, Thermocool, 5 blade axial fan. High airflow and low noise for cooling electrical equipment or general air circulation. Metal housing with plastic blades.

ITEM	CFM	Model	DB Rating	Watts	RPM	Mount	Bearings	Size	Shpg.	Price
501320	23	G8025HAS	27	12	2300	2.81″ square	Sleeve	3.15″ x 3.15″ x 0.98″	1 lb.	$13.65
501321	34	G9225HAS	34	12	2300	3.18″ square	Sleeve	3.62″ x 3.62″ x 0.98″	1 lb.	$13.30
500723	85	G12038MAS	44	25	2600	4.12″ square	Sleeve	4.75″ x 4.75″ x 1.5″	2 lbs.	$14.75
500724	122	G13538HAS	53	25	2600	4.43″ square	Sleeve	5.31″ x 5.31″ x 1.5″	2 lbs.	$13.75
500627	198	G15050HAST	59	38	2900	4.81″ square	Sleeve	5.9″ x 5.9″ x 2″	2 lbs.	$23.60
500625	198	G17050HASB	59	38	2900	4 holes on 6⅜″ b.c.	Ball	6.75″ dia. x 2″	2 lbs.	$22.95
500626	198	G17050	59	38	2900	4 holes on 6⅜″ b.c.	Ball	6.75″ x 5.9″ x 2″	2 lbs.	$22.95

12 Volt GC Cooling Fans



• Brand new, GENERAL CAB cooling fans. Use for radiators, oil coolers, air conditioning condensers, etc. Applications range from bulldozers and skid loaders to street rods and race cars. Available in 4 different motor ratings, 8 different diameters and both puller (draw air thru heat exchanger, more efficient design) and pusher (blow air thru heat exchanger) types. Airflow ranges from 270 to over 2400 CFM. IP-68 (waterproof). Made in Italy.



⚠ SC Item #	Mfg Model	Dia.	Style	Air Flow (CFM)	Amps	Size	Shpg.	Retail
				Low Profile Series				
501074	90050160	7″	Puller	335	6.1	7″ dia. x 2″	4 lbs.	$72.00
501075	90050161	7″	Pusher	270	5.6	7″ dia. x 2″	4 lbs.	$72.00
501076	90050164	8″	Puller	425	7.2	8″ dia. x 2″	4 lbs.	$72.00
501077	90050165	8″	Pusher	386	6.5	8″ dia. x 2″	4 lbs.	$72.00
501073	90050209	9″	Puller	589	7.2	9″ dia. x 2″	5 lbs.	$72.00
501078	90050220	9″	Pusher	558	7.2	9″ dia. x 2″	5 lbs.	$72.00
501079	90050223	11″	Puller	729	8.7	11″ dia. x 2″	5 lbs.	$72.00
501080	90050224	11″	Pusher	766	8.7	11″ dia. x 2″	5 lbs.	$72.00
501081	90050176	12″	Puller	795	6.6	12″ dia. x 2″	5 lbs.	$72.00
501082	90050177	12″	Pusher	757	7.2	12″ dia. x 2″	5 lbs.	$72.00
501083	90050180	13″	Puller	881	7.1	13″ dia. x 2″	4 lbs.	$72.00
501084	90050181	13″	Pusher	840	6.4	13″ dia. x 2″	4 lbs.	$72.00
				Mid Performance Series				
501085	90050188	12″	Puller	1043	9.4	12″ dia. x 2.5″	5 lbs.	$86.40
501086	90050189	12″	Pusher	1048	9.5	12″ dia. x 2.5″	5 lbs.	$86.40
501087	90050192	13″	Puller	1325	12.1	13″ dia. x 2.5″	5 lbs.	$86.40
501088	90050193	13″	Pusher	1272	12.8	13″ dia. x 2.5″	5 lbs.	$86.40
501089	90050232	14″	Puller	1568	14	14″ dia. x 2.5″	6 lbs.	$86.40
501090	90050233	14″	Pusher	1495	13.5	14″ dia. x 2.5″	6 lbs.	$86.40
501091	90050196	16″	Puller	1740	12.4	16″ dia. x 2.5″	6 lbs.	$86.40
501092	90050197	16″	Pusher	1750	12.3	16″ dia. x 2.5″	6 lbs.	$86.40
				High Performance Series				
501093	90050451	9″	Puller	729	12.4	9″ dia. x 3.5″	7 lbs.	$118.80
501094	90050569	9″	Pusher	693	10.8	9″ dia. x 3.5″	7 lbs.	$118.80
501095	90050563	12″	Puller	1192	11.9	12″ dia. x 3.5″	7 lbs.	$118.80
501096	90050564	12″	Pusher	1237	9.5	12″ dia. x 3.5″	7 lbs.	$118.80
501097	90050429	13″	Puller	1504	17.3	13″ dia. x 3.5″	8 lbs.	$118.80
501098	90050437	13″	Pusher	1339	13	13″ dia. x 3.5″	8 lbs.	$118.80
501099	90050384	14″	Puller	1761	19	14″ dia. x 3.5″	7 lbs.	$118.80
501100	90050442	14″	Pusher	1718	21	14″ dia. x 3.5″	7 lbs.	$118.80
501101	90050356	16″	Puller	2067	20.1	16″ dia. x 3.5″	6 lbs.	$118.80
501102	90050383	16″	Pusher	2077	18.1	16″ dia. x 3.5″	6 lbs.	$118.80
				Big Motor Model				
501103	90050588	16″	Puller	2469	31.9	16″ dia. x 3.6″	8 lbs.	$178.20

12″ Stainless Steel Mounting Bracket Pair



⚠ MADE IN USA

ITEM 501105 **$39.60**

• Use with the General Cab cooling fans. Stainless steel, polished on one side. Simply cut to length and drill holes necessary for mounting. **Shpg 3 lbs**.

SPECIFICATIONS

- Mounting Pattern Two 7mm (0.276″) dia. holes on 155mm (6.102″) centers
- **Shpg. 2 lbs.**
- Material 18 Gauge Stainless Steel, brushed and polished
- Size 24″ long x 1 11/16″ wide x 5/16″ deep

****For low profile and mid performance series only.***

66 CFM 5″ 48 VDC Fan



ITEM 501200

$29.95

• New, PENTAIR enclosure filter fan model SF0548414. Gray plastic grill. Air is pulled through the plastic grill and filter. Metal housing with plastic blades. Snap over grill with foam filter. 42db rating.

SPECIFICATIONS

- Flow 66 CFM max.
- Voltage 48 DC
- Amperage 0.08 Amps
- Power 3.5 Watts
- Speed 3050 RPM
- Blade Dia. 4½″
- Mount 4 holes on 5¼″ x 5¼″
- Operating Temperature Range Min. -4° F to Max. 149° F
- IP Rating 54
- Cutout Dimensions 4.92″ x 4.92″
- Size 5⅞″ x 5⅞″ x 2¾″
- **Shpg. 3 lbs.**

High Amperage DC Circuit Breakers



• Brand new BUYERS direct current circuit breaker. Plastic housing with rubber gasket, rubber caps for terminal studs. Push button trip, manual reset. Waterproof.

SPECIFICATIONS

- Maximum Voltage 30 VDC
- Amperage 30 Amps
- Terminal Studs ¼″-28
- Mount Two Hole on 2 7/16″ centers
- Size 2 15/16″ x 1 15/16″ x 1⅜″
- **Shpg. ¼ lbs.**

ITEM	Amperage	Price
500707	30 Amps	$22.40
500708	50 Amps	$22.95
500709	60 Amps	$22.40
500710	90 Amps	$21.35
500711	100 Amps	$22.40
500712	120 Amps	$22.90
500713	150 Amps	$21.75
500820	200 Amps	$24.40

12 VDC Jet Air Blower w/Oscillating Grill



ITEM 500141 **$19.95**

• New HUPP. Features high efficiency, oscillating grille, adjustable bracket for vertical or horizontal mounts. Black/tan design in high impact plastic. Comes with cigarette lighter plug, power cord, mounting hardware and instructions.

SPECIFICATIONS

- 12 VDC
- 1.2 amp
- Grill intake 4½″ x 3″
- Discharge 1⅛″ x 4½″
- Blower wheel 2½″ x 4¾″
- Size 3½″ dia. x 10″
- **Shpg. 4 lbs.**

12 Volt DC N.O. Relay ⚠



ITEM 500510

$2.39

• New. Ideal for auxiliary lights, motors. 12 volt DC 43 ohm coil. Normally open 5 amp contacts. Grounds thru mounting bracket. Push on terminals. Size 1½″ x 1⅛″ x ⅞″. **Shpg. ¼ lb**

1043 CFM 10″ 12 VDC Puller Fan



ITEM 501468

$39.95

• New, GC model# GC-90050593 10″ MP puller fan. Features larger motor for higher performance. Originally intended for use in side-by-side UTVs. Plastic housing and blower wheel. IP68 rating.

SPECIFICATIONS

- Type Puller
- Blade Dia. 10″
- Blade Count 8
- RPM 3500 RPM
- Air Flow: 1043 CFM @ 0″ Static Pressure
- Voltage 12 VDC
- Amperage: 9.4 Amps @ 1043 CFM
- Shroud Extra Flat
- Duty Continuous
- Connector Type MetriPack 280
- Mount Four 6.5mm dia. (0.256″) holes on 247mm (9.724″) x 142mm (5.59″) centers
- Size 11¾″ dia. x 3 1/16″
- **Shpg. 6 lbs**.

California Residents WARNING:Cancer and Reproductive Harm For more information refer to:www.P65Warnings.ca.gov

DC Motor Reversing Contactors



• Brand new, SPAL reversing polarity contactor. Ideal for controlling permanent magnet motors. Both output terminals rest at ground for dynamic braking in de-energized state. Splash resistant body with O-ring seals. Silver-plated contacts.

SPECIFICATIONS

- Coil Ratings: 12 VDC nominal, 15 VDC max 7 Ohms
- Contact Ratings: 5-30 VDC 100 Amps @ max duty cycle
- 20% max duty cycle
- 6 minutes @ max continuous output
- Coil terminals: ¼″ spade
- Motor & battery terminals: 6mm studs
- Two hole mount on 2¾″ centers
- Size 2⅛″ x 3³⁄₁₆″ x 3¼″
- **Shpg. 1 lb.**

ITEM 500558 **$78.50**

• Coil ratings 12 VDC nominal, 15 VDC max. 7 ohms

ITEM 500559 **$82.45**

• Coil ratings 24 VDC nominal, 30 VDC max. 26.8 ohms

12 VDC Motor Reversing Contactor



ITEM 500540 **$47.85**

• Brand new TROMBETTA Model 214-1231-A11 reversing polarity contactor. Ideal for controlling permanent magnet motors. Dynamic braking in de-energized state. Sealed plastic housing.

SPECIFICATIONS

- 12 VDC coil
- Contact Ratings: 12 VDC nominal, 15 VDC max 75 Amps for 5 min. max 125 Amps for 30 sec. 150 Amps in-rush
- 5 min. max ON time
- 20% max duty cycle
- Coil terminals: ¼ spade
- Motor & battery terminals: ⁵⁄₁₆″-24 studs
- Two bolt mount on 4⅛″ centers
- Size 5″ x 3⅜″ x 3″
- **Shpg. 1 lb.**

ITEM 500667 **$8.50**

• Plastic cover for ITEM 500540 above. 2 hole mount. **Shpg. ¹⁄₁₀ lb.**

Hand Held Remote Control

ITEM 501294

$9.95



• New hand remote control switch with pistol grip.

SPECIFICATIONS

- Switch Type Rocker
- Contacts SPDT-CO
- Contact Rating 16 amps 125/250 Volt
- Action Momentary
- Switch Positions Three (on-off-on)
- Cord 3 conductor 10 ft.
- Connector 3 pin
- Size 3¼″ x 4″ x 6″
- **Shpg. 1 lb.**

SPDT Keyswitch

ITEM 500751

$3.99



• New, SPDT keyswitch. Key can be removed in either position. Furnished with 1 round key.


SPECIFICATIONS

- Switch Type Key
- Contacts SPDT
- Current 3 amps, 250 VAC
- Action Maintained
- Spade Terminals
- Switch Positions Two
- Mounting ¾″ hole
- Mounting Depth 1⅜″
- **Shpg. ¼ lb.**

SPDT Relay w/Base

ITEM 501701

$9.55



• New. Ideal for auxiliary lights, motors. Includes base socket with 11″ leads.

SPECIFICATIONS

- Coil Voltage 12 volt DC
- Contacts SPDT
- Mounting Single hole
- Size 1″ x 1″ x 1¾″
- Amp Rating 30 break 40 make
- **Shpg. ½ lb.**

12 Volt DC SPDT Relay

ITEM 500582

$5.20



• Brand new. Ideal for auxiliary lights, motors. Plastic enclosure. Use with a standard, five terminal socket base (our item number 500602).

SPECIFICATIONS

- Coil Voltage 12 volt DC
- Contacts SPDT
- Mounting Single hole
- Terminals ¼″ spade
- Size 1″ x 1″ x 1¾″
- Contact Ratings: 14 VDC max 30 Amps break 40 Amps make
- **Shpg. ¼ lb.**

12 VDC SPDT Relay

ITEM 501283

$4.50



• Brand new. Ideal for auxiliary lights, motors. Plastic enclosure. Steel mounting tab.

SPECIFICATIONS

- Coil Voltage 12 volt DC
- Contacts SPDT
- Mounting Single hole
- Terminals ¼″ spade
- Size 1″ x 1″ x 1¾″
- Contact Ratings: 14 VDC max 30 Amps break 40 Amps make
- **Shpg. ¼ lb.**

12 VDC Cont. Duty Insulated Solenoid

ITEM 500668

$26.80



• Brand new, TROMBETTA Part #1306317 solenoid. Environmentally sealed plastic housing for demanding environmental conditions. Copper contacts. Replaces Western® part number 56131K-1.

SPECIFICATIONS

- Voltage 12 DC
- Current Ratings: 150 Amps cont. carry 250 Amps break 800 Amps in-rush
- Duty Continuous
- Coil Resistance 13.5 ohms
- Main terminals ⁵⁄₁₆″-24
- Center Terminals 10-32
- Size 4″ x 2½″ x 2⅝″
- **Shpg. 2 lbs.**

36 Volt DC 4PDT Relay

ITEM 500231

$3.99



• WESTCODE 36 Volt DC relay. Like new condition

SPECIFICATIONS

- 4PDT Contacts
- 25 amp capacity
- 36 Volt DC coil
- 295 ohms
- 3″ x 2″ x 3″
- **Shpg 2 lbs**

12 VDC Cont. Duty Solenoids



• Brand new, BUYERS PRODUCTS solenoid. Plated steel housing.

SPECIFICATIONS

- Voltage 12 DC
- Current Ratings: 80 Amps cont. 150 Amps in-rush
- Duty Continuous
- Coil Resistance 16.3 Ohms
- Main Terminals ⁵⁄₁₆″-24
- Center Terminal 10-32
- Size 2¾″ x 3½″ x 2⅝″
- **Shpg. 2 lbs.**

ITEM 500653 **$20.55**

• #1306510. Case grounded, apply positive 12 VDC to center terminal to activate.

ITEM 500654 **$20.80**

• #1306505. Insulated housing, apply ground to center terminal to activate.

12 Volt DC SPST Solenoid Relay



ITEM 501072

$13.50

• Brand new, ARROWHEAD part number SFD6004 solenoid. Three terminals, plastic housing. Grounded through case. Apply 12 volts DC positive (+) to the small terminal to activate.

SPECIFICATIONS

- Voltage 12 DC
- Current Rating 100 Amps @ 12 VDC
- Current Inrush 750 Amps
- Duty Intermittent
- Main Terminals ⁵⁄₁₆″-24
- Center Terminal 10-32
- Size 2¼″ x 2⅛″ x 2⅛″
- **Shpg. 1½ lbs.**

12 Volt DC Int. Duty Solenoid



ITEM 905314

$37.30

• Brand new, motor starter solenoid. Three terminals, plastic housing. Copper contact material. Grounded through case. Apply 12 volts DC positive (+) to the small terminal to activate. IP67 water-resistant case.

SPECIFICATIONS

- Brand Hydraulic Technologies
- Model Number 4795-AA
- Voltage 12 Volt DC
- Model # Listed On Relay SAZ-4201FP
- Contacts SPST-NO
- Current Carry Rating 100 Amps @ 12 Volt DC
- Current Inrush 600 Amps
- Duty Intermittent, 25% duty cycle, 2 minutes max. on time
- Coil Ohms 3
- Main Terminals ⁵⁄₁₆″-18
- Center Terminal 10-32
- Mounting Curved 2.22″ Radius, 0.28″ slots
- Size 2¾″ x 2⅝″ x 2⅛″
- **Shpg. 0.65 lb.**

12 VDC Int. Duty Solenoids



• Brand new, BUYERS PRODUCTS solenoid. Plastic housing.

SPECIFICATIONS

- Voltage 12 DC
- Current Rating: 100 Amps @ 12 VDC
- Duty Intermittent
- Coil Resistance 3.2 Ohms
- Main Terminals ⁵⁄₁₆″-24
- Center Terminal 10-32
- Size 2½″ x 3½″ x 3″
- **Shpg. 1½ lbs.**

ITEM 500669 **$18.30**

• Part #1306300. Insulated, apply ground to center terminal to activate. Ideal replacement for use on snowplows, replaces Western® #25634.

ITEM 500675 **$17.10**

• Part #1306070. Case grounded, apply positive 12 VDC to center terminal to activate. Ideal replacement for use on snowplows, replaces Western® #15370.

Mini Limit Switches

• Brand new, RELAY & CONTROLS CORP limit switches. Gasket on housing for dust proof, oil tight and water resistant sealing. Operating temperature range 5F°-160F°. Maximum operating frequency 30 operations per minute. Rubber strain relief. Metal base with plastic cover. See our website for additional details.

Item	Model	Actuator type	Operating Force	Price
501020	RCM-400	Standard Roller Lever	660g	$35.20
501021	RCM-401	Adjustable Length Roller Lever	340g	$40.15
501022	RCM-402	Adjustable Rod Lever	203g	$39.00
501023	RCM-403	Coil Spring Rod	90g	$37.15
501024	RCM-406	Top Push Roller	900g	$36.40
501025	RCM-407	Top Push Roller 90 degree	900g	$36.40
501026	RCM-408	Top Push Rod Plunger	900g	$36.40



SPECIFICATIONS

- Contact Type 1 Normally Open, 1 Normally Closed
- Contact Ratings 5 Amps @ 250 VAC
- Terminals Screw
- Mount 4 holes 21mm x 56mm
- Size 1.125″ x 0.97″ x 3.22″ (housing only)
- **Shpg. 1 lb.**

Precision Oil Tight Limit Switches

• Brand new, RELAY & CONTROLS CORP limit switches. Gasket on housing for dust proof, oil tight and water resistant sealing. Operating temperature range 5F°-175F°. Maximum operating frequency 30 operations per minute.
See our website for additional details.

Item	Model	Actuator type	Operating Force	Price
501027	RCL-300	Standard Roller Lever	1400g	$59.70
501028	RCL-301	Over Travel Roller Lever	900g	$59.70
501029	RCL-302	Adjustable Length Roller Lever-High Force	1400g	$61.80
501030	RCL-303	Adjustable Length Roller Lever-Low Force	900g	$61.80
501031	RCL-304	Adjustable Rod Lever 43 degree	150g	$59.70
501032	RCL-305	Ajustable Rod Lever 90 degree	245g	$59.70
501033	RCL-306	Wobble Head	150g	$64.10
501034	RCL-307	Top Push Roller	2800g	$60.40
501035	RCL-308	Top Push Rod Plunger	2800g	$60.40
501036	RCL-309	Top Ball Push Rod Plunger	2800g	$60.40
501037	RCL-310	Fork Lever Roller	1200g	$64.50



SPECIFICATIONS

- Contact Ratings: 10 Amps @ 125 VAC ½ HP @ 125 VAC, 1 HP @ 250 VAC
- Contact Type 1 Normally Open, 1 Normally Closed
- Terminals Screw
- Mount 4 holes 1⅛″ x 2⅜″
- Size 1⅝″ x 1½″ x 4″ (housing only)
- **Shpg. 1 lb.**

Sealed Limit Switches

• Brand new, RELAY & CONTROLS CORP limit switches. Available as standard or with rubber boot on actuator to protect switch. Gasket on metal housing for dust proof, oil tight and water resistant sealing. Operating temperature range 5F°-175F°. Maximum operating frequency 20 operations per minute. ½″ conduit entry.
See our website for additional details.

Item	Model	Actuator type	Operating Force	Price
Standard Models				
501038	MJI-6101	Plunger	250-450g	$26.40
501039	MJI-6102	Roller Plunger	250-450g	$27.40
501040	MJI-6102R	Roller Plunger 90 degree	250-450g	$27.40
501041	MJI-6104	Top Roller Arm	570g	$28.05
501042	MJI-6107	Top Roller Arm 1 way	600g	$28.35
With Seal Boot on Actuator				
501047	MJI-6111	Plunger	800g	$28.90
501046	MJI-6112	Roller Plunger	500g	$29.45
501045	MJI-6112R	Roller Plunger 90 degree	500g	$29.45
501044	MJI-6114	Top Roller Arm	640g	$30.55
501043	MJI-6117	Top Roller Arm 1 way	640g	$30.80



SPECIFICATIONS

- Contact Type Single Pole Double Throw
- Contact Ratings 15 Amps @ 250 VAC
- Terminals Screw
- Side Mount 2 M4 screws, 1″ c/c
- Size 3.375″ x 1″ x 1.75″ (housing only)
- **Shpg. 1 lb.**

RV/Mobile Home Adapter



ITEM 500599
$3.95

• New, Eletricord (Leviton) model C-1427-009-BL. Male end plugs into 30 amp 125V outlet and converts to standard 15 amp female.

SPECIFICATIONS
- Conductor Gauge 12
- Conductor Count 3
- Length 9″
- Jacketing Type STW
- End 1 30 Amp 125 volt male
- End 2 15 Amp 125 volt female
- **Shpg. 1 lbs.**

16/3 Power Cord



ITEM 501127
$18.99

• New, three conductor power cord. SJTW smooth jacket. Weather resistant for outdoor use.

SPECIFICATIONS
- Wire #16 AWG, 3 conductors
- End 1 NEMA three-prong connector, Female
- End 2 NEMA three-prong connector, Male
- Jacket Type SJTW, Orange
- Length 50'
- **Shpg 3 lbs.**



501048 ***501049*** ***501050***

3-Button Control Station

• Brand new, RELAY & CONTROL. Steel housing with 3 momentary push buttons. NEMA 1 enclosure. Knockouts for 1″ conduit on top/bottom.

SPECIFICATIONS FOR ALL
- Size 2⅜″ x 1 13/16″ x 5 5/16″
- Contact Rating 5 amps @ 240 VAC max.
- **Shpg. 1 lb.**

ITEM 501048 **$29.78**
Model PBS-601
Top Button Green OPEN
Middle Button Green DOWN
Lower Button Red STOP

ITEM 501049 **$29.78**
Model PBS-602
Top Button Green UP
Middle Button Green DOWN
Lower Button Red STOP

ITEM 501050 **$29.78**
Model PBS-603
Top Button Green FORWARD
Middle Button Green REVERSE
Lower Button Red STOP

Two Button Start Stop Station



ITEM 501327
$25.90

• Brand new, RELAY & CONTROL model SS-1. Steel housing with 2 momentary push buttons. Use with magnetic starters. NEMA 1 enclosure. Knockouts for 1″

SPECIFICATIONS
- Contact Rating 5 amps @ 240 VAC max.
- Top Button Green START
- Lower Button Red STOP
- Size 2⅜″ x 1½″ x 4″
- **Shpg. 1 lb.**

18/3 Power Cord



ITEM 501492
$6.95

• New. WELL SHIN, 10′, Three-conductor UL listed power cord. SVT outdoor jacket.

SPECIFICATIONS
- Wire #18 AWG, 3 conductors
- Plug WS-001, 3-prong male
- Rating 10 Amp, 250V
- Connector End WS-002, 3-pin female
- Jacket Type SVT
- Length 10′
- **Shpg 0.55 lb.**

14/3 Male to Dual Female Power Cord Adapter



ITEM 500874
$9.95

• New, E-ZEELOCK. Converts extension cords from single to dual outlets. Unique cord lock to prevent cords pulling away from all 3 connectors.

SPECIFICATIONS
- Wire size 14/3 STW
- Length 2 Ft.
- **Shpg. 1½ lbs.**

18/2 Power Cords




$1.99 ***each***

• New, two conductor power cord. SPT jacket. Use for lamps, clocks, etc.

SPECIFICATIONS
- 18 gauge conductors
- Two prong male plug
- **Shpg. ¼ lb.**

ITEM 500753 White, 9 ft. long
ITEM 500754 Brown, 12 ft. long

18/3 Power Cord



• New, 3 conductor power cord. SJT smooth jacket. White lead has another lead piggybacking off first ¼″ spade connector.

ITEM 500821 **.59¢**

SPECIFICATIONS
- Conductor Gauge 18
- Conductor Count 3
- Length Black 6½″, White 11″ to 18½″, Green 9″
- Jacketing Type SJT
- End 1 3 prong male
- End 2 Black lead 3/16″ spade connector, white leads have ¼″ spade connector. Green lead has ¼″ ring connector.
- **Shpg. 1½ lbs.**

6′ HDMI Cable



ITEM 100185
$1.99

• New, HDMI cable.

SPECIFICATIONS
- Length 6′
- End 1 HDMI A Male
- End 2 HDMI A Male
- **Shpg. ¼ lb.**

18/3 16″ Power Cord



ITEM 501193
$2.95

• New, three conductor power cord. SJT type jacket.

SPECIFICATIONS
- Conductor Gauge 18
- Conductor Count 3
- Length 16 in.
- Jacketing Type SJT
- End 1 Stripped leads
- End 2 IEC C14
- **Shpg. ¼ lb.**

8′ 16/3 IEC Power Cord



ITEM 501061 **$7.95**

• New, hospital grade line cord. Clear molded ends with green dot on plug.

SPECIFICATIONS
- Conductor Gauge 16
- Conductor Count 3
- Length 96″
- Max Temperature 105°C
- Jacketing Type SJT
- End 1 NEMA 5-15P
- End 2 IEC 60320/C13
- **Shpg. 1 lb.**

3PST Rotary Switch



ITEM 500134 **$9.99**

• New ELECTROSWITCH. 3 sets of contacts rated 10 amps, 120 VAC. Handle snaps to 4 different positions. All contacts open in two positions, closed in other two. Mount through panel with ¼″ opening. Size 2 ¾″ x 2 ¼″ x 3 ¾″. **Shpg. 1 lb.**

12 VDC Battery Isolator Switch



ITEM 501583 **$8.95**

• New, battery isolator switch. Circuit closes when key is locked in place. Removable twist-lock plastic key.

SPECIFICATIONS
- Model Number 1636000033
- Contacts SPST
- Contact Rating 100 Amps @ 12 VDC
- Switch Type Rotary isolator
- Termination Two M8-1.25 studs
- Action Maintained
- Switch Positions Two
- Face Size 2.29″ dia.
- Mounting Two ¼″ holes
- Mounting Depth 1½″
- **Shpg 0.25 lbs.**

Momentary 2 Button Pendant Switch



ITEM 501439
$39.05

• Brand new. Handheld two button momentary pendant switch. Normally open contacts rated 5 Amps at 250 volt AC. For power-up, gravity down powerpacks (single acting). Weatherproof plastic housing and 2 magnets on the back of the pendant. Ideal for remote control of winches, hoists, hydraulic power units, etc.

SPECIFICATIONS
- Pushbuttons (2) Normally open
- Cord 18/3, 15 feet long
- Size 2″ x 2⅝″ x 6¼″
- Contact Rating 5 Amp, 250 Volts AC
- Wires 3 wires with ring terminals
- **Shpg. 2.5 lbs.**

12 Volt DC Wireless Remote



ITEM 905851 **$187.40**

• Brand new, DALTON G3-H10 wireless remote 3 or 4 wire control. Potted and water resistant. "Learning" transmitter easily syncs to receiver. Antenna and remote included. 10 amp in-line fuse on battery input wire.

SPECIFICATIONS
- Brand Dalton
- Model Number G3-H10
- Part Number PSN-208
- Voltage 12 Volt DC
- Range 100' max.
- Switch On/Off
- Mount Four 0.2″ holes on 4⅜″ x 2⅞″ centers
- Size 5⅞″ x 3⅜″ x 1″
- **Shpg 0.8 lbs.**




Reversing Drum Switches

• Brand new, drum type reversing switches. Heavy duty copper contacts, painted metal housing. UL and CSA listed. Available for single or three phase operation and momentary or maintained operation.

MADE IN USA

		Horsepower Ratings 1 Phase Volts		3 Phase Volts				
ITEM	Action	115	230	230	460	Size	Shpg	Price
500789	Maintained	1.5	2	—	—	2.5″ x 4″ x 4.5″	2 lbs.	$80.50
500801	Momentary	1.5	2	—	—	2-5″ x 4″ x 4.5″	2 lbs.	$89.35
500802	Maintained	1.5	2	2	1	2.5″ x 4″ x 4.5″	2 lbs.	$100.60
500803	Momentary	1.5	2	2	1	2.5″ x 4″ x 4.5″	2 lbs.	$110.45
500804	Maintained	2	3	5	7.5	3.5″ x 6.2″ x 5.6″	4 lbs.	$226.70



Heavy Duty Foot Switch w/Guard

ITEM 501286 **$36.10**

• Brand new TMAZTZ heavy duty foot Switch. Features include momentary operation with SPDT switch, rugged cast aluminum construction and oversized guard opening.

SPECIFICATIONS

- Model TFS-502
- Contact Rating 15A, 125/250 VAC
- Actuation Force 7 lbs.
- Contacts SPDT
- Switch Action Momentary
- Finish Powder-painted safety orange
- Conduit Connection ½″ NPT
- Nema Enclosure Type 2, 4, 13
- Mounting Pattern Triangular 3⅜″ x 7¼″
- Size 8¼″ x 5¾″ x 5″
- **Shpg. 3 lbs.**



Double Pedal Footswitch

ITEM 501287 **$80.50**

• Similar to 501286 but with 2 pedals. Each pedal has a N.O./N.C. plunger switch. Size 8¼″ x 9″ x 6″. **Shpg 6 lbs.**



12 VDC Heavy Duty Reversing Switch

ITEM 500672 **$18.65**

• Brand new, BUYERS PRODUCTS Part # SW710 reversing switch. Heavy-duty 50 Amp rotary switch controls forward and reverse motion of a 12-volt motor without requiring a relay. Ideal for use with 12 VDC linear actuators, gearmotors and other permanent magnet motors. Commonly used on 12-volt truck and trailer tarp systems. Three positions: momentary-ON, OFF, momentary-ON. Terminal hardware included.

SPECIFICATIONS

- Contacts DPDT-CO
- Contact Ratings 50 Amps @ 12 VDC
- Switch Type Rotary reversing
- Termination Four screw terminals
- Action Momentary
- Switch Positions ON-OFF-ON
- Face Size 2″ dia.
- Mounting ½″ hole
- Mounting Depth 1⅞″
- **Shpg. 2 lbs.**



Two Button Pendant Switch

ITEM 905848 **$38.50**

• Brand new, DALTON HYDRAULICS dual pushbutton three wire double pole hand-held remote. Set up for use with power up/power down double acting hydraulic units. Features magnetic back cover to securely hold to metal surfaces as well as a hanging loop.

SPECIFICATIONS

- Brand Dalton Hydraulics
- Model Number PSN-0012M
- Pushbuttons 2 Normally open
- Cord 18/4, 15 feet long
- Wires 3 wires w/ ring terminals
- Size 11¼″ x 3⅞″ x 2⅞″
- **Shpg. 3 lbs.**



SPST Momentary Push Button Switch

ITEM 500673 **$9.60**

• Brand new, BUYERS SW901 panel mount momentary push button switch. Moisture repellent insulator.

SPECIFICATIONS

- Contacts SPST N.O.
- Switch Type Pushbutton
- Termination Screw Terminals
- Action Momentary
- Switch Positions Two
- Face Size 7⁄16″ diam.
- Mounting Stem ⅝″-32 thread x ¾″
- Mounting Depth 1¾″
- **Shpg. ¼ lb.**



SPST Momentary Pushbutton Switch

ITEM 500670 **$7.75**

• Brand new, BUYERS BSW90030 panel mount momentary normally open push button switch. Weather and dust proof housing. Originally intended for vehicle uses.

SPECIFICATIONS

- Contacts SPST (normally open)
- Contact Ratings 35 Amps @ 12 VDC
- Switch Type Pushbutton
- Screw Terminals
- Action Momentary
- Switch Positions Two
- Face Size 15⁄16″ diam.
- Mounting Stem ⅝″-32 thrd. x 21⁄32″ long
- Mounting Depth 1¾″
- **Shpg. ¼ lb.**



Two Button Pendant Switches

• Brand new, for Single Acting (power up, gravity down) hydraulc power units.

SPECIFICATIONS

- Pushbuttons (2) Normally open
- Cord 18/3, 14 feet long
- Size 2⅛″ x 2⅝″ x 6″
- Contact Rating 5 Amp, 250 Volts AC
- 3 wires with ring terminals
- **Shpg. 3 lbs.**

ITEM 500189 15′ cord **$37.20**

ITEM 501423 20′ cord **$41.00**



Two Button Pendant Switch

ITEM 905849 **$47.25**

• Brand new, dual pushbutton handheld remote. Use with power up/power down double acting hydraulic units. (Four wire control with input connecting to both output wires when “up” is pressed and input to only one output wire when “down” is pressed.) Magnetic back cover.

SPECIFICATIONS

- Pushbuttons 2 Normally open
- Cord 18/4, 15 feet long
- Wires 4 wires w/ ring terminals
- Size 11¼″ x 3⅞″ x 2⅞″
- **Shpg. 3 lbs.**

ITEM 905850 **$49.70**

• 20 ft. cord



Two Button Pendant Switch

ITEM 500624 **$29.95**

• Brand new, dual pushbutton handheld remote. Use with power up/power down double acting hydraulic units. (Three wire control with input connecting to both output wires when “up” is pressed and input to only one output wire when “down” is pressed.)

SPECIFICATIONS

- Pushbuttons 2 Normally open
- Contact Rating 5 amp 250 VAC
- Cord 18/3, 10 feet long
- Wires 3 wires w/ ring terminals
- Size 5⅞″ x 2½″ x 2⅛″
- **Shpg. 2 lbs.**



12 VDC Rotary Disconnect Switch

ITEM 500671 **$23.30**

• Brand new, BUYERS Model SW700 heavy duty master disconnect switch.

SPECIFICATIONS

- Contacts SPST
- Contact Ratings: 20 Amps @ 12 VDC cont. 125 Amps @ 12 VDC int. 15 sec. ON and 5 min. OFF
- Terminal Stud Size ⅜″
- Action Maintained
- Mounting Panel ¾″-16
- **Shpg. 1 lb.**

California Residents ⚠ WARNING:Cancer and Reproductive Harm
For more information refer to:www.P65Warnings.ca.gov

Toggle Switches ⚠

• Brand new toggle switches. Includes legend plate. Screw terminals. Contact ratings 20 Amps at 125 VAC, 15 Amps at 250 VAC. **Shpg. ¼ lb.**



ITEM 500577 SPST Maintained **$4.05**

ITEM 500578 SPDT-CO Maintained **$4.50**



ITEM 500873 SPDT-CO Momentary **$5.45**

ITEM 500579 DPST Maintained **$4.95**

ITEM 500580 DPDT-CO Maintained **$6.55**



ITEM 500638 DPDT-CO Momentary **$7.15**

ITEM 500655 DPDT-CO Momentary/Maintained **$7.15**

4PDT-CO Toggle Switch ⚠



ITEM 500581 **$7.75**

• Brand new, maintained toggle switch. Includes legend plate. Screw terminals. Contact ratings 15 Amps at 125 VAC, 10 Amps at 250 VAC. **Shpg. ½ lb.**

SPNC 16 Amp Paddle Switch



ITEM 500513 **.95¢**

• New, SPNC momentary paddle switch. 16 amps at 125 VAC, 10 amps at 250 VAC, ¾ HP at 125-250 VAC. ¼″ spade terminals. **Shpg. 1/10 lb.**

4PDT 15 Amp Toggle Switch



ITEM 501481 **$5.95**

• New, maintained toggle switch. 15 amps at 125 VAC. Mounts in ½″ hole, 1 11/16″ deep. Two switch positions. Push on terminals **Shpg. 0.15 lb.**

DPST 15 Amp Paddle Switch



ITEM 500512 **$1.49**

• New, DPST maintained paddle switch. Orange paddle is ⅝″ wide by ⅞″ long. 10 amps at 250 VAC, 15 amps at 125 VAC, ¾ HP at 125 VAC. Two hole mount 1⅝″ c/c. ⅛″ spade terminals. **Shpg. 1/10 lb.**


SPST Illuminated Green Glow Toggle Switch



ITEM 500660 **$1.99**

• New, CALTERM duckbill lever SPST maintained action toggle switch. Contacts 20 Amps at 12 VDC. Switch positions 2 (on-off). ¼″ spade terminals. Mounting ½″ hole. **Shpg. 1/10 lb.**

SPST Toggle Switch



ITEM 500870 **$3.99**

• New, NAPA chrome maintained ON/OFF switch. Metal construction. Jam nut included. Contact ratings 35 Amps at 12 VDC. Screw terminals. Two switch positions. Mount ½″ dia. opening. **Shpg. ¼ lb.**


DPDT Toggle Switch



ITEM 501576 **$4.95**

• New, maintained toggle switch. Contact ratings 10 Amps at 277 VAC, 20 Amps at 125 VAC. 3 switch positions. 3/16″ push-on terminal. **Shpg. 0.1 lb.**

SPST Toggle Switch



ITEM 501292 **$3.99**

• New, CARLING illuminated rocker switch. Clear paddle. Red lamp illuminates in position 1, amber lamp illuminates in position 2. Contact ratings 15 Amps at 12 VDC. ¼″ spade terminals. Mount ½″ dia. opening. **Shpg. 1/10 lb.**


SPST Toggle Switch



ITEM 500661 **$1.49**

• New, CALTERM 40100 black duckbill lever SPST maintained toggle switch. 20 Amps at 12 VDC. Switch positions 2 (on-off). ¼″ spade terminals. Mounting ½″ hole. **Shpg. 1/10 lb.**

DPDT-CO Toggle Switch



ITEM 500640 ⚠ **$4.55**

• Brand new, maintained toggle switch. Includes legend plate. Screw terminals. Contact ratings 10 Amps at 125 VAC, 6 Amps at 250 VAC. **Shpg. ¼ lb.**


SPDT Toggle Switch



ITEM 501291 **$2.99**

• New, FEME model S1S-D maintained toggle switch. Solder terminals. Mounting 12mm, Mountin depth 1⅛. **Shpg. ⅛ lb.**

SPDT Toggle Switch



ITEM 501194 **$2.95**

• New, CARLING maintained toggle switch. Extra long 1″ lever. Spade terminals. Mounts in ½″ x 1″ opening. Contacts rated 15 amps at 125 VAC, 10 amps at 250 VAC. **Shpg. ⅛ lb.**


4PST Toggle Switch



ITEM 501122 **$3.99**

• New, maintained toggle switch. Screw terminals. Contacts rated 15 amps at 125 VAC, 10 amps at 250 VAC. Mounts in ½″ hole, 1¼″ deep. Two switch positions. **Shpg. ¼ lb.**


DPST Toggle Switch



ITEM 501195 **$2.29**

• New, maintained toggle switch. Includes legend plate. Contact ratings 3 Amps at 125 VAC, Switch positions two. Mounts in ½″ hole, ⅞″ deep. **Shpg. ⅛ lb.**

SPDT Toggle Switch



ITEM 501121 **$2.99**

• New, maintained toggle switch. ¼″ Push-on terminals. Contact ratings 20 amps at 125 VAC, ¾ HP. **Shpg. ⅛ lb.**

SPST Toggle Switch



ITEM 501411 **$2.45**

• New, CARLING, maintained toggle switch. ¼″ Spade terminals. Contacts rated 20 amps at 125 VAC, 10 amps at 250 VAC. **Shpg. 0.05 lb.**

SPDT Toggle Switch



ITEM 501483 **$3.95**

• New, momentary toggle switch. Screw terminals. Two switch positions (on-on) Contact rated 15 amps at 115 VAC, Mounts in ½″ hole, 1⅛″ deep. **Shpg. 0.05 lb.**


DPDT Toggle Switch



ITEM 501487 **$3.95**

• New, momentary toggle switch. w/yellow plastic paddle. Three switch positions (on-off-on) ¼″ Push-on terminals. Contact rated 10 amps at 250 VAC, Mounts in ½″ hole, 1″ deep. **Shpg. 0.1 lb.**

SPST Illuminated Toggle Switch



• New, illuminated lever toggle switch.

SPECIFICATIONS

- Contacts SPST
- Contact Rating 20 Amps @ 12 VDC
- Switch Type Toggle
- Termination ¼″ Spade
- Action Maintained
- Switch Positions Two (on-off)
- Mounting ½″ hole
- Mounting Depth 1″
- **Shpg. 1/10 lb.**

ITEM 501278 Purple Glow **$2.95**

ITEM 501276 Blue Glow **$2.95**

SPST Lighted LED Tip Toggle Switch ⚠



• Brand new, maintained ON/OFF toggle switch. LED in tip of lever.

ITEM 501319	Amber LED in tip	**$5.10**
ITEM 501318	Blue LED in tip	**$5.10**
ITEM 501316	Green LED in tip	**$5.10**
ITEM 501317	Red LED in tip	**$5.10**

SPECIFICATIONS

- Contacts SPST
- Contact Ratings: 25 Amps @ 12 VDC
- Switch Type Toggle
- Termination ¼″ Spade
- Action Maintained
- Mounting Mounts in ½″ dia. opening
- Mounting Depth 1 5/16″
- **Shpg. ⅛ lb.**

SPST 10 Amp Toggle Switch w/ Recessed Pan



ITEM 500674

$7.30 MADE IN USA

• Brand new, BUYERS Model SW911 toggle switch recessed in a pan. Recessed pan prevents accidental activation and protects switch from impacts. 20 gauge plated steel pan. Mounts in 2″ diameter hole, with 3 holes on 2⅝″ diameter bolt circle.

SPECIFICATIONS

- Contacts SPST
- Contact Ratings: 10 Amps @ 12 VDC 12 VDC max.
- Switch Type Toggle
- Spade Terminals
- Action Maintained
- Switch Positions Two
- Face Size 3 3/16″ diameter
- Mounting Flange
- Mounting Depth 2″
- **Shpg. ¼ lb.**

Rubber Covers For Toggle Switch ⚠



• New, rubber covers for lever on toggle switches. Helps keep moisture and dust

SPECIFICATIONS

- Thread size M12 x 0.75
- Size 9/16″ dia. x 1″
- **Shpg. 1/10 lb.**

ITEM 500630 With loop **$1.80**

ITEM 500832 Without loop **$1.80**

Spring-Loaded Switch Covers Your Choice ⚠ $2.60 each




• Brand new. Spring-loaded switch covers for two-position, on-off switches to prevent accidental actuation. For switches with ½″ dia. stems. Available in 9 colors.

Shpg. 1/10 lb. each.

Black	*ITEM 500641*	*Yellow*	*ITEM 500648*
Carbon	*ITEM 500645*	*Blue*	*ITEM 500642*
Clear	*ITEM 500647*	*Chrome*	*ITEM 500643*
Purple	*ITEM 500639*	*Green*	*ITEM 500644*
		Red	*ITEM 500646*

Ceramic Ring Magnet



ITEM 100148 **.19¢**

• New, ceramic (ferrite) ring magnet.

SPECIFICATIONS

- Pull approx. 1 lb.
- Outside diameter 1¼″
- Inside diameter ⅜″
- Thickness 3/16″
- **Shpg. 1/10 lb.**

SPST Pushbutton ON/OFF Switch



ITEM 501293 **$1.99**

• New. ARROW HART model 80511E normally open momentary push-button switch. CSA and UL Listed. 3 Amps @ 120 VAC. Mounts in 12mm dia. hole. Solder terminals. **Shpg. 1/10 lb.**

Pushbutton Switch



ITEM 501297 **$1.99**

• New, normally open momentary push-button horn switch. Size 7/8″ dia. Panel opening 1 5/8″ dia. Size 2 5/8″ x 1 5/8″ x 3/4. Mounts flush. Screw terminals. **Shpg. 1/4 lb.**

SPST Pushbutton ON/OFF Switch



ITEM 500911 **$1.99**

• New, push on-push off switch. Extended length mounting threads. Single hole mount. Contact rating 6 amps 125 VAC, 3 amps 250 VAC. Size 2″ x 7/8″ x 3/4. Leads 18 gauge 6″ long. **Shpg. 1/4 lb.**

DPDT Rocker Switch



ITEM 500949 **$1.49**

• New, CUTLER HAMMER two position maintained rocker switch. 5 amps at 125 VAC. 1″ x 3/4″ face. Mounts in 13/16″ x 11/16″ opening. Mounting depth 13/16″ 1/8″ spade terminals. **Shpg. 1/10 lb.**

SPST 16 Amp Rocker Switch



ITEM 501414 **.99¢**

• New, HOSENSE single-pole, single-throw maintained switch. Red rocker with -/o markings. 16 amps at 125/250 VAC. 0.625″ x 1.25″ face. Mounts in 1.14″ x 0.51″ opening. Mounting depth 1.18″. 1/4″ spade terminals. **Shpg. 1/10 lb.**

SPDT Maintained Rocker Switch



ITEM 500517 **$1.29**

• New, McGILL SPDT maintained switch. Plastic rocker and housing. 20 amps at 277 VAC, 1 1/2 HP. 1 17/32″ x 29/32″ face. Mounts in 1 15/32″ x 13/16″ opening. 1/4″ spade terminals. **Shpg. 1/10 lb.**

SPST Illuminated Red Rocker Switch ⚠



ITEM 500888 **$3.30**

• Brand new, red illuminated round rocker switch. Spade terminals. Mounts in 13/16″ opening. Contacts rated 15 amps at 125 VAC. **Shpg. 1/10 lb.**

SPST 16 Amp Toggle Switch



ITEM 501482 **$3.95**

• New CARLING. SPST maintained ON/OFF switch. 16 amps @ 125, 10 amps @ 250 VAC. Mounting 1 1/8″ x 5/8″, depth 1 1/8″. Push on terminals. **Shpg. 0.05 lb.**

SPST Rocker Switch



ITEM 501395 **$4.95**

• New, CARLING model V2D1 rocker switch. Horn image on switch face. Contact ratings 20 Amps at 12 VDC,. Termination 0.250″ spade. Switch positions two. Mtg. hole 1.45″ x 0.830″. **Shpg. 1/10 lb.**


SPST 15 Amp Rocker Switch



ITEM 500508 **.95¢**

• New, SPST ON/OFF maintained rocker switch. Plastic housing with tabs to hold switch in place. Contact ratings 15 amps at 125 VAC, 7.5 amps at 250 VAC. 1/8″ spade terminals. **Shpg. 1/10 lb.**

SPST Lighted Amber Rocker Switch



ITEM 500722 **.99¢**

• New, SPST ON/OFF maintained rocker switch. Plastic housing with tabs to hold switch in place. Contact ratings 15 amps at 125 VAC, 7.5 amps at 250 VAC. 1/8″ spade terminals. **Shpg. 1/10 lb.**

SPNO Pushbutton Microswitch



ITEM 500779 **.99¢**

• New, CHERRY microswitch. 15 Amps @ 125/250 VAC, 3/4 HP @ 115 VAC, 1 1/2 HP @ 250 VAC. 1/4″ spade terminals. Size 1 13/16″ x 5/8″ x 1 1/16″. Mount two 0.143″ diam. holes on 1″ centers. **Shpg. 1/4 lb.**

SPDT 16 Amp Rocker Switch w/Cover



ITEM 500547 **.99¢**

• New SPDT switch. Plastic housing, clear flexible plastic cover over rocker. 1/4″ spade terminals. 16 amps at 250 VAC, 1/2 HP at 125 VAC. 1 HP at 250 VAC. 1 7/16″ x 1 1/16″ face. Mounts in 1 1/8″ x 17/32″ opening 1″ deep. **Shpg. 1/10 lb.**

SPDT-CO 15 Amp Rocker Switch



ITEM 500332 **$1.95**

• New CARLING. SPDT-CO maintained rocker switch. 10 amps at 250 VAC, 15 amps at 125 VAC, 3/4 HP at 125-250 VAC. Snaps into 1 7/16″ x 13/16″ rectangular opening. Three spade terminals on rear of switch. **Shpg. 1/10 lb.**

ON/OFF Pushbutton



ITEM 500175 **$1.99**

• New OSLO CONTROLS. Momentary pushbutton. Rated 125 volt AC, 10 amps. Snaps into 7/8″ x 1 3/16″ hole. **Shpg. 1/4 lb.**

SPST N.O. 12 VDC 15 Amp Pushbutton Switch



ITEM 500565 **$2.49**

• New, CALTERM Model 42210 SPST N.O. momentary push-button switch. Plastic and metal construction. Jam nut included. 15 amps at 12 VDC. Mounts in 5/8″ dia. opening. **Shpg. 1/4 lb.**

DPDT-CO Rocker Switch



ITEM 500345 **$2.95**

• New. Double pole, double throw, center off maintained rocker switch. Snaps into 7/8″ x 1″ opening. Contacts rated 16 amps at 125 VAC, 10 amps at 250 VAC. Spade terminals. **Shpg. 1/10 lb.**

SPST N.O. 12 VDC 15 Amp Pushbutton Switch



ITEM 500869 **$3.99**

• New brass momentary pushbutton switch. Rubber boot switch cover. Jam nut included. Contact ratings 15 Amps at 12 VDC. Spade terminals. Switch positions two. Face size 15/16″ dia. Mount 5/8″ dia. opening. **Shpg. 1/4 lb.**


2 Button ON/OFF Switch



ITEM 500236 **$1.49**

• New, maintained, 2 button ON/OFF switch. Rated 16 amps, 1/3 HP at 125 volt AC; 1/2 HP at 250 volt AC. Mounts in 1 1/4″ x 1/2″ hole. Size 1 1/4″ x 1 3/8″ x 9/16″. **Shpg. 1/4 lb.**

Three Position Rotary Switch



ITEM 500604 **$2.99**

• Three position maintained switch rotates 180°. Contact rating 25 Amps at 120-240 VAC. Connections: Position 1 Off, Position 2 L1 to 1 & 2, Position 3 L1 to 1 & 5. Spade terminals. Face size 2″ x 1 5/8″. Mtg. 2 tapped #6-32 holes on 3/4″ centers. **Shpg. 1/4 lb**

SPDT 10 Amp Switch



ITEM 500449 **.59¢**

• New, LUMINEX SENCILLO switch. Snap-on cover. Mounts in 1 1/2″ x 3/4″ x 1 1/4″ deep opening. Beige color. Switch rated 10 Amps @ 150 VAC Two bolt mount on 84 mm (3.31″) centers Face dimensions: 2 7/8″ x 4 3/4″ **Shpg. 1/4 lb.**

SPST 5 Amp Slide Switch



ITEM 500183 **.89¢**

• New. ON/OFF slide switch. CSA and UL Listed. 3/4 HP at 125 volt AC. 12 amp at 250 volt AC. Snaps into 9/16″ x 1 3/8″ opening. Push on terminals. **Shpg. 1/4 lb.**

SPST Illuminated Rocker Switches

$4.30 ⚠



ITEM 501310
Amber LED.

ITEM 501309
Blue LED.

ITEM 501307
Green LED.

ITEM 501308
Red LED.

• Brand new, maintained ON/OFF rocker switch. Amber LED. Easy to mount in 1/2″ dia. hole. 16 amps at 12 VDC. Mounting depth 1.1/16″ 0.250″ spade terminals. **Shpg. 1/10 lb.**

California Residents ⚠ WARNING:Cancer and Reproductive Harm
For more information refer to:www.P65Warnings.ca.gov

Trailer Connectors

• Brand new, trailer connectors and adapters.



ITEM	Description	Material	Shpg.	Price
300289	7 flat pin vehicle socket with cover plate.	Plastic	½ lb.	$7.95
300290	7 flat pin cable end connector.	Plastic	½ lb.	$5.95
300291	6 pin round vehicle socket with cover plate.	Die Cast	½ lb.	$7.05
300292	6 pin round cable end connector.	Die Cast	½ lb.	$6.45
300293	6 pin round cable end to 7 flat pin socket.	Die Cast/Plastic	½ lb.	$14.40
300294	6 pin round to 7 pin flat adapter.	Plastic	½ lb.	$6.90
300235	96″ long, 7 pin trailer connector.	Plastic	4 lbs.	$29.85

4 Section Terminal Block

ITEM 501322 **$4.50**

• Brand new, Use for low voltage wiring projects. Clear plastic cover snaps in place over terminals.

SPECIFICATIONS
• Sections 4
• Size 2¾″ x 1³⁄₁₆″ x ¾″
• **Shpg ⅛ lb.**



ITEM 501323 **$5.60**

SPECIFICATIONS
• Sections 6
• Size 3⁹⁄₁₆″ x 1³⁄₁₆″ x ¾″
• **Shpg ¼ lb.**



ITEM 501324 **$7.75**

SPECIFICATIONS
• Sections 12
• Size 6⅜″ x 1³⁄₁₆″ x ¾″
• **Shpg ¼ lb.**



12″ Quick Disconnect Cables ⚠



• Brand new, quick disconnect cables. Ideal for applications where correct polarity connections are critical.Color coded leads. Sold individually or in packages of 20.

SPECIFICATIONS • Length 12″ • Connections 2 pin bullet type

Individual Shpg. ¹⁄₁₀ lb. **Package of 20 Shpg. 2 lbs.**

Wire Gauge	ITEM	Price	ITEM	Price
18	500879	$5.00	501706	$43.00
16	500878	$4.90	501705	$49.00
14	500877	$5.10	501704	$51.00
12	500876	$7.15	501703	$72.00
10	500875	$7.55	501702	$76.00

Snapper Pins



• Brand new, BUYERS PRODUCTS Snapper Pins. Snapper pins are a convenient way to fasten accessories on truck equipment. Square wire lock. Simply pull the wire loop over the pin to lock it in place. It quickly releases for easy removal. Corrosion resistant yellow zinc plated steel construction.

ITEM	Dia.	Usable Length	Shpg.	Price
100234	3⁄16″	1.625″	¹⁄₁₀ lb.	$0.70
100235	¼″	1.813″	¹⁄₁₀ lb.	$0.85
100236	5⁄16″	2.594″	¹⁄₁₀ lb.	$0.85
100237	⅜″	1.513″	¹⁄₁₀ lb.	$0.80
100238	⅜″	2.344″	¼ lb.	$0.80
100239	¼″	2.5″	¹⁄₁₀ lb.	$0.80
100240	¼″	3″	¹⁄₁₀ lb.	$0.80
100241	¼″	3.625″	¹⁄₁₀ lb.	$0.80
100242	½″	2.5″	½ lb.	$1.95

⅜″ Diameter x 1.42″ Zinc Plated Snapper Pin

ITEM 100395 **.70¢**

• See description for items 1002 above.

SPECIFICATIONS
• Diameter ⅜″
• Usable Length 1.42″
• **Shpg. ¹⁄₁₀ lb.**

⅜″ Diameter x 2¼″ Square Snap Pin Set



ITEM 100208 **$1.79**

• New 3 zinc plated steel snap pins with square retaining wire.

SPECIFICATIONS
• Quantity 3
• Pin Diameter ⅜″
• Pin Length 2¼″ between cap and lock wire
• Head Dia. ⅝″
• Loop Clearance 1½″
• Overall Length 2¾″
• **Shpg. ½ lb.**

Lynch Pins



• Brand new, BUYERS PRODUCTS Lynch Pins. Corrosion resistant yellow zinc plated steel construction.

ITEM	Dia.	Usable Length	Shpg.	Price
100221	¼″	1.511″	¹⁄₁₀ lb.	$0.45
100230	3⁄16″	1.1″	¹⁄₁₀ lb.	$0.30
100231	5⁄16″	1.44″	¹⁄₁₀ lb.	$0.35
100232	7⁄16″	1.5″	¹⁄₁₀ lb.	$0.60
100233	7⁄16″	1.6″	¹⁄₁₀ lb.	$0.85

Seven Terminal Trailer Junction Box

ITEM 300237 **$10.05**



• Brand new, BUYERS PRODUCTS model# 5601100 electrical junction box with seven terminals. Provides convenient, sealed access for truck/trailer electrical connections. Coded terminals for easy identification.

SPECIFICATIONS
• Dimensions 8⅜″ x 3⅞″ x 2½″
• Mounting Two 5⁄16″ dia. holes on 7¾″ centers
• Material High-Impact Poly
• Terminal Thread Size Seven 10-32 studs w/ nuts and lock washers
• **Shpg. 1.5 lbs.**

6 Circuit Fused ⚠ Distribution Block

ITEM 501306 **$16.15**



• Brand new, 6 position fuse block has an integrated 24″ 10 gauge power wire with a ⅜″ ring terminal that feeds 6 separate fuses. Clear plastic dust cover included. Maximum load capacity for all circuits combined is 50 amps. Connections are made using #8 ring terminals on the side of the fuse block. Uses standard ATC fuses (not included). 5″ x 1½″x 2″. **Shpg ½ lb.**

ATC Blade Fuse Holders ⚠



• Brand new fuse holders. Splices into circuit, does not include fuse. 12″ long. **Shpg ⅛ lb.**

ITEM	Wire Gauge	Price
501315	18	$2.50
501314	16	$2.60
501313	14	$2.80
501312	12	$3.15
501311	10	$3.50

ATC Fuse Holder 10 pack 14 Gauge ⚠



ITEM 501415 **$4.95**

• New, blue rubber fuse holder without cap. Uses ATC blade style fuses. Simply splice into circuit. Set of 10 holders. Does not include fuses.

SPECIFICATIONS
• Wire #14 AWG,
• Length 12″
• Fuse Type ATC blade
• **Shpg ½ lb.**

4 Position Fuse Block



ITEM 501355 **$1.99**

• New, CALTERM fuse block. Uses standard AGC/SFR glass fuses (not included).

SPECIFICATIONS
• Fuse Count 4
• Terminals ¼″ spade
• Size 2⅜″ x 2⅛″ x ¾″
• **Shpg. ¼ lb.**

Spring Latch w/Keeper



ITEM 300267 **$7.90**


• Brand new, BUYERS PRODUCTS Spring Latch. Ideal for doors, compartments or panels that need to engage and disengage quickly and securely. Zinc plated steel construction. Spring loaded bolt can lock in the open position.

SPECIFICATIONS
• Bolt 0.5″ diam. x 1.0625″ long
• Model B2595LKB
• Travel 1.0625″
• Size w/out Keeper 5.5″ x 5″ x 1.875
• Spring Latch Mount Four 0.285″ diam. holes on 1.5″ x 1.25″ centers
• Keeper Mount Two 0.275″ diam. holes on 1.25″ centers
• **Shpg. 1½ lbs.**

Rol-Air Two Stage Air Compressors

• Brand new ROL-AIR. Two-stage compressors with aluminum crankcase for light weight and good heat dissipation. Cast iron cylinders for long life and greater wear resistance. Crankshaft supported on roller bearings with replaceable bearings for connecting rods. Reed valves. Deep fins for cooling on output lines and intercooler. Includes oil sight gauge and automotive style air filter.


400136


400127


400239

SPECIFICATIONS FOR ALL TWO STAGE

• 175 PSI Max.
• CCW Rotation

ITEM	Model	Cylinders	HP	RPM	CFM Open	CFM at 175 PSI	Port NPT	Pulley	Mount	Size	Shpg.	Price
400127	K24	Two	3	1000	14.58	10.37	½″	15.16″ dia.	6.41″ x 8.09″	15.18″ x 12.25″ x 16.37″	**64 lbs.**	**$654.00**
			5	1250 *	18.25	13.14		Two A belts				
400239	K28	Two	3	800	16.66	13.02	¾″	15.16″ dia.	6.41″ x 8.09″	16.37″ x 12.25″ x 16.62″	**75 lbs.**	**$676.50**
			5	1250 *	20.35	15.87		Two A belts				
400128	K30	Two	5	800	20.52	16.01	¾″	15.16″ dia.	7.48″ x 8.97″	16.37″ x 14.18″ x 22.25″	**95 lbs.**	**$894.00**
			7.5	1200 *	30.78	23.63		Two A belts				
400136	K60	Four	10	800	41.04	33.65	1″	21.65″ dia.	9.6″ x 11.73″	28.94″ x 17.5″ x 23.62″	**255 lbs.**	**$2181.00**
			15	1100 *	54.58	44.75		Two B belts				

** Maximum*

Rol-Air Single Stage Air Compressors

• Brand new ROL-AIR. Single stage compressors, ideal replacement on portable compressors. Aluminum head and crankcase give good heat dissipation while cast iron cylinder sleeves provide long life.


400145


400135


400146

SPECIFICATIONS FOR ALL SINGLE STAGE

• 150 PSI Max. (140 PSI on ITEM 400145)
• CCW Rotation

ITEM	Model	Cylinders	HP	RPM	CFM Open	CFM at 150 PSI	Port NPT	Pulley	Mount	Size	Shpg.	Price
400145	K3	One	0.5	700	2.16	1.3	½″	10.24″ dia.	3.74″ x 4.53″	10.25″ x 9.87″ x 12.5″	**17 lbs.**	**$285.00**
			0.75	1000 *	3.09	1.85		One A belt				
400135	K17	Two	1	600	7.32	4.98	½″	11.5″ dia.	5.19″ x 7.08″	11.5″ x 10.25″ x 13.75″	**40 lbs.**	**$454.50**
			1.5	800	9.07	6.16		One A belt				
			2	1000	11.33	7.7						
			3	1100 *	13.42	9.51						
400146	K35	Two	5	800 *	30.16	22.62	¾″	15.16″ dia.	7.48″ x 8.97″	15.18″ x 14.18″ x 18.5″	**86 lbs.**	**$870.00**
								Two A belts				

** Maximum*

Heavy Duty Two Stage Air Compressors

• Brand new. Heavy duty two stage, cast iron compressors designed for heavy duty applications where high air volume and pressure are required along with extra long life. All cast iron including inner and after coolers to reduce air temperature. Low speed gives quieter operation, less vibration. Complete with oil sight glass, unloader valve and safety pop off valve.

23 CFM, Two Cylinder



ITEM 400100
$958.25

SPECIFICATIONS

- Displ. 23 CFM
- 175 PSI max.
- 17 CFM at 175 PSI
- 805 RPM max.
- Bore/stroke 4⅛″ x 3½″ 1st stage 2⅛″ x 3½″ 2nd stage
- Mtg. pattern 8″ x 9″
- Two cylinder
- 5 HP
- 17″ pulley 2 groove B belt
- Cooling fan/pulley
- Size 17″ x 19″ x 21″
- **Shpg. 250 lbs.**

Truck freight only.

46 CFM, Four Cylinder



ITEM 400101
$1336.45

SPECIFICATIONS

- Displ. 46 CFM
- 175 PSI max.
- 35 CFM at 175 PSI
- 805 RPM max.
- Bore/stroke 4⅛″ x 3½″ 1st stage 2⅛″ x 3½″ 2nd stage
- Mtg. pattern 9¼″ x 9½″
- Four cylinder
- 10 HP
- 19″ pulley 2 groove B belt
- Cooling fan/pulley
- Size 20″ x 29″ x 28″
- **Shpg. 250 lbs.**

Truck freight only.

12.9 CFM, Single Stage Compressor



ITEM 400276
$262.50

• Brand new, FINI Model MK103. Single cylinder, single stage belt drive compressor. Aluminum head and crankcase. Integral cold start valve allows no load starting. Oil sight gauge.

SPECIFICATIONS

- One stage, one cylinder
- Pressure 145 PSI max.
- Flow at 1370 RPM (3 HP) 12.9 CFM open flow 8 CFM at 145 PSI 9.9 CFM open flow 7.2 CFM at 145 PSI
- Rotation CCW
- Flywheel 10″ dia. single ½″ groove
- Port ½″ NPT
- Oil capacity ½ qt.
- Mount 6¼″ x 4¾″
- Size 10″ x 10″ x 11″
- **Shpg. 27 lbs.**

California Residents ⚠ WARNING:Cancer and Reproductive Harm
For more information refer to:www.P65Warnings.ca.gov



⚠ 10 Gallon Portable Tire Blaster

ITEM 100192 **$189.00**

• Brand new EAGLE Model IHCT10 portable tire blaster. Uses a blast of air to seat tire beads onto rims. 2″ NPT ball valve and special adapter nozzle to control air flow into tire. Features include heavy gauge steel construction, shut-off valve, filling valve, pressure gauge, 3 foot hose, tire chuck and built-in cushioned carry handle. Quick coupler end for attachment to compressor airline for filling.

SPECIFICATIONS

- Tank capacity 10 gallon
- Size 35″ x 12¼″ x 15.8″
- Pressure 150 PSI max.
- **Shpg. 39 lbs.**

12 Volt DC Vacuum Pump



ITEM 400272 **$18.95**

• New MITSUBISHI. Model# G6T50371ZC. Original application was automotive cruise control. Ideal source of vacuum.

SPECIFICATIONS

- Volts 12 VDC
- Amps 0.35 Amps
- Vacuum 11 In. Hg vacuum @ no flow
- Port Barb for 0.2 ID tubing
- Mounting 3 holes each side
- Size 5½″ x 2⅜″ x 3¼″
- **Shpg. 6 lbs.**

Compressor Unloader Valve ⚠



ITEM 400143 **$46.50** MADE IN USA

• Brand new. Use on compressors driven by continuous power input (gas engines, hydraulic, etc.). Once tank reaches full pressure incoming air from compressor is vented to atmosphere. ¼″ NPT tank connection, ¼″ tubing connection for air line, ⅛″ NPT for idle control or head unloader. Toggle lever to override. Size 3″ x 3½″ x 1½″. **Shpg. 1 lb.**

¼″ NPT Air Safety Valve ⚠



• Brand new, CONRADER SRV-187 brass air compressor safety relief valve. Factory set, non-adjustable. Pull ring allows manual pressure relief. MADE IN USA

SPECIFICATIONS FOR ALL

• Connection ¼″ NPT • Size 9⁄16″ dia. x 1½″ • **Shpg. ¼ lb.**

ITEM	Relief Setting	Air Flow	Price
400331	125 PSI	62 CFM	$4.15
400330	150 PSI	73 CFM	$4.15
400329	170 PSI	82 CFM	$4.15
400328	200 PSI	96 CFM	$4.15

In-tank Check Valves

• Brand new brass construction air check valve. Threads directly into tank port. Allow one way airflow from compressor to tank while preventing air from leaking backward from tank thru compressor. Auxillary port for connection to unloader valve on pressure



SPECIFICATIONS FOR ALL ⚠

• 450 PSI max. • Cracking pressure 4 PSI • Unloader port ⅛″ NPT • Temp. 400° F

ITEM	Tank Port	Inlet Port	Size	Shpg.	Price
400325	½″ NPT	½″ NPT	1″ hex x 2 13⁄16″	1 lb.	$10.45
400324	¾″ NPT	¾″ NPT	1 3⁄16″ hex x 3 15⁄16″	1 lb.	$12.40
400326	1″ NPT	1″ NPT	1½″ hex x 3 15⁄16″	1½ lbs.	$22.15
400327	½″ NPT	½″ male flare	1″ hex x 2 13⁄16″	1 lb.	$9.00

Air Control Valves MADE IN USA



400153 & 400155



400154

ITEM 400153 **$96.00**

• Brand new AIR-MITE. Use for operating single or double acting air cylinders. Anodized aluminum body. Ports ¼″ NPT. Rated 150 PSI. **Shpg. 2 lbs.**

• Model V-4203. Two position, lever operated. Manual return. Size 5½″ x 2″ x 1⅜″.

ITEM 400155 **$129.00**

• Model V-4204-3P. Three position, lever operated. Spring return to center. Size 5½″ x 2″ x 1⅜″.

ITEM 400154 **$99.00**

• Model V-4208. Two position, foot pedal. Spring return. Size 7″ x 2⅜″ x 1⅝″.

Air Control Valve



ITEM 400233 **$126.00**

• Brand new AIR-MITE Model V-4210-3P. Use for operating single or double acting air cylinders. Anodized aluminum body. All ports blocked in spring centered position.

SPECIFICATIONS

- Ports ¼″ NPT
- PSI 150
- Three position
- Treadle style foot pedal
- Spring centered
- Size 7″ x 2⅜″ x 1⅝″
- **Shpg. 2 lbs.**

¼ NPS x ¼ NPS Air Hex Fitting Nipple




ITEM 400555 **$2.95**

• New, Aluminum hex nipple with 30 degree cone seat. Adapter fitting used on air hose to air tool connection.

SPECIFICATIONS

- ¼ NPS 30° cone seat x ¼ NPS 30° cone seat
- **Shpg. 0.1 lb.**

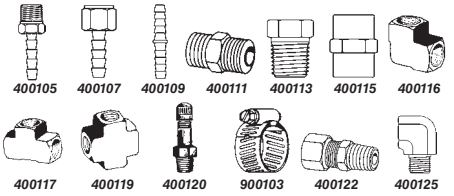

• Brand New . Brass fittings and stainless steel hose clamps.

Shpg. ¼ lb. ea.

⚠ Air Fittings

400105	Male hose end, ¼″ hose x ¼″ NPT	$1.55
400106	Male hose end, ⅜″ hose x ¼″ NPT	$1.45
400107	Female NPT, ¼″ hose x ¼″ NPT	$3.40
400108	Female NPT, ⅜″ hose x ¼″ NPT	$5.50
400109	Hose mender, ¼″ hose x ¼″ hose	$1.65
400110	Hose mender, ⅜″ hose x ⅜″ hose	$1.65
400111	Reducer, ¼″ NPT x ⅛″ NPT	$1.70
400112	Hex nipple, ¼″ x ¼″ NPT	$1.45
400113	Bushing, ⅛″ female x ¼″ male NPT	$0.90
400114	Bushing, ¼″ female x ⅜″ male NPT	$1.40
400115	Coupling, ¼″ x ¼″ female NPT	$4.25
400148	90° elbow, ⅛″ NPT	$1.75
400116	90° elbow, ¼″ NPT	$4.75
400117	Tee, ¼″ NPT	$5.30
400118	Tee, ⅛″ NPT	$3.55
400119	Cross, ¼″ NPT	$8.30
400120	Filling valve, ⅛″ NPT	$2.30
400121	Filling valve, ¼″ NPT	$3.45
900103	Clamp, for standard ¼″ ID hose	$0.60
900104	Clamp, for standard ⅜″ ID hose	$0.60
400122	Compression Coupling ¼″ NPT x ¼″ cu. tubing	$2.15
400123	Compression coupling ¼″ NPT x 5⁄16″ cu. tubing	$2.40
400124	Compression coupling ¼″ NPT x ⅜″ cu. tubing	$2.05
400125	⅛″ Street Elbow	$2.15
400126	¼″ Street Elbow	$4.20
400321	Male hose end, ⅛″ hose x ⅛″ NPT	$1.10
400322	Female solid NPT, ¼″ hose x ¼″ NPT	$2.00
400323	Female solid NPT, ⅜″ hose x ¼″ NPT	$2.30
400332	Male hose end, 0.17″ hose x ¼″ NPT	$3.35
400382	45° elbow Male hose end, ⅜″ hose x ⅜″ NPT	$8.10

115 Volt AC Air Pump



ITEM 400554 **$39.95**

• New, HAILEA model ACO-009E air pump. Use for large or multiple aquariums. Finned aluminum housing. Linear piston design for long life, low noise and vibration. Oilfree air.

SPECIFICATIONS

- Voltage 115 AC
- Power Consumption 160 watts
- Flow 5 CFM (145 Liters/Min.) free flow
- Pressure 5 PSI (0.035 Mpa)
- Noise Level <60 db
- Duty Continuous
- Inlet Port 0.571 OD barb for 13mm tubing
- Outlet Port M12x1.5 metric pipe
- Inlet Port 0.466 OD barb for 10mm tubing
- Mount Rubber cushion feet
- Size 11¼″ 5″ x 6⅝″
- **Shpg. 13 lbs.**

Quick Change Air Hose Couplers MADE IN USA

• Brand new. Install at one end of hoses to air equipment.

• Compressor need not be shut off. Swivel action helps prevent hose kinking. Change from one air tool to another in seconds.

Complete Unit



ITEM 400102 **$8.95**

• Complete unit (coupler and adapter). Couplers ¼″ female NPT. Adapter ¼″ male NPT. Complete unit ¾″ x 2½″. **Shpg. 1 lb.**

Male Adapter Only



ITEM 400103 **$1.65**

• ¼″ male NPT adapter only. **Shpg. ¼ lb.**

Female Adapter Only



ITEM 400104 **$1.70**

• ¼″ female NPT adapter only. **Shpg. ¼ lb.**

Humphrey Multi-Mount Air Cylinders

• New, HUMPHREY. Multi-mount style air cylinders. Aluminum construction, rated to 100 PSI working pressure. 10-32 ports.

Bore - Rod Dimensions

¼″ = 0.118″ ⅜″ = 0.197″ ⅝″ = 0.236″

Single Acting Push Only



ITEM	Bore	Stroke	R. Lgth.	Shpg.	Price
400175	¼″	¼″	2.14″	½ lb.	$5.95
400173	⅜″	¼″	2.337″	¾ lb.	$5.95
400174	⅜″	½″	2.587″	¾ lb.	$5.95
400176	⅝″	¼″	2.533″	½ lb.	$6.95
400168	⅝″	½″	2.783″	¾ lb.	$6.95

Double Acting

ITEM	Bore	Stroke	R. Lgth.	Shpg.	Price
400171	¼″	½″	2.193″	½ lb.	$5.95
400170	¼″	¾″	2.443″	½ lb.	$5.95
400169	⅜″	¾″	2.64″	½ lb.	$5.95

Double Acting Double Rod



ITEM	Bore	Stroke	R. Lgth.	Shpg.	Price
400177	⅜″	¾″	3.902″	½ lb.	$8.95
400172	⅝″	½″	3.677″	¾ lb.	$9.95
400178	⅝″	¾″	4.177″	¾ lb.	$9.95

12 mm x 2¾″ DA Air Cylinder



ITEM 400222 **$5.95**

• New, FESTO Model DO-12-74-PP-SA air cylinder. Stainless steel tubing with aluminum end-caps. 10-32 ports with adapters to 1/16″ hosebarbs. Rod end threaded 4 mm, 0.70″ pitch. Base end-cap tapped 4 mm, 0.70″ pitch. Cushions at both ends of stroke.

SPECIFICATIONS

- Double Acting
- Bore 12 mm (0.472″)
- Stroke 2¾″
- Rod dia. 4 mm (0.156″)
- Press. 8 Bar (116 PSI) max
- Ports 1/16″ hosebarbs
- Retracted lgth. 6¾″ end-to-end
- **Shpg. 1 lb.**

¾″ Bore Air Cylinder



ITEM 400251 **$4.95**

• Used BIMBA stainless steel. Extend port in base, retract port in rod end. P/N 53E743. Stroke ¾″, retracted lgth. 5″ (rod end to base end).

SPECIFICATIONS

- Double acting
- Bore ¾″
- PSI max. 250
- Rod diam. ¼″
- Ports ⅛″ NPT
- Threaded rod end ¼″-28 x ½″ long
- Nose mount threaded ⅝″-18
- Flat base 0.81″ O.D.
- **Shpg. 1 lb.**

Double Acting Pneumatic Cylinders

• New. BUYERS double acting pneumatic cylinder. Has a cushion valve on each end. H Models have hinge mount accessory kit. Ideal for remote tailgate latches.

SPECIFICATIONS

- Double Acting
- Gland Retainer Tie-Rod
- Pressure 200 PSI
- Ports ¼″ NPT
- Rod End Clevis w/ Jam Nut
- Base End Clevis
- Pin Holes ½″

ITEM	Bore	Stroke	Rod Dia.	R. Lgth.	Shpg.	Price
400655	2.5″	6″	0.75″	14.5″	8.5 lbs.	$91.40
400656	2.5″	8″	0.75″	16.5″	8.5 lbs.	$91.80
400660	2.5″	8″	0.75″	16.5″	9.5 lbs.	$103.25
400657	3.25″	6″	1″	16.25″	11 lbs.	$112.35
400658	3.25″	8″	1″	18.25″	13 lbs.	$132.45
400659	3.25″	8″	1″	18.25″	14 lbs.	$150.05



400655



400660

2″ x 8″ Air Cylinder



ITEM 400664 **$89.95**

• New, BIMBA, TRD, double acting air cylinder. Tie-rod construction. Foot mounted. Cylinder has a integrated cushion valve on each end.

SPECIFICATIONS

- Model CYL-9929418
- Double Acting
- Bore/Stroke 2″ x 8″
- Rod ⅝″ dia.
- Pressure 250 PSI max
- Ports ⅜″ NPT Ports
- Rod 7/16-20 UNF thread
- Mounting Pattern 10⅞″ x 3¼″
- Overall Retracted Length 13¾″
- **Shpg 6 lbs.**

Regenerative Blower



ITEM 501685

$249.95

• New, Centraction 3-phase side channel regenerative blower. Frequently used for aeration, pneumatic conveying, and industrial vacuum systems.

SPECIFICATIONS

- Brand Centraction
- Model Number 2RB730-7AT26Z
- Ports 2.4″ O.D.
- Size 17½″ x 16½″ x 14½″
- Power 4.0 HP (3.0 kW) @ 50 Hz 4.6 HP (3.45 kW) @ 60 Hz
- Voltage 200-260 Volt AC 3 Ph/ 11.4 Amps @ 50 Hz 350-450 Volt AC 3 Ph/ 6.5 Amps @ 50 Hz 230-290 Volt AC 3 Ph/ 10.8 Amps @ 60 Hz 400-500 Volt AC 3 Ph/ 6.2 Amps @ 60 Hz
- Vacuum Performance -6.2 in. Hg (-210 mbar) @ 50 Hz -5.3 in. Hg (-180 mbar) @ 60 Hz
- Pressure Performance 5.9 in. Hg (200 mbar) @ 50 Hz 5.0 in. Hg (170 mbar) @ 60 Hz
- **Shpg 96 lbs.**

Aftercooler



ITEM 400668

$249.95

• New. aftercooler for Quincy 40-50 hp air compressors.

SPECIFICATIONS

- Model Number 2013500723
- Pressure 200 PSIG
- Temperature 250° F
- Flow Unknown
- Ports 1½ NPT
- Top Mounting Holes Three 0.395″ holes on 6¼″ centers
- Bottom Mounting Holes Two 0.395″ holes on 2¾″ centers
- Size 25½″ x 14″ x 3½″
- **Shpg 35 lbs.**

11.9 CFM 3 HP Single Stage Air Compressor



ITEM 400671 **$179.95**

• New, B2800B 3 HP two cylinder single stage air compressor. Oil level sight glass.

SPECIFICATIONS

- Cylinders 2
- Stages Single
- Flow 11.9 CFM
- Pressure 131 PSI max.
- Power Reqd. 3 HP max.
- Speed 1570 RPM max.
- Rotation CCW
- Flywheel 11″ A belt
- Port ½″ NPT
- 1st Stage Bore/Stroke 2.36″/1.97″
- Mount Four 0.34″ holes on 5¼″ x 6¼″ centers
- Size 10″ x 11″ x 13″
- **Shpg. 25 lbs.**

7.5 CFM, Single Stage Air Compressor



ITEM 400317 **$149.95**

• New, V-twin cylinder single stage air compressor. Cast iron block and cylinder with aluminum head. Oil level sight glass.

SPECIFICATIONS

- One stage, two cylinders
- Flow: 7.5 CFM open flow 4.28 CFM at 110 PSI
- Pressure 115 PSI max.
- Power reqd. 2 HP max.
- Speed 980 RPM max.
- Rotation CCW
- Flywheel 10½″ A belt
- Port ½″ OD tube
- 1st stage bore/stroke 55mm x 45mm
- Mount 6⅞″ x 3⅝″
- Size 13″ x 10½″ x 10½″
- **Shpg. 37 lbs.**

7.1 CFM, Single Stage Air Compressor



ITEM 400666 **$149.95**

• New, B2800 2 HP two cylinder single stage air compressor. Oil level sight glass.

SPECIFICATIONS

- Cylinders 2
- Stages Single
- Flow 7.1 CFM
- Pressure 90 PSI max.
- Power Reqd. 2 HP max.
- Speed 1000 RPM max.
- Rotation CCW
- Flywheel 11″ dia. A belt
- Port ½″ NPT
- 1st Stage Bore/Stroke 2.36″/1.97″
- Mount Four 0.34″ dia. holes on 5¼″ x 6¼″ centers
- Size 10″ x 11″ x 12½″
- **Shpg. 23 lbs.**

Air Filter Pair



ITEM 400320

$4.95

• New, pair of plastic housing air filters for air compressors. Uses paper element.

SPECIFICATIONS

½″ NPT connection
½″ inlet tube
4″ dia x 2″
Shpg 1 lb.

California Residents WARNING:Cancer and Reproductive Harm
For more information refer to:www.P65Warnings.ca.gov

Metal Housing Pressure Switches

$29.00 each



• Brand new, LEFOO automatic pressure switch for compressed air systems. Automatically turns electric motor ON or OFF at set values. Adjustable differential. Unloader port ¼″ OD copper tubing which allows compressor to start without back pressure load. Sturdy metal housing. Single port.

SPECIFICATIONS FOR BOTH

- Contact rating
  2 HP, 24 amps at 120 VAC
  3 HP, 20 amps at 240 VAC
- Port ¼″ NPT
- Min. ON (cut-in) 40 PSI
- Differential 25-60 PSI
- Size 3¾″ x 3½″ x 4¼″
- **Shpg. 3 lbs.**

ITEM	Factory Setting ON (cut-in)	OFF (cut-out)	Max. OFF (cut-out)
400261	145 PSI	175 PSI	250 PSI
400260	105 PSI	135 PSI	200 PSI

Heavy Duty Automatic Pressure Switches



• Brand new, SUNNY automatic pressure switch for compressed air systems. Automatically turns electric motor ON or OFF at set values. Adjustable differential. Unloader port ¼″ OD copper tubing which allows compressor to start without back pressure load. Sturdy plastic housing. Manual off switch.

SPECIFICATIONS

- Contact ratings
  25 amps at 120/240 VAC
  25 amps at 32/120/230 VDC
- Port(s) ¼″ NPT
- Size 3¾″ x 3″ x 3⅛″
- **Shpg. 1½ lbs.**

ITEM	Port(s)	Factory Setting ON (Cut-In)	OFF (Cut-Out)	Price
400264	1	95 PSI	125 PSI	$14.50
400266	1	140 PSI	175 PSI	$14.50
400265	4	95 PSI	125 PSI	$14.50
400267	4	140 PSI	175 PSI	$14.50

0-4 BAR Pressure Switch

ITEM 400313

$19.95



• New. industrial pressure switch. Able to process air, oil and water. Commony used on railways, boilers, water treatment, fire fighting systems, and compressors.

SPECIFICATIONS

- Brand WAAREE
- Model CNI-3
- Range 0-4 BAR (0-58 PSI)
- Max. Pressure 25 BAR (362.5 PSI)
- Differential Pressure 0.1 to 0.3 BAR (1.45 to 4.35 PSI)
- Max. Temperature 150° C (302° F)
- Mounting Direct/Panel
- Switch 1 SPDT Snap action micro switch
- Contact Rating 15 Amps 250 Volts AC, 0.4 Amps 110 Volts DC
- Electrical Connection P.G. 13.5 mm
- Process Connection Size ⅜″ BSP male standard
- Size 2⅜″ x 1⅝″ x 2½″
- **Shpg 3 lbs.**

ITEM 400314

$19.95

SPECIFICATIONS

- Range 0-6 BAR (0-87 PSI)
- Size 4½″ x 5″ x 1¾″
- Differential Pressure 0.25 to 1.5 BAR (3.6 to 21.7 PSI)
- **Shpg 3 lbs.**

Automatic Pressure Switches

$14.50 each



• Brand new, LEFOO automatic pressure switch for compressed air systems. Automatically turns electric motor ON or OFF at set values. Adjustable differential. Unloader port ¼″ OD copper tubing which allows compressor to start without back pressure load. Sturdy plastic housing. Manual OFF switch.

SPECIFICATIONS

- Contact ratings
  120 VAC: 1½ HP at 20 amps
  240 VAC: 2 HP at 12 amps
  240 VAC 3 Ph.: 3 HP at 9.6 amps
- Size 3¾″ x 3⅜″ x 3¼
  32 VDC: ¼ HP at 8.6 amps
  120 VDC: ¼ HP at 3.1 amps
  240 VDC: ¼ HP at 1.6 amps
- **Shpg. 1½ lbs.**

ITEM	Factory Setting ON (Cut-In)	OFF (Cut-Out)	Min. On (Cut-In)	Max. OFF (Cut-Out)	Differential	Ports
400256	95 PSI	125 PSI	35 PSI	150 PSI	30-40 PSI	¼″ NPT (x1)
400257	95 PSI	125 PSI	35 PSI	150 PSI	30-40 PSI	¼″ NPT (x4)
400258	140 PSI	175 PSI	50 PSI	175 PSI	35-55 PSI	¼″ NPT (x1)
400259	140 PSI	175 PSI	50 PSI	175 PSI	35-55 PSI	¼″ NPT (x4)





Automatic Pressure Switches

• New automatic pressure switches. For compressed air or water systems. Automatically switch electric motor ON or OFF at pre-set values.

ITEM	HP	Voltage	Pressure (PSI) ON	OFF	Port	Size	Shpg	Price
500509	1	115/230	20	40	¼″ Hosebarb	4″ x 2¾″ x 3½″	2 lbs.	$11.95
500376	1½	115	20	40	¼″ NPT	3½″ x 2¼″ x 3″	1½ lbs.	$12.99

Portable Air Carry Tanks ⚠

• Brand New IRON HORSE portable air carry tanks. Ideal for filling tires, blowing off equipment and other inflation needs when a compressor isn't handy. Features include heavy gauge steel construction, shut-off valve, filling valve, pressure gauge, 3 foot hose, tire chuck and built-in carry handle. Pressure 150 PSI max.

5 Gal. Tank

ITEM 400299

$55.15

SPECIFICATIONS

- Capacity 5 gallon
- Size 17½″ x 9¾″ x 11½″
- **Shpg. 20 lbs.**



10 Gal. Tank

ITEM 400300

$86.65

SPECIFICATIONS

- Capacity 10 gallon
- Size 22½″ x 12″ x 14″
- **Shpg. 34 lbs.**



120 Volt AC 2 Way Solenoid Valve

ITEM 200484

$8.95



• New, GOULD ALLIED CONTROL model 306x 14 two way normally closed solenoid valve. For use in low pressure water systems.

SPECIFICATIONS

- Configuration 2 way N.C.
- Voltage 120 VAC
- Power 9 W
- Duty Intermittent
- Maximum Opening Pressure Difference 12 PSI
- Ports ¼″ NPTF
- Size 1⅝″ x 1½″ x 2⅞″
- **Shpg. 1½ lbs.**

115 VAC Solenoid Valve

ITEM 400318

$8.95



• New PARKER model 15-200470-001B solenoid valve. Normally closed, furnished with brass right angle hose barb adapters (¼″ ID on inlet and ⅛″ ID on outlet). Stainless steel body.

SPECIFICATIONS

- Voltage 115 VAC
- Power consumption 6 Watts
- Pressure Rating 10 PSI
- Orifice ⅛″
- Ports ⅛″ NPT
- Size 2″ x 1⅜″ x 2¼″
- **Shpg. 1 lb.**

2-Way N.C. Air Control Valve

ITEM 400663

$29.99



• New, SAF HOLLAND model XB-11745 fifth wheel release valve. Pull knob, spring return. For kingpin or slider lock release. Ports labeled on valve body as #1 Delivery Port, to the fifth wheel slide assembly, and #2 Supply Line, from the truck.

SPECIFICATIONS

- 2-Way N.C.
- Max. Pressure 200 PSI
- Ports ⅛″ NPTF
- Pull Type, Spring Return
- Size 3½″ x 1¾″ x 1⅜″
- **Shpg 0.55 lb.**

⅛″ NPT Bronze Air Muffler

ITEM 400370

.99¢



• New, HUMPHREY model HKM-10 brass air muffler.

SPECIFICATIONS

- Thread ⅛″ NPT male
- Hex Size 7/16″
- Size ½″ dia. x ¾″ long
- **Shpg. 1/10 lb.**

8 Zone Sprinkler Controller



ITEM 500130 **$64.95**

- New. Great for farms, nurseries, golf courses, parks, stadiums. Operates up to 8 stations with either automatic or manual control. All timing and set-up is done from the keyboard. Digital display.
- Operates on 115 VAC, station outputs are 24 VAC, 30 watts. Use 24 VAC relays on outputs to control heavier loads. Steel weather resistant housing with lock. Built-in circuit breakers and surge/lightning protection.
- 3 independent programs with up to 4 starts per program. Zones can be set for any or all programs. Timing range from 1 min. to 10 hrs. in 1 min. increments. 7 day repeat or 6 day skip cycles.
- Separate master valve/pump start circuit. Self test program and system test - syringe cycle. Battery back-up capability. Size 11″ x 5½″ x 13″. **Shpg. 18 lbs.**


12 & 24 Volt DC Counters, non-resettable



ITEM	Digits	Watts	Connection	Mount	Size	Shpg.
			12 Volt			
500834	6	2	Wire leads	Base	2.37″ x 1.496″ x 2.252″	¼ lb.
500835	6	2	Wire leads	Base	2.5″ x 2.25″ x 1″	¼ lb.
500833	7	1.1	Terminal pins	Rear	1.68″ x 1.18″ x 0.71″	⅒ lb.
500836	7	1.1	Wire leads	Panel	1 3/16″ x 1⅜″ x 1 1/16″	⅒ lb.
500749	4	2	Wire Leads	Rear	1.25″ x 2.25″ x 1″	½ lb.
			24 Volt			
500839	6	1.2	Terminal pins	Rear	1.68″ x 1.18″ x 0.71″	⅒ lb.
500840	6	2	Wire leads	Base	2.37″ x 1.496″ x 2.252″	¼ lb.
500841	7	2	Wire Leads	Face & Base	2.37″ x 1.496″ x 2.252″	¼ lb.
500837	7	N/A	Wire leads	Face	1¾″ x 1⅜″ x 1″	⅒ lb.
500838	7	1.2	Terminal pins	Rear	1.68″ x 1.18″ x 0.71″	⅒ lb.

Cable Ties

- Nylon cable ties. Use for wire, hydraulic hoses, etc.

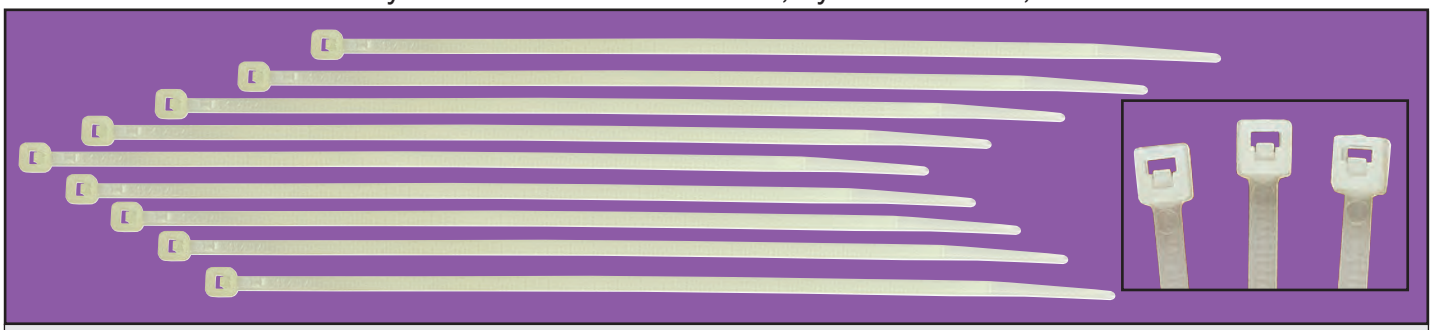

ITEM	Qty.	Length	Width	Tensile Strength	Max. Loop Dia.	Color	Features/Model	Brand	Shpg.	Price
100182	100	4.7″	0.1″	18 lbs.	1.18″	Natural	CT18-1.18Z	JST	½ lb.	$ .99
100179	1000	5.5″	0.1″	N/A	1.38″	Natural	954623	—	2 lbs.	$5.99
100188	25	32″	0.375″	N/A	9″	Ivory	T150L-9A	Tyton	1 lb.	$7.99
100187	25	32″	0.31″	N/A	10″	Ivory	T150L-R-12	Tyton	2 lbs.	$5.99
100180	25	32″	0.31″	N/A	11″	Ivory	T150LL-9A	Tyton	2 lbs.	$5.99


Drawer Slide Pair

- New ball bearing drawer slides. Sold as a pair; one left side guide and one right side guide.

ITEM	Stage 1 Travel	Stage 2 Travel	Total Travel	Retracted Length	Height	Thickness	Shpg.	Price
100123	11¾″	11¼″	23″	24″	2″	½″	6 lbs.	$7.95
100124	9¾″	9¼″	19″	24″	2″	½″	6 lbs.	$8.95
100130	12⅜″	10″	44″	21 11/16″	1¾″	½″	5 lbs.	$11.95
100141		Single Stage	28¾″	17⅝″	1⅜″	1⅛″	3 lbs.	$1.95
100177		Single Stage	28¾″	21″	1.3″	½″	6 lbs.	$5.95



Pack Of 10 Test Leads



- Brand new. Set of test leads with crimped on alligator leads. Pack consists of 10 leads 2 of each color, Red, Black, Yellow, Green and White.

ITEM 500828 **$7.05**

SPECIFICATIONS

- Overall lgth. 21″
- Clip 1″ Alligator
- Wire gauge 22 AWG
- **Shpg. 1 lb.**

ITEM 500829 **$7.65**

SPECIFICATIONS

- Overall lgth. 25″
- Clip 1½″ Alligator
- Wire gauge 20 AWG
- **Shpg. 1 lb.**

ITEM 500830 **$7.50**

SPECIFICATIONS

- Overall lgth. 24″
- Clip 1¾″ Alligator
- Wire gauge 20 AWG
- **Shpg. 1 lb.**

7000 lb. Hydraulic Trailer Tongue Jack



ITEM 300257

$59.95

• Brand new, STILWELI hydraulically powered trailer tongue jack. Works with bumper hitch trailers. Use with trash trailers, equipment trailers. Works with any source of hydraulic pressure providing two way hydraulic flow. Centrally located ports on body with steel lines to each end of cylinder. Simple installation using existing jack mounting holes on trailer tongue.

SPECIFICATIONS

- Load Capacity 7000 lbs.
- Stroke Length 24″
- Removable Foot 8″ x 6″
- Ports SAE 6 (9⁄16-18 ORB)
- Maximum Pressure 3200 PSI
- Cylinder 2″ Bore, 1.25″ Rod
- Retracted Overall Length 32″
- Extended Overall Length 56″
- Mount to Foot 12″ retracted
- **Shpg. 35 lbs.**

12 VDC, 24″ Travel, 3500 lb. Electric Tongue Jack ⚠



ITEM 300170

$204.80

• Brand new, BUYERS PRODUCTS Model 0093500 electric tongue jack. Ideal for use on travel trailers and boat trailers. Powder-coated steel tubing, hardened steel gears, weather-sealed switches. Travel length includes 18″ of electric-powered travel plus 6″ ofmanual drop leg extension length. Drop leg adjustable in 1½″ increments. Built-in leveling gauge and two LED nightlights. Crank-handle included for manual over-ride.

SPECIFICATIONS

- Load Ratings: 3500 lbs. continuous 5000 lbs. break-away
- Travel 24″ (see above)
- Voltage 12 DC
- Speed 30 sec. full stroke
- Wiring 48″ cord w/ 7-pin RV plug
- Foot Pad 5¼″ O.D
- Retracted Height 26½″
- **Shpg. 23 lbs.**

7000 lb. Hydraulic Trailer Tongue Jack



ITEM 300329 MADE IN USA

$59.95

• Brand new, STILWELL hydraulically powered trailer tongue jack. Works with bumper hitch trailers. Use with trash trailers, equipment trailers. Works with any source of hydraulic pressure providing two way hydraulic flow. Centrally located ports on body with steel lines to each end of cylinder. Simple installation using existing jack mounting holes on trailer tongue.

SPECIFICATIONS


- Load Capacity 7000 lbs.
- Stroke Length 16″
- Removable Foot 8″ x 6″
- Ports SAE 6 (9⁄16-18 ORB)
- Maximum Pressure 3000 PSI
- Cylinder 2″ Bore, 1.25″ Rod
- Retracted Overall Length 24″
- Extended Overall Length 40″
- Mount to Foot 8″ retracted
- **Shpg. 29 lbs.**

Trailer Jacks

• Brand new trailer jacks. Zinc plated inner tube for long life. Mounting style 2″ dia. tube, foot size 4″ x 7″.

2¼″ Round Tube Body • Black painted outer tube. Swivel mount with retaining pin allows jack to be swiveled 90° for clearance.

2¼″ Square Heavy Duty • 12 gauge tube body with powder coated outer tube. Weld-on tubular mount allows jack to be swiveled 90° for clearance. 3 year mfg. warranty.

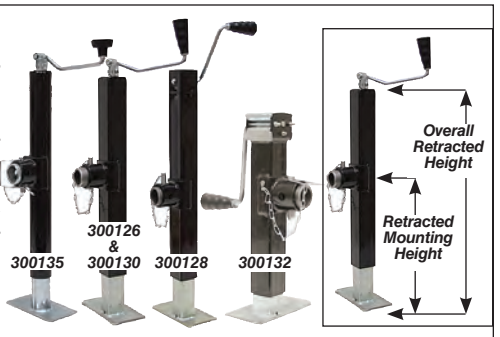

2¼″ Round Tube Body

ITEM	Load Capacity lbs.	Type of Wind	Lgth. of Travel	Retracted Mounting Height	Overall Retracted Height	Shpg.	Price
300134	2000	Top	10″	11¾″	15″	13 lbs.	$40.15
300135	2000	Top	15″	15¼″	24½″	13 lbs.	$49.85

2¼″ Square Tube Body

ITEM	Load Capacity lbs.	Type of Wind	Lgth. of Travel	Retracted Mounting Height	Overall Retracted Height	Shpg.	Price
300125	2000	Top	10″	11″	15″	15 lbs.	$61.85
300126	2000	Top	15″	14½″	24¾″	19 lbs.	$70.70
300127	2000	Side	10″	10¾″	17¼″	16 lbs.	$56.80
300128	2000	Side	15″	14⅝″	26⅞″	20 lbs.	$58.60
300129	5000	Top	10″	11¼″	15¼″	16 lbs.	$55.30
300130	5000	Top	15″	14⅝″	24¼″	21 lbs.	$58.65
300131	5000	Side	10″	10½″	19½″	18 lbs.	$73.70
300132	5000	Side	15″	15½″	21¾″	21 lbs.	$83.00

8000 lb. Trailer Jack



ITEM 300133

$103.80

• Brand new heavy duty trailer jack. For large high capacity trailers. 12 gauge square tubing for extra strength. Powder coated outer tube and zinc plated inner tube for long life. Direct weld mount. Drop leg allows 13½″ extra length. 3 year mfg. warranty.

SPECIFICATIONS

- Load Capacity 8000 lbs.
- Top-wind
- 15″ travel
- 2½″ square tube body
- 6″ x 8 ft.
- Length center of tube mount to base: Retracted 21½″, Extended 50″
- 9⁄16″ pin for mount w/retainer chain
- **Shpg. 25 lbs.**

Tri-Ball and Hook Hitch For 2″ Receiver ⚠



ITEM 300306

$66.25

• Brand new, BUYERS PRODUCTS model 1802208 tri-ball and hook hitch for 2″ receiver. Mounts in vehicles receiver. Durable steel construction. Corrosion resistant black powder-coated finish. The hook can be used with chains or straps to recover objects but is NOT intended for towing use.

SPECIFICATIONS

- Fits 2″ Receiver
- 1⅞″ Ball Towing Capacity 6,000 lbs.
- 2″ Ball Towing Capacity 7,500 lbs.
- 2 5⁄16″ Ball Towing Capacity 10,000 lbs.
- Hitch Pin Hole Size ⅝″ dia.
- Size 12″ x 7½″ x 8½″
- **Shpg 17 lbs.**

3000 lb. Trailer Jack



ITEM 300369

$29.95

• New, heavy duty trailer jack with sidewind plastic handle.

SPECIFICATIONS

- Model 796875
- Lift Capacity 3000 lbs.
- Support Capacity 5000 lbs.
- Handle Sidewind
- Travel 16″
- Retracted length 22½″
- Round Tube Body 2¼″ dia.
- Jack Mount Three slotted 0.42″ x 0.75″ holes on triangle mount
- Base Mount 0.42″ thru hole w/ 2″ dia. with groove for mounting foot baseplate or wheel
- Size 22½″ x 8½″ x 4½″
- **Shpg. 12 lbs.**

2″ Receiver Anchor Shackle



ITEM 300304

⚠ **$37.15**

• Brand new, BUYERS PRODUCTS model 1804020 2″ receiver anchor shackle. Mounts in vehicles receiver for towing and recovery purposes. Removable anchor shackle features a threaded pin for easy installation and use. Durable steel construction. Corrosion resistant black powder-coated finish. Intended for straight line pulling.

Do Not Exceed Vehicles Towing Capacity!

SPECIFICATIONS

- Fits 2″ Receiver
- Anchor Shackle Fits 2″ Wide Straps
- Hitch Pin Hole Size ⅝″ dia.
- Working Load Limit 10,000 lbs. W.L.L.
- Size 7″ x 4¼″ x 2″
- **Shpg 11 lbs.**

ITEM 300307 ⚠ **$88.00**

3″ Reciever Model 1804040

SPECIFICATIONS

- Fits 3″ Receiver
- Size 8″ x 5″ x 3″
- Working Load Limit 18,000 lbs. W.L.L.
- **Shpg 22 lbs.**

2.50-4 Wheel Assembly



ITEM 700654

$5.95

• New, rubber tire with tube on steel wheel. Offset hub.

SPECIFICATIONS

- Size 2.50-4
- O.D. 8½″
- Bore ⅝″ dia.
- Thru Bore Length 1 7⁄16″
- Tread Width 2 3⁄16″
- Tube Type
- Load Range 297 lbs. Pressure 30 PSI max.
- Ply Rating 2
- **Shpg. 4 lbs.**

4.10/3.50x4 2 Ply Tire



ITEM 700449

$1.99

• New, DICO pneumatic tire.

SPECIFICATIONS

- Size 4.00/3.50-4
- Outside Diameter 10″
- Tread Width 2½″
- Tread Sawtooth
- Load Rating 250 lbs.
- Pressure 30 PSI max.
- Ply Rating 2
- **Shpg. 2½ lbs.**

13 x 5.00-6 Turf Tire



ITEM 700450

$4.95

• NEW, DURO Turf tire. Tires are shipped flat and may require extra effort to mount on a rim.

SPECIFICATIONS

- Size 13x5.0-6
- Outside Diameter 13″ dia.
- Cross Section 5″ Wide
- Tread Knobby
- Tread Width 4″
- Tire Tubeless
- Pressure 20 PSI max.
- Ply Rating 2
- **Shpg. 5 lbs.**

½″-20 Cone Wheel Lug Nut



ITEM 700602


.95¢

• Brand new. ½″-20 NF cone lug nut. Replacement lug nut to fit popular trailer hub studs.

SPECIFICATIONS

- Thread ½″-20 NF
- Length 0.585″
- Hex Size 0.805″ (measured across flats)
- **Shpg. 0.05 lb.**

Trailer Bearing Kits



• Brand new, DURA-ROLL replacement trailer bearing kit. Use with boat, camping, utility and snowmobile trailers. 1 kit per wheel required. Bearings must be packed with grease before installation. Kit contents available at **www.surpluscenter.com**. Fully tested and exceeds VESC regulations. Installation instructions included.

ITEM	Typical Axle Bearing Bore Inner	Outer	Rating (lbs.)	Shpg.	Price
700167	1″	1″	2000	1 lb.	$14.85
700168	¾″	¾″	2000	1 lb.	$11.90
700169	1¼″	1¼″	2000	1½ lbs.	$14.35
700170	1⅜″	1 1⁄16″	3500	1 lb.	$15.00
700171	1 1⁄16″	1 1⁄16″	2000	1 lb.	$14.50

Press In Bearings & Bushings



• Brand new, bearings and bushings for low speed wheels. Available in Oilite bushings, standard ball bearings and precision sealed ball bearings. All are designed to fit into common 1⅜″ ID wheel hubs. **Shpg ¼ lb.**

ITEM	Style	Axle Bore	Price
700536	Oilite Bushing	1″	$1.00
700537	Oilite Bushing	¾″	$1.50
700538	Oilite Bushing	⅝″	$2.25
700539	Ball Bearing	½″	$2.25
700540	Ball Bearing	¾″	$2.25
700541	Ball Bearing	⅝″	$1.95
700542*	Precision BB	¾″	$5.75
700543	Precision BB	⅝″	$4.95
700544	Precision BB	⅝″	$3.25

** with flange*

18 x 6.50-8 Wheel Assembly



ITEM 700560

$32.99

• New, WANDA pneumatic tire mounted on steel rim. NOT for Highway Service.

SPECIFICATIONS

- Size 18 x 6.50-8
- Outside Diameter 18″
- Cross Section 6½″ Wide
- Tread Knobby
- Tread Width 5½″
- Bore 1″
- Bore Thru-Length 3″
- Hub Type Centered
- Tire Tubeless
- Load Rating 330 lbs. @ 10 PSI
- Ply Rating 2
- **Shpg. 16 lbs.**

Hi-Speed Wheel Hubs



• Brand new. Use with a 1″ diameter spindle to mount high speed wheels on small trailers. Includes grease cap, tapered roller bearings and seal. **Shpg. 7 lbs.**

ITEM	Bolts	Bolt Circle	Type	Price
700101	4	4″	Lug Bolt	$43.95
700102	5	4½″	Lug Bolt	$46.70
700413	4	4″	Stud	$45.05
700414	5	4½″	Stud	$48.00

1″ Trailer Spindle



ITEM 700100

MADE IN USA **$15.30**

• Brand new steel trailer spindle with castle nut. 1″ diam. x 8½″ long. **Shpg. 4 lbs.**

Grease Cap



ITEM 700662

$1.59

• New. Steel grease cap.

SPECIFICATIONS

- Height 1.165″
- Inside Diameter 1.895″
- Outside Diameter 1.987″
- **Shpg 0.15 lb.**

24 x 12.00-12 Directional Lug Tread OTR Tire and Steel Wheel Assembly



$119.95 ea.

• New, OTR directional lug tread tire mounted on steel rim.
(Not For Highway Use).

ITEM 700599 Right Hand
ITEM 700600 Left Hand

SPECIFICATIONS

- Size 24 x 12.00-12
- Outside Diameter 24.37″
- Tread Directional Lug Tread Width 12″
- Mount: 5 hole on 4½″ B.C. 2¾″ dia. pilot
- Backspace 4.5″
- Tire Tubeless
- Load Rating 1710 lbs. @10mph
- Pressure 20 PSI max.
- Ply Rating 4
- Actual Weight 39.15 lbs.
- **Dimensional Shpg. 57 lbs.**

250/50R15 Radial Tire Pair



ITEM 700759

$49.95

• New, Vision Envy 250/50R15 6-ply radial DOT rated tire pair. Applications include golf carts, mowers, ATVs, and other low-speed vehicles.

SPECIFICATIONS

- Brand Vision
- Part Number WVS8642505015R6
- Size 250/50R15
- Outside Diameter 23″
- Tread Envy non-conventional
- Tread Width 9.75″
- Tire Tubeless
- Load Rating 910 lbs @ 30 PSI
- Pressure 30 PSI
- Ply Rating 6
- Max. Speed 40 mph
- **Shpg. 91 lbs.**

4.80/4.00-8 Wheelbarrow Wheel



ITEM 700549

$65.60

• New, LOADSTAR wheelbarrow tire on steel wheel with ball bearings. NHS

SPECIFICATIONS

- Size 4.80/4.00-8
- Outside Diameter 16″
- Tread Sawtooth
- Tread Width 3¼″
- Cross section 4″
- Bore ⅝″
- Bore Thru-Length 6″
- Hub Type Centered
- Bearing Ball
- Tire Tubeless
- Load Rating 590 lbs.
- Pressure 30 PSI max.
- Ply Rating 4
- **Shpg. 12 lbs.**

8″ x 5.5″ Steel Wheel Rim w/Bearings



ITEM 700415

$5.99

• New take-offs, black steel rim with dual ball bearings for 8″ tires.

SPECIFICATIONS

- Wheel Rim Size 8″ x 5.5″
- O.D. 8⅞″
- Width 6 5⁄16″
- Bearings Ball
- Bore ¾″
- Hub thru length 3 1⁄16″
- Hub type Offset
- **Shpg. 8 lbs.**

12″ x 1.75″ Spoked Wheel With Bearing



ITEM 700699

$6.95

• New, black rubber tire on light gray 5 spoke plastic wheel. Diamond tread pattern. Centered hub.

SPECIFICATIONS

- Size 12″ x 1¾″
- Tread Diamond
- Bore ½″
- Thru-Length 2⅜″
- Bearing Ball
- **Shpg. 3 lbs.**

10″ x 2.5″ Semi-Pneumatic Wheel



ITEM 700659

$5.95

• New, Semi-pneumatic black tire on orange plastic wheel. 83 tooth 8¾″ dia. internal gear.

SPECIFICATIONS

- Size 10.5″ x 2.5″
- Outside Diameter 10.5″
- Cross Section 2.5″ Wide
- Tread Ribbed
- Tread Width 2.5″
- Load Rating Unknown
- Bore ½″
- Bore Thru-Length 2.5″
- Hub Type Centered
- Bearing Ball
- **Shpg. 4 lbs.**

10″ x 2¼″ Plastic Geared Wheel



ITEM 700487

$3.95

• New. Black Plastic Solid Wheel w/Gear Molded onto Hub.

SPECIFICATIONS

- Size 10″ x 2.25″
- Outside Diameter 10″ dia.
- Tread Ribbed
- Tread Width 2¼″
- Bore ⅝″
- Bore Thru-Length 1½″
- Hub Type Offset
- Bearing Bushing (Plastic)
- **Shpg. 3 lbs.**

10″ x 2″ Plastic Geared Wheel



ITEM 700535

$2.95

• New, Black plastic geared wheel. Wheel has 5¼″ dia. x 50 tooth drive gear.

SPECIFICATIONS

- Size 10″ x 2″
- Outside Diameter 9¾″ dia.
- Cross Section 2¼″ Wide
- Tread Ribbed
- Tread Width 2″
- Bore ¾″
- Bore Thru-Length 1.15″
- Hub Type Offset
- Bearing Plain
- **Shpg. 2 lbs.**

10″ x 1¾″ Rubber Tire



ITEM 700531

$6.95

• New rubber tire on black plastic wheel. Diamond pattern tread. Offset hub.

SPECIFICATIONS

- Size 10″ dia. x 1¾″ wide
- Tread Diamond
- Bore ⅝″ dia.
- Thru-Length 1½″
- **Shpg. 3.5 lbs.**

10″ x 1.75″ Semi Pneumatic Tire



ITEM 700571

$8.95

• New, HOOSIER WHEEL semi pnuematic rubber tire on black steel wheel.

SPECIFICATIONS

- Size 10″ x 1.75″
- O.D. 10″
- Tread Ribbed
- Tread Width 1¼″
- Load Rating 150 lbs.
- Bore ½″ dia.
- Bore thru-length 1.25″
- **Shpg. 6 lbs.**

10″ x 1¾″ Rubber Tire



ITEM 700393

$3.99

• New rubber tire on gray plastic wheel. Diamond pattern tread. Offset hub.

SPECIFICATIONS

- Size 10″ dia. x 1¾″ wide
- Tread Diamond.
- Bore ½″ dia.
- Thru-length 2¼″
- **Shpg. 3 lbs.**

10″ x 1.75″ Rubber Wheel



ITEM 700523

$4.95

• New rubber tire on orange plastic wheel. Block pattern tread. 57 tooth 6¾″ dia. internal gear.

SPECIFICATIONS

- Size 10″ dia. x 1¾″ wide
- Tread Block
- Bore ⅝″ dia.
- Thru-Length 1½″
- **Shpg. 2½ lbs.**

10″ x 1.75″ Rubber Wheel



ITEM 700524

$4.95

• New rubber tire on green plastic wheel. Bar pattern tread. 57 tooth 6¾″ dia. internal gear.

SPECIFICATIONS

- Size 10″ dia. x 1¾″ wide
- Tread Bar
- Bore ⅝″ dia.
- Thru-Length 1½″
- **Shpg. 2½ lbs.**

10″ x 1.75″ Rubber Wheel



ITEM 700527

$3.99

• New rubber tire on gray plastic wheel. Bar pattern tread. 57 tooth 6¾″ dia. internal gear.

SPECIFICATIONS

- Size 10″ dia. x 1¾″ wide
- Tread Block
- Bore ⅝″ dia.
- Thru-Length 1½″
- **Shpg. 2½ lbs.**

Find additional wheels and tires at www.surpluscenter.com

10″ x 1⅝″ Plastic Wheel



ITEM 700355

$4.99

• New plastic wheel made from recycled material.

SPECIFICATIONS

- Size 10″ dia. x 1⅝″ wide
- Tread smooth
- Bore ⅝″ dia.
- Thru-Length 2¾″
- **Shpg. 3 lbs.**

9⅝″ x 2¼″ Black Wheel w/56 Tooth Gear



ITEM 700491

$3.95

• New, semi-pnuematic tire on black plastic wheel.

SPECIFICATIONS

- Size 9⅝″ x 2¼″
- Outside Diameter 9⅝″ dia.
- Cross Section 2¼″ Wide
- Tread Bar
- Tread Width 2″
- Bore ⅝″
- Bore Thru-Length 1.44″
- Hub Type Offset
- Bearing None
- **Shpg. 2.5 lbs.**

9¾″ x 1¾″ Solid Rubber Tire



ITEM 700134

$6.95

• New, FALLSHAW solid rubber wheel.

SPECIFICATIONS

- Wheel Size 9¾″ x 1¾″
- Wheel Bearings: none
- Hub Centered
- Tread Pattern 4 groove
- Bore & Thru-length 1.45″ dia. x 2.345″ serrated hub
- **Shpg. 5 lbs.**

9¾″ x 2½″ Gray Wheel w/Black Rim



ITEM 700660

$8.95

• New, HUSQVARNA 591697701 semi-pneumatic gray tire on black plastic wheel.

SPECIFICATIONS

- Size 9.75″ x 2.5″
- Outside Diameter 9.75″
- Cross Section 2.5″ Wide
- Tread Ribbed
- Tread Width 2.5″
- Load Rating Unknown
- Bore ¾″
- Bore Thru-Length 2.25″
- Hub Type Centered
- Bearing None
- **Shpg. 4 lbs.**

8½″ x 1½″ Rubber Wheel



ITEM 700526

$4.95

• New rubber tire on gray plastic wheel. Bar pattern tread. 57 tooth 6¾″ dia. internal gear.

SPECIFICATIONS

- Size 8½″ dia. x 1½″ wide
- Tread Block
- Bore ⅝″ dia.
- Thru-Length 1½″
- **Shpg. 1 lb.**

9″ x 3″ Plastic Wheel



ITEM 700377

$3.99

• New, black plastic wheel and hub.

SPECIFICATIONS

- Size 9″ dia. x 3″ wide
- Tread ribbed
- Bore ⅜″ dia.
- Bore thru-length 2¾″
- Plain bearing
- Hub offset
- **Shpg. 1¾ lbs.**

8½″ x 1½″ Wheel



ITEM 700525

$4.95

• New rubber tire on white plastic wheel. Bar pattern tread. 57 tooth 6¾″ dia. internal gear.

SPECIFICATIONS

- Size 8½″ dia. x 1½″ wide
- Tread Block
- Bore ⅝″ dia.
- Thru-Length 1½″
- **Shpg. 1 lb**.

8″ x 2″ Wheel w/Bearings



ITEM 700582

$5.95

• New, Plastic wheel with ribbed tread. Provision for snap on hubcap (not included).

SPECIFICATIONS

- Size 8″ x 2″
- Tread Gray Ribbed
- Tread Width 2″
- Bore ½″
- Bore Thru-Length 1¼″
- Hub Type Offset
- Bearing Ball Bearing
- **Shpg. 2.5 lbs.**

8″ x 2″ Rubber Tire w/Steel Rim



ITEM 700710

$8.95

• New, rubber tire on steel wheel.

SPECIFICATIONS

- Size 8″ x 2″
- Tread Ribbed
- Bore ⅝″
- Thru-Length 1½″
- Hub Offset
- Wheel Bearing Ball
- **Shpg. 5 lbs.**

8″ x 2″ Rubber Tire w/ Plastic Wheel



ITEM 700714

$4.95

• New, rubber tire on black plastic wheel.

SPECIFICATIONS

- Size 8″ dia x 2″
- Tread Bar-Rib
- Bore ½″
- Bore Thru-Length 1½″
- **Shpg. 3 lbs.**

Find additional wheels and tires at www.surpluscenter.com

8″ x 1¾″ Wheel Ball Bearing Hub



ITEM 700584

$5.95

• New rubber tire on light gray 5 spoke plastic wheel.

SPECIFICATIONS

- Size 8″ dia. x 1¾″ wide
- Tread Cross Ribs
- Bearing Ball Bearing
- Bore ½″ dia.
- Thru-Length 1⅜″
- Hub Offset ½″
- **Shpg. 2 lbs.**

8″ x 1½″ Thermoplastic Rubber Wheel



ITEM 700188

$4.99

• New JARVIS wheel. Blue thermoplastic rubber flat face tread bonded to polyolefin wheel.

SPECIFICATIONS

- Diameter 8″
- Width 1½″
- Load Capacity 800 lbs.
- Bore 1.36″
- Bore Width 2″
- Temperature Range -40° to 180°F
- **Shpg. 2 lbs.**

8″ x 1.2″ Caster Wheel



ITEM 700595

$5.99

• New, black rubber tread on plastic wheel. Plastic 60 teeth 3.22″ dia. gear.

SPECIFICATIONS

- Wheel Diameter 8″ (203mm) dia.
- Wheel Width 1.2″ (30mm)
- Load Capacity Unknown
- Bore 5/16″ dia.
- Bore Thru-Length 1.22″
- Hub Centered
- Bearing Ball
- Wheel Tread Material Black Rubber
- Caster Wheel Core Material Plastic
- **Shpg. 1 lb.**

8″ x 1″ Rubber Wheel



ITEM 700522

$5.95

• New, Solid black rubber wheel on a plastic rim.

SPECIFICATIONS

- Size 8″ x 1″
- Outside Diameter 8″ dia.
- Cross Section 1″ Wide
- Tread Smooth
- Tread Width 7/16″″
- Bore 7/16″
- Bore Thru-Length 2¼″
- Hub Type Centered
- Bearing Ball Bearing
- **Shpg. 2 lbs.**

8″ x 1″ Foam Filled Wheel



ITEM 700532

$4.95

• NEW, Solid foam filled wheel with soft plastic tread on a plastic rim.

SPECIFICATIONS

- Size 8″ x 1″
- Outside Diameter 8″ dia.
- Cross Section 1″ Wide
- Tread Ribbed
- Tread Width 1″
- Bore 5/16″
- Bore Thru-Length 2 5/16″
- Hub Type Centered
- Bearing Ball Bearing
- Tire Solid Foam Filled
- Ply Rating 2
- **Shpg. 1 lb.**

7⅞″ x 1¼″ Caster Wheel



ITEM 700304

$4.95

• New, RHOMBUS caster wheel. Solid rubber tire on plastic rim. Ball bearing in hub. Plastic thread guards.

SPECIFICATIONS

- Wheel Size 7⅞″ dia. x 1¼″
- Load Capacity 264 lbs.
- Hub 5/16″ dia.
- Length thru hub 1.46″
- **Shpg. 2 lbs.**

7⅞″ x 1¼″ Caster Wheel



ITEM 700301

$7.95

• New, RHOMBUS caster wheel. Solid rubber tire on plastic rim. Ball bearing in hub. Plastic thread guards.

SPECIFICATIONS

- Wheel Size 7⅞″ dia. x 1¼″
- Load Capacity 280 lbs.
- Hub 5/16″ dia.
- Length thru hub 1.46″
- **Shpg. 4 lbs**.

7¾″ x 2⅛″ Semi-Pneumatic Wheel



ITEM 700661

$3.95

• New, Semi-pneumatic black tire on orange plastic wheel.

SPECIFICATIONS

- Size 7.75″ x 2.125″
- Outside Diameter 7.75″
- Cross Section 2.125″ Wide
- Tread Ribbed
- Tread Width 2.125″
- Load Rating Unknown
- Bore ½″
- Bore Thru-Length 2.25″
- Hub Type Centered
- Bearing Ball
- **Shpg. 3 lbs.**

7¾″ x 2″ Plastic Wheel



ITEM 700184

$1.99

• New, rubber tire on plastic wheel.

SPECIFICATIONS

- Size 7¾″ dia. x 2″ wide
- Tread bar-rib
- Bore ½″ dia.
- Bore thru-length 1⅝″
- **Shpg. 3 lbs**

7¾″ x 1¾″ Semi-Pneumatic Wheel



ITEM 700698

$8.95

• New, HUSQVARNA 591696501 semi-pneumatic tire on black plastic wheel.

SPECIFICATIONS

- Size 7¾″ x 1¾″
- Outside Diameter 7¾″
- Cross Section 1¾″ Wide
- Tread Ribbed
- Tread Width 1.613″
- Bore 0.59″ dia.
- Bore Thru-Length 1.42″
- Hub Type Centered
- **Shpg. 2 lbs.**

7″ x 2″ Wheel



ITEM 700553

$3.99

• NEW, Solid foam filled wheel on a two piece plastic rim.

SPECIFICATIONS

- Size 7″ x 2″
- Outside Diameter 7″ dia.
- Cross Section 2″ Wide
- Tread Ribbed
- Bore 5/16″
- Bore Thru-Length 2 9/16″
- Hub Type Centered
- Bearing Ball Bearing
- Tire Solid Foam Filled
- **Shpg. 2 lbs.**

7″ x 1 5/8″ Plastic Wheel



ITEM 700335

$2.99

• New, one piece molded tire with black plastic wheel. 5 spoke.

SPECIFICATIONS

- Size 7″ dia. x 1 5/8″ wide
- Tread bar
- Bore 3/4″ dia.
- Thru-length 1 5/8″
- **Shpg. 1½ lbs.**

6″ x 2″ Wheel



ITEM 700234

$1.95

• New, COLSON Transforma wheel made from recycled material.

SPECIFICATIONS

- Size 6″ O.D. x 2″ wide
- Load Capacity 400 lbs.
- Bore 1 3/16″
- Bore Thru-Length 2 3/16″
- Bearing none
- Hub Centeredd
- **Shpg. 2 lbs.**

6″ x 1½″ Wheel



ITEM 700529

$3.99

• New. Semi pneumatic wheel for mowers, hand carts, tables, etc. Plastic offset hub. Smooth bore.

SPECIFICATIONS

- Size 6″ x 1.5″
- Bore ½″
- Hub Width 1½″ Offset
- Tread Diamond
- Load Rating 5 lbs.
- **Shpg. 2.25 lbs.**

5″ x 2″ Composite Ball Bearing Wheel



ITEM 700331

$4.99

• New PEMCO polyurethane tread molded to polyolefin wheel.

SPECIFICATIONS

- Diameter 5″
- Width 2″
- Load capacity 750 lbs.
- Bore ½″
- Hub width 2½″
- Temperature range -40° to 180°F
- **Shpg. 2 lbs.**

5″ x 1¼″ Tenteprene Wheel



ITEM 700443

$6.99

• New, TENTE grey, TENTEprene wheel with wheelguard.

SPECIFICATIONS

- Wheel Diameter 5″ (4.92″)
- Wheel Width 1¼″
- Load Capacity 220 lbs.
- Bore 5/16″ dia.
- Bore Thru-Length 1 7/16″
- Hub Centered
- Bearing Plain
- Wheel Tread Material TENTEprene (Thermoplastic Rubber)
- Caster Wheel Core Material Polypropylene
- Wheel Tread Color Gray
- **Shpg. 2 lbs.**

5″ x 1¼″ Wheel



ITEM 700530

$3.99

• NEW, ALBION, Solid, black soft plastic wheel on steel rim and hub.

SPECIFICATIONS

- Wheel Diameter 5″ dia.
- Wheel Width 1¼″ Wide
- Bore ½″ dia.
- Bore Thru-Length 1.375″
- Hub Centered
- Bearing Ball Bearing
- Wheel Tread Material Black Polyurethane
- Caster Wheel Core Material Steel
- **Shpg. 3 lbs.**

5″ x 1¼″ Rubber Wheel



ITEM 700490

$2.99

• New, rubber tire on gray plastic wheel. Ribbed tread.

SPECIFICATIONS

- Size 5″ dia. x 1¼″ wide
- Tread ribbed
- Bore 3/8″ dia.
- Thru-Length 1½″
- Hub offset
- **Shpg. ¾ lb.**

5″ x 1¼″ Wheel



ITEM 700533

$1.49

• NEW, ALBION, Solid, black soft plastic wheel on steel rim and hub.

SPECIFICATIONS

- Wheel Diameter 5″ dia.
- Wheel Width 1¼″ Wide
- Bore 1⅛″
- Bore Thru-Length 1.25″
- Hub Centered
- Bearing Plain
- Wheel Tread Material Black Polyurethane
- Caster Wheel Core Material Phenolic
- **Shpg. 3 lbs**

5″ x 1¼″ Shopping Cart Wheels



ITEM 700392

$1.49

• New, SHEPARD replacement shopping cart wheels. Black polyurethane tread bonded to polyolefin wheel. Thread guards. Model P83224E.

SPECIFICATIONS

- Size 5″ dia. x 1¼″ wide
- Load Capacity 315 lbs.
- Bore 5/16″ dia.
- Bore Thru-Length 1 5/8″
- Ball Bearing
- Centered Hub
- **Shpg. ¾ lb.**

5″ x 1.2″ Caster Wheel w/ 5/16″ Bore



ITEM 700594

$3.99

• New, black rubber tread on plastic wheel. Plastic 60 teeth 3.22″ dia. gear.

SPECIFICATIONS

- Wheel Diameter 5″ (127mm) dia.
- Wheel Width 1.2″ (30mm) Wide
- Load Capacity Unknown
- Bore 5/16″ dia.
- Bore Thru-Length 1.22″
- Hub Centered
- Bearing Ball
- Wheel Tread Material Black Rubber
- Caster Wheel Core Material Plastic
- **Shpg. ½ lb.**

4″ x 1¼″ Polyurethane Wheel



ITEM 700338

$1.19

• New, SHEPHERD blue polyurethane wheel.

SPECIFICATIONS

- Wheel Diameter 4″X 1¼″
- Load Capacity 260 lbs.
- Bore 9/16″ dia.
- Bore Thru-Length 1 3/16″
- Hub Centered
- Bearing Ball
- Wheel Tread Blue Polyurethane
- Caster Wheel Core Material Polyolefin
- **Shpg. 1 lb.**

4″ x 1″ Wheel



ITEM 700440

$1.39

• New, TENTE polyurethane wheel.

SPECIFICATIONS

- Wheel Diameter 4″ (3.94″)
- Wheel Width 1″ (0.98″)
- Load Capacity 165 lbs.
- Bore 5/16″ dia. (0.31″)
- Bore Thru-Length 1″ (1.03″)
- Hub Centered
- Bearing Plain
- Wheel Tread Material Gray Polyurethane
- Caster Wheel Core Material Polypropylene
- **Shpg. ½ lb.**

100mm x 25mm Caster Wheel



ITEM 700303

$1.95

• New, RHOMBUS gray polyurethane caster wheel.

SPECIFICATIONS

- Size 100mm O.D. x 25mm width
- Load Capacity 140 lbs.
- Bearings smooth bore
- Hub Width 1.16″
- Bore 8mm
- **Shpg. 1 lb.**

3½″ x 1¼″ Wheel



ITEM 700137

.49¢

• New, plastic utility wheel with ribbed rubber tire. Offset hub (⅛″)

SPECIFICATIONS

- Diameter 3½″
- Width 1¼″
- Bore 5/16″
- Hub width 1¼″
- **Shpg. ½ lb.**

3″ x 1¼″ Polyurethane Wheel



ITEM 700462

$1.95

• New, COLSON gray, Polyurethane wheel. Flat tread.

SPECIFICATIONS

- Wheel Diameter 3″
- Wheel Width 1¼″
- Load Capacity 180 lbs.
- Bore 15mm
- Bore Thru-Length 0.44″
- Hub Centered
- Bearing Ball
- Wheel Tread Material Polyurethane
- Caster Wheel Core Material Polypropylene
- Wheel Tread Color Gray
- **Shpg. ½ lb.**

3″ x 1¼″ Thermoplastic Rubber Wheel



ITEM 700463

$1.95

• New, COLSON gray, thermoplastic rubber wheel. Rounded tread.

SPECIFICATIONS

- Wheel Diameter 3″
- Wheel Width 1¼″
- Load Capacity 180 lbs.
- Bore 15mm
- Bore Thru-Length 0.44″
- Hub Centered
- Bearing Ball
- Wheel Tread Material Polyurethane
- Caster Wheel Core Material Polypropylene
- Wheel Tread Color Gray
- **Shpg. ½ lb.**

3″ x 1¼″ Rubber Wheel



ITEM 700464

$4.95

• New, RHOMBUS rubber tread on plastic wheel.

SPECIFICATIONS

- Model Number 29K080A
- Wheel Diameter 3″ dia.
- Wheel Width 1¼″ Wide
- Load Capacity 176 lbs.
- Bore 8mm dia.
- Bore Thru-Length 1 7/16″
- Hub Centered
- Bearing Ball
- Wheel Tread Material Gray Rubber
- Caster Wheel Core Material Plastic
- **Shpg. ½ lbs.**

3″ x 1 3/16″ Polyolefin Wheel



ITEM 700381

$3.49

• New, black polyolefin wheel.

SPECIFICATIONS

- Wheel Diameter 3″
- Wheel Width 1 3/16″
- Load Capacity 250 lbs.
- Bore ½″ dia.
- Bore Thru-Length 1 9/16″
- Hub Centered
- Bearing Plain
- Wheel Tread Material Black Polyolefin
- Caster Wheel Core Material Polyolefin
- **Shpg. ½ lb.**

3″ x 1″ Tenteprene Wheel



ITEM 700442

$1.99

• New, TENTE polypropylene wheel

SPECIFICATIONS

- Wheel Diameter 3″ (2.95″)
- Wheel Width 1″ (0.98″)
- Load Capacity 165 lbs.
- Bore ¼″ dia. (0.24″)
- Bore Thru-Length 1⅛″ (1.12″)
- Hub Centered
- Bearing Ball
- Wheel Tread Material Gray TENTEprene (Thermoplastic Rubber)
- Caster Wheel Core Material Polypropylene
- **Shpg. ½ lb.**

3″ x 15/16″ Wheel



ITEM 700246

$2.95

• New, RHOMBUS polyurethane wheel.

SPECIFICATIONS

- Wheel Diameter 3″
- Wheel Width 15/16″
- Load Capacity 110 lbs.
- Bore 12mm dia. 8T spline coupler
- Bore Thru-Length 1 1/16″
- Hub Centered
- Bearing Ball
- Wheel Tread Material Gray Polyurethane
- Caster Wheel Core Material Plastic
- **Shpg. ½ lb.**

3″ x 15/16″ Rubber Wheel



ITEM 700345

.49¢

• New, SHEPHERD brown rubber wheel.

SPECIFICATIONS

- Wheel Diameter 3″
- Wheel Width 15/16″
- Load Capacity 110 lbs.
- Bore ¾″ dia.
- Bore Thru-Length ⅞″
- Hub Centered
- Bearing Plain
- Wheel Tread Material Brown Rubber
- Caster Wheel Core Material Polyolefin
- **Shpg. ½ lb.**

75mm x 22mm Wheel



ITEM 700302

$1.55

• New, RHOMBUS gray polyurethane caster wheel.

SPECIFICATIONS

- Size 75mm O.D. x 22mm width
- Load Capacity 10 lbs.
- Bearings smooth bore
- Hub Width ⅞″
- Bore 8mm
- **Shpg. ½ lb.**

2½″ x ¾″ Rubber Wheel



ITEM 700596

$2.99

• New, black rubber tread on plastic wheel. Centered hub with ball bearings.

SPECIFICATIONS

- Wheel Diameter 2½″ dia.
- Wheel Width ¾″ Wide
- Load Capacity Unknown
- Bore 6mm (0.23″) dia.
- Bore Thru-Length 15/16″
- Hub Centered
- Bearing Ball
- Wheel Tread Material Black Rubber
- Caster Wheel Core Material Plastic
- **Shpg. ¼ lb.**

2½″ x ⅞″ Rubber Wheel



ITEM 700343

.45¢

• New, SHEPHERD wheel. Clear Vipor wheel molded on red support trim on plastic hub. Vipor material is resistant to most oils.

SPECIFICATIONS

- Size 2½″ dia. x ⅞″ wide
- Load capacity 80 lbs.
- Bore ¼″ dia.
- Bore thru-length 15/16″
- Plian bearing
- Hub centered
- **Shpg. ½ lb.**

5″ x 1½″ Rigid Threaded Stem Caster w/ Brake



ITEM 700724

$9.95

• New, Jarvis rigid stem caster with wheel brake.

SPECIFICATIONS

- Wheel Diameter 5″ dia.
- Wheel Width 1½″ Wide
- Load Capacity 350 lbs.
- Mounting Height 6″
- Caster Wheel Bearing Delrin
- Wheel Brake
- Threaded Stem 1½″-12 TPI x 8″ long w/ ¼″ thru-hole
- Wheel Tread Material Gray TPR
- Caster Wheel Core Material Polyolefin
- **Shpg. 8 lbs.**

5″ x 1¼″ Swivel Square Stem Caster



ITEM 700682

$10.95

• New, JARVIS stem caster.

SPECIFICATIONS

- Wheel Diameter 5″ dia.
- Wheel Width 1¼″ Wide
- Load Capacity 200 lbs.
- Mounting Height 6 1/16″
- Caster Wheel Bearing Delrin
- Mount ⅞″ x ⅞″ Square x 2½″ long stem w/ two 0.225″ dia. holes on 1″ centers
- Wheel Tread Material Black Cushion Rubber
- Caster Wheel Core Material Rubber
- **Shpg. 4 lbs.**

4″ x 1¼″ Swivel Stem Caster



ITEM 700613

$5.95

• New, TENTE swivel stem caster.

SPECIFICATIONS

- Wheel Diameter 4″ dia.
- Wheel Width 1¼″ Wide
- Load Capacity 220 lbs.
- Mounting Height 5.39″
- Mount 32mm dia. (1.26″ dia.) x 1.77″ stem w/ M6-1.0 tapped cross hole
- Wheel Tread Material Gray TENTEprene
- Caster Wheel Core Material Polypropylene
- Caster Wheel Bearing Ball
- **Shpg. 3 lbs.**

4″ x 15/16″ Swivel Square Stem Caster



ITEM 700626

$5.95

• New, JARVIS swivel stem caster.

SPECIFICATIONS

- Wheel Diameter 4″ dia.
- Wheel Width 15/16″ Wide
- Load Capacity 100 lbs.
- Mounting Height 4⅞″
- Brake None
- **Shpg. 3 lbs**
- Mount 0.875″ square x 2″ long w/ ¼″ dia. cross hole stem
- Wheel Tread Material Black Cushioned Rubber
- Caster Wheel Core Material Cushioned Rubber

3″ x 15/16″ Bolt Hole Caster w/ Brake



ITEM 700721

$1.99

• New, Jarvis hollow kingpin caster.

SPECIFICATIONS

- Wheel Diameter 3″ dia.
- Wheel Width 15/16″ Wide
- Load Capacity 100 lbs.
- Mounting Height 3⅝″
- Brake PosiLoc Brake
- Mounting Hollow Kingpin
- Bolt Hole ⅜″ dia.
- Wheel Tread Material Cushion Solid Black Rubber
- Caster Wheel Core Material Cushion Solid Rubber
- Caster Wheel Bearing Delrin
- **Shpg. 0.9 lbs.**

7⅞″ x 1¼″ Swivel Caster 1.102″ x 3.937″ Round Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700282	260 lbs.	Rubber	9⅝″	5 lbs.	$8.95

5¹⁵⁄₁₆″ x 1¼″ Swivel Caster w/Lock 0.94″ dia. x 1.9″ Round Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700265	220 lbs.	Polyurethane	7³⁄₁₆″	3 lbs.	$6.95

4¹⁵⁄₁₆″ x 1¼″ Swivel Caster w/Brake 0.94″ dia. x 1.895″ Round Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700257	220 lbs.	Polyurethane	6″	2½ lbs.	$7.95

7⅞″ x 1¼″ Swivel Stem Caster w/Brake 28mm dia. x 100mm Round Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700285	260 lbs.	Rubber	9⅝″	5 lbs.	$8.95

5″ x 1¼″ Swivel Caster w/Brake 32mm dia. x 45mm Round Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700313	260 lbs.	Rubber	6¾″	5 lbs.	$3.95

4″ x 1¼″ Swivel Stem Caster w/Brake 1″ x 1¾″ Round Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700512	220 lbs.	Rubber	5⅜″	2½ lbs.	$9.95

6″ x 7⁄16″ Swivel Caster w/Brake 28mm dia. x 100mm Round Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700276	330 lbs.	Rubber	7½″	5 lbs.	$17.95

5″ x 1¼″ Swivel Caster 0.865″ dia. 2³⁄₁₆″ Round Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700743	300 lbs.	Polyolefin	6¹⁄₁₆″	2 lbs.	$6.95

4″ x 1¼″ Swivel Caster ⅞″ x 1¹⁵⁄₁₆″ Round Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700510	220 lbs.	Rubber	5⅜″	2 lbs.	$4.95

6″ x 7⁄16″ Swivel Caster w/Brake 28mm dia. x 100mm Round Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700278	330 lbs.	Rubber	7½″	5 lbs.	$17.95

5″ x 1¼″ Swivel Caster w/Brake ½″ x 1″ Round Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700513	220 lbs.	Rubber	6¼″	2 lbs.	$8.95

4″ x 1¼″ Swivel Caster w/Brake 0.863″ dia. x 1⅝″ Round Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700430	220 lbs.	Rubber	5¾″	2 lbs.	$9.95

6″ x 0.59″ Swivel Caster 1.10″ dia. x 1.77″ Round Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700424	330 lbs.	Polyurethane	6⅞″	5 lbs.	$29.99

5″ x 1¼″ Swivel Caster 28mm dia. x 3¼″ Round Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700493	500 lbs.	Rubber	6¼″	4 lbs.	$11.95

4″ x 0.59″ Swivel Caster w/Lock 1.10″ dia. x 1.77″ Round Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700423	275 lbs.	Polyurethane	5″	4 lbs.	$19.99

5″ x 1³⁄16″ Swivel Caster 24mm dia. x 45mm Round Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700252	220 lbs.	Rubber	6″	4 lbs.	$5.95

5″ x ½″ Swivel Caster 32mm dia. x 45mm Round Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700349	280 lbs.	Polyurethane	5⅞″	5 lbs.	$9.99

3¹⁵⁄₁₆″ x 1¼″ Swivel Stem Caster 0.95″ dia. x 1.9″ Round Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700254	176 lbs.	Polyurethane	5³⁄₁₆″	2 lbs.	$4.95

5″ x 1³⁄16″ Swivel Caster w/Brake 24mm dia. x 50mm Round Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700263	220 lbs.	Rubber	6″	4½ lbs.	$7.95

5″ x 7⁄16″ Swivel Caster w/Brake 28mm dia. x 50mm Round Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700279	260 lbs.	Rubber	5⅞″	4 lbs.	$9.95

3¹⁵⁄₁₆″ x 1¼″ Swivel Caster w/Lock 0.94″ dia. x 1.895″ Round Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700261	220 lbs.	Polyurethane	5¹⁄₁₆″	2½ lbs.	$4.95

5¹⁵⁄₁₆″ x 1¼″ Swivel Caster 0.94″ dia. x 1.895″ Round Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700250	220 lbs.	Polyurethane	7³⁄₁₆″	2½ lbs.	$5.95

5″ x 7⁄16″ Swivel Caster w/Brake 28mm dia. x 50mm Round Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700280	260 lbs.	Rubber	5⅞″	4 lbs.	$9.95

100mm x 60mm Swivel Caster w/Brake 32mm dia. x 50mm Round Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700495	275 lbs.	Polyurethane	129mm	3 lbs.	$11.95

2½″ x 1¼″ Swivel Caster 3/8″-16 TPI x 1½″ Threaded Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700677	Unknown	Unknown	Unknown	.95 lb.	$3.95

3″ x 13/16″ Swivel Caster 3/8″-16 x 1″ Threaded Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700405	110 lbs.	Polyolefin	3⅝″	1.5 lbs.	$1.95

3″ x 13/16″ Swivel Caster 3/8″-16 x 1⅛″ Threaded Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700337	110 lbs.	Rubber	4¼″	2 lbs.	$2.95

3″ x 1″ Swivel Caster M10-1.5 x ⅞″ Threaded Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700342	75 lbs.	Polyurethane	4¾″	1.5 lbs.	$1.99

3½″ x 1¼″ Swivel Caster w/Brake 1¼″-11.5 TPI x 1½″ Threaded Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700735	230 lbs.	Rubber	4 7/16″	2 lbs.	$5.95

4″ x ⅝″ Swivel Caster ½″-13 x 9/16″ Threaded Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700471	225 lbs.	Nylon	4⅝″	1.5 lbs.	$5.95

4″ x ⅝″ Dual Wheel Swivel Caster ½″-13 x ½″ Threaded Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700411	250 lbs.	Polyurethane	4¾″	2 lbs.	$5.95

4″ x 7/8″ Swivel Caster w/ Brake 7/16″-14 x 1¾″ Threaded Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700453	135 lbs.	Polyolefin	4¾″	1.5 lbs.	$2.95

4″ x 15/16″ Swivel Caster ⅜″-16 x ¾″ Threaded Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700458	125 lbs.	Polyurethane	5⅜″	1 lb.	$2.95

4″ x 1″ Swivel Caster ½″-13 x 1½″ Threaded Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700476	115 lbs.	Rubber	5″	1.5 lbs.	$1.95

4″ x 1¼″ Swivel Caster M10-1.5 x ⅝″ Threaded Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700607	220 lbs.	Polypropylene	5 7/16″	3 lbs.	$3.95

4″ x 1¼″ Swivel Caster 1″-14 x ¾″ Threaded Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700678	400 lbs.	Phenolic	5 3/16″	2.95 lbs.	$5.95

4″ x 1¼″ Swivel Caster w/Brake ½″-13 x 2″ Threaded Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700460	275 lbs.	Rubber	5⅜″	1.5 lbs.	$9.95

4″ x 1¼″ Swivel Caster w/Brake 1″-14 x ⅞″ Threaded Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700515	170 lbs.	Rubber	5″	3 lbs.	$3.95

4″ x 1¼″ Swivel Caster ½″-13 x 2″ Threaded Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700461	275 lbs.	Rubber	5½″	1.5 lbs.	$6.55

4″ x 1¼″ Swivel Caster ½″-13 TPI x 1″ Threaded Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700711	Unknown	Unknown	5″	3 lbs.	$4.95

5″ x 1¼″ Swivel Caster w/Brake ½″-13 x ¾″ Threaded Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700641	200 lbs.	Rubber	6″	4 lbs.	$4.95

5″ x 1¼″ Swivel Caster M10-1.5 x ⅝″ Threaded Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700431	220 lbs.	Polypropylene	6⅜″	2 lbs.	$6.99

5″ x 1¼″ Swivel Caster M10-1.5 x ⅝″ Threaded Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700603	220 lbs.	Rubber	6⅜″	2 lbs.	$3.95

5″ x 1¼″ Swivel Caster ½″-13 x 1″ Threaded Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700618	300 lbs.	Polyurethane	5 13/16″	3 lbs.	$1.49

5″ x 1¼″ Swivel Caster ½″-13 x 1½″ Threaded Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700379	300 lbs.	Polyurethane	7″	2.5 lbs.	$3.95

5″ x ⅞″ Swivel Caster ½″-13 x 1½″ Threaded Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700382	140 lbs.	Rubber	5¾″	2 lbs.	$2.99

5″ x 15/16″ Swivel Caster w/Brake ½″-13 x 1½″ Threaded Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700404	125 lbs	Rubber	5 23/32″	2 lbs.	$3.95

5″ x 15/16″ Swivel Caster ½″-13 x 1½″ Threaded Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700224	125 lbs.	Rubber	5 23/32″	1 lb.	$2.95

5″ x 15/16″ Swivel Caster w/Brake ½″-13 x 1½″ Threaded Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700330	135 lbs.	Rubber	5 23/32″	2 lbs.	$4.95

5″ x 15/16″ Swivel Caster ½″-13 x 1½″ Threaded Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700227	150 lbs.	Polyolefin	5 23/32″	1 lb.	$2.95

5″ x 15/16″ Swivel Caster w/Brake ½″-13 x 1½″ Threaded Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700228	150 lbs.	Polyolefin	5 23/32″	1.5 lbs.	$3.95

5″ x 2″ Swivel Caster w/Brake 1½″-12 TPI Threaded Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
906000	750 lbs.	Polyurethane	5¾″	8 lbs.	$19.95

6″ x 1¼″ Swivel Caster M14x1.50 x 1″ Threaded Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700467	300 lbs.	Rubber	7⅝″	3 lbs.	$9.95

6″ x 1¼″ Swivel Caster ½″-13 x 15/16″ Threaded Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700611	220 lbs.	Rubber	7.28″	3 lbs.	$4.95

Bolt Hole Casters

Item	Wheel Size	Load Capacity	Wheel Material	Mtg. Height	Special Features	Shpg.	Price
2″ Diameter Wheels							
700305	2″ x 1½″	132 lbs.	Solid Rubber	3″	Double Wheel	2 lbs.	$2.95
700605	2″ x 1½″	155 lbs.	TPR	2¾″	Double Wheel	½ lb.	$2.95
3″ Diameter Wheels							
700238	3″ x 1″	110 lbs.	Solid Rubber	4 1/16″		¾ lb.	$3.95
700396	3″ x 13/16″	100 lbs.	TPR	4″		1 lb.	$1.95
4″ Diameter Wheels							
700488	4″ x 1″	165 lbs.	Polyurethane	4¾″	Total Brake	1 lb.	$1.99
700239	4″ x 1″	143 lbs.	Solid Rubber	4 15/16″		1 lb.	$3.95
700429	4″ x 1⅛″	175 lbs.	TPR	5½″	Total Brake	2 lbs.	$9.99
700251	4″ x 1¼″	143 lbs.	TPR	5 1/16″		1½ lbs.	$3.95
700269	4″ x 1¼″	176 lbs.	Solid Rubber	5⅛″		2 lbs.	$3.95
700609	4″ x 1¼″	220 lbs.	Polyurethane	5⅜″		3 lbs.	$4.95
4″ Diameter Caster Yokes							
700507	4″ x 1¼″		5/16 Wheel Bore			¾ lb.	$1.49
700508	4″ x 1¼″		5/16 Wheel Bore		Total Brake Lock	1 lb.	$1.49
5″ Diameter Wheels							
700253	5″ x 1¼″	220 lbs.	TPR	6 1/16″		2 lbs.	$4.95
700306	5″ x 1¼″	220 lbs.	TPR	5 15/16″	1 Position Swivel Lock	2 lbs.	$3.95
700420	5″ x 1¼″	220 lbs.	Polypropylene	5¾″		2 lbs.	$2.99
6″ Diameter Wheels							
700255	6″ x 1¼″	242 lbs.	TPR	7 1/16″		2 lbs.	$5.95
700266	6″ x 1¼″	242 lbs.	TPR	7 1/16″	1 Position Swivel Lock	3 lbs.	$5.95
700272	6″ x 1¼″	220 lbs.	TPR	7½″		2 lbs.	$5.95
700468	6″ x 1¼″	240 lbs.	TPU	6 15/16″		2 lbs.	$4.95
8″ Diameter Wheels							
700270	8″ x 1¼″	265 lbs.	TPR	9⅛″		7 lbs.	$8.95
700273	8″ x 1¼″	264 lbs.	TPR	9¼″	Total Brake	5 lbs.	$9.95
700274	8″ x 1¼″	265 lbs.	TPR	9⅛″	Total Brake	5 lbs.	$9.95


700305


700396


700429


700508


700272


700270

2″ Dual Wheel Swivel Plate Casters


700367

700376

• New, general purpose dual wheel swivel plate caster with brake. Zinc plated body.

ITEM 700376 **$1.39**

SPECIFICATIONS

- Wheels 2″ dia. x 13/16″ w. Mounting holes
- Load capacity 200 lbs. 1¾″ x 2⅞″ - 3″ slotted
- Top plate 3¾″ x 2¾″
- Bolt size 5/16″
- Mounting height 2 13/16″
- **Shpg. 1¾ lbs.**

ITEM 700367 **$1.39**

Same as 700376 except Polyolefin wheel

1.5″ x ¼″ Dual Wheel Swivel Plate Caster Set



ITEM 700406

$1.99

• New, set of 4 nylon hooded swivel casters with dual plastic wheels and plated steel stem and mounting plate. Independent wheel rotation in each caster.

SPECIFICATIONS

- Wheel size 1½″ dia. x ¼″ (2 per caster)
- Wheel Material Hard plastic
- Load Capacity 50 lb. ea. (200 lbs. per set)
- Mounting height 2⅛″
- Top Plate 1 5/16″ sq.
- Mount Four ⅛″ slots 11/16″ x 11/16″ 15/16″ x 15/16″
- **Shpg. ½ lb.**

4″ x ⅝″ Dual Wheel Swivel Threaded Stem Caster



ITEM 700412

$2.99

• New, model# 202IX04041S003 threaded-stem caster.

SPECIFICATIONS

- Wheel Diameter 4″
- Wheel Width ⅝″ tread, 2 13/16″ overall
- Load Capacity 275 lbs.
- Mounting Height 5″
- Mount M12-1.75 x 1″ long threaded stem
- Brake None
- Wheel Tread Material Gray Thermoplastic Rubber
- Caster Wheel Core Material Polypropylene
- Caster Wheel Bearing Plain
- **Shpg. 2 lbs.**

Rigid Caster Yokes



• New, TENTE rigid plate caster yoke.

SPECIFICATIONS
- Wheel Width 2″
- Brake None
- Top Plate 4½″ x 4″ x ¼″ thick
- Mount 4 holes on 3¾″-3″ x 3⅛″-2⅝″ centers
- Bolt Holes 7⁄16″ dia.
- Wheel Bore ½″
- **Shpg. 3 lbs.**

ITEM 700503 **$1.49**
4″ Wheel Rigid Plate Caster Yoke

ITEM 700504 **$1.49**
6″ Wheel Rigid Plate Caster Yoke

8″ x 2″ Swivel Plate Caster



ITEM 700690
$18.95

• New, COLSON GROUP 8″ x 2″ swivel plate caster. Cast iron wheel with red polyurethane tread.

SPECIFICATIONS
- Wheel Diameter 8″ dia.
- Wheel Width 2″ Wide
- Load Capacity Unknown
- Top Plate 4½″ x 3 15⁄16″ x ¼″
- Mount Four slotted holes on 2¾″ x 3¼″ centers
- Bolt holes 0.431″ dia.
- Brake None
- Wheel Tread Material Red Polyurethane
- Caster Wheel Core Material Cast Iron
- **Shpg. 12 lbs.**

6″ x 2″ Rigid Plate Caster



ITEM 700194
$7.99

• New, rigid plate caster.

SPECIFICATIONS
- Wheel Diameter 6″ dia.
- Wheel Width 2″ Wide
- Load Capacity 450 lbs.
- Mounting Height 7″
- Brake None
- Top Plate 4⅜″ x 3¾″ x 3⁄16″ thick
- Bolt Holes 7⁄16″ dia.
- Mount 4 holes on 3⅞″ x 2¾″ centers
- Wheel Tread Black Thermoplastic rubber
- Caster Wheel Core Material Phenolic
- Caster Wheel Bearing Ball
- **Shpg. 5.5 lbs.**

6″ x 2″ Rigid Plate Caster



ITEM 700580
$4.95

• New, ER WAGNER caster. Polyolefin wheel with thread guards. Plain bearing.

SPECIFICATIONS
- Wheel Size 6″ dia. x 2″
- Load Capacity 400 lbs.
- Top Plate 2¾″ x 3¾″
- Mounting height 7½″
- Mount 1¾″ x 2⅝″ slotted to 3″
- Bolt Holes 5⁄16″
- **Shpg. 3 lbs.**

5 15⁄16″ x 1¼″ Rigid Plate Caster



ITEM 700267
$5.95

• New, RHOMBUS rigid plate caster. Thermoplastic polyurethane tire on steel rim. Ball bearings in hub. Plated steel yoke. Steel thread guard.

SPECIFICATIONS
- Wheel Size 5 15⁄16″ dia. x 1¼″
- Load Capacity 242 lbs.
- Top Plate 3¾″ x 2¾″
- Mounting height 7 7⁄16″
- Mount 4 bolt holes on 2 13⁄16″ x 1¾″ to 3″ x 2⅛″ centers
- Bolt Holes 5⁄16″ dia.
- **Shpg. 3 lbs.**

5″ x 2″ Rigid Plate Caster



ITEM 700127
$5.99

• Used take-off, steel frame rigid plate caster.

SPECIFICATIONS
- Wheel Diameter 5″ dia. (4.92″ dia.)
- Wheel Width 2″
- Load Capacity 250 lbs.
- Working Height 6¼″
- Brake None
- Top Plate 4″ x 4½″
- Mount 4 slots on 2¾″ x 3¼″
- Bolt Holes 0.433″ dia.
- Wheel Tread Color Black
- Caster Wheel Hard Plastic
- **Shpg. 5 lbs.**

5″ x 1½″ Swivel Plate Caster

w/ Swivel Lock



ITEM 700670
$24.95

• New, JARVIS model# 5-30-521NHT-1PSLGS PLT2, swivel plate caster with hi-temp resin wheel w/ swivel lock and grease zerk in dust cap.caster.

SPECIFICATIONS
- Wheel Diameter 5″
- Wheel Width 1½″
- Load Capacity 325 lbs.
- Mounting Height 7¼″
- Lock Swivel
- Top Plate 2⅜″ x 3⅝″ x ⅛″ thick
- Bolt Holes 5⁄16″ dia.
- Mount 4 holes 1¾″ x 3″ centers
- Wheel Tread Material Hi-temp Gray Resin
- Caster Wheel Core Material Resin
- Caster Wheel Bearing Plain
- **Shpg. 4 lbs.**

5″ x 1¼″ Scaffold Caster w/Brake



ITEM 700451
$9.95

• New, swivel grip ring stem caster with solid rubber wheel. Originally intended for use on scaffolds. Circular mounting face has two ends bent upwards 90 degrees on either side of the stem, inside width of 1 9⁄16″. Wheel and swivel lock. Swivel has double-row ball bearings. Zinc plated caster yoke.

SPECIFICATIONS
- Wheel Diameter 5″ dia.
- Wheel Width 1¼″ Wide
- Load Capacity 264 lbs.
- Mounting Height 6⅜″
- Brake Wheel and Swivel Lock
- Mount 26mm (1.025″) dia. x 2¾″ w/ circlip
- Stem through Holes 7⁄16″ dia.
- Wheel Tread Material Black Rubber
- Caster Wheel Core Material Rubber
- Caster Wheel Bearing None
- **Shpg. 4 lbs.**

5″ x 1¼″ Swivel Plate Caster

w/ Swivel Lock



ITEM 700141
$6.99

• New, RHOMBUS swivel plate caster. Metal lever single position swivel lock (does not lock wheel). Thermoplastic polyurethane wheel with plastic wheel center.

SPECIFICATIONS
- Wheel size 5″ x 1¼″
- Load capacity 220 lbs.
- Top plate 2¾″ x 3¾″ x ⅛″
- Mounting height 6⅜″
- Mount four bolt on 1⅞″ x 2⅞″ ctrs.
- Bolt holes 5⁄16″ diam.
- **Shpg. 3 lbs.**

5″ x 1¼″ Swivel Stem Caster



ITEM 700550 **$2.95**

• New, TENTE round stem caster threadguards.

SPECIFICATIONS
- Wheel Diameter 5″
- Wheel Width 1¼″
- Load Capacity 220 lbs.
- Mounting Height 6⅜″
- Mount ¾″ x 1½″ long round stem w/ M8-1.25 threaded crosshole
- Brake None
- Wheel Tread Material Gray Thermoplastic Rubber
- Caster Wheel Core Material Polypropylene
- Caster Wheel Bearing Ball
- **Shpg. 2 lbs.**

ITEM 700551 **$3.95**
w/Brake and Swivel Lock

4″ x 2″ Rigid Plate Caster



ITEM 700199 **$2.99**

• New, rigid plate caster.

SPECIFICATIONS
- Wheel Diameter 4″ dia.
- Wheel Width 2″ Wide
- Load Capacity 75 lbs.
- Mounting Height 4¾″
- Brake None
- Top Plate 3¾″ x 2¾″ x ⅛″ thick
- Bolt Holes 5⁄16″ dia.
- Mount 4 holes on 3″ x 1¾″ centers
- Wheel Tread Material Black Plastic
- Caster Wheel Core Material Plastic
- Caster Wheel Bearing Plain
- **Shpg. 2 lbs.**

4″ x 1″ Rigid Plate Caster



ITEM 700289 **$1.95**

• New, RHOMBUS plate caster.

SPECIFICATIONS
- Wheel Diameter 4″
- Wheel Width 1″
- Load Capacity 150 lbs.
- Mounting Height 5″
- Brake None
- Top Plate 4 1⁄16″ x 3 5⁄16″ x 3⁄32″
- Mount Four slots
- Bolt Holes 14mm (0.551″) x 9mm (0.354″)
- Wheel Tread Material Solid Black Rubber
- Caster Wheel Core Material Plastic
- Caster Wheel Bearing Roller
- **Shpg. 2 lbs.**

3″ x 1¼″ Swivel Plate Caster



ITEM 700187 **$4.95**

• New JARVIS adjustable height swivel plate caster. Polyolefin wheel. Steel caster yoke. Travel in height 0.486″.

SPECIFICATIONS
- Wheel Size 3″ dia. x 1¼″
- Load Capacity 180 lbs.
- Top Plate: 3¼″ x 2 11⁄16″ x 3⁄16″ thick
- Bolt Holes 5⁄16″ dia.
- Mounting height 5⅞″ up to 6⅜″
- Mount: 4 bolt on 2⅝″ x 1⅛″ centers
- **Shpg. 3 lbs.**

3″ x 1 13⁄16″ Swivel Plate Caster



ITEM 700103 **$3.99**

• Removed from service. FAULTLESS heavy duty swivel plate caster. Low profile design. Glass filled nylon wheel. Roller wheel bearing with swivel ball bearing plate.

SPECIFICATIONS
- Wheel size 3″ diam. x 1 13⁄16″ wide
- Load capacity 700 lbs.
- Top plate 3⅛″ x 4⅛″ x 3⁄16″ thick
- Mounting height 3 31⁄32″
- Mount four bolt on 3⅜″ x 2⅜″ centers
- Bolt holes 5⁄16″ diam.
- **Shpg. 3 lbs.**

Swivel Plate Casters

* Brake
** Lock

New, various manufacturers plate mount swivel casters.

ITEM	Wheel Size	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700722*	2″ x 13/16″	75	Rubber	3½″	0.65 lb.	$1.99
700727	2″ x 13/16″	75	Rubber	3½″	0.6 lb.	$1.95
700667	2½″ x 1⅛″	120	Rubber	3 5/16″	2.25 lbs.	$2.95
700726	4″ x 1¼″	300	Polyolefin	5⅛″	5 lbs.	$3.95
700202	4″ x 1¼″	350	Polyolefin	5 3/16″	3 lbs.	$4.95
700416	4″ x 1 15/16″	358	Polyolefin	4⅞″	5 lbs.	$4.95
700402	5″ x 1″	125	Thermo-plastic Rubber	5¾″	3 lbs.	$2.99
700506*	5″ x 1¼″		Yoke		2 lbs.	$1.49
700351	5″ x 1¼″	275	Thermo-plastic Rubber	6 7/16″	4 lbs.	$3.99
700730**	6″ x 2″	500	Polyolefin	7½″	8 lbs.	$6.95



5″ x 3¼″ Dual Wheel Swivel Plate Caster



ITEM 700608 **$5.95**

• New, TENTE dual wheel swivel plate caster. Swivel plate has double-row ball bearings.

SPECIFICATIONS
- Wheel Diameter 5″ dia.
- Wheel Width 3.25″ Wide Overall 0.785″ Wide Individually
- Load Capacity 245 lbs.
- Mounting Height 6.69″
- Brake None
- Bolt Holes 0.33″ dia.
- Caster Wheel Bearing Ball
- Top Plate 3.03″ x 2.64″ x 0.11″ thick
- Mount 4 holes on 2.42″ to 2.2″ x 2.03″ to 1.83″ centers
- Wheel Tread Material Gray Polyurethane
- Caster Wheel Core Material Polyamide
- **Shpg. 3 lbs.**

5″ x 1.25″ Swivel Plate Caster w/ Brake



ITEM 700140 **$6.99**

• Used, RHOMBUS swivel plate caster. Thermoplastic polyurethane tire with plastic wheel. Plated steel yoke.

SPECIFICATIONS
- Wheel size 5″ dia. x 1¼″
- Load capacity 220 lbs.
- Top plate 3¾″ x 2¾″ x ⅛″
- Mounting height 6″
- Mount 2⅞″ x 1⅞″
- Bolt holes 5/16″ dia.
- **Shpg. 3 lbs.**

4½″ x 1½″ Swivel Plate Caster w/ Brake



ITEM 700718 **$5.95**

• New, Colson swivel plate caster with polyolefin wheel and Top Lock brake. Top Lock brake gives positive braking action by engaging a rubber brake shoe directly against the tread surface of the wheel.

SPECIFICATIONS
- Model Number 3.00417.901 BRK1
- Wheel Diameter 4″ dia.
- Wheel Width 1½″ Wide
- Load Capacity 400 lbs.
- Mounting Height 5⅜″
- Top Lock Wheel Brake
- Top Plate 3¾″ x 4⅜″ x 5/32″ thick
- Mount 4 slotted holes on 3⅝″ x 3″ centers
- Bolt Holes ⅜″ dia.
- Wheel Tread Material Red Polyurethane HI-TECH
- Caster Wheel Core Material Polyolefin
- Caster Wheel Bearing Delrin
- **Shpg. 4 lbs.**

4″ x 2″ Caster Set of 4



ITEM 700332 **$8.95**

• New, ALBION model KITDCPB04241001 toolbox caster set includes two rigid and two swivel casters and mounting hardware. Swivel casters have brakes.

SPECIFICATIONS
- Wheel Size 4″ dia. x 2″ wide
- Wheel Material Hard plastic
- Set Load Capacity 720 lbs.
- Top Plate 3¾″ x 2¾″
- Mounting height 4 15/16″
- Mount 4 bolt holes on 3″ x 1¾″ centers
- Bolt Holes 5/16″ dia.
- **Shpg. 6 lbs.**

3″ x 2″ Dual Wheel Swivel Plate Caster




ITEM 700223 **$2.95**

• New, SHEPARD dual wheel swivel plate caster. Plated steel mounting plate. Thermoplastic elastomer wheels. Each wheel is 7/16″ wide overall width is 2″.

SPECIFICATIONS
- Wheel Size 3″ dia. x 2″ wide
- Load Capacity 165 lbs.
- Top Plate 3 1/16″ x 2½″
- Mounting height 4⅛″
- Mount 4 bolt on 2″ x 1½″ centers
- Bolt Holes 5/16″ dia.
- **Shpg. 1½ lbs.**

3 x 1⅜″ Caster Set



ITEM 700132 **$7.99**

• Removed from service, caster set includes two swivel and two rigid casters. Black hard plastic wheel.

SPECIFICATIONS
- Wheel Size 3″ dia. x 1⅜″ wide
- Wheel Material Hard plastic
- Mounting Height 3⅞″
- Set Load Capacity 800 lbs.
- Plate Size 3¾″ x 2¾″
- Four Bolt Mount 3″ x 1¾″ centers
- Bolt hole 5/16″ dia.
- **Shpg. 7 lbs.**

3″ x 1¼″ Swivel Plate Caster w/ Brake



ITEM 700480 **$5.95**

New, JARVIS swivel plate caster with polyolefin wheel with brake and 4½″ long extension leg. Swivel plate has double-row ball bearings.

SPECIFICATIONS
- Model Number FB334521D5
- Wheel Diameter 3″ dia.
- Wheel Width 1¼″ Wide
- Load Capacity 250 lbs.
- Mounting Height 8⅜″
- Brake Wheel Lock
- Top Plate 3⅝″ x 2⅜″ x 5/32″ thick
- Mount 4 holes on 3″ x 1¾″ centers
- Bolt Holes 5/16″ dia.
- Wheel Tread Material Black Polyolefin
- Caster Wheel Core Material Polyolefin
- Caster Wheel Bearing None
- **Shpg. 5 lbs.**

3″ x 1¼″ Swivel Plate Caster w/ Brake



ITEM 700720 **$4.95**

• New, Jarvis swivel plate caster with cushion rubber wheel and PosiLoc wheel brake.

SPECIFICATIONS
- Model Number 3-30-105-2 P/LBRKPASP.LDHT
- Wheel Diameter 3″ dia.
- Wheel Width 1¼″ Wide
- Load Capacity 150 lbs.
- Mounting Height 3½″
- Brake Wheel Lock
- Top Plate 3¾″ x 2¾″ x ⅛″ thick
- Mount 4 holes on 3″ x 1¾″ centers
- Bolt Holes 5/16″ dia.
- Wheel Tread Material Black Cushion Rubber
- Caster Wheel Core Material Cushion Rubber
- Caster Wheel Bearing Delrin
- **Shpg. 2 lbs.**

2⅞″ x ½″ Dual Wheel Swivel Plate Caster w/ Brake



ITEM 700214 **.95¢**

• New, ALBION dual wheel swivel plate caster with wheel lock. Solid nylon wheels.

SPECIFICATIONS
- Wheel Size: 2 15/16″ dia. x ½″ wide
- Load Capacity: 100 lbs.
- Top Plate 2⅝″ x 2⅝″
- Mounting height 3⅝″
- Mount: 4 holes on 2″ x 1⅝″ centers
- Bolt Holes 5/16″ dia.
- **Shpg. ¾ lb.**

2.5″ x .875″ Swivel Plate Dual Caster w/ Isolation Pads



ITEM 700105 **$7.95**

• Used. Ball bearing dual wheel swivel caster. For use under heavy office equipment. 4 15/16″ x 1¾″ rubber pads on each end of plate. Individual bolt brakes for each wheel.

SPECIFICATIONS
- Wheel Size: Dual 2½″ dia. x ⅞″
- Load Capacity 220 lbs.
- Top Plate: 9 5/16″ x 4⅞″ x 5/16″ thick
- Mounting height 3⅜″
- Mount: Four 1 3/16″ dia holes in plate on 3″ x 7⅞″ pattern with 5/16″ holes in rubber pad directly above.
- **Shpg. 9 lbs.**

40.5mm x 17mm Swivel Plate Caster



ITEM 700147 **.99¢**

• New, FAULTLESS swivel plate caster for furniture. Polyurethane wheel. Brass finish.

SPECIFICATIONS
- Wheel size 40.5mm x 17mm
- Load capacity 70 lbs.
- Top plate 1½″ x 2″ x 3/32″
- Mounting height 2″
- Mount 4 bolt on 26mm x 42mm ctrs.
- Bolt holes 7mm diameter
- **Shpg. ¼ lb.**

6″ x 2″ Rigid Plate Caster



ITEM 700138

$7.99

• New, ER WAGNER rigid plate caster. Polyolefin wheel with thread guards.

SPECIFICATIONS

- Wheel size 6″ dia. x 2″
- Load capacity 400 lbs.
- Top plate 2¾″ x 3¾″
- Mounting height 7½″
- Mount 1¾″ x 2⅝″ slotted to 3″
- Bolt holes 5⁄16″
- **Shpg. 3 lbs.**

6″ x 2″ Swivel Plate Caster



ITEM 700734

$3.95

• New, Pemco swivel plate caster with Thermo-Rubber wheel and thread guards.

SPECIFICATIONS

- Model Number ES6X2TPD
- Wheel Diameter 6″ dia.
- Wheel Width 2″ Wide
- Load Capacity 500 lbs.
- Mounting Height 7½″
- Brake None
- Top Plate 4″ x 4½″ x 3⁄16″ thick
- Mount 4 holes on 3″ x 3⅝″ centers
- Bolt Holes ⅜″ dia.
- Wheel Tread Material Gray TPD
- Caster Wheel Core Material Polyolefin
- Caster Wheel Bearing Roller
- **Shpg. 6 lbs.**

5″ x 1½″ Rigid Plate Caster



ITEM 700452

$4.95

• New, JARVIS rigid plate caster with solid Phenolic wheel. Zinc plated steel yoke.

SPECIFICATIONS

- Wheel Diameter 5″ dia.
- Wheel Width 1½″ Wide
- Load Capacity 400 lbs.
- Mounting Height 6¼″
- Brake None
- Top Plate 4⅛″ x 3⅛″ x 5⁄32″ thick
- Bolt Holes 5⁄16″ dia.
- Mount 4 holes on 3 7⁄16″ x 2⅜″ centers
- Wheel Tread Material Black Phenolic
- Caster Wheel Core Material Phenolic
- Caster Wheel Bearing None
- **Shpg. 3 lbs.**

6″ x 1¼″ Rigid Plate Caster



ITEM 700176

$3.99

• New, JARVIS rigid plate caster. Solid hardened rubber tread wheel. Plated steel caster yoke.

SPECIFICATIONS

- Wheel size 6″ dia. x 1¼″
- Load capacity 220 lbs.
- Top plate 3⅝″ x 2⅜″
- Mounting height 7¼″
- Mount 4 bolt on 3″ x 1¾″ centers
- Bolt holes 5⁄16″
- **Shpg. 5 lbs.**

6″ x 1¼″ Rigid Plate Caster



ITEM 700249

$5.95

• New, RHOMBUS rigid plate caster with thermoplastic rubber tire on plastic wheel. Zinc plated yoke and plastic thread guards.

SPECIFICATIONS

- Model Number 354A35K150RZPF
- Wheel Diameter 6″ dia.
- Wheel Width 1¼″ Wide
- Load Capacity 220 lbs.
- Mounting Height 7⅛″
- Brake None
- Top Plate 3¾″ x 2¾″ x ⅛″ thick
- Mount 4 holes on 2⅞″ x 1⅞″ centers
- Bolt Holes ⅜″ dia.
- Wheel Tread Gray Thermoplastic Rubber
- Caster Wheel Core Material Plastic
- Caster Wheel Bearing Ball
- **Shpg. 2 lbs.**

5″ x 2″ Toolbox Rigid Caster



ITEM 700193

$4.99

• New, toolbox rigid caster. Black frame with chromed wheel.

SPECIFICATIONS

- Wheel Size 5″ dia. x 2″ wide
- Load Capacity 250 lbs.
- Top Plate 4″ x 2¾″
- Mounting height 6″
- Mount 4 bolt holes on 3″ x 1¾″ centers
- Bolt Holes 5⁄16″ dia.
- **Shpg. 3 lbs.**

5″ x 2″ Steel Plate Casters



SPECIFICATIONS

- Four bolt mount on 3″ x 3″ or 2⅝″ x 3⅝″ ctrs
- 6½″ from floor to top of plate
- Steel Frame
- Plastic wheel
- 5″ dia. x 2″ wide wheel
- Mtg. plate 4″ x 4½″ x ¼″
- Capacity 400 lbs.

ITEM	Style	Condition	Shpg.	Price
700125	Rigid	New	5 lbs.	$7.95
700126	Rigid	New take-offs	5 lbs.	$6.95

6″ x 2″ Rigid Plate Caster



ITEM 700737

$3.95

• New, Pemco rigid plate caster with Thermo-Rubber Donut wheel and plastic thread guards.

SPECIFICATIONS

- Model Number ER6X2TPDTG2
- Wheel Diameter 6″ dia.
- Wheel Width 2″ Wide
- Load Capacity 500 lbs.
- Mounting Height 7½″
- Brake None
- Top Plate 4″ x 4½″ x 3⁄16″ thick
- Mount 4 holes on 3″ x 3⅝″ centers
- Bolt Holes ⅜″ dia.
- Wheel Tread Material Gray Thermo-Rubber
- Caster Wheel Core Material Polyolefin
- Caster Wheel Bearing Roller
- **Shpg. 5 lbs.**

5″ x 1¼″ Swivel Plate Caster



ITEM 700681

$1.95

MADE IN USA

• New, JARVIS swivel plate caster

SPECIFICATIONS

- Wheel Diameter 5″
- Wheel Width 1¼″
- Load Capacity 300 lbs.
- Mounting Height 6¼″
- Brake None
- Top Plate 2⅜″ x 3⅝″ x ⅛″ thick
- Bolt Holes 5⁄16″ dia.
- Mount 4 holes 1¾″ x 3″ centers
- Wheel Tread Material Black Polyolefin
- Caster Wheel Core Material Polyolefin
- Caster Wheel Bearing Plain
- **Shpg. 3 lbs.**

5″ x 1¼″ Swivel Plate Caster



ITEM 700359

$5.95

• New, ALBION plate caster with total brake.

SPECIFICATIONS

- Wheel Diameter 5″
- Wheel Width 1¼″
- Load Capacity 150 lbs.
- Mounting Height 6⅞″
- Brake Wheel and Swivel
- Top Plate 3⅝″ x 2½″ x ⅛″
- Mount Four slots on 2 15⁄16″ x 1¾″ centers
- Bolt Holes 7⁄16″ x 5⁄16″
- Wheel Tread Material Gray Polyurethane
- Caster Wheel Core Material Polypropylene
- Caster Wheel Bearing Delrin
- **Shpg. 3 lbs.**

4″ x 1 5⁄16″ Rigid Plate Caster



ITEM 700339


$2.49

• New, FAULTLESS plate caster.

SPECIFICATIONS

- Wheel Diameter 4″
- Wheel Width 1 5⁄16″
- Load Capacity 225 lbs.
- Mounting Height 5″
- Top Plate 6¼″ x 3″ x ⅛″
- Mount Four holes on 5″ x 1¾″ centers and ½″ dia. center hole
- Brake None
- Bolt Holes ⅜″ dia.
- Wheel Tread Material Black Rubber
- Caster Wheel Core Material Polyolefin
- Caster Wheel Bearing Plain
- **Shpg. 3 lbs.**

4″ x 1″ Swivel Plate Caster



ITEM 700741

$3.95

• New, Jarvis model# 4-25-211G-4 swivel plate caster with PolyLoc wheel.

SPECIFICATIONS

- Wheel Diameter 4″ dia.
- Wheel Width 1″ Wide
- Load Capacity 150 lbs.
- Mounting Height 4¾″
- Brake None
- Top Plate 2⅜″ x 3⅝″ x ⅛″ thick
- Bolt Holes 5⁄16″ dia.
- Mount 4 holes on 1¾″ x 33″ centers
- Wheel Tread Material Gray PolyLoc
- Wheel Tread Color Gray
- Caster Wheel Core Material Polyolefin
- Caster Wheel Bearing Delrin
- **Shpg. 2 lbs.**

3 3⁄16″ x 1⅛″ Rigid Plate Caster



ITEM 700293

$2.95

• New RHOMBUS rigid plate caster. Plated steel rim, yoke and plate. Solid rubber tire. Roller bearings in hub.

SPECIFICATIONS

- Model 439A08R080CZPG
- Wheel Size 3 3⁄16″ dia. x 1⅛″
- Load Capacity 154 lbs.
- Top Plate: 4⅛″ x 3 3⁄16″
- Mounting height 4 7⁄16″
- Mount: 4 bolt holes on 3″ x 2¼″ centers
- Bolt Holes 5⁄16″ dia.
- **Shpg. 1 lb.**

3″ x 1⅜″ Rigid Plate Caster



ITEM 700133

$2.79

• Used, general purpose rigid plate caster. Molded polypropylene wheel.

SPECIFICATIONS

- Wheel size 3″ dia. x 1⅜″
- Load capacity 200 lbs.
- Top plate 3¾″ x 2¾″
- Mounting height 3⅞″
- 4 bolt mount 3″ x 1¾″ ctrs.
- Bolt holes 5⁄16″
- **Shpg. 2 lbs.**

3″ Swivel Plate Caster



ITEM 700554

$1.99

• New swivel plate caster. Translucent tread wheel.

SPECIFICATIONS

- Wheel Diameter 3″ dia.
- Wheel Width ⅞″ Wide
- Load Capacity 80 lbs
- Mounting Height 3 13⁄16″
- Brake No
- Top Plate 2⅜″ x 2⅜″ x 0.80″ thick
- Bolt Holes ¼″ dia.
- Mount Four bolt holes 1¾″ x 1¾″ to 1 13⁄16″ x 1 13⁄16″
- Wheel Tread Material Clear Polyurethane
- Caster Wheel Core Material Plastic
- Caster Wheel Bearing Plain
- **Shpg. ¾ lb.**

6″ x 2″ Rigid Plate Caster



ITEM 700713 **$8.95**

• New, rubber tire on cast iron wheel rigid plate caster.

SPECIFICATIONS

- Wheel Diameter 6″
- Wheel Width 2″
- Load Capcacity 500 lbs.
- Mounting height 7½″
- Top Plate 4″ x 4½″ x ¼″
- Mount 2⅝″ x 3⅜″ slotted to 3″ x 3″ centers
- Bolt holes ⅜″ dia.
- Wheel Thread Material Black Rubber
- Wheel Core Material Cast iron
- Wheel Bearing Roller
- **Shpg. 8 lbs.**

6″ x 2″ Rigid Plate Caster



ITEM 700732

$2.95

• New, Colson model# 4.06108.339 WB29 rigid plate caster with Phenolic wheel.

SPECIFICATIONS

- Wheel Diameter 6″ dia.
- Wheel Width 2″ Wide
- Load Capacity 1200 lbs.
- Mounting Height 7½″
- Brake None
- Top Plate 4″ x 4½″ x ¼″ thick
- Bolt Holes ⅜″ dia.
- Mount 4 holes on 3⅝″ x 3″ centers
- Wheel Tread Material Black Phenolic
- Caster Wheel Core Material Phenolic
- Caster Wheel Bearing Roller
- **Shpg. 6 lbs.**

5″ x 1¼″ Threaded Stem Caster



ITEM 700456

$3.95

• New, COLSON solid polyolefin wheel threaded-stem caster. Ball bearing in swivel head.

SPECIFICATIONS

- Wheel Diameter 5″
- Wheel Width 1¼″
- Load Capacity 300 lbs.
- Caster Wheel Bearing Delrin
- Mount ½″-13 x 1″ long threaded stem
- Mounting Height 6″
- Wheel Tread Material Black Polyolefin
- Caster Wheel Core Material Polyolefin
- **Shpg. 2 lbs.**

4″ x ⅝″ Swivel Stem Caster w/Brake



ITEM 700190

$5.95

• New dual wheel swivel stem caster. Plastic wheel. Wheel brake.

SPECIFICATIONS

- Wheel Diameter 4″
- Wheel Width ⅝″ tread, 2¾″ overall
- Load Capacity 250 lbs.
- Mounting Height 4¾″
- Brake Wheel lock
- Caster Wheel Bearing Ball
- Mount ½″-13 x ½″ long threaded stem
- Wheel Tread Material Gray Polyurethane
- Caster Wheel Core Material Plastic
- **Shpg. 2 lbs.**

3″ x 1¼″ Swivel Stem Caster w/Brake



ITEM 700165

$3.99

• New, FAULTLESS swivel stem caster with brake. "DYNA-TRED" thermoplastic rubber on polypropylene. Zinc plated caster yoke.

SPECIFICATIONS

- Wheel Size 3″ x 1¼″
- Load Capacity 180 lbs.
- Mounting height 3⅝″
- Stem Threaded ½″-13 x 1½″ thread
- **Shpg. 1½ lbs.**

Rigid Plate Casters

New, various manufacturers plate mount rigid casters.



ITEM	Wheel Size	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700242	2″ x 1 1/16″	90	Solid Rubber	2¾″	1½ lbs.	$1.95
700386	2½″ x 1⅛″	100	Soft Rubber	3 3/16″	1 lb.	$0.89
700373	3″ x ¾″	225	Dual Rubber Wheel	3¾″	2 lbs.	$3.99
700244	3″ x 1 3/16″	110	Rubber	4″	2 lbs.	$1.95
700197	3″ x 1⅛″	200	Polyolefin	3 9/16″	¾ lb.	$2.49
700211*	3″ x 1 13/16″	500	Polypropylene	4″	2 lbs.	$3.95
700333*	3½″ x 1¼″	225	Thermo-plastic Rubber	4¾″	1½ lbs.	$1.99
700215*	3½″ x 1¼″	300	Thermo-plastic Rubber	4⅞″	2 lbs.	$2.95
700370	3½″ x 1¼″	250	Cast Iron	4¾″	4 lbs.	$4.99
700212	3½″ x 1¼″	360	Polyurethane tread	4⅞″	2 lbs.	$5.95
700294	3 15/16″ x ⅞″	154	Rubber	5″	1½ lbs.	$2.95
700287	3 15/16″ x 1″	220	Blue Rubber	5″	2 lbs.	$1.95
700410	4″ x 15/16″	115	Thermo-plastic Rubber	4 13/16″	2 lbs.	$2.49
700399	4″ x 15/16″	160	Rubber	4¾″	2 lbs.	$2.49
700245	4″ x 15/16″	143	Solid Rubber	4 15/16″	2 lbs.	$3.95
700658	4″ x 1¼″	Unknown	Hard Plastic	5⅛″	3 lbs.	$3.95
700521	4″ x 1¼″	325	Polypropylene	5¼″	3 lbs.	$2.95
700203	4″ x 1¼″	150	Soft Rubber	5⅛″	2 lbs.	$4.95
700371	4″ x 1¼″	300	Polypropylene	5″	2 lbs.	$3.45
700200	4″ x 1¼″	150	Soft Rubber	5⅝″	3 lbs.	$4.95
700229*	4″ x 15/16″	350	Polyolefin	5″	2 lbs.	$1.95
700385	4″ x 15/16″	350	Hard Rubber	5″	3 lbs.	$1.95
700387	4″ x 15/16″	350	Polypropylene	5″	2½ lbs.	$1.95
700479	4″ x 15/16″	350	Rubber	5″	3½ lbs.	$2.95
700195	4½″ x 1½″	150	Plastic	5¾″	2¼ lbs.	$2.99
700290	4 15/16″ x 1⅛″	264	Rubber	5 15/16″	1½ lbs.	$2.95
700248	4 15/16″ x 1¼″	220	Polyurethane	6 1/16″	2 lbs.	$3.95
700408	5″x 1″	145	Polyolephin	5¾″	2 lbs.	$2.49
700383	5″ x 1¼″	300	Polyurethane	6 3/16″	2 lbs.	$3.95
700372	5″ x 1¼″	350	Polypropylene	6¼″	4 lbs.	$3.99
700356	5″ x 1¼″	350	Polypropylene	6⅛″	3 lbs.	$4.95
700679*	5″ x 1¼″	200	Rubber	6¼″	3.7 lbs.	$4.95
700192	5″ x 2″	350	Thermo-plastic Rubber	6½″	4½ lbs.	$3.99
700205	6″ x 1¼″	310	Polypropylene	7⅜″	3 lbs.	$4.95
700201	6″ x 1¼″	200	Soft Rubber	7⅜″	4 lbs.	$4.95
700204	6″ x 1¼″	200	Soft Rubber	7⅜″	4 lbs.	$4.95
700291	6¼″ x 1¼″	300	Solid Rubber	7¾″	6 lbs.	$5.95

* MADE IN USA

3″ x 13/16″ Swivel Stem Caster



ITEM 700209

$3.95 MADE IN USA

• New, FAULTLESS swivel threaded stem caster. Zinc plated yoke. Solid soft rubber wheel.

SPECIFICATIONS

- Wheel 3″ dia. x 13/16″ w.
- Load capacity 90 lbs.
- Stem threaded
- Mounting height 3 19/32″
- Mount ⅜″-16 x ⅝″ long
- **Shpg. ¾ lb.**

3″ x 13/16″ Threaded Stem Caster w/Brake



ITEM 700231

$1.95

• New, JARVIS model FG3L41022JY swivel threaded stem caster. Solid cushioned black rubber wheel. Plated caster yoke.

SPECIFICATIONS

- Wheel Size 3″ dia. x 13/16″ wide
- Load Capacity 75 lbs.
- Threaded Stem
- Mounting height 3½″
- Mount ⅜″-16 x 1″ long
- **Shpg. ¾ lbs.**

5″ x 1½″ Swivel Stem Caster
w/ Swivel & Wheel Lock



ITEM 700146
$19.99

• New, FAULTLESS swivel stem caster. Originally intended for scaffold. Swivel and wheel lock. Solid hard rubber wheel. Zinc plated steel yoke.

SPECIFICATIONS
- Wheel size 5″ x 1½″
- Load capacity 325 lbs.
- Mounting height 6¼″
- Stem friction grip stem mount 1″ dia. x 2½″
- **Shpg. 6 lbs.**

5″ x 1¼″ Swivel Plain Stem Caster



ITEM 700314
$4.95

• New, MEDCASTER model# HC05RPP125TLCL02 plain stem caster with sheet metal threadguards and central total brake. Intended for use with hospital beds. Braking mechanism is operated by rotating 11mm (0.433″) hex.

SPECIFICATIONS
- Wheel Size 5″x 1¼″
- Load Capacity 260 lbs.
- Mounting Height 6⅞″
- Brake Wheel and Swivel
- Caster Wheel Bearing Ball
- Mount 32mm x 2″ long plane stem w/ two M6-1.0 tapped bolt holes
- Wheel Tread Gray TPR
- Caster Wheel Core Material Polypropylene
- **Shpg. 5 lbs.**

5″ x 1⅛″ Swivel Stem Caster



ITEM 700106
$6.95

• New. Ball bearing swivel stem caster with 5″ diam. x 1⅛″ wide cushion rubber wheel. 7⁄16″ diam. x 1½″ stem with retention ring. 150 lb. capacity. **Shpg. 4 lbs.**

5″ x 15⁄16″ Swivel Stem Caster
w/ Wheel Lock



ITEM 700145
$5.99

• New FAULTLESS swivel stem caster with wheel lock. Thermoplastic tire on black polypropylene wheel.

SPECIFICATIONS
- Wheel size 5″ x 15⁄16″
- Load capacity 125 lbs.
- Mounting height 5¾″
- Stem threaded ½″-13 x 1½
- **Shpg. 1½ lbs.**

Grip Ring Caster Sockets



700173 ***700174*** ***700492*** ***700369***

• Brand new, use to mount grip ring casters with 7⁄16″ dia. stem into steel tubing. **Shpg. 1⁄10 lb.**

ITEM	Fits into	Length	Price
700173	1″ OD 16 gauge tubing	1½″	$ .60
700174	¾″ OD 16 gauge tubing	1½″	$2.55
700492	9⁄16″ OD 16 gauge tubing	1⅜″	$ .39
700369	Steel Corner Bracket	1⅝″	$ .59

5″ x 15⁄16″ Swivel Stem Caster



ITEM 700340
$3.95

• New, FAULTLESS model# 30807 threaded stem caster. Ball bearing in swivel head.

SPECIFICATIONS
- Wheel Diameter 5″
- Wheel Width 15⁄16″
- Load Capacity 125 lbs.
- Mounting Height 5¾″
- Wheel Tread Gray TPR
- Mount ½″-13 x 1½″ long threaded stem
- Caster Wheel Core Polypropylene
- Caster Wheel Bearing Plain
- **Shpg. 2½ lbs.**

5″ x 15⁄16″ Swivel Stem Caster
w/ Brake



ITEM 700208
$3.95

• New, FAULTLESS swivel threaded stem caster with brake. Zinc plated steel yoke. Solid polypropylene wheel.

SPECIFICATIONS
- Wheel Size 5″ dia. x 15⁄16″ wide
- Load Capacity 150 lbs.
- Stem Threaded
- Mounting height 513⁄16″
- Mount: ½″-13 x 1½″
- **Shpg. 1½ lbs.**

4″ x 2½″ Swivel Stem Caster *w/ Brake*



ITEM 700329
$2.95

• New, threaded stem swivel caster.

SPECIFICATIONS
- Wheel Diameter 4″ dia.
- Wheel Width 2½″ Wide
- Load Capacity 100 lbs.
- Mounting Height 4½″
- Brake Wheel lock
- Mount ½″-13 threaded stem, 1″ long
- Wheel Tread Material Black Plastic
- Caster Wheel Core Material Plastic
- Caster Wheel Bearing Plain
- **Shpg. 2 lbs.**

4″ x 1″ Grip Ring Caster



ITEM 700177
$2.99

• New, JARVIS swivel grip ring stem caster. Solid polyolefin wheel. Plated steel caster yoke.

SPECIFICATIONS
- Wheel size 4″ dia. x 1″
- Load capacity 150 lbs.
- Mounting height 4⅝″
- Stem grip ring 0.845″ dia. x 2″
- **Shpg. 3 lbs.**

4″ x 15⁄16″ Swivel Stem Caster



ITEM 700664
$1.95

• New, SHEPHERD model# PRE40637ZN-TPU, swivel threaded stem caster with polyurethane wheel.

SPECIFICATIONS
- Wheel Diameter 4″
- Wheel Width 15-16″
- Load Capacity 150 lbs.
- Mounting Height 4¾″
- Brake None
- Caster Wheel Bearing Ball
- Mount ⅜″-16 x ¾″ long threaded stem
- Wheel Tread Material Red Polyurethane
- Caster Wheel Core Material Polyolefin
- **Shpg. 0.8 lbs.**

3″ x 1¼″ Stem Swivel Caster



ITEM 700128
$5.99

• New. Swivel stem caster with 3″ diam. x 1¼″ wide solid polypropylene wheel. 1″-12 diam. x 5⅛″ threaded stem. Working height 4¼″ (floor to base of stem). Load capacity 100 lbs. **Shpg. 5 lbs.**

3″ x 13⁄16″ Rigid Stem Caster



ITEM 700163
$1.99

• New, FAULTLESS rigid stem caster. “DYNA-TRED II” thermoplastic rubber on polypropylene. Zinc plated caster yoke.

SPECIFICATIONS
- Wheel size 3″ x 13⁄16″
- Load capacity 90 lbs.
- Mounting height 3½″
- Stem grip ring 7⁄16″ dia. x 2″
- **Shpg. 1 lb.**

3″ x ½″ Swivel Stem Caster *w/ Brake*



ITEM 700436
$1.99

• New, TENTE swivel threaded stem caster with wheel brake.

SPECIFICATIONS
- Wheel Diameter 3″ (2.95″)
- Wheel Width ½″ tread, 2″ overall
- Load Capacity 110 lbs.
- Mounting Height 3″
- Mount M10-1.5 x ⅝″ long threaded stem
- Brake Wheel
- Wheel Tread Material Black Elastic Tire
- Caster Wheel Core Material Polyamide
- Caster Wheel Bearing Plain
- **Shpg. 1 lb.**

3″ x 7⁄16″ Swivel Stem Caster *w/ Brake*



ITEM 700344
$2.99

• New, SHEPHERD threaded stem caster with total brake.

SPECIFICATIONS
- Wheel Diameter 3″
- Wheel Width 7⁄16″ tread, 25⁄16″ overall
- Load Capacity 165 lbs.
- Mounting Height 3¾″
- Mount ½″-13 x 1″ long threaded stem
- Brake Wheel and Swivel
- Wheel Tread Material Gray Urethane
- Caster Wheel Core Material Polyolefin
- Caster Wheel Bearing Plain
- **Shpg. 1.5 lbs.**

1.5″ Dual Wheel Swivel Caster Set



ITEM 700334
.99¢

• New, set of 4 nylon hooded swivel casters with dual plastic wheels and grip ring stem. Two casters have wheel rotation locks. Independent wheel rotation in each caster.

SPECIFICATIONS
- Wheel size 1½″ dia. x ⅜″ (2 per caster)
- Load Capacity 50 lbs. ea. (200 lbs. per set)
- Mounting height 2 1⁄16″
- Mount 7⁄16″ dia. x 1″ grip ring stem
- **Shpg. ½ lb.**



Grip Ring Stem Casters

- New, mixed manufacturers grip ring stem casters.

** Brake*
*** Brake and Directional Lock*



ITEM	Wheel Size	Load Capacity	Wheel Material	Stem Size	Mtg. Height	Shpg.	Price
700435	2″ x 7/16″	110	Polyamide	7/16″ x 1½″	2¼″	½ lb.	$0.39
700466	2″ x 7/16″	75	Nylon	7/16″ x 17/16″	2¼″	½ lb.	$0.39
700615*	2″ x ¾″	90	Polypropylene	7/16″ x 1¼″	2¾″	½ lb.	$1.49
700347	2″ x 13/16″	90	Polyolefin	5/16″ x 1½″	2⅝″	½ lb.	$0.59
700457*	3″ x ⅜″	100	Soft Rubber	5/16″ x 1½″	3″	1 lb.	$5.95
700437*	3″ x 7/16″	220	Polyamide	7/16″ x 15/16″	3⅛″	1 lb.	$1.99
700434	3″ x 7/16″	200	Polyurethane	7/16″ x 1½″	3⅜″	1 lb.	$1.99
700348*	3″ x ¾″	165	Nylon	7/16″ x 1⅜″″	3″	1 lb.	$0.79
700474*	3″ x ⅞″	115	Thermo-plastic Rubber	7/16″ x 1⅜″	3⅞″	1½ lbs.	$2.49
700419*	3″ x 1″	100	Polyamide	7/16″ x ⅞″	3″	1½ lbs.	$4.99
700501	3″ x 2¼″	100	Hard Plastic	5/16″ x 1″	3″	2 lbs.	$2.95
700683	3½″ x 1¼″	250	Polyolefin	0.86″ x 0.86″ x 2 3/16″	3″	2 lbs.	$3.95
700230	4″ x 15/16″	140	Polyolefin	7/16″ x 1½″	4⅝″	1 lb.	$1.95
700207* MADE IN USA	4″ x 15/16″	140	Polypropylene	7/16″ x 1½″	4⅝″	1½ lbs.	$3.95
700390*	4″ x 15/16″	110	Soft Rubber	7/16″ x 1⅜″	4¾″	2 lbs.	$2.95
700232 MADE IN USA	4″ x 15/16″	115	Soft Rubber	⅞″ x 2″	4¾″	2 lbs.	$3.95
700675*	4″ x 15/16″	125	Thermo-plastic Rubber	7/16″ x 1⅜″	4⅝″	3 lbs.	$3.95
700478*	4″ x ⅞″	135	Thermo-plastic Rubber	7/16″ x1 5/16″	4¾″	1½ lbs.	$4.95
700417* MADE IN USA	4″ x 1″	140	Polyolefin	7/16″ x 1½″	4¾″	2 lbs.	$1.99
700391	4″ x 1″	115	Thermo-plastic Rubber	7/16″ x 1⅜″	4⅝″	2 lbs.	$1.95
700517*	4″ x 1″	115	Thermo-plastic Rubber	7/16″ x 1½″	4¾″	2 lbs.	$2.95
700610**	4″ x 1¼″	220	Polypropylene	7/16″ x ⅞″	5.39″	3 lbs.	$5.95
700206*	5″ x 15/16″	125	Thermo-plastic Rubber	7/16″ x 1½″	5⅝″	1½ lbs.	$3.95
700226	5″ x 15/16″	150	Polyolefin	7/16″ x 1½″	5⅝″	1 lb.	$2.95
700225* MADE IN USA	5″ x 15/16″	150	Polyolefin	7/16″ x 1½″	5⅝″	1½ lbs.	$3.95
700401	5″ x 1″	125	Thermo-plastic Rubber	7/16″ x 1½″	5 9/16″	3 lbs.	$1.99
700744	5″ x 1″	160	Polyolefin	7/16″ x 1⅜″	5⅝″	2 lbs.	$3.95
700739	5″ x 1¼″	325	Polyolefin	⅝″ x 2 3/16″	6 1/16″	3 lbs.	$4.95
700511**	5″ x 1¼″	220	Thermo-plastic Rubber	7/16″ x 2″	6¼″	2½ lbs.	$7.95
700680 MADE IN USA	5″ x 1¼″	280	Hard Rubber	0.860″ x 2 3/16″	6 1/16″	3.6 lbs.	$5.95




Faultless Grip Ring Stem Casters

- New, FAULTLESS grip ring stem casters. All have ball bearing swivels. Choose from a wide variety of wheel construction, yoke material and with or without brakes.
- Dual brakes lock both the swivel and wheel
- Dyna Tred II and TPR are thermoplastic rubber on polypropylene wheel



ITEM	Dia.	Wheel Width	Dia.	Stem Length	Stem Construction	Wheel Brake	Frame	Mounting Height	Load Rating	Shpg.	Price
700152	3″	13/16″	7/16″	1⅜″	Dyna Tred II Gray	No	Zinc Plated	3½″	90 lbs.	1 lb.	$1.99
700144	3″	1¼″	7/16″	1⅜″	Solid hard rubber	Yes	Zinc Plated	3¾″	270 lbs.	2 lbs.	$3.99
700153	3″	1¼″	7/16″	1⅜″	Solid Polypropylene	Yes	Zinc Plated	3¾″	270 lbs.	1½ lbs.	$3.99
700151	3″	1¼″	7/16″	1⅜″	Solid Polypropylene	No	Zinc Plated	3¾″	270 lbs.	1½ lbs.	$2.99
700156	4″	15/16″	7/16″	1⅜″	Dyna Tred II Gray	Yes	Zinc Plated	4⅝″	115 lbs.	1½ lbs.	$3.99
700155	4″	15/16″	7/16″	1⅜″	Dyna Tred II Black	Yes	Zinc Plated	4⅝″	115 lbs.	1½ lbs.	$4.99
700158	4″	15/16″	7/16″	2″	Dyna Tred TPR Gray	Yes	Zinc Plated	4⅝″	115 lbs.	1½ lbs.	$3.99
700150	5″	15/16″	7/16″	1⅜″	Dyna Tred II Black	No	Zinc Plated	5⅝″	125 lbs.	1½ lbs.	$2.99
700154	5″	15/16″	7/16″	1⅜″	Dyna Tred II Gray	Yes	Zinc Plated	5⅝″	125 lbs.	1½ lbs.	$3.99
700160	5″	15/16″	7/16″	1⅜″	Dyna Tred TPR Gray	Yes	Zinc Plated	5⅞″	125 lbs.	1½ lbs.	$3.99
700161	5″	15/16″	7/16″	1⅜″	Dyna Tred TPR Black	Yes	Zinc Plated	5¾″	125 lbs.	1½ lbs.	$3.99

3″ x 15⁄16″ Swivel Stem Casters



• New, COLSON clear polyurethane swivel threaded stem caster.

SPECIFICATIONS
- Wheel Diameter 3″ dia.
- Wheel Width 15⁄16″ Wide
- Load Capacity 120 lbs.
- Bearing Ball
- Stem Threaded 3⁄8″-16 TPI x 1″ thread
- Wheel Tread Material Clear Polyurethane
- **Shpg. 0.85 lbs.**

ITEM 700688 **$1.99**
• 3″ x 15⁄16″ Swivel Stem Caster

ITEM 700689 **$2.99**
• 3″ x 15⁄16″ Swivel Stem Caster w/Lock

3″ x 1″ Grip Ring Swivel Stem Casters



• New, TENTE grip ring swivel stem caster. Polyamide housing.

SPECIFICATIONS
- Model Number 5020UJH080B10
- Wheel Diameter 3″ dia.
- Wheel Width 1″ Wide
- Load Capacity 155 lbs.
- Mounting Height 4.33″
- Brake None
- Mount 7⁄16″ dia. x 3⁄4″ long Grip Ring Stem
- Wheel Tread Material Gray Thermoplastic Rubber
- Caster Wheel Core Material Polypropylene
- Caster Wheel Bearing Plain
- **Shpg. 0.45 lb**.

ITEM 700655 **$1.29**
• 3″ x 1″ Grip Ring Swivel Plate Caster.

ITEM 700656 **$1.79**
• 3″ x 1″ Grip Ring Swivel Plate Caster w/Brake

4″ x 1 1⁄4″ Round Stem Swivel Casters



• New, TENTE round stem swivel caster.

SPECIFICATIONS
- Wheel Diameter 4″ dia.
- Wheel Width 1 1⁄4″
- Load Capacity 220 lbs.
- Mounting Height 5 3⁄8″
- Mount 7⁄8″ dia round stem, 1 15⁄16″ long
- Brake None
- Bolt Holes 1⁄4″
- Wheel Tread Material Gray Thermoplastic rubber
- Caster Wheel Core Material Phenolic
- Caster Wheel Bearing Bushing
- **Shpg. 2 lbs.**

ITEM 700497 **$2.95**
• 4″ x 1.25″ Round Stem Swivel Caster

ITEM 700498 **$2.95**
• 4″ x 1.25″ Round Stem Swivel Caster w/Swivel Lock

5″ x 1 1⁄4″ Swivel Stem Caster Set




ITEM 700760
$11.95

• New, set of 4 TENTE round stem swivel casters. 2 full swivel and 2 full swivel with wheel and swivel locks.

SPECIFICATIONS
- Wheel Diameter 5″
- Wheel Width 1 1⁄4″
- Set Load Capacity 880 lbs.
- Mounting Height 6 3⁄8″
- Wheel Tread Material: Gray Thermoplastic Rubber
- Mount 7⁄8″ x 1 1⁄2″ long round stem w/ M8-1.25 threaded crosshole
- Caster Wheel Core Material: Polypropylene
- Caster Wheel Bearing: Ball
- **Shpg. 8 lbs.**

4″ x 1 1⁄2″ Swivel Stem Casters



• New, COLSON swivel stem caster. steel yoke.

SPECIFICATIONS
- Wheel Diameter 4″ dia.
- Wheel Width 1 1⁄2″ Wide
- Load Capacity 300 lbs.
- Mounting Height 5 3⁄32″
- Brake None
- Mount 3⁄4″ dia. x 2 7⁄16″ stem
- Wheel Tread Material Black Polypropylene
- Caster Wheel Core Material Solid Polypropylene
- **Shpg. 2 lbs.**

ITEM 700454 **$2.95**

ITEM 700455 w/brake **$3.95**

5″ x 7⁄16″ Swivel Round Stem Casters



• New, RHOMBUS round stem caster with brake. Intended for use with hospital beds. Brake operated by rotating 11mm hex in cross-hole, has positions for both directional lock and total lock.

SPECIFICATIONS
- Wheel Diameter 5″ x 7⁄16″
- Load Capacity 260 lbs.
- Mounting Height 6 1⁄4″
- Tread Gray Rubber
- Mount 28mm (1.102″) x 100mm (3.937″) long round stem w/ two M8-1.25 tapped bolt holes
- **Shpg. 6 lbs.**

ITEM 700277 **$14.95**
• 5″ x 7⁄16″ Stem Caster w/Bisectional Lock and Brake

ITEM 700275 **$14.95**
• 5″ x 7⁄16″ Stem Caster w/Total Brake

5″ x 1 1⁄4″ Swivel Stem Casters



• New, swivel stem caster. Swivel has double-row ball bearings.

SPECIFICATIONS
- Wheel Diameter 5″ dia.
- Wheel Width 1 1⁄4″ Wide
- Load Capacity 300 lbs.
- Mounting Height 6″
- Brake None
- Mount 1⁄2″-13 x 2 1⁄2″ Threaded Stem
- Wheel Tread Material Gray Polyurethane
- Caster Wheel Core Material Polyolefin
- Caster Wheel Bearing Derlin
- **Shpg. 3 lbs.**

ITEM 700617 **$1.49**
• 5″ x 1 1⁄4″ Swivel Stem Caster

ITEM 700619 **$2.49**
• 5″ x 1 1⁄4″ Swivel Stem Caster w/Lock

5″ x 1 1⁄4″ Swivel Stem Caster

w/ Wheel Lock



ITEM 700620
$2.49

• New, threaded stem, swivel caster with wheel lock. Colson caster with Shepherd caster yoke and Jarvis PolyLoc wheel. Swivel has double-row ball bearings. Only available in a Caster w/lock version

SPECIFICATIONS
- Model Number PGS50748ZN213GTB
- Wheel Diameter 5″ dia.
- Wheel Width 1 1⁄4″ Wide
- Load Capacity 300 lbs.
- Mounting Height 6″
- Brake Wheel Lock
- Mount 1⁄2″-13 x 1″ Threaded Stem
- Wheel Tread Material PolyLoc
- Wheel Tread Color Gray
- Caster Wheel Core Material PolyLoc
- Caster Wheel Bearing Ball
- **Shpg. 3 lbs.**

5″ x 1 1⁄4″ Swivel Stem Casters



• New, ALGOOD swivel stem caster. Swivel has double row ball bearings

SPECIFICATIONS
- Wheel Diameter 5″ dia.
- Wheel Width 1 1⁄4″ Wide
- Load Capacity 200 lbs.
- Mount 1⁄2″-13 x 1″ Threaded Stem
- Caster Wheel Bearing Nylon
- Mounting Height 5 13⁄16″
- Brake None
- Wheel Tread Material Gray Urethane
- Caster Wheel Core Material Urethane
- **Shpg. 3 lbs.**

ITEM 700621 **$1.49**
• 5″ x 1 1⁄4″ Swivel Stem Caster

ITEM 700622 **$2.49**
• 5″ x 1 1⁄4″ Swivel Stem Caster w/Lock

5″ x 1 1⁄4″ Swivel Stem Casters



• New, ALGOOD swivel stem caster with solid urethane wheel. Swivel has double-row ball bearings.

SPECIFICATIONS
- Wheel Diameter 5″ dia.
- Wheel Width 1 1⁄4″ Wide
- Load Capacity 200 lbs.
- Mount 1⁄2″-13 x 1 1⁄2″ Threaded Stem
- Caster Wheel Bearing Nylon
- Mounting Height 5 13⁄16″
- Brake None
- Wheel Tread Material Gray Urethane
- Caster Wheel Core Material Urethane
- **Shpg. 3 lbs.**

ITEM 700623 **$1.49**
• 5″ x 1 1⁄4″ Swivel Stem Caster

ITEM 700624 **$2.49**
• 5″ x 1 1⁄4″ Swivel Stem Caster w/Lock

Swivel Round Stem Casters w/Directional Lock



• New, RHOMBUS round stem caster with three-position central brake. Intended for use with hospital beds. Braking mechanism operated by rotating 11mm (0.433″) hex in crosshole.

SPECIFICATIONS FOR ALL
- Brake Wheel and Swivel
- Wheel Tread Material Gray Thermoplastic Rubber
- Mount 32mm (1.259″) dia. x 50mm (1.969″) long w/ four M6-1.0 tapped bolt holes
- Caster Wheel Bearing Ball

5″ Diameter

ITEM 700284 **$8.95**
• 5″ x 1 1⁄4″ Swivel Round Stem Caster

ITEM 700281 **$8.95**
• 5″ x 1 1⁄4″ Swivel Round Stem Caster w/Total Brake

SPECIFICATIONS
- Wheel Diameter 5″x 1 1⁄4″
- Load Capacity 220 lbs.
- Mounting Height 6 1⁄4″
- **Shpg. 5 lbs.**

8″ Diameter

ITEM 700286 **$12.95**
• 8″ x 1 1⁄4″ Swivel Round Stem Caster

ITEM 700283 **$14.95**
• 8″ x 1 1⁄4″ Swivel Round Stem Caster w/Total Brake

SPECIFICATIONS
- Wheel Diameter 8″x 1 1⁄4″
- Load Capacity 260 lbs.
- Mounting Height 9 5⁄16″
- **Shpg. 6 lbs.**

California Residents WARNING:Cancer and Reproductive Harm
For more information refer to:www.P65Warnings.ca.gov

3″ x 1″
Swivel Caster
7/16″ x 1 1/2″ Grip Ring Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700642	75 lbs.	Rubber	3 5/8″	¾ lb.	$1.95

3″ x 1 1/4″
Swivel Caster w/Brake
1/2″-13 x ¾″ Threaded Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700635	250 lbs.	Polyolefin	4″	3 lbs.	$3.95

3″ x 1 1/4″
Swivel Caster w/Brake
0.845″ x 2 3/16″ Grip Ring Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700669	150	Rubber	3 15/16″	3 lbs.	$6.95

3″ x 1 13/16″
Swivel Caster w/Brake
1 1/4″ NPT x 1 5/8″ Threaded Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700636	300 lbs.	Polyolefin	4 15/16″	4 lbs.	$4.95

3″ x 1 13/16″
Swivel Caster
1 1/4″ NPT x 1 5/8″ Threaded Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700643	300 lbs.	Polyolefin	4 5/16″	4 lbs.	$2.95

3 1/4″ x 1″
Rigid Caster w/Brake
0.854″ x 2 5/32″ Grip Ring Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700625	Unknown	Hard Plastic	3 13/16″	3 lbs.	$3.95

3 1/2″ x 1 1/4″
Rigid Plate Caster w/Brake
5/8″-18 x 3 1/2″ Threaded Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700634	250 lbs.	Polyolefin	4 1/2″	3 lbs.	$3.95

3 15/16″ x 1 1/4″
Swivel Caster w/Brake
0.95″-1.9 dia Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700256	176 lbs.	Polyurethane	5 3/16″	3 lbs.	$7.95

4″ x 15/16″
Dual Wheel Swivel Caster
4 holes on 1 3/4″ x 3″ centers



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700723	125	Polyolefin	4 3/4″	3 lbs.	$4.95

4″ x 15/16″
Swivel Caster w/Brake
0.845″ x 1 15/16″ Grip Ring Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700676	115	Rubber	4 5/8″	2.35 lbs.	$3.95

4″ x 15/16″
Swivel Caster w/Brake
1/2″-13 x 2 3/8 Rubber Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700637	125 lbs.	Rubber	4 7/8″	3 lbs.	$2.95

4″ x 1 1/4″
Rigid Plate Caster
4 holes on 3″ x 1 3/4″ centers



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700644	275 lbs.	Polyolefin	5 1/4″	2 lbs.	$1.95

4″ x 1 1/4″
Rigid Plate Caster
4 holes on 3″ x 1 3/4″ centers



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700645	275 lbs.	Polyolefin	5 1/8″	3 lbs.	$1.95

5 x 1″
Swivel Caster w/Brake
1/2″-13 x 2 3/4″ Threaded Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700638	160 lbs.	Polyurethane	5 5/8″	3 lbs.	$2.95

5″ x 1 1/4″
Swivel Caster
18mm Round Stem, 1 1/16″ Long



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700494	220 lbs.	Rubber	6 1/4″	2.5 lbs.	$11.95

5″ x 1 1/4″
Swivel Caster
1/2″-13 x 1″ Threaded Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700646	300 lbs.	Polyolefin	6 1/4″	3 lbs.	$2.95

5″ x 1 1/4″
Swivel Caster w/Brake
1.11″ x 2″ Grip Ring Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700640	300 lbs.	Polyurethane	5 15/16″	4 lbs.	$3.95

5″ x 1 1/4″
Rigid Caster
0.854″ x 2 1/4″ Grip Ring Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700630	300 lbs.	Polyurethane	6″	3 lbs.	$4.95

5″ x 1 1/4″
Rigid Plate Caster
4 holes on 3″ x 1 3/4″ centers



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700647	300 lbs.	Polyloc	6 1/4″	3 lbs.	$1.95

5″ x 1 1/4″
Rigid Plate Caster
4 holes on 3″ x 1 3/4″ centers



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700649	200 lbs.	Rubber	6 1/4″	4 lbs.	$2.95

5″ x 1 1/4″
Swivel Plate Caster
4 holes on 1 3/4″ x 3″ centers



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700742	250	Polyolefin	6 1/4″	3 lbs.	$3.95

5″ x 1 1/4″
Swivel Plate Caster
4 holes on 1 5/8″ x 3″ centers



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700733	325	Polyolefin	6 3/16″	3 lbs.	$3.95

5″ x 1 1/4″
Swivel Caster w/Brake
1/2″-13 x 1″ Threaded Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700639	300 lbs.	Polyolefin	6 1/2″	3 lbs.	$3.95

5″ x 1 1/4″
Swivel Caster
1/2″-13 x ¾″ Threaded Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700648	200 lbs.	Rubber	6″	3 lbs.	$3.95

5″ x 1 1/4″
Swivel Caster w/Brake
1/2″-12 x 2 3/4″ Threaded Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700672	325 lbs.	Polyolefin	6 1/16″	3 lbs.	$3.95

5″ x 1 1/4″
Round Stem Fixed Caster
22mm x 1 3/4″ Round Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700514	220 lbs.	Rubber	6 3/4″	3 lbs.	$11.95

5″ x 1 1/4″
Swivel Plate Caster w/Brake
4 holes on 3″ x 1 3/4″ centers



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700650	300 lbs.	Polyurethane	6 1/8″	4 lbs.	$6.95

5″ x 1 1/4″
Swivel Caster w/Brake
1/2″-13 x 1″ Threaded Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700556	200 lbs.	Rubber	6″	3 lbs.	$5.95

5″ x 1 1/4″
Swivel Caster w/Brake
1/2″-13 x 1 1/2″ Threaded Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700520	220 lbs.	Plastic	5 3/4″	3.5 lbs.	$3.95

6″ x 1 1/2″
Swivel Caster
1 1/2″ x 3 1/8″ Round Stem



ITEM	Load Capacity	Wheel Material	Mtg. Height	Shpg.	Price
700632	400 lbs.	Polyurethane	7 1/4″	6 lbs.	$6.95


Rigid


Swivel

4″ to 8″ Heavy Duty Casters

• Brand new. Heavy duty casters. Use on work tables, material dollies, carts, etc. Grease zerks on swivels and axles. Roller bearings. Choose between steel wheel and rubber tired cast iron.


Rigid


Swivel

Steel Wheel Casters

• Steel wheel casters. All sizes have 4½″ x 3⅞″ top plate.

Rigid		Swivel				
ITEM	Price	ITEM	Price	Size	Capacity	Shpg.
700122	$23.95	700123	$23.95	4″ x 2″	900 lbs.	7 lbs.
700117	$23.60	700116	$27.10	5″ x 2″	900 lbs.	9 lbs.
700119	$28.40	700118	$31.90	6″ x 2″	900 lbs.	9 lbs.
700121	$36.20	700120	$39.85	8″ x 2″	900 lbs.	14 lbs.

Rubber Tire Casters

• Cast iron wheels and rubber tires.
• All sizes have 4⅝″ x 3⅞″ top plate.

Rigid		Swivel				
ITEM	Price	ITEM	Price	Size	Capacity	Shpg.
700107	$17.40	700108	$20.95	4″ x 2″	350 lbs.	7 lbs.
700114	$17.95	700115	$21.45	5″ x 2″	450 lbs.	7 lbs.
700109	$20.05	700110	$23.60	6″ x 2″	500 lbs.	8 lbs.
700111	$25.25	700112	$29.00	8″ x 2″	600 lbs.	12 lbs.

4″ to 8″ Phenolic Plate Casters



SPECIFICATIONS
• Top Plate 4″ x 4½″ x ¼″
• Mount 2⅝″ x 3⅝″ slotted to 3″ x 3″ centers
• Bolt Holes ⅜″ dia.
• Wheel Temperature Rating -50ºF to 250ºF

Rigid		Swivel		Mtng.			
ITEM	Price	ITEM	Price	Size	Hgt	Capacity	Shpg.
700573	$15.00	700572	$18.45	4″ x 2″	5⅝″	800 lbs.	5 lbs.
700574	$16.75	700575	$20.25	5″ x 2″	6½″	900 lbs.	6 lbs.
700577	$18.75	700576	$22.30	6″ x 2″	7½″	900 lbs.	6 lbs.
700578	$24.70	700579	$28.40	8″ x 2″	9½″	900 lbs.	6 lbs.

5″ x 2″ Casters

• Brand New casters with blue polyurethane coated aluminum wheel.



SPECIFICATIONS
• Load Capacity 900 lbs.
• Mounting Height 6½″
• Top Plate 4″ x 4½″ x ⅛″ thick
• Mount 4 holes 2⅝″ x 3⅝″ slotted to 3″ x 3″ centers
• Bolt Holes ⅜″ dia.
• Caster Wheel Bearing Roller
• **Shpg. 6 lbs.**

Rigid		Swivel		Swivel w/brake	
ITEM	Price	ITEM	Price	ITEM	Price
700557	$30.90	700558	$34.45	700559	$37.20

3″ x 1¼″ Swivel Plate Caster w/ Cast Iron Wheel



ITEM 700570 **$8.00**

• Brand new, swivel plate caster with cast iron wheel.

SPECIFICATIONS
• Model Number WC5030-01-STL
• Wheel Diameter 3″
• Wheel Width 1¼″
• Load Capacity 300 lbs.
• Mounting Height 4″
• Top Plate 3⅝″ x 2½″ x ⅛″ thick
• Mount Four holes on 1¾″ x 2⅞″ to 3′ centers
• Bolt Holes 5⁄16″ dia.
• Wheel Tread Material Cast iron
• Wheel Tread Color Gray
• Wheel Tread Durometer 130-150 Brinell
• Caster Wheel Bearing Plain
• Wheel Temperature Rating -40ºF to 800ºF
• **Shpg. 3 lbs.**

ITEM 700569 **$6.45**
3″ x 1¼″ Rigid Plate Caster

4½″ x 1½″ Toolbox Caster Set



ITEM 700375 **$13.95**

• New, WATERLOO 1008771 toolbox caster set. Includes two swivel plate casters, two rigid casters and fasteners. Swivel casters have brakes.

SPECIFICATIONS
• Wheel Size 4½″ dia. x 1½″ wide
• Wheel Material Hard plastic
• Set Load Capacity 700 lbs.
• Top Rigid Plate 4″ x 2¾″
• Top Swivel Plate 3 11⁄16″ x 2¾″
• Mounting height 5¾″
• Mount 4 bolt holes on 3″ x 1¾″ centers
• Bolt Holes 5⁄16″ dia.
• **Shpg. 8 lbs.**

5″ x 2″ Toolbox Caster Set



ITEM 700545 **$18.95**

• New, HUSKY toolbox caster set includes two swivel casters with brakes and two rigid casters. Black hard plastic wheel.

SPECIFICATIONS
• Wheel Size 5″ dia. x 2″ wide
• Mounting Height 6¼″
• Set Load Capacity 880 lbs.
• Plate Size 2½″ x 3¾″
• Four Bolt Mount 1¾″ x 3″ centers
• Bolt holes 5⁄16″ dia.
• **Shpg. 8 lbs.**

Floor Locks for 4″ to 8″ Casters

New. Floor Locks for 4″ to 8″ casters with skid resistant rubber discs.



• All sizes have: 4″ x 4½″ top plate.
• 3¾″ foot pad
• Mount: Four bolt slots from 3⅝″ x 2⅝″ to 3″ x 3″ centers

ITEM	Wheel Size	Ext. Height	Ret. Height	Size	Shpg.	Price
700565	4″	6″	4¾″	4½″ x 5″ x 4¾″	4 lbs.	$29.45
700566	5″	6½″	5½″	4½″ x 5″ x 5½″	4 lbs.	$29.45
700567	6″	7¾″	6¾″	4½″ x 5″ x 5½″	4 lbs.	$29.45
700568	8″	9⅝″	8⅝″	4½″ x 5″ x 5½″	4.5 lbs.	$29.45

Caster Brake Kits

• Brand new brake kits to add to 4″, 5″, 6″ and 8″ casters. Made specifically for the Steel Wheel and Rubber Tire casters above. They lock the wheel from turning. Does not lock the swivel mechanism. Easy to install. **Shpg 2 lbs.**



ITEM	Wheel Size	Price
700561	4″ x 2″	$3.80
700562	5″ x 2″	$4.10
700563	6″ x 2″	$4.35
700564	8″ x 2″	$5.05

SURPLUS CENTER
1015 West "O" Street
Lincoln, NE 68528

Flush Face Quick Coupler



ITEM 907079
$24.95

• New, Flush face quick coupler. Includes body and tip. Flush face design is easily cleaned, minimizes oil spillage during disconnection and air inclusion during connection. One-handed, push-to-connect convenience. Commonly used on many models of skid-steer loaders and construction and agricultural equipment. Plated steel construction. Interchangeable with Parker FEM, Faster FF, Holmburg Series A and other brands of quick couplings that conform to International Standard ISO 16028 dimensional requirements.

SPECIFICATIONS
- ISO Standard 16028
- ISO Body Size ½″
- Ports SAE 12
- Tip Diameter 0.96″
- Pressure, Working 3000 PSI Max
- Burst, Pressure 12000 PSI
- Flow 11.9 GPM Max
- Temperature Range -25° C to 125° C
- Oil Spillage (at disconnect) 0.07 cc
- Coupler O.D. 1.72″
- Coupled Length 6¾″
- **Shpg. 3 lbs.**

22 GPM Two Stage Hydraulic Pump



ITEM 906420
$149.95

• New, BAILEY two stage HI/LO pressure hydraulic gear pump. Ideal for applications such as log splitters, presses and other equipment where rapid movement of the cylinder at low pressure is required prior to automatically switching to the high pressure mode to meet load requirements.

SPECIFICATIONS
- Model Number CBDN-16/7SA2
- Displacement: 0.429 cu. in. / rev. HI press. stage 0.989 cu. in. / rev. LO press. stage
- Pump Type Gear
- Rotation CW
- Pressure 3000 PSI max.
- Speed 3600 RPM max.
- Flow: 6.1 GPM HI press. stage 22 GPM LO press. stage
- Unloading Pressure 652 PSI
- Mount 2-Bolt SAE A
- Shaft ⅝″ dia. x 2″ long w/ 3⁄16″ keyway
- Inlet Port SAE 16
- Outlet Port SAE 12
- Size 8¼″ x 6″ x 4½″
- **Shpg. 16 lbs.**

24 HP Kohler Engine ⚠



ITEM 300391
$699.95

• New, Kohler KT735-3094 7000 series four-cycle, twin-cylinder, air-cooled, vertical shaft, gasoline, OHV, with cast iron cylinder sleeves. Applications include residential riding and zero turn mowers. Fits TimeCutter, TimeCutter Max and Quest S. Does not include fuel tank or muffler. Adjustable mechanical governor.

SPECIFICATIONS
- Brand Kohler
- Model KT735-3094
- Engine Family 7000 series
- Power 24 HP
- Torque 40.5 lb-ft @ 2400 RPM
- Bore/Stoke 3.3″ (83mm)/2.6″ (67mm)
- Disp. 44.2 cu in (725 cc)
- Oil Capacity 2.0 US qt. (1.9 L)
- Speed Governor set to 3300 RPM max.
- Start Electric
- Fuel Tank None
- Shaft 1″ (25.4mm) dia. x 3.16″ (80.26 mm) w/ 0.25″ Keyway tapped 7⁄16″-20 TPI
- Mount Four 0.34″ dia. untapped holes on 10″ dia. B.C.
- Size 18.6″ x 17.5″ x 13.9″
- **Shpg 125 lbs.**

Truck freight only.



8-20 Ton Scissor Hoist Kit for Dump Trailers Maxim 516

ITEM 300386 ***$799.95***



10-20 Ton Scissor Hoist Kit for Dump Trailers Maxim 520

ITEM 300388 ***$899.95***

Additional specifications on each hoist can be found on page 2.

1 Spool 30 GPM Log Splitter Valve



ITEM 906130
$239.45

• Brand new CROSS CD11FCA0 series directional control valve for operating double acting cylinders. Features include monoblock construction, built-in pressure relief valve, open center, side inlet/outlet and top work ports. Handle assembly can be mounted to have the handle be push or pull to extend the cylinder.

SPECIFICATIONS
- Brand Cross Mfg.
- Model# SCD2E
- Cross Item# 108360
- Open Center
- Spools One
- Flow 30 GPM max.
- Pressure 2500 PSI rated
- Size 12.62″ x 7.41″ x 4.62
- Relief Valve 2000 PSI, fixed
- Detent Release Pressure 1000 PSI
- In/Out Ports ¾″ NPT
- Work Ports ½″ NPT
- Mount Three, ⅜″ dia. holes
- **Shpg. 12 lbs.**

2.5″ x 14″ x 1.25″



ITEM 905477 ***$59.95***

New, BAILEY welded, double acting cylinder. Includes SAE to JIC adapters, 90° JIC 6 M on rod end and JIC 6 M straight on base end.

SPECIFICATIONS
- New, Double Acting
- Bore x Stroke 2½″ x 14″
- Pressure 3000 PSI max.
- Rod Dia. 1¼″
- Ports SAE 6
- Retracted Length 24¼″
- Clevis Ends
- Pin Holes 1″
- **Shpg. 27 lbs.**

7.05 cu in Hydraulic Motor



ITEM 906471
$799.95

• New. Rexroth axial piston variable motor. The automatic high pressure related control adjusts the displacement automatically depending on the working pressure.

SPECIFICATIONS
- Brand Rexroth
- Model A6M-115HA1000004C/71AR-V0D4T11U0-0
- Family A6VM
- Series 71
- Displacement 7.05 cu. in. / rev.
- Motor Type Axial Piston
- Rotation CW
- Pressure: 6527 PSI cont.
- Size 16″ x 8″ x 12½″
- Torque: 7328 in-lbs. max.
- Speed: 3550 RPM cont. 6150 RPM int.
- Flow: 108 GPM max.
- Mount Four bolt SAE D
- Shaft 1¾″ dia. 13T, 2½″ long
- Ports 1″, 4 bolt flange, code 62
- Case Drain SAE 16
- **Shpg. 158 lbs.**

Truck freight only.

1″ Steel Flange Bearing



ITEM 604137
$8.95

• New, Sealed self aligning ball bearing with two bolt stamped steel two piece housing. Model SB205-16/R2. Bearing is centered in housing. Inner race has 2 set screws for locking to shaft.

SPECIFICATIONS
- Bearing Model# SB205-16/R2
- Housing Model# PFL205
- Bore 1″
- Mount 2 Bolt, 3″ c/c
- Bore thru length 1.06″
- Bolt size 5⁄16″ sq.
- Size 3.74″ x 2.74″ x 1.17″
- **Shpg. 0.55 lbs.**