



AXIAL FANS | ELETTROVENTILATORI ASSIALI

FAN DIAMETER | DIAMETRO VENTOLE

MOTOR (dimension) | MOTORE (dimensione)

MOTOR TYPE | TIPO MOTORE

Ø 305 mm

Ø 12 in

63 mm

8612

12V

D.C. - C.C.

90050192

suction - aspirante

90050193

blowing - soffiante

24V

D.C. - C.C.

90050194

suction - aspirante

90050195

blowing - soffiante

Static Pressure Pressione Statica	Airflow Portata	Current Corrente	Airflow Portata	Current Corrente
mmH ₂ O	m ³ /h	A	m ³ /h	A
0,0	2246	12,1	2156	12,8
2,5	2078	12,1	2036	12,9
5,0	1914	12,3	1904	12,9
7,5	1742	12,5	1766	12,6
10,0	1555	12,4	1569	12,4
12,5	1301	12,0	1277	12,4
15,0	900	11,1	961	12,2
17,5	583	11,1	555	11,8
20,0	345	11,2	222	11,9


Static Pressure Pressione Statica	Airflow Portata	Current Corrente	Airflow Portata	Current Corrente
inH ₂ O	m ³ /h	A	m ³ /h	A
0	2277	6,5	2128	6,1
0,1	2136	6,5	2006	6,3
0,2	1976	6,6	1887	6,2
0,3	1818	6,7	1739	6,1
0,4	1658	6,7	1560	6,0
0,5	1425	6,4	1321	6,1
0,6	1068	5,9	1022	6,0
0,7	749	5,8	630	5,8
0,8	491	5,8	249	5,9

Test voltage 13V D.C. - Tensione di prova 13V C.C.

Test voltage 26V D.C. - Tensione di prova 26V C.C.

Airflow - Portata d'aria : 1 m³/h = 0,59 cfm

Static pressure - Pressione : 1 mmH₂O = 0,04 inH₂O - 1 mmH₂O = 9,81 Pa

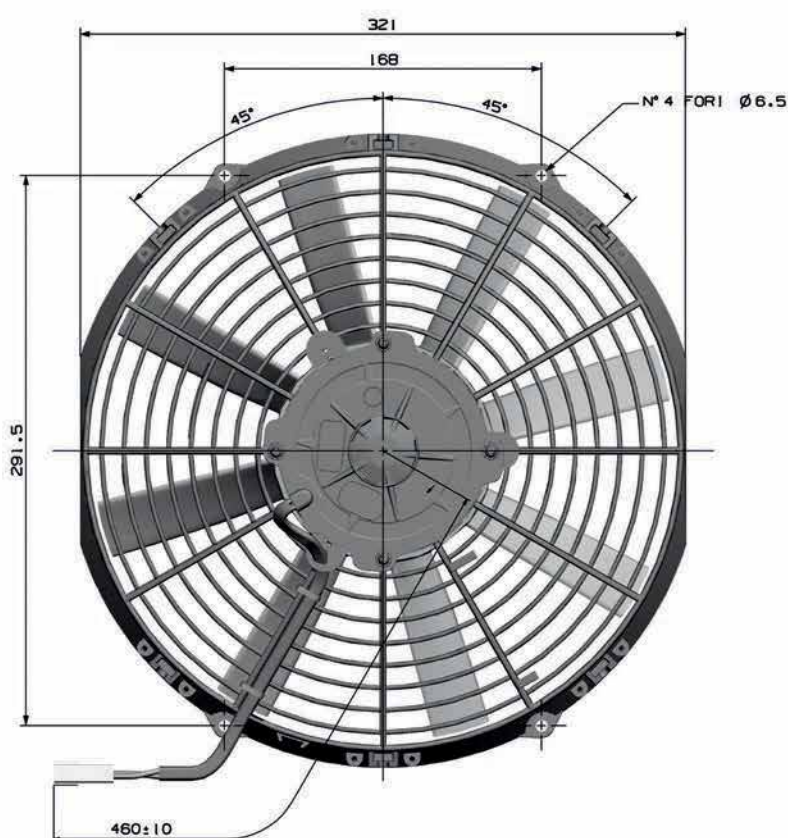

Waterproof Motor IP68

Motore stagno IP68

AMP Connector: 180908

Connettore AMP: 180908

Available with other connectors

Disponibile con altri connettori

