



AXIAL FANS | ELETTROVENTILATORI ASSIALI

FAN DIAMETER | DIAMETRO VENTOLE

MOTOR (dimension) | MOTORE (dimensione)

MOTOR TYPE | TIPO MOTORE

Ø 350 mm

Ø 13 in

63 mm

8612

12V

90050232

90050233

D.C. - C.C.

suction - aspirante

blowing - soffiante

24V

90050234

90050235

D.C. - C.C.

suction - aspirante

blowing - soffiante

Static Pressure Pressione Statica	Airflow Portata	Current Corrente	Airflow Portata	Current Corrente
mmH ₂ O	m ³ /h	A	m ³ /h	A
0,0	2658	14,0	2535	13,5
2,5	2438	14,4	2324	14,0
5,0	2196	14,6	2131	13,9
7,5	1951	14,5	1946	13,7
10,0	1624	14,0	1623	13,5
12,5	1251	13,3	1172	13,3
15,0	801	12,9	589	12,8
17,5	482	13,0	179	12,9
20,0	124	13,4		



Static Pressure Pressione Statica	Airflow Portata	Current Corrente	Airflow Portata	Current Corrente
inH ₂ O	m ³ /h	A	m ³ /h	A
0	2616	6,2	2514	6,0
0,1	2392	6,4	2295	6,2
0,2	2172	6,5	2119	6,2
0,3	1904	6,4	1925	6,1
0,4	1557	6,2	1610	6,1
0,5	1218	5,9	1148	6,0
0,6	763	5,8	664	5,9
0,7	437	5,9	164	5,9
0,8	101	6,0		

Test voltage 13V D.C. - Tensione di prova 13V C.C.

Test voltage 26V D.C. - Tensione di prova 26V C.C.

Airflow - Portata d'aria : 1 m³/h = 0,59 cfm

Static pressure - Pressione : 1 mmH₂O = 0,04 inH₂O - 1 mmH₂O = 9,81 Pa

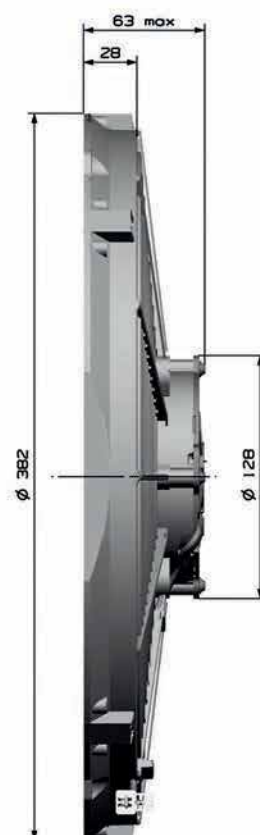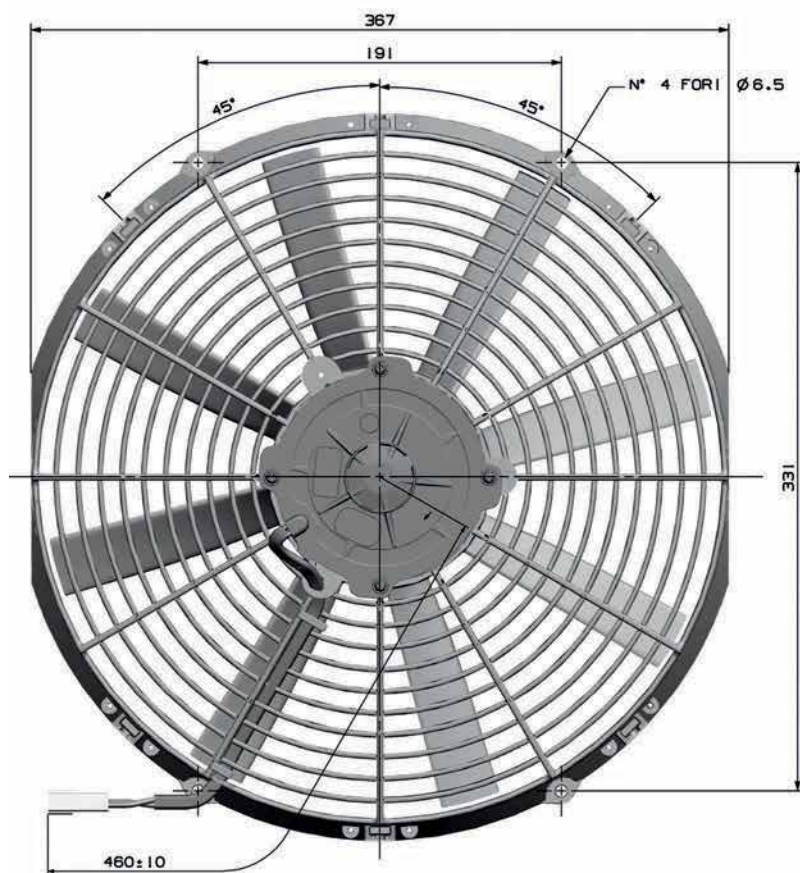

Waterproof Motor IP68

Motore stagno IP68

AMP Connector: 180908

Connettore AMP: 180908

Available with other connectors

Disponibile con altri connettori

