



AXIAL FANS | ELETTROVENTILATORI ASSIALI

FAN DIAMETER | DIAMETRO VENTOLE

MOTOR (dimension) | MOTORE (dimensione)

MOTOR TYPE | TIPO MOTORE

Ø 225 mm

Ø 8 in

81 mm

8622

12V

D.C. - C.C.

90050451

suction - aspirante

90050569

blowing - soffiante

24V

D.C. - C.C.

90050568

suction - aspirante

90050567

blowing - soffiante

Static Pressure Pressione Statica	Airflow Portata	Current Corrente	Airflow Portata	Current Corrente
mmH ₂ O	m ³ /h	A	m ³ /h	A
0,0	1236	12,4	1175	10,8
2,5	1157	12,5	1121	10,8
5,0	1078	12,5	1067	10,6
7,5	980	12,2	993	10,6
10,0	881	11,8	909	10,4
12,5	786	11,5	784	10,2
15,0	691	11,1	661	10,2
17,5	604	11,4	503	10,2
20,0	518	11,6	321	10,0
22,5	440	11,9	192	10,4
25,0	363	12,3		



Static Pressure Pressione Statica	Airflow Portata	Current Corrente	Airflow Portata	Current Corrente
inH ₂ O	m ³ /h	A	m ³ /h	A
0	1322	4,9	1184	5,5
0,1	1259	5,0	1130	5,5
0,2	1178	5,0	1077	5,4
0,3	1075	4,9	1005	5,4
0,4	922	4,7	923	5,3
0,5	732	4,3	799	5,2
0,6	602	4,2	680	5,2
0,7	539	4,4	525	5,2
0,8	450	4,5	342	5,1
0,9	373	4,6	209	5,3
1	291	4,7	110	5,4

Test voltage 13V D.C. - Tensione di prova 13V C.C.

Test voltage 26V D.C. - Tensione di prova 26V C.C.

Airflow - Portata d'aria : 1 m³/h = 0,59 cfm

Static pressure - Pressione : 1 mmH₂O = 0,04 inH₂O - 1 mmH₂O = 9,81 Pa

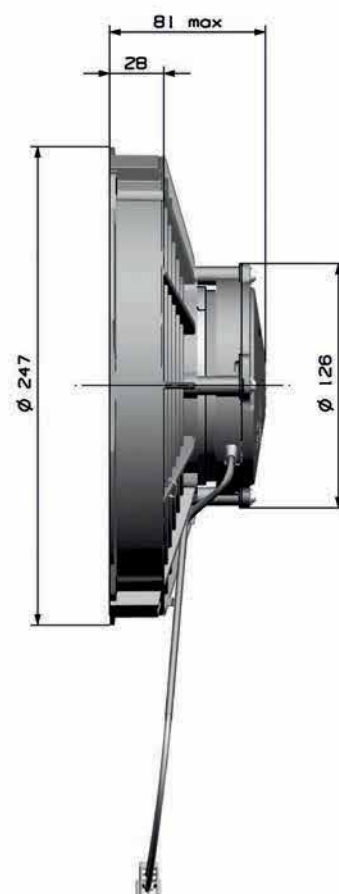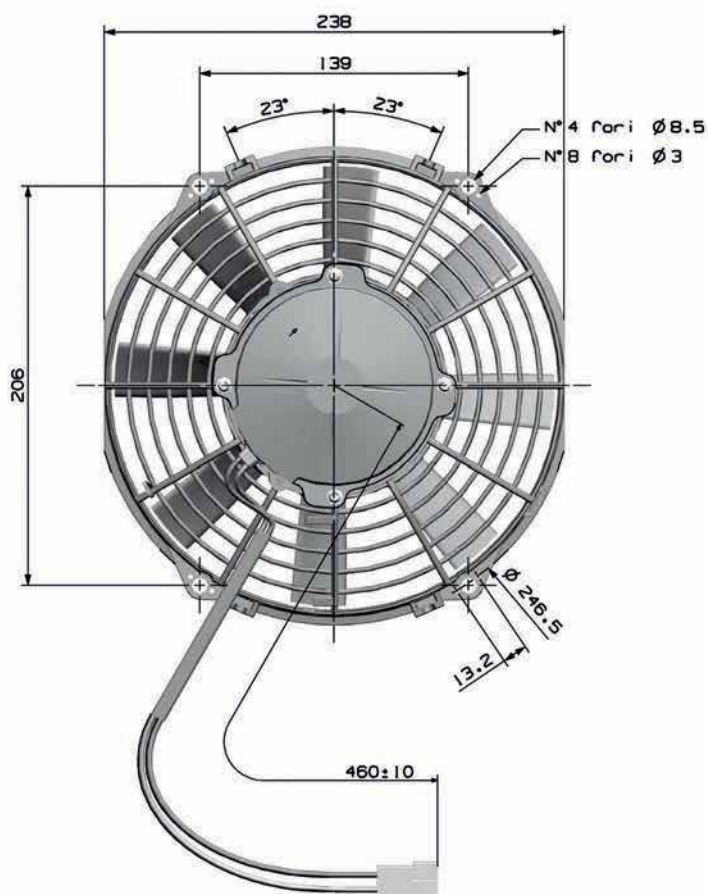

Waterproof Motor IP68

Motore stagno IP68

AMP Connector: 180908

Connettore AMP: 180908

Available with other connectors

Disponibile con altri connettori

