

AXIAL FANS | ELETTROVENTILATORI ASSIALI

FAN DIAMETER | DIAMETRO VENTOLE

MOTOR (dimension) | MOTORE (dimensione)

MOTOR TYPE | TIPO MOTORE

Ø 385 mm

Ø 15 in

81 mm

8622

12V

D.C. - C.C.

90050356

suction - aspirante

90050383

blowing - soffiante

24V

D.C. - C.C.

90050408

suction - aspirante

90050468

blowing - soffiante

Static Pressure Pressione Statica	Airflow Portata	Current Corrente	Airflow Portata	Current Corrente
mmH ₂ O	m ³ /h	A	m ³ /h	A
0,0	3505	20,1	3521	18,1
2,5	3281	20,2	3317	18,6
5,0	3057	20,3	3130	19,0
7,5	2807	20,5	2900	19,0
10,0	2556	20,6	2654	19,0
12,5	2287	20,5	2358	19,1
15,0	2018	20,3	1880	18,7
17,5	1461	19,2	1120	18,0
20,0	901	18,1	583	17,4
22,5	528	18,2	104	17,8
25,0	158	18,3		



Static Pressure Pressione Statica	Airflow Portata	Current Corrente	Airflow Portata	Current Corrente
inH ₂ O	m ³ /h	A	m ³ /h	A
0	3605	9,8	3658	9,7
0,1	3395	10,0	3463	9,8
0,2	3186	10,2	3294	10,2
0,3	2947	10,3	3096	10,4
0,4	2707	10,4	2905	10,6
0,5	2439	10,3	2666	10,6
0,6	2170	10,2	2334	10,4
0,7	1613	9,5	1802	10,1
0,8	1037	8,8	1158	9,9
0,9	680	8,9	638	9,8
1	343	9,0		

Test voltage 13V D.C. - Tensione di prova 13V C.C.

Test voltage 26V D.C. - Tensione di prova 26V C.C.

Airflow - Portata d'aria : 1 m³/h = 0,59 cfm

Static pressure - Pressione : 1 mmH₂O = 0,04 inH₂O - 1 mmH₂O = 9,81 Pa

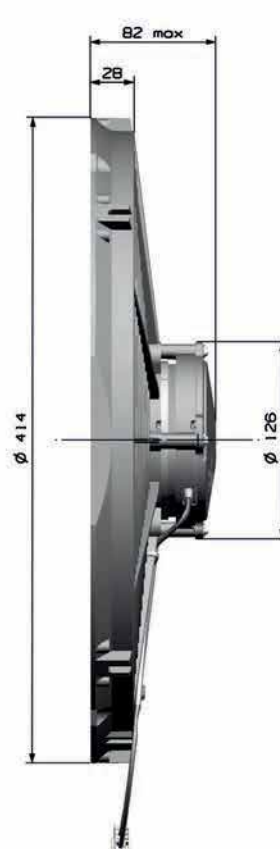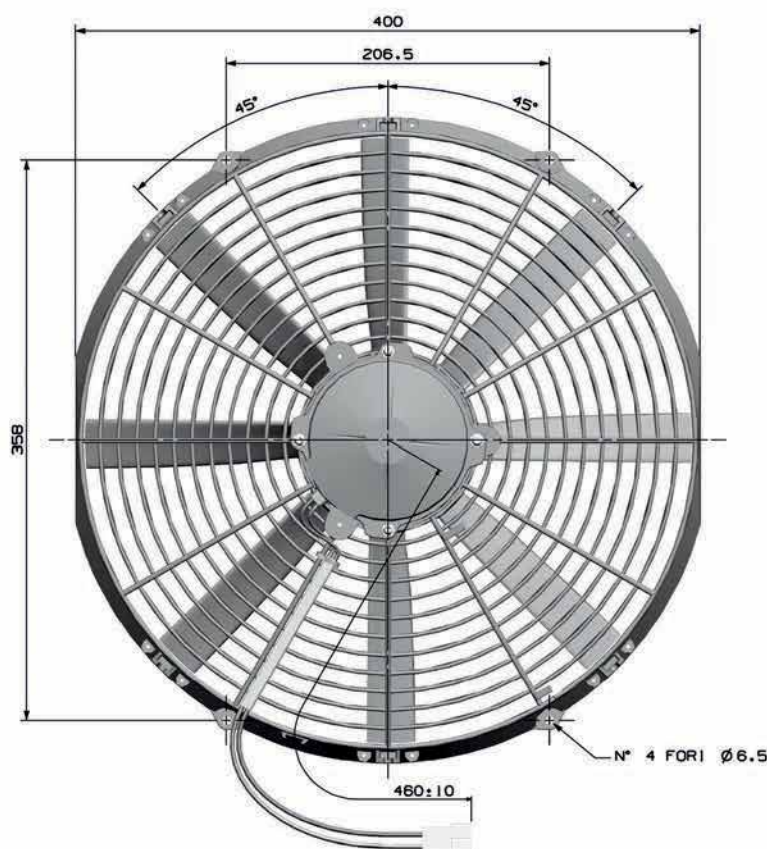

Waterproof Motor IP68

Motore stagno IP68

AMP Connector: 180908

Connettore AMP: 180908

Available with other connectors

Disponibile con altri connettori

