





12 VDC Hydraulic Power Packs ⚠

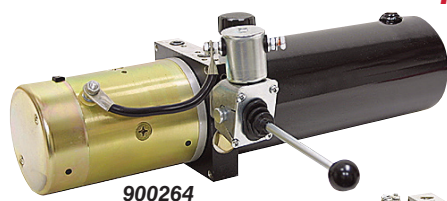

900264

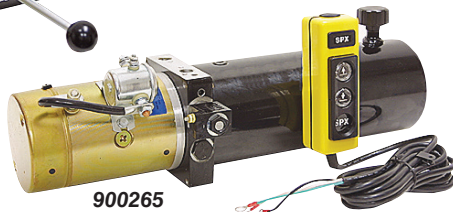

900265



900266



901980



- Brand new SPX STONE. Hydraulic power packs for operating hydraulic cylinders. Steel reservoir tank with inlet strainer, magnet and filtered filler/breather. Built in check valve and adjustable relief valve. See chart for details about control valves, tank size and pressure ratings.

SPECIFICATIONS (all models)

- Flow rate 1.3 GPM at max PSI
- 12 Volt DC motor
- Needle bearings
- Intermittent duty



ITEM	Valve Type	Ports	Relief Valve		Tank Size		Shpg.	Price
			Factory Set		Cap.	Useable		
900264	Single Acting Lever Operated	3/8" NPT	2500 PSI		3 qt.	2.3 qt.	21" x 9" x 7"	38 lbs. \$607.55
900265	Single Acting 12 Volt DC w/handheld remote	SAE 6	2500 PSI		3 qt.	2.3 qt.	21" x 8" x 6"	39 lbs. \$645.90
901979	Single Acting 12 Volt DC w/handheld remote	SAE 6	2500 PSI		2.5 gal.	1.6 gal.	25" x 8 1/4" x 8"	40 lbs. \$689.25
900266	Double Acting 12 Volt DC (does not include remote)	SAE 6	2500 PSI		3 qt.	2.3 qt.	21" x 8" x 7"	40 lbs. \$677.10
901980	Double Acting 12 Volt DC (does not include remote)	SAE 6	2500 PSI		2.5 gal.	1.6 gal.	25" x 8" x 7"	41 lbs. \$699.15
901978	None (use with external valve)	SAE 6	2500 PSI		2.5 gal.	1.6 gal.	25" x 7" x 8"	40 lbs. \$612.40

2 HP 115/230 VAC Hydraulic Power Packs ⚠

- Brand new, SPX hydraulic power packs. All models include motor, gear pump and steel reservoir tank with filtered filler/breather. Horizontal mount. Select from a variety of valve options in chart below.

SPECIFICATIONS (all models)

- 2 HP TEFC motor
- 3450 RPM
- Continuous duty
- 115/230 VAC, 1 Ph.
- 22/11 Amps
- Port(s) SAE 6



ITEM	Pressure/Flow	Relief Valve		Valve Type	Tank Size		Shpg.	Price
		Factory Set			Cap.	Useable		
901553	2.5 GPM @ 1000 PSI	1300 PSI		None (use with external valve)	4 gal.	3.03 gal.	39" x 9" x 9 3/8"	55 lbs. \$838.85
901554	1.3 GPM @ 2000 PSI	2500 PSI		Single Acting release, 115 Volt AC	2.5 gal.	1.6 gal.	30" x 9" x 9 3/8"	52 lbs. \$908.05
901555	1.3 GPM @ 2000 PSI	2500 PSI		Double Acting 4 way, 115 Volt AC	2.5 gal.	1.6 gal.	30" x 9" x 9 3/8"	53 lbs. \$1256.55
901552	1.3 GPM @ 2000 PSI	2500 PSI		None (use with external valve)	2.5 gal.	1.6 gal.	30" x 9" x 9 3/8"	51 lbs. \$839.90

10 ft.
Hand Held
Remote
Controls ⚠
for DC Powerpacks

ITEM 900262

- For single acting, 3 wire style

900265, 901979

\$71.20

Shpg. 4 lbs.

ITEM 900261

- For double acting, 3 wire style

900266, 901980

\$202.70

Shpg. 4 lbs.

ITEM 903661

- Brand new two pushbutton (4 wire) hand held control made for use with double acting hydraulic power packs with two coil solenoid valve. Magnets on back for mounting to steel surfaces. 10 foot power cord. Shpg. 4 lbs.

\$129.202 HP
230 VAC
Hydraulic
Powerpack ⚠

ITEM 901556

\$825.30

- Brand new SPX hydraulic powerpack ideal for use in automobile hoists, lifts and other applications. Cartridge style check valve for load-holding. Momentary "ON" pushbutton switch for raising with a manual lever for lowering. Vertical mount.

SPECIFICATIONS

- 2 HP TENV motor
- 208-230 Volt AC, 1 Ph.
- 15-18 Amps
- Int. duty
- 2.25 GPM @ 2,000 PSI max output
- 2300 PSI maximum
- 2300 PSI fixed relief valve setting
- 4 gallon plastic reservoir (3 gallon usable)
- SAE 6 port
- Mount vertical
- Size 10 1/2" x 7" x 31 1/2"
- Shpg. 60 lbs.

12 VDC Snow Plow
Powerpack ⚠

ITEM 903223

\$1131.55

- Brand new, SPX Model DC-80SPC. Power pack with built-in 12 volt DC solenoid valves for operating snow plows. Provides power up, hold and gravity down for single acting cylinder blade lift plus left and right control for two single acting cylinders or one double acting cylinder for blade angle. Horizontal mount.

SPECIFICATIONS

- Voltage 12 Volt DC
- Amperage 300 amps
- Duty Intermittent
- Flow 1.7 GPM at 1750 PSI
- Pressure 3500 PSI max.
- Main Relief Valve Adjustable set @ 2000 PSI
- Cross-over Relief Valve 1500 PSI
- Reservoir 1.5 qt. useable
- Ports Cylinder SAE 6
- Mnt 2 bolt base on 3 1/4" c/c
- Orientation Horizontal
- Size 14 3/4" x 8 1/8" x 7 1/4"
- Shpg. 36 lbs.