

AXIAL FANS | ELETTROVENTILATORI ASSIALI

FAN DIAMETER | DIAMETRO VENTOLE

MOTOR (dimension) | MOTORE (dimensione)

MOTOR TYPE | TIPO MOTORE

Ø 305 mm

Ø 12 in

81 mm

8622

12V

D.C. - C.C.

90050429

suction - aspirante

90050437

blowing - soffiante

24V

D.C. - C.C.

90050397

suction - aspirante

90050418

blowing - soffiante

Static Pressure Pressione Statica	Airflow Portata	Current Corrente	Airflow Portata	Current Corrente
mmH ₂ O	m ³ /h	A	m ³ /h	A
0,0	2550	17,3	2271	13,0
5,0	2309	18,7	2015	14,0
10,0	2022	19,8	1736	14,9
12,5	1869	20,0	1583	15,2
15,0	1716	20,3	1429	15,6
17,5	1512	20,3	1262	16,2
20,0	1307	20,4	1094	16,8
22,5	1161	21,2	941	17,4
25,0	1015	22,0	788	18,1
27,5	871	22,7	571	18,9
30,0	726	23,3	352	19,7



Static Pressure Pressione Statica	Airflow Portata	Current Corrente	Airflow Portata	Current Corrente
inH ₂ O	m ³ /h	A	m ³ /h	A
0	2647	8,8	2529	8,1
0,2	2406	9,6	2291	8,7
0,4	2161	10,3	2050	9,1
0,5	2018	10,5	1924	9,3
0,6	1876	10,6	1798	9,4
0,7	1710	10,7	1642	9,7
0,8	1544	10,7	1487	9,9
0,9	1376	11,0	1343	10,2
1	1209	11,2	1200	10,6
1,1	1093	11,6	1076	11,0
1,2	978	12,1	953	11,4

Test voltage 13V D.C. - Tensione di prova 13V C.C.

Test voltage 26V D.C. - Tensione di prova 26V C.C.

Airflow - Portata d'aria : 1 m³/h = 0,59 cfm

Static pressure - Pressione : 1 mmH₂O = 0,04 inH₂O - 1 mmH₂O = 9,81 Pa

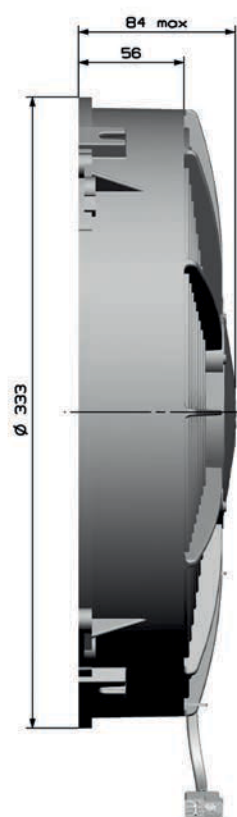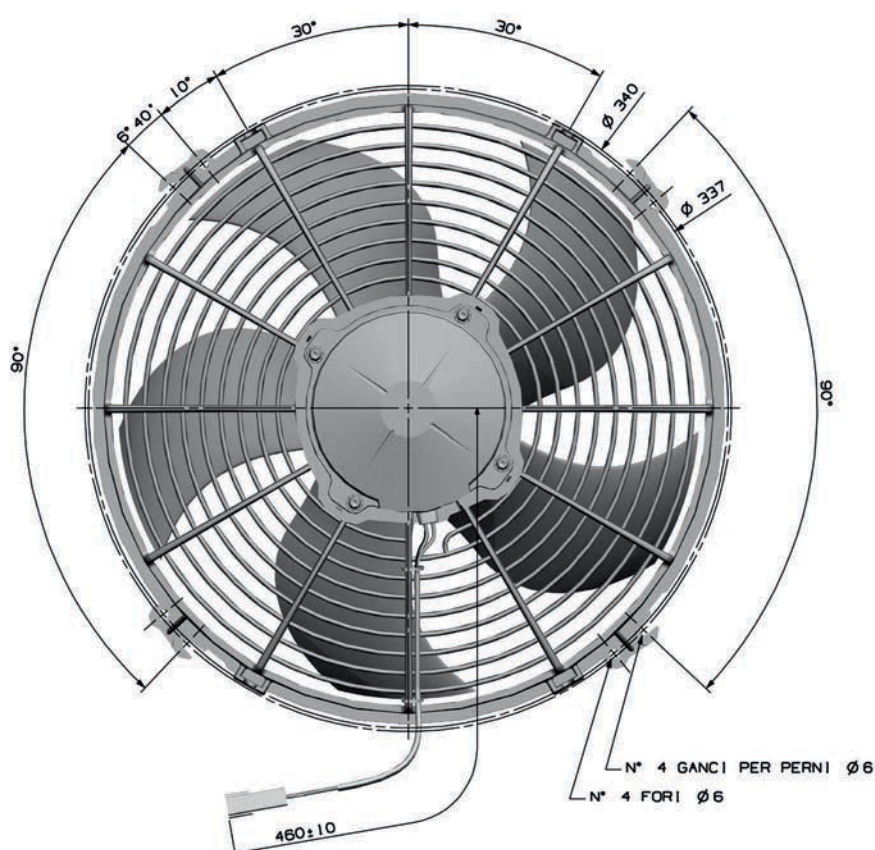

Waterproof Motor IP68

Motore stagno IP68

AMP Connector: 180908

Connettore AMP: 180908

Available with other connectors

Disponibile con altri connettori

