


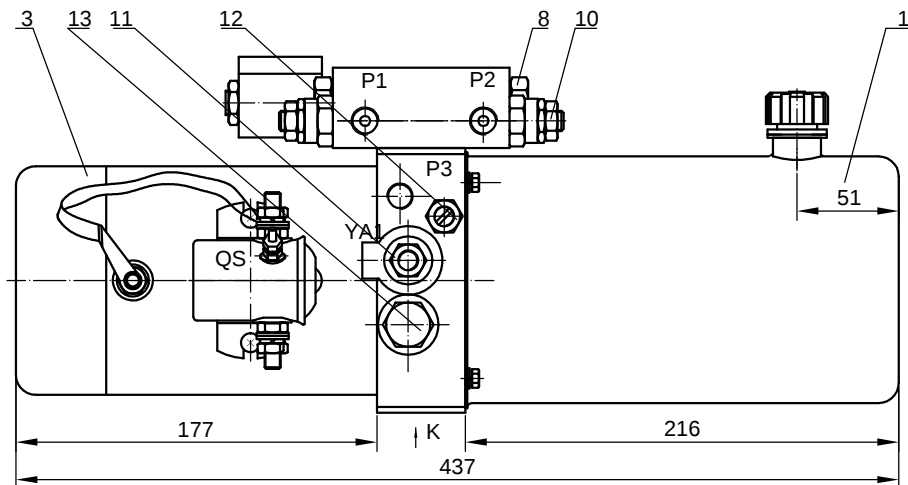


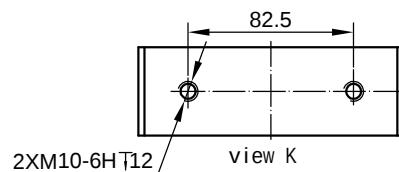


view M

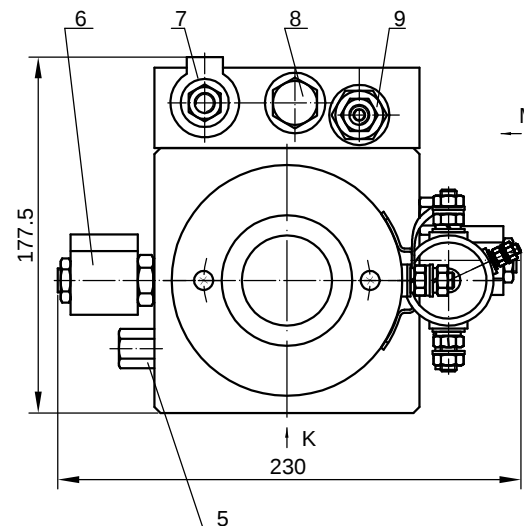

view K

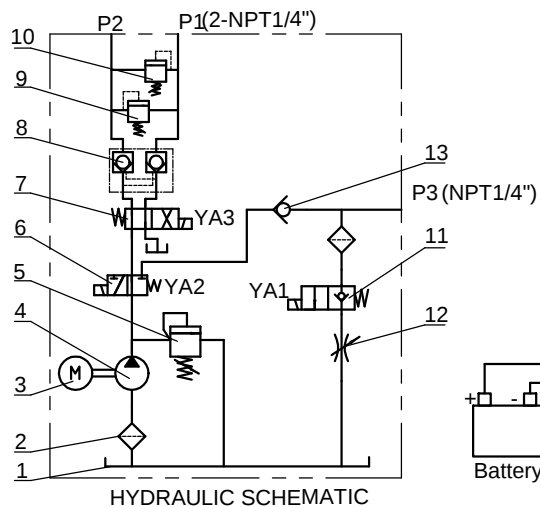

HYDRAULIC SCHEMATIC

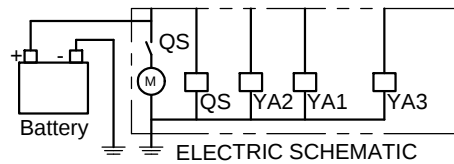

ELECTRIC SCHEMATIC

12	Flow control valve	YBZ-E2D31/1-11	
11	Solenoid valve	LSV-08-2NCP-1D	2-Way,2-Position,12VDC
10	Relief valve	LRV-08-36	3480PSI
9	Relief valve	LRV-08-36	3480PSI
8,13	Check valve	DF08-01-00	
7	Directional valve	LSV-08-4CO-1D	2-Way,4-Position,12VDC
6	Directional valve	LSV2-08-3-1D	2-Way,3-Position,12VDC
5	System Relief valve	RV-3/4-A	Preset at 2600 PSI
4	Gear pump	CBK-F2.1F	2.1cc/r
3	DC Motor	DM11-1WWU-3BC1R-B	12VDC,1.5KW
2	Suction Filter	YBZ-4-100	
1	Tank	KR12W	2L Round Steel Horizontal
No.	Description	P/N	Technical data

Designed by

Checked by

Reviewed by

Approved by

Name: Hydraulic Power Unit

P/N: YBZ-F2.1Z1W14/WUAAT1

Item# 9-12370

Rev.: O

Deli Wuxi Deli Hydraulics Co., Ltd.
www.wx-dl.com tech@wx-dl.com